



AFRL-RY-WP-TP-2020-0097

**LOW COST ALL METAL ADDITIVELY
MANUFACTURED WIDEBAND ANTENNA ARRAY
MODULES (Preprint)**

Jeffrey P. Massman

**Antennas & Electromagnetics Technology Branch
Multispectral Sensing & Detection Division**

Thomas P. Steffen

Defense Engineering Corporation

MAY 2020

Final Report

Approved for public release; distribution is unlimited.

See additional restrictions described on inside pages

STINFO COPY

**AIR FORCE RESEARCH LABORATORY
SENSORS DIRECTORATE
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7320
AIR FORCE MATERIEL COMMAND
UNITED STATES AIR FORCE**

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YY) May 2020		2. REPORT TYPE Conference Paper Preprint		3. DATES COVERED (From - To) 10 February 2020 –10 February 2020	
4. TITLE AND SUBTITLE LOW COST ALL METAL ADDITIVELY MANUFACTURED WIDEBAND ANTENNA ARRAY MODULES (Preprint)				5a. CONTRACT NUMBER FA8650-17-C-1026	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER N/A	
6. AUTHOR(S) Jeffrey P. Massman (AFRL/RYMH) Thomas P. Steffen (Defense Engineering Corporation)				5d. PROJECT NUMBER N/A	
				5e. TASK NUMBER N/A	
				5f. WORK UNIT NUMBER N/A	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Antennas & Electromagnetics Technology Branch Multispectral Sensing & Detection Division (AFRL/RYMH) Air Force Research Laboratory, Sensors Directorate Wright-Patterson Air Force Base, OH 45433-732 Air Force Materiel Command, United States Air Force				8. PERFORMING ORGANIZATION REPORT NUMBER Defense Engineering Corporation	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Sensors Directorate Wright-Patterson Air Force Base, OH 45433-7320 Air Force Materiel Command United States Air Force				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/RYMH	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-RY-WP-TP-2020-0097	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES PAO case number 88ABW-2020-0423, Clearance Date 10 February 2020. To be presented at IEEE AP-S Symposium on Antennas and Propagation, Montreal, Quebec, Canada, 7/5/20. The U.S. Government is joint author of this work and has the right to use, modify, reproduce, release, perform, display, or disclose the work. Report contains color.					
14. ABSTRACT This paper introduces a modular, end-fire, dual-polarized ultra-wideband scalable array (MEDUSA) realized exclusively with direct metal laser sintering (DMLS) to achieve a connector-less phased array antenna module. The radiator is based on a variation of conventional tapered slot antennas (i.e. Vivaldi) to achieve an all metal fully-monolithic element consist-ing of RF coaxial interface, balun, and free-space transformer. A very low-cost array module is achieved by adapting the design uniquely to the fabrication process in order to eliminate nearly all post-processing. A finite 8x8 array covering 7-21 GHz has been prototyped and measured to demonstrate agreement in active impedance and element patterns.					
15. SUBJECT TERMS antenna array					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON (Monitor) Jeffrey Massman 19b. TELEPHONE NUMBER (Include Area Code) N/A
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Low Cost All Metal Additively Manufactured Wideband Antenna Array Modules

Jeffrey P. Massman

Sensors Directorate

Air Force Research Laboratory

2241 Avionics Cir, Wright-Patterson AFB, OH 45433, USA

jeffrey.massman.5@us.af.mil

Thomas P. Steffen

Defense Engineering Corporation

2458 Dayton-Xenia Rd, Beavercreek, OH 45434, USA

tommy.steffen@teamdec.com

Abstract—This paper introduces a modular, end-fire, dual-polarized ultra-wideband scalable array (MEDUSA) realized exclusively with direct metal laser sintering (DMLS) to achieve a connector-less phased array antenna module. The radiator is based on a variation of conventional tapered slot antennas (i.e. Vivaldi) to achieve an all metal fully-monolithic element consisting of RF coaxial interface, balun, and free-space transformer. A very low-cost array module is achieved by adapting the design uniquely to the fabrication process in order to eliminate nearly all post-processing. A finite 8x8 array covering 7-21 GHz has been prototyped and measured to demonstrate agreement in active impedance and element patterns.

I. INTRODUCTION

Modern active electronically scanned array (AESA) systems generally support multifunctional, shared-aperture operations such as radar and multiple-input, multiple-out (MIMO) communication systems. These diverse functional requirements lead to AESA systems that must maintain ultra-wideband (UWB) operation over wide-scan angles with polarization agility. High-profile notch or Vivaldi based antenna architectures have remained popular solutions for these sensor applications due to its ability to cover operational bandwidths in excess of 10:1 over wide scan volumes with a simple 50-ohm coaxial feed [1]–[4]. Vivaldi antenna arrays continue to receive interest as researchers seek to improve various performance or fabrication complexities associated with the design [5]–[7]. Recent advances have also demonstrated a low cost UWB array module with connector-less phased array radiating element realized with stereolithography (SLA) [8].

In this paper the metallized SLA MEDUSA antenna architecture is extended to titanium DMLS as an alternative prototyping process to achieve a mechanically robust, low-cost UWB antenna array. This paper will first briefly review the design for the modular, end-fire, dual-polarized ultra-wideband scalable array (MEDUSA). Then, a fully-monolithic all metal titanium element consisting of a 50-ohm coaxial interface, balun, and free-space transformer will be shown which completely eliminates the need for additional RF connectors or alternative interconnects. This titanium DMLS design realizes the advantages of rapid manufacturing and provides substantial cost savings for high power phased array antennas.

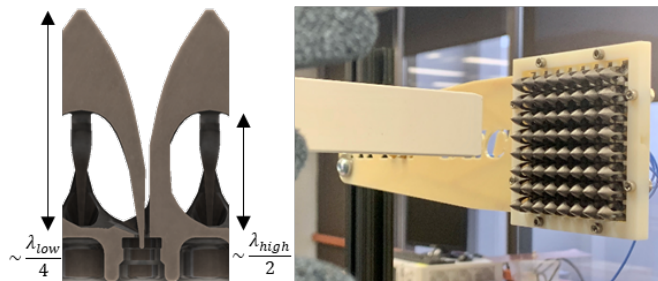


Fig. 1. 3D model of the titanium DMLS MEDUSA element with integrated SMPM connector, balun and impedance transformer.

II. ELEMENT DESIGN

The conventional approach to feeding Vivaldi antennas utilizes the Knorr balun for a wideband transition from an unbalanced feed to a balanced slot line radiator. This feed geometry generally consists of the unbalanced feed structure routed out and around the cavity structure to terminate into a 50-ohm coaxial connector at the antenna element base. The standard method unnecessarily increases the transition routing complexity and a modified feed method was introduced in [8]. This new feed method shifts the balun location up and around the parallel line feed arms and allows the impedance transition elements to be concentric with the radiator elements. The approach reduces the DMLS structure complexity and will readily scale into millimeter wave bands.

The presented element realized with titanium DMLS, as shown in Figure 1, accommodates both the printer dimensional tolerances and post-processing requirements (i.e. support structures, build platform removal, etc.) with the inclusion of two 50-ohm embedded SMPM (GIPO) coaxial connectors. This design eliminates the need for additional RF connectors by printing two modified SPMP connectors directly into the array module. The modified feed geometry attempts to ideally trade-off the geometric requirements for successfully mating to the SMPM connector while also providing a mechanically robust feed pin. This effectively reduces both the materials cost and assembly integration times to achieve a very low cost phased array antenna module.

III. PREDICTED AND MEASURED RESULTS

Simulations and measurements demonstrate the performance to be comparable to conventional PCB fabricated Vivaldi antenna arrays. The presented titanium DMLS MEDUSA element (8mm x 8mm x 12mm unit cell size) covers 7-21 GHz operation, though may be scaled to other frequency bands and operational bandwidth ratios. A prototype module consisting of 8x8 elements was fabricated and measured to validate the DMLS MEDUSA architecture. This initial prototype was developed with a Concept Laser M2 machine with titanium (Ti 6Al-4V) at 30um layers to achieve the necessary geometric tolerances with a 300 uin Ra surface roughness. Secondary plating may be applied as needed to increase the surface conductivity. Plots of the predicted active-VSW along the E-/H-/D-plane cuts are shown in Figure 2. The design achieves low VSWR for wide scan angles in all planes. This predicted performance is comparable to conventional PCB Vivaldi antennas in terms in operational bandwidth, scan volume, VSWR, and polarization purity.

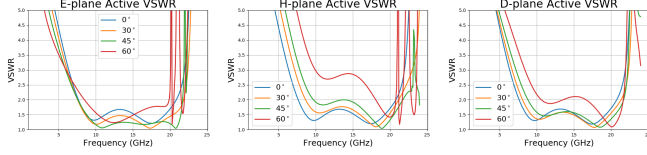


Fig. 2. Predicted infinite array active-VSWR for E/H/D-planes.

Embedded element patterns were measured using a near-field scanner with boresight realized swept gain for the center most element of the array shown alongside predictions for a planar array in Figure 3. At broadside radiation, more than a 3:1 bandwidth is achieved (7-21 GHz). For this operational frequency range the active VSWR is 2.0 or better and the realized embedded element gain correlates to within ± 2 dB the theoretical ideal. Additionally, the measured embedded element patterns along E-/H-/D-plane cuts are shown in Figure 4. The co-polarization and cross-polarization measured patterns are shown for E-plane and H-plane cuts and demonstrate stable patterns across the operational bandwidth. All measurements include some variation due to finite array effects as well general measurement setup and fabrication tolerance errors.

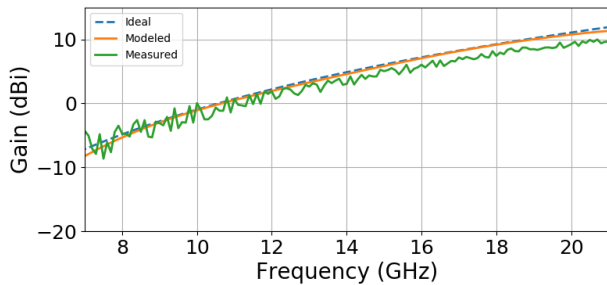


Fig. 3. Modeled vs measured broadside realized embedded element gain for the prototype 8x8 array.

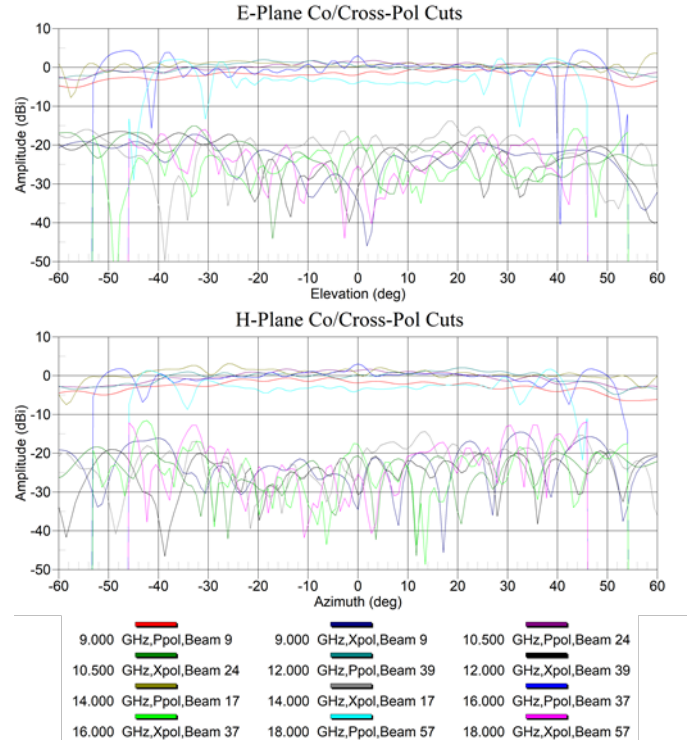


Fig. 4. Measured co-polarized and cross-polarized embedded element radiation patterns for E/H/D-planes.

ACKNOWLEDGEMENT

The views of the coauthors expressed in this article do not reflect the official policy of the U.S. Air Force, Department of Defense, or the U.S. Government.

REFERENCES

- [1] P. J. Gibson, "The vivaldi aerial," in *1979 9th European Microwave Conference*, pp. 101–105, Sep. 1979.
- [2] H. Holter, "A new type of antenna element for wide-band wide-angle dual polarized phased array antennas," in *IEEE International Symposium on Phased Array Systems and Technology*, 2003., pp. 393–398, Oct 2003.
- [3] R. W. Kindt and W. R. Pickles, "Ultrawideband all-metal flared-notch array radiator," *IEEE Transactions on Antennas and Propagation*, vol. 58, pp. 3568–3575, Nov 2010.
- [4] J. Yan, S. Gogineni, B. Camps-Raga, and J. Brozena, "A dual-polarized 2–18-ghz vivaldi array for airborne radar measurements of snow," *IEEE Transactions on Antennas and Propagation*, vol. 64, pp. 781–785, Feb 2016.
- [5] J. T. Logan and M. N. Vouvakis, "A low cross-polarization decade-bandwidth vivaldi array," in *2015 IEEE International Symposium on Antennas and Propagation USNC/URSI National Radio Science Meeting*, pp. 2519–2520, July 2015.
- [6] J. T. Logan and M. N. Vouvakis, "Decade-bandwidth low cross-polarization uwb array," in *2016 IEEE International Symposium on Antennas and Propagation (APSURSI)*, pp. 437–438, June 2016.
- [7] T. G. Spence and R. Rodriguez, "Additively manufactured ultrawideband, wide scan, monolithic vivaldi arrays," in *2017 IEEE International Symposium on Antennas and Propagation USNC/URSI National Radio Science Meeting*, pp. 1239–1240, July 2017.
- [8] J. Massman, B. Simpson, and T. Steffen, "Low cost additively manufactured antenna array modules," in *2019 IEEE International Symposium on Phased Array Systems and Technology (PAST)*, pp. 1–4, Oct 2019.