

AD-A040 797

NAVAL RESEARCH LAB WASHINGTON D C
APPLICATION OF SPEED IMPROVEMENT TECHNIQUES IN COORDINATE TRANS--ETC(U)
MAY 77 B H CANTRELL

F/G 12/1

UNCLASSIFIED

NRL-MR-3520

NL

1 of 1
ADA040797



END

DATE
FILMED
7-77

ADA 040797

12
NW

NRL Memorandum Report 3520

**Application of Speed Improvement Techniques
in Coordinate Transformations for
the Multiple Platform Sensor
Integration Problem**

B.H. CANTRELL

*Radar Analysis Staff
Radar Division*

May 1977

DDC
JUN 22 1977
B



**NAVAL RESEARCH LABORATORY
Washington, D.C.**

AD No. _____
DDC FILE COPY

Approved for public release; distribution unlimited.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

9 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 3520 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6 4. TITLE (and Subtitle) APPLICATION OF SPEED IMPROVEMENT TECHNIQUES IN COORDINATE TRANSFORMATIONS FOR THE MULTIPLE PLATFORM SENSOR INTEGRATION PROBLEM.	5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) 10 Ben H. Cantrell	14	8. CONTRACT OR GRANT NUMBER(s) NRL-MR-3524
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory ✓ Washington, D.C. 20375	10 8 p.	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem R12-18 OMN
11. CONTROLLING OFFICE NAME AND ADDRESS Department of the Navy Naval Ship Engineering Center Washington, D.C. 20362	11	12. REPORT DATE May 1977
	13. NUMBER OF PAGES 8	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Command and control Radar integration Computer algorithms		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A means of improving the speed of computation in performing coordinate transformation used in multiple platform sensor integration problems is described. The method is based on quaternions.		

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
DISTRIBUTION AVAILABILITY CODES	
Dist.	Avail. and/or SPECIAL
A	

DD FORM 1473


EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

251 950

mt

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

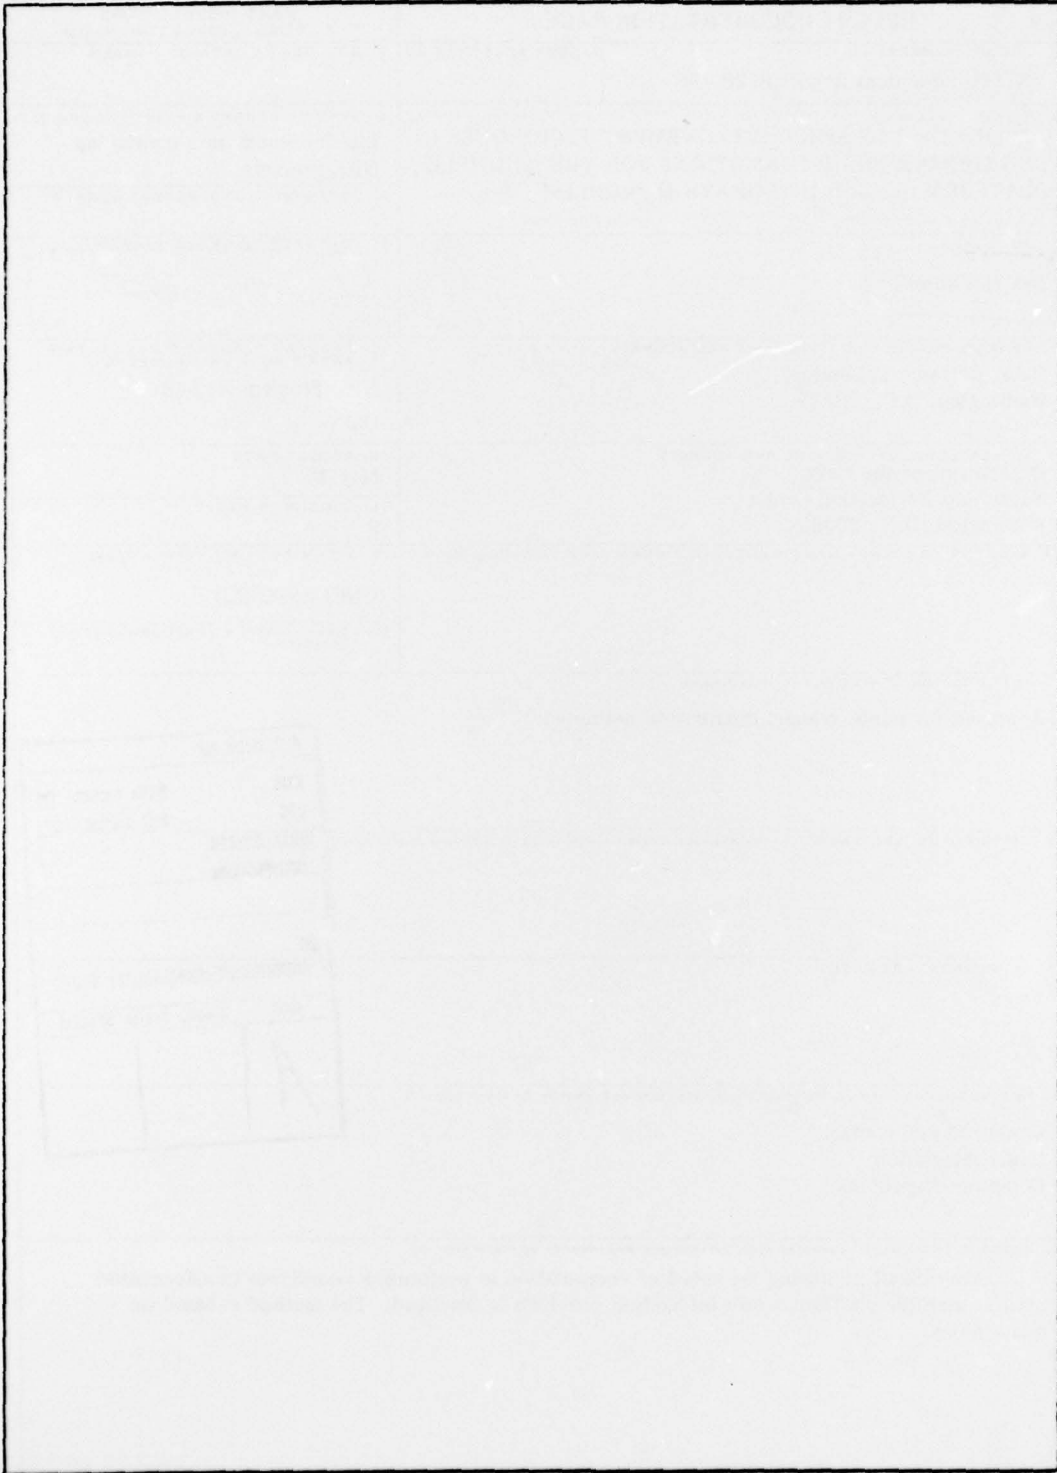

CONTENTS

INTRODUCTION 1

EXAMPLE 1

THE METHOD 3

SUMMARY 5

**APPLICATION OF SPEED IMPROVEMENT TECHNIQUES
IN COORDINATE TRANSFORMATIONS
FOR THE MULTIPLE PLATFORM SENSOR
INTEGRATION PROBLEM**

INTRODUCTION

In multiple platform sensor integration a large number of coordinate transformations are required. Therefore it is necessary to improve the speed of calculations as much as possible. There are at least two fundamentally different starting points in which coordinate rotations can be derived. The first is the use of direction cosine matrices which are well known, published, and used repeatedly in the literature. The *second means* is to derive the coordinate rotations by using quaternions. This method may not be as well known. Rather than develop the quaternions an example is first shown using the direction cosine and then the quaternion approach. Since both methods yield the same results for the same initial conditions they are equivalent. In fact identities relate the two methods. It is the purpose of this report to describe to those members of the sensor integration community (who may not be aware of it) how these identities can be used to improve the computation time in coordinate rotations.

EXAMPLE

A simple rotation of the X,Y coordinates into the X', Y' coordinates by the angle α is shown in Fig. 1.

Note: Manuscript submitted May 10, 1977.

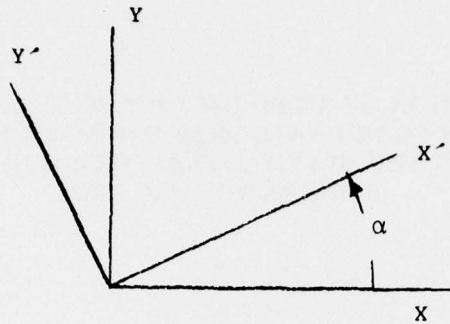


Fig. 1 - Demonstration of coordinate rotation using direction cosines

The equations are well known and are as follows:

$$X' = X \cos \alpha + Y \sin \alpha \quad (1)$$

$$Y' = -X \sin \alpha + Y \cos \alpha \quad (2)$$

The same transformation in quaternions is

$$X' = \frac{2(X + Y \tan \alpha/2)}{1 + \tan^2 \alpha/2} - X \quad (3)$$

$$Y' = Y - \frac{2(X + Y \tan \alpha/2)}{1 + \tan^2 \alpha/2} \tan \alpha/2 \quad (4)$$

We will shown (1) and (2) are equivalent to (3) and (4). Expanding (3) and (4) one obtains

$$x' = \frac{(1 - \tan^2 \alpha/2)}{(1 + \tan^2 \alpha/2)} x + \frac{2 \tan \alpha/2}{1 + \tan^2 \alpha/2} y \quad (5)$$

$$y' = \frac{-2 \tan \alpha/2}{1 + \tan^2 \alpha/2} x + \frac{(1 - \tan^2 \alpha/2)}{1 + \tan^2 \alpha/2} y. \quad (6)$$

By using the trigometric identities

$$\cos \alpha = \frac{1 - \tan^2 \alpha/2}{1 + \tan^2 \alpha/2} \quad \text{and} \quad (7)$$

$$\sin \alpha = \frac{2 \tan \alpha/2}{1 + \tan^2 \alpha/2} \quad , \quad (8)$$

we find (1) and (2) are equivalent to (3) and (4).

THE METHOD

In the example used the quaternion technique would be faster to compute because only one trigometric function need be computed. In addition, the tangent of the half angle is also an easier computation as discussed subsequently. The object then is to compute the tangent of the half angle and through the use of trigometric identities to rearrange the direction cosine equations so that the least computation is obtained.

Consider the following sequence of computations:

$$b = \tan \alpha/2 \quad (9)$$

$$D = 2/(1 + b^2) \quad (10)$$

$$X' = D(X + bY) - X \quad (11)$$

$$Y' = Y - bD(X + bY) \quad (12)$$

for example. Equation (11) and (12) are equivalent to either (1) and (2) or (3) and (4) when (9) and (10) are substituted into (11) and (12). The calculation requires the evaluation of one trigonometric function, 5 multiplies or divides, and 4 additions or subtractions. More complex rotations can be improved in the computation time by applying similar principles. The principal is to modify the sine and cosine functions by trigonometric identities so that they are in terms of the tangent of the half angle and then rearrange the direction cosine equations for the least computation.

A few comments are made on the evaluation of the tangent. Since the range of values of α is from -180° to 180° the range of values for the half angle $\alpha/2$ is -90° to 90° . However only the values from 0° to 90° need be computed because of the odd symmetry. This range of values can be further reduced by using the trigonometric identity.

$$\tan \alpha/2 = 1/[\tan (90^\circ - \alpha/2)] \quad (13)$$

for values of $\alpha/2$ between 45° and 90° . Therefore, the only values required for computation are those of $\alpha/2$ between 0° and 45° . The computation can be made very accurate with the table lookup and a linear interpolation between points.

SUMMARY

Coordinate rotations can be derived in two fundamentally different ways. The quaternion representation has a speed advantage to the direction cosine representation. It was the purpose of this report to point out to those in the sensor integration community this fact. The basic principle which can be applied is to find the tangent of the half angle and rearrange the direction cosine equations using trigometric identities to obtain the higher speed forms. The technique is applicable to either digital computers or high speed dedicated digital hardware where extremely high speeds are desired.