
AD-A037 020 DAYTON UNIV OHIO RESEARCH INST F/G 6/14
BIOMECHANICS AND ANTHROPOMETRY FOR COCKPIT AND EQUIPMENT DESIGN--ETC(U)
MAR 76 S M EVANS, M J HIMES, P E KIKTA F33615-75-C-5092
UNCLASSIFIED UDRI-TR-76-85 AMRL-TR-77-7 NL

1 OF 1
AD A037020

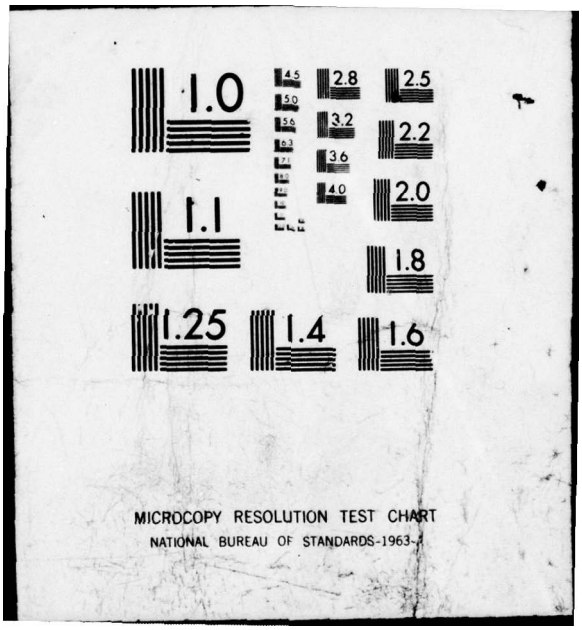

END
DATE FILMED
4-77


1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
4.5
5.0
5.6
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AMD/R&D

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER: AMRL-TR-77-7	2. GOVT ACCESSION NO.
3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle): Biomechanics and Anthropometry for Cockpit and Equipment Design	5. TYPE OF REPORT & PERIOD COVERED: Final Report 1 Dec 75 - 31 Dec 76
6. PERFORMING ORG. REPORT NUMBER: UDRI-TR-76-85	
7. AUTHOR(s): Susan M. Evans, Paul E. Kikta, Martin J. Himes	8. CONTRACT OR GRANT NUMBER(s): F33615-75-C-5092
9. PERFORMING ORGANIZATION NAME AND ADDRESS: University of Dayton Research Institute, 300 College Park, Dayton, Ohio 45469	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS: 62202F; 7184-08-24
11. CONTROLLING OFFICE NAME AND ADDRESS: Aerospace Medical Research Laboratory, Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433	12. REPORT DATE: March 1976
	13. NUMBER OF PAGES: 90 (91 p.)
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report): Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

DDC RECEIVED MAR 17 1977 A

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Computer Model	Visibility Plot	Strength Study
Man-Model	Three Dimensional	Anthropometric Data
Evaluation	Anthropometry	Anthropometric Model
COMBIMAN	Bivariate Table	Multiple-Bivariates
Plot	HERCULES	

105 400

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report describes enhancements made to the AMRL COMBIMAN (COMputerized BIomechanical MAN-model) program in the areas of man-model link-system and enfleshment characteristics, and in the area of additional functions or options made available to the user of the interactive graphics computer program of COMBIMAN. These new functions include obtaining hard-copy plots of the man-model and workstation as displayed on the Cathode Ray Tube (CRT).

ADA037020

Block 20:

and obtaining visibility plots of the workstation boundary.

The report also documents technical procedures followed in readying the AMRL HERCULES (Human Engineering Research to Cull Efficient Strength) Lab for measuring strength capabilities of seated operators, and the procedures established for running the subjects and gathering the data. The last area covered in this report is the development of programs and the manipulation of anthropometric data used in the analysis of human size variability data. This includes preliminary documentation for the Multiple Bivariate Plotting program, and the procedure established in standardizing the AMRL Data Bank Library Computer Programs, and the AMRL Data Bank Tape Library.

AMRL-TR-77-7



BIOMECHANICS AND ANTHROPOMETRY FOR COCKPIT AND EQUIPMENT DESIGN

UNIVERSITY OF DAYTON RESEARCH INSTITUTE
BIOENGINEERING DIVISION
DAYTON, OHIO 45469

DDC
RECEIVED
MAR 17 1977
A

March 1976

Approved for public release; distribution unlimited

AEROSPACE MEDICAL RESEARCH LABORATORY
AEROSPACE MEDICAL DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Please do not request copies of this report from Aerospace Medical Research Laboratory. Additional copies may be purchased from:

National Technical Information Service
5285 Port Royal Road
Springfield, Virginia 22161

Federal Government agencies and their contractors registered with Defense Documentation Center should direct requests for copies of this report to:

Defense Documentation Center
Cameron Station
Alexandria, Virginia 22314


TECHNICAL REVIEW AND APPROVAL

AMRL-TR-77-7

This report has been reviewed by the Information Office (OI) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

FOR THE COMMANDER



CHARLES BATES, JR.
Chief
Human Engineering Division
Aerospace Medical Research Laboratory

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AMRL-TR-77-7	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE *(and Subtitle)* Biomechanics and Anthropometry for Cockpit and Equipment Design		5. TYPE OF REPORT & PERIOD COVERED Final Report 1 Dec 1975 - 31 Dec 1976 6. PERFORMING ORG. REPORT NUMBER UDRI-TR-76-85
7. AUTHOR(s) Susan M. Evans Paul E. Kikta Martin J. Himes		8. CONTRACT OR GRANT NUMBER(s) F33615-75-C-5092
9. PERFORMING ORGANIZATION NAME AND ADDRESS University of Dayton Research Institute 300 College Park Dayton, Ohio 45469		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62202F 7184-08-24
11. CONTROLLING OFFICE NAME AND ADDRESS Aerospace Medical Research Laboratory, Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433		12. REPORT DATE March 1976 13. NUMBER OF PAGES 90
14. MONITORING AGENCY NAME & ADDRESS*(if different from Controlling Office)*		15. SECURITY CLASS. *(of this report)* Unclassified 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT *(of this Report)*

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT *(of the abstract entered in Block 20, if different from Report)*

18. SUPPLEMENTARY NOTES

19. KEY WORDS *(Continue on reverse side if necessary and identify by block number)*

Computer Model	Visibility Plot	Strength Study
Man-Model	Three Dimensional	Anthropometric Data
Evaluation	Anthropometry	Anthropometric Model
COMBIMAN	Bivariate Table	Multiple-Bivariates
Plot	HERCULES	

20. ABSTRACT *(Continue on reverse side if necessary and identify by block number)*

This report describes enhancements made to the AMRL COMBIMAN (COMputerized BIomechanical MAN-model) program in the areas of man-model link-system and enfleshment characteristics, and in the area of additional functions or options made available to the user of the interactive graphics computer program of COMBIMAN. These new functions include obtaining hard-copy plots of the man-model and workstation as displayed on the Cathode Ray Tube (CRT),

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

Block 20:


and obtaining visibility plots of the workstation boundary.

The report also documents technical procedures followed in readying the AMRL HERCULES (Human Engineering Research to Cull Efficient Strength) Lab for measuring strength capabilities of seated operators, and the procedures established for running the subjects and gathering the data. The last area covered in this report is the development of programs and the manipulation of anthropometric data used in the analysis of human size variability data. This includes preliminary documentation for the Multiple Bivariate Plotting program, and the procedure established in standardizing the AMRL Data Bank Library Computer Programs, and the AMRL Data Bank Tape Library.

SUMMARY

This report describes the engineering services performed by the University of Dayton Research Institute (UDRI) to provide the Aerospace Medical Research Laboratory (AMRL) with biomechanic and anthropometric data in a form readily and clearly interpretable by design engineers. The ultimate use of the data will be in developing specifications and standards for cockpit geometries of advanced aircraft and personal-protective equipment. The primary effort was to modify, maintain, validate, and document computer programs for guiding the design and evaluation of cockpit geometries and to present, in standard format, the computer programs designed for analyses of military anthropometric data. These are required for the design of workstations, personal-protective equipment, and human analogs. The secondary effort was to provide engineering and research support to studies describing strength characteristics of AF personnel.

The work described in this report is a direct outgrowth and represents a continuation of the development and documentation of AMRL's COMputerized BIomechanical MAN-model (COMBIMAN) program. It also describes the continuation of the extensive work in developing and standardizing computer programs designed for the efficient analysis of presentation of anthropometric data for guiding the design of AF systems and equipment.

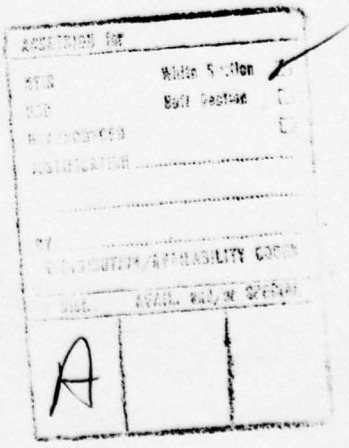

PREFACE

This report documents research performed by personnel of the University of Dayton Research Institute (UDRI) for USAF Contract F33615-75-C-5092, entitled "Biomechanics and Anthropometry for Cockpit and Equipment Design". The government work unit number for this contract is 71840824. The contract was monitored by Dr. Joe W. McDaniel, of the Crew Station Integration Branch, Human Engineering Division, Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio. The principal investigator on the contract was Ms. Susan M. Evans, while Paul E. Kikta provided programming support, and Martin J. Himes provided technical support. David Nearing provided programming support for program RANDM, documented in Section 3.

The research documented in this report was performed in conjunction with personnel of the Crew Station Integration Branch. In particular, Drs. Joe McDaniel and Kenneth Kennedy provided valuable data and equations used in the generation of the COMBIMAN man-model. The link system presently used in COMBIMAN is the result of research performed by personnel in the Crew Station Integration Branch (AMRL/HED), in particular Dr. Kenneth W. Kennedy. Mr. Charles Clauser directed much of the effort involving the bivariate program, the standardization of the AMRL Anthropometric Data Base, and the biostereometric program. Dr. H. E. Krause, formerly of UDRI, also participated in the development of the enfleshment ellipsoids about the COMBIMAN man-model. The authors gratefully acknowledge his assistance, as well as that of the staff of the UDRI.

TABLE OF CONTENTS

Section		Page
1	INTRODUCTION	7
2	FURTHER DEVELOPMENT OF THE COMBIMAN PROGRAM	8
	2.1 Enfleshment of the Man-Model	8
	2.1.1 Generating the Link System	8
	2.1.2 Enfleshment Ellipsoids	11
	2.1.3 Tangent Line Connectors	15
	2.2 Plot COMBIMAN	18
	2.2.1 Data Preparation	20
	2.2.2 Plotting	21
	2.3 Ground Visibility Plots	21
	2.3.1 Workspace Outline Coordinate Data Input	24
	2.3.2 Generating the Vision Angles	30
	2.3.3 The Visibility Plot and Printed Output	32
3	STRENGTH CAPABILITIES OF SEATED OPERATORS	36
	3.1 HERCULES Lab	36
	3.1.1 Contractor-Built Equipment	36
	3.1.1.1 Remote Control Unit	36
	3.1.1.2 Timer Controlled Tone Generator	39
	3.1.1.3 Audio Amplifier	39
	3.1.1.4 Power Supply	42
	3.1.2 Modifications to the Existing Equipment	42
	3.1.2.1 Reference Resistors	42
	3.1.2.2 Noise Level Reduction	42
	3.1.2.3 Dial Encoder	42
	3.1.2.4 Tape Recorder Remote Control	42
	3.1.2.5 Remote Strip Chart ON/OFF Switch	44
	3.2 Procedures	44
	3.2.1 Computer-Generated Data Collection Format	44
	3.2.1.1 Method	44
	3.2.1.2 Program Input Data	45
	3.2.1.3 Program Output	50
4	MULTIPLE BIVARIATE PLOTTING PROGRAM (BIVPLOT)	52
	4.1 The Plot	52
	4.2 Table of Contents	55

TABLE OF CONTENTS (Continued)

Section		Page
	4.3 BIVPLOT Multiple Survey Tapes	55
	4.4 Equalizing Sample Sizes	63
	4.5 Summary	63
5	BIOSTEREOMETRIC DATA	65
	5.1 Herron's Biostereometric Data	65
	5.2 Input	65
	5.3 Summary	66
6	THE AEROSPACE MEDICAL RESEARCH LABORATORY DATA BANK AND RELATED MATERIALS	72
	6.1 The AMRL Data Bank Library of Computer Programs	72
	6.2 The AMRL Data Bank Tape Library	72
	6.2.1 Tape Format	73
	6.2.2 Summary	73
	6.3 Intercorrelations of Anthropometric Measurements	73
	6.3.1 Two Tapes for Comparison	80
	6.3.2 U.S. Correlations	80
REFERENCES		85

LIST OF FIGURES

Figure		Page
1	Side View of COMBIMAN Link System (Reference 2).	10
2	Side View of COMBIMAN With Enfleshment Ellipses (Reference 2).	12
3	Ellipsoid Surrounding the Distal Joint of Link L_{I_i}.	13
4	Side View of COMBIMAN With Tangent Lines (Reference 2).	16
5	Flow of Tangent Line Subroutine.	17
6	Side View of Model With Concentric Ellipses at Mid-Hip and Right Hip Identified.	19
7	Flow Diagram for Subroutine CBMCP1.	22
8	Flow Diagram for Subroutine CBMCP2.	22
9	Sample Plot of Man-Model and Workstation from X-Z Y-Z and X-Y Planes.	23
10	Orientation of Aircraft System of Coordinates.	25
11	Input Formats for Visibility Plot Subroutine.	26
12	Punched Data for A7 Cockpit Boundary.	28
13	Job Control Cards Needed to Establish Data Set on Disk Containing Boundary Outlines for Visibility Plots.	29
14	Sample Visibility Plot - Straight Ahead View.	31
15	Sample Visibility Plot - Off Angle View.	34
16	Sample Visibility Plot Printed Output for Cockpit Clearline Boundary in Figure 14.	35
17	HERCULES System Component Diagram.	37
18	HERCULES System Remote Control Unit.	38
19	Circuit Diagram for Electronic Timer.	40
20	Diagram of the Power Supply and Audio Amplifier.	41
21	Diagram Representing a Single Channel of a 3-Channel HERCULES Bridge Transducer System.	43
22	Sample Data Collection Sequence, with Subject 1 Repeated.	46
23	Sample Data Collection Sequence, with New Seed Number Printed.	47

LIST OF FIGURES (Continued)

Figure		Page
24	Flow Diagram for Program RANDM.	48
25	Input Data Formats for Program RANDM.	49
26	Repeat of Input to Program RANDM.	51
27	Line Printer Output for a Single Survey from Program BARE BIVAR.	53
28	Metric BIVPLOT Output.	54
29	Table of Contents for 1967 USAF Men Vs. 1968 USAF Women Plots; Plotted by Program Contents.	56
30	Survey Variable Names, Numbers and Ranges from the Individual Survey Tapes.	60
31	Combined Tape for Input to BIVPLOT.	61
32	Format Information for Herron's Data (Reference 8).	67
33	General Flow of Program HER1.	68
34	Input from Report DOT-HS-801:430 Variable Names and Density/Weight Values for Each Segment (Reference 9).	69
35	First Two Tables of Herron's Data Input for HER1.	70
36	HER1 Output.	71
37a	The Heading and Identification Records and Some Formats (Reference 10).	74
37b	The Historical Background and Coding Information (Reference 10).	75
37c d&e	The Variable Name-Range Records (Reference 10).	76
37f	The Subject Data Format and the Data Itself for the First Five Subjects (Reference 10).	79
38	Listing of Correlation Tape of 1967 USAF Men Vs. 1968 USAF Women (WAF) for 100 Variables.	81

SECTION 1
INTRODUCTION

This report covers the enhancements made to the Aerospace Medical Research Laboratory (AMRL) COMBIMAN program, the efforts to standardize the AMRL Anthropometric Data Bank, and the research support provided for studies describing the strength characteristics of AF personnel.

The work documented in this report is a direct outgrowth and represents a continuation of the development and documentation of AMRL's COMputerized BIomechanical MAN-model (COMBIMAN) program. The COMBIMAN program has been developed to provide the workstation engineer with an interactive graphics program to be used in the design and evaluation of aircraft cockpits. This report describes the procedures developed for the generation of the link system and enfleshment of the COMBIMAN man-model. It also documents features which enable the user to obtain visibility plots and hard copy plots of the man-model and workstation configurations.

This report also documents the continuing effort in developing and standardizing computer programs designed for the efficient analyses of anthropometric data for guiding the design of AF systems and equipment. In particular it describes the computer program developed to plot multiple survey bivariate tables, the research performed on AMRL-supplied biostereometric data, and the standardization effort dealing with the programs and the anthropometric survey data tapes of the AMRL Anthropometric Data Bank.

SECTION 2

FURTHER DEVELOPMENT OF THE COMBIMAN PROGRAM

This section documents the continued development of AMRL COMBIMAN (COMputerized BIomechanical MAN-model) program, as performed by UDRI personnel during this contract period. The three primary areas covered in this section are the enfleshment procedures established for the man-model, the plot program developed to generate hard copy plots of the man-model and workstation as displayed on the IBM 2250-3 Cathode Ray Tube, and the on-line generation of visibility plots. Another area of development which will not be documented here is the COMBIMAN User's Guide (Reference 1), written during this contract period. It reflects the operational status of the COMBIMAN programs as of 1 November 1976.

2.1 ENFLESHMENT OF THE MAN-MODEL

The man-model used in COMBIMAN is based on a 33-link skeletal system. Each of these links connects major points of rotation of the body segments. The model is constructed by the interactive graphics program of COMBIMAN in three stages. The first stage is the generation of the link system of the model. The second stage involves the definition of the enfleshment ellipsoids about the link system joints. The third stage is the connection of the elliptical projections with tangent lines.

2.1.1 Generating the Link System

Although 33 links are defined for the man-model, two of these links are positioning links, and are used to provide a common reference between the seat reference point of the model and the workspace. The links system is constructed by adding links together to form a link chain, starting with the link at the seat reference point (SRP). As each link is positioned, the link end point, or joint location, is defined in terms of a position vector,

with respect to the SRP. The major points of rotation of the body segments are shown in a side view of the model in Figure 1. Work of the Aerospace Medical Research Laboratory (AMRL) with two dimensional drawing board manikins formed the foundation for the three dimensional link system of the COMBIMAN model. AMRL data have been used in defining relationships between measurable anthropometric surface dimensions and difficult to measure internal link lengths, and in defining the range of values for transformation or Euler-type angles used to position the links.

When using the COMBIMAN interactive graphics program CBM04, the user has the ability to vary the proportions of the model to suite the needs of the application. The user may supply values as dimensions or percentiles for a variable number of anthropometric surface dimensions, or may insert the internal link lengths directly. To alter the position of the model, the user changes any of the values for the Euler-type angles available for each link. More information on the procedures for altering the dimensions of the model is given in the COMBIMAN User's Guide - (Reference1).

At the present time the equations used to establish the internal link lengths have not been validated against real life data. This is to be done in the upcoming contract period. Because they have not been validated, actual equations based on AMRL supplied data will not be presented in this report.

In assembling the individual links called L_i to establish joint locations in three dimensional space, the length and the three-dimensional Euler-type angles of a particular link are used, along with the three dimensional coordinate of the previous link, L_{i-1}, and the product of the transformation matrices which positioned L_{i-1}. The three Euler-type angles used for each link correspond to the three rotations of the coordinate axis of the system about link L_i to establish its location relative to link L_{i-1}. If all the Euler angles between adjacent links are specified, the geometric configuration of the man-model is specified. A more detailed description of the use

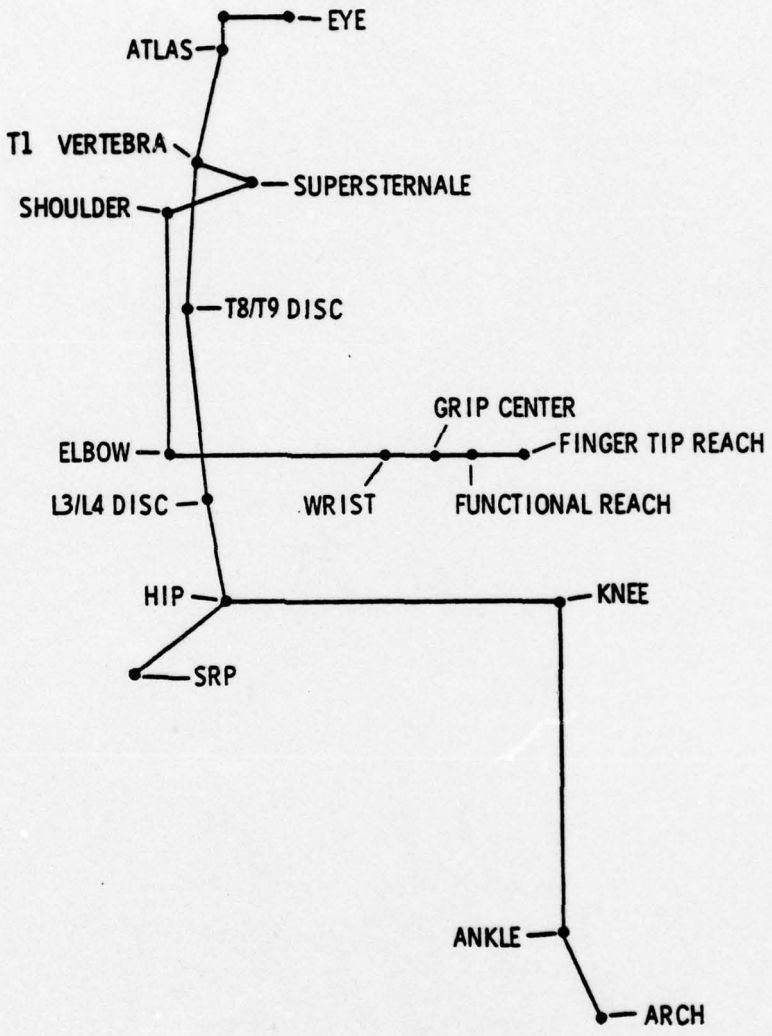


Figure 1. Side View of COMBIMAN Link System (Reference 2).

of transformation matrices and the establishment of joint locations, see Chapter 2 in Reference 3. This technique of positioning links places realistic limitations on the range of mobility of each joint and permits the repositioning of the distal link, L_i, by movement of a proximal link, say L_{i-1}.

2.1.2 Enfleshment Ellipsoids

The enfleshment, or addition of volume about the links, of the stick man-model to produce a realistic and anthropometrically correct man-model starts with the joints of the stick man-model. The joint at the distal end of each link is surrounded with an ellipsoid (three dimensional ellipse) for this purpose, as shown for a side view of the model in Figure 2. Figure 3 shows a system of coordinates for a joint at the distal end of the link L_{I_i}. This is known as the "link's system of coordinates." It is permanently attached to the end of the link, and moves with it in space. It is used to define the orientation of the next distal link which is attached to the joint.

The size and shape of an ellipsoid is defined by the dimensions of the semiaxes a, b, and c in Figure 3. These dimensions are based on body surface and mass dimensions, and derived from equations supplied by personnel of AMRL/HED. The semiaxes dimensions for each joint correspond to the height, width and breadth surface dimensions at that joint.

The position of the ellipsoid in space is determined in relation to the individual link's system of coordinates. The dimensions α, β, and γ in Figure 3 specify the distances by which the center of the ellipsoid is offset from the origin of system of coordinates in the x, y, and z directions respectively. The ellipsoid is centered at the origin of the system of coordinates, and therefore about the center of rotation, if $\alpha = \beta = \gamma = 0$.

The angular alignment of the ellipsoid is another necessary quantity to define its position. The y axes of the links' system of coordinates of the present stick-man model have been aligned with the major axis of rotation of the joint. The semiaxis b of the ellipsoid is aligned with this major

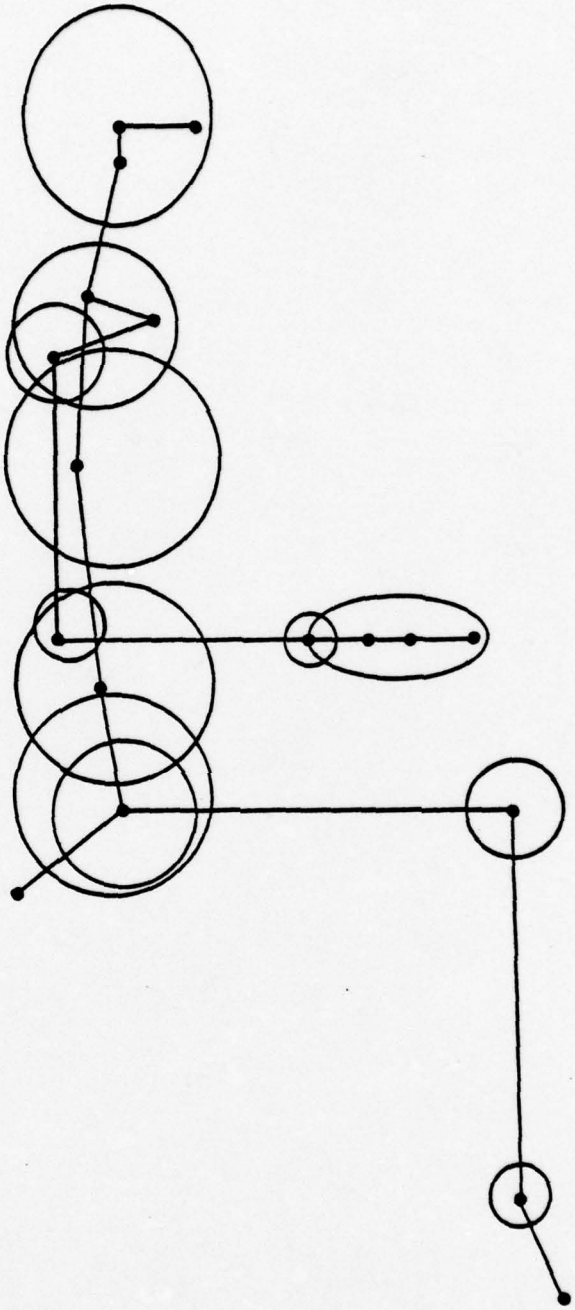


Figure 2. Side View of COMBIMAN With Enfleshment Ellipses (Reference 2).

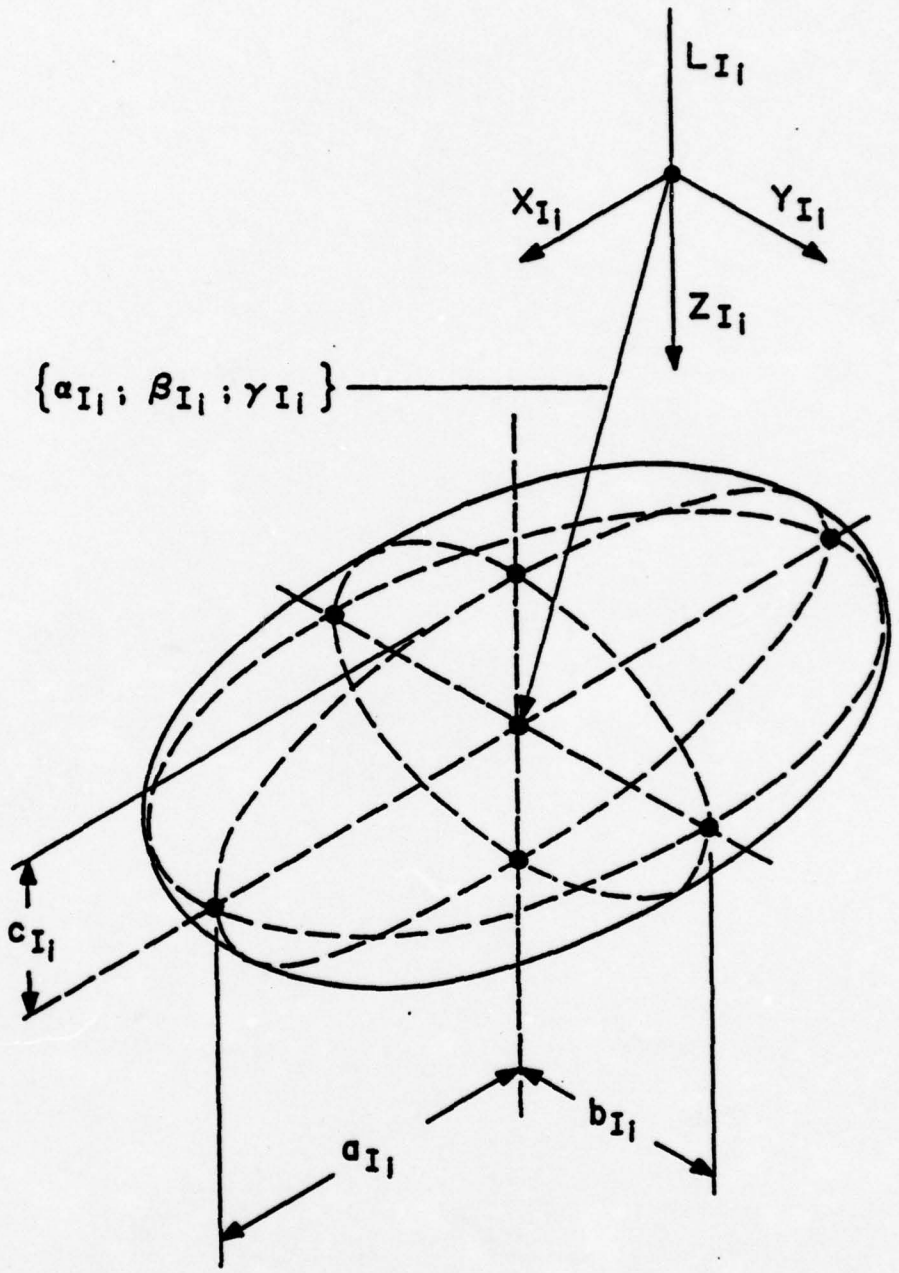


Figure 3. Ellipsoid Surrounding the Distal Joint of Link L_{I_i}.

axis of rotation. All ellipsoid axes are parallel to the axes of the link system of coordinates. This alignment produces a realistic contour of highly flexible joints at any degree of joint flexion or extension. The semiaxes a and c will have identical dimensions in most flexible joints. The cross sectional area of the ellipsoid in planes parallel to the z-x plane is thus circular. This enables the ellipsoid to function like a ball joint and to maintain anthropometrically realistic dimension in several directions.

The COMBIMAN man-model is displayed by projecting two orthogonal views on a cathode ray tube screen. The ellipsoids surrounding the joints are also projected into the screen. These projections are ellipses and are identical to the shadow of the ellipsoids produced by a source of parallel light perpendicular to the viewing screen. The man-model can be rotated and magnified or reduced within the viewing area. Any such manipulation changes the shape and/or size of the projected man-model. Any such manipulation will also change the shape and size of the shadow of a given ellipsoid on the cathode ray tube screen. The essence of the joint enfleshment stage is the definition of the projected ellipses under all conditions of body positions and viewing angles.

The projected contour of the ellipsoid onto a screen is identical to the crest (visible outer boundary) of the ellipsoid. The equations which have been developed by UDRI in conjunction with AMRL personnel are defined in detail in Section 2 of "The COMBIMAN Enfleshment Procedure and Expanded Joint Mobility Analysis", published as UDRI-TR-76-18, by the University of Dayton Research Institute in September, 1976.

The equations which are used to establish the lengths of the semiaxes a, b, and c for each joint, have not yet been validated against actual subject data. This, like the validation of the data used in stage one, is a key task to be accomplished during the next contract period.

2.1.3 Tangent Line Connectors

The last stage of the man-model generation is the connection of the elliptical contours of adjacent joints with tangent lines. This is done separately for all the contours in each viewing plane. Figure 4 shows a side view of the model with the tangent lines added. In this figure, unnecessary elliptical outlines have been eliminated. The present COMBIMAN program retains all outlines on the various views.

The equations used to establish the location of the endpoints of the tangent lines were developed by AMRL/HED personnel, in particular Dr. Joe McDaniel. The procedure used requires two sets of points which define the contours of two ellipses, each around a point of origin, with a link connecting them. One of the points of origin, and the set of points about it will be called proximal, and the other point will be called distal. From a point along the line passing thru the proximal and distal points, but beyond the proximal point, compute the slope of lines connecting this new point with each of the points on the distal ellipse. Locate the minimum and maximum slopes. From the point used in defining the maximum slope to the proximal projection, calculate the slopes to each point on the distal projection, and locate the minimum slope. From the first point used to define the first maximum slope, calculate the slope to each point on the proximal projection, and find the minimum slope. From the point used in defining this last minimum slope on the proximal projection, calculate the slopes to each point of the distal projection, and locate the maximum slope. A more detailed explanation of this procedure is shown in the flowchart in Figure 5.

The points which are located in steps 2 and 3, and 4 and 5 in Figure 5 define the endpoints of two tangent lines connecting adjacent links for one view of the model. This procedure is repeated for each combination of elliptical projections of adjacent links, for each view of the model.

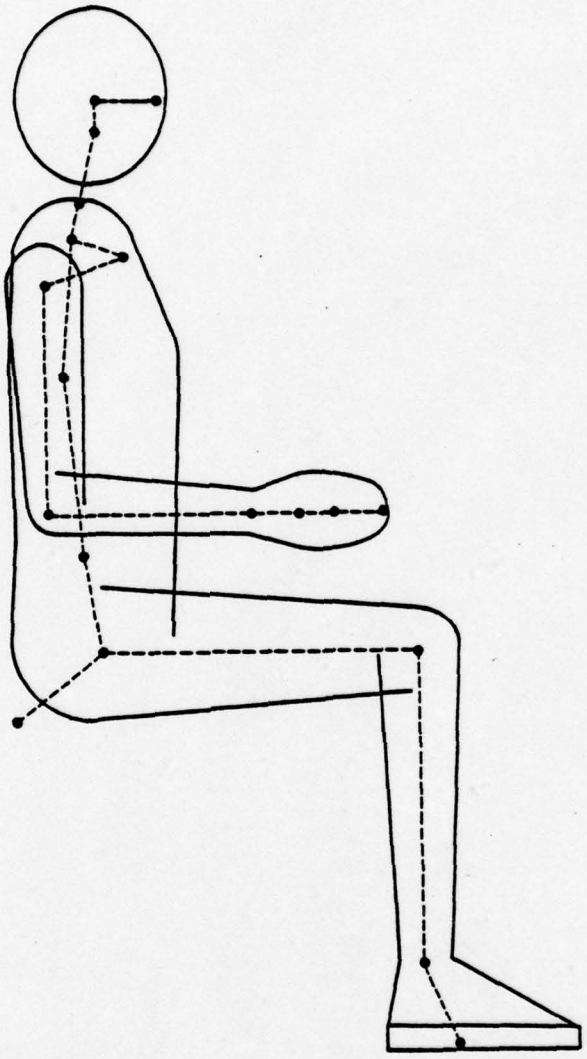


Figure 4. Side View of COMBIMAN With Tangent Lines (Reference 2).

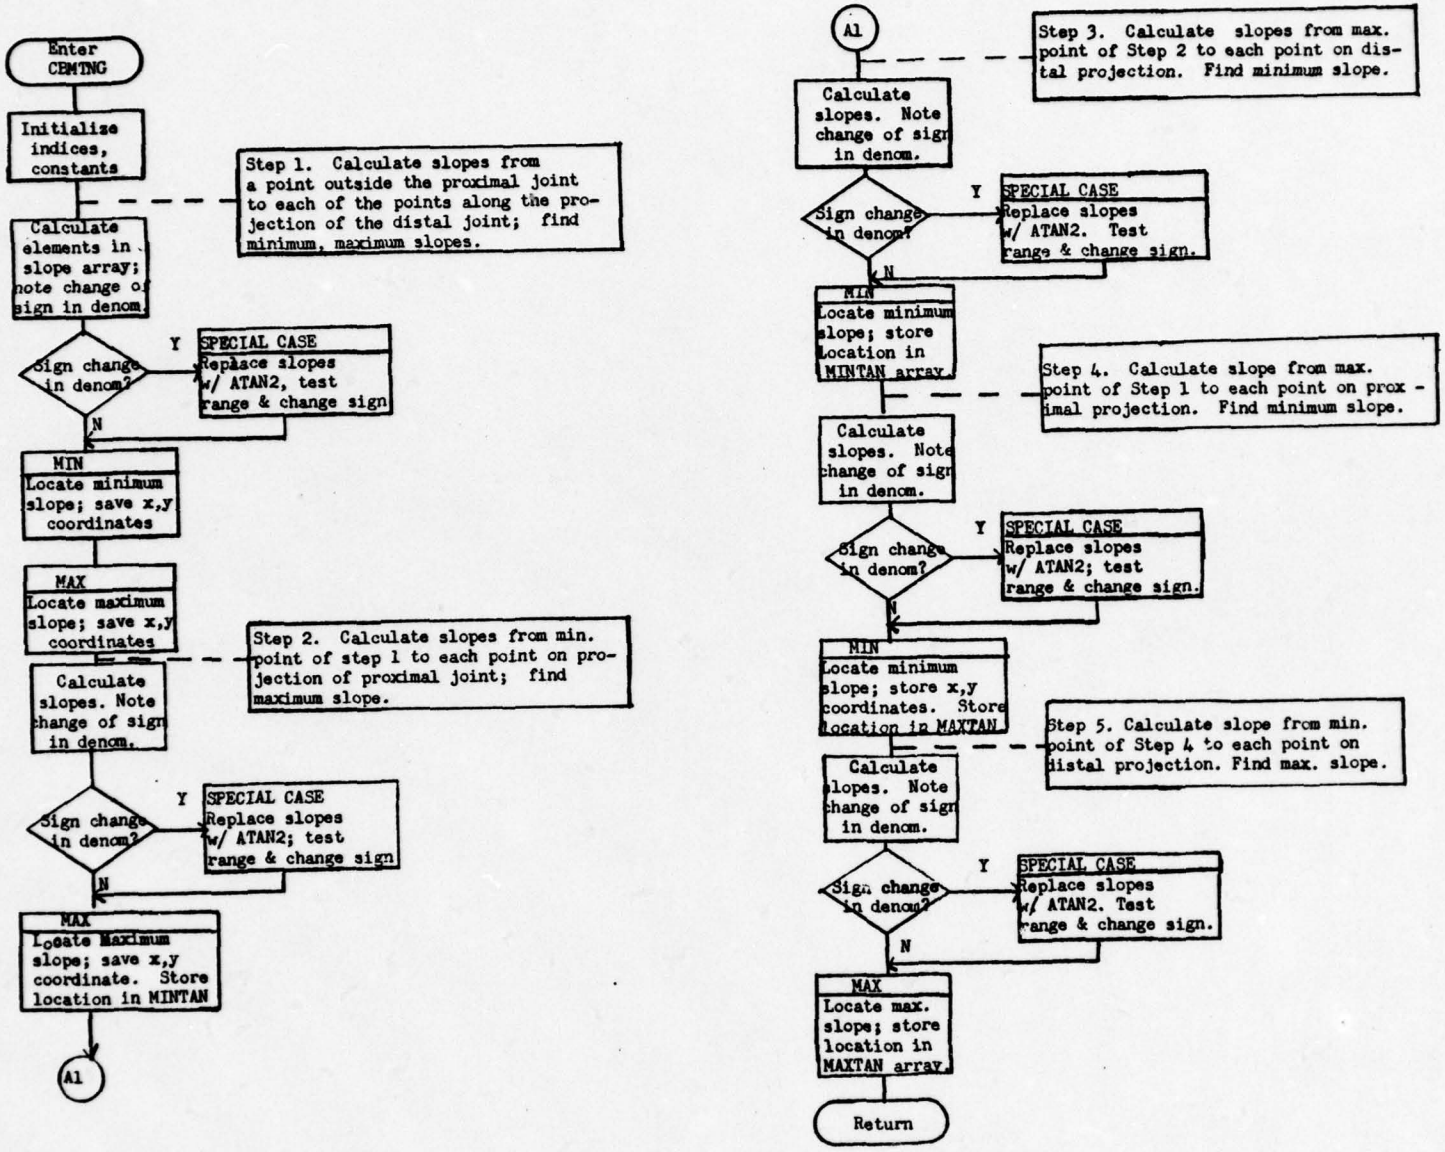


Figure 5. Flow of Tangent Line Subroutine.

Because of the nature of certain adjacent links, the enfleshment ellipses may appear to be concentric at certain viewing angles. Eventually, the tangent line subroutine will be able to detect this, and not calculate tangent line endpoints. At the present time, however, it attempts to calculate tangent lines, and often generates unusual results. An example of concentric ellipses in the side view is shown in Figure 6. The "tangent lines" connecting the MID-HIP projection and the RIGHT UPPER THIGH projection lay within the outer projection, creating unnecessary clutter on the display for the viewer.

The subroutine of the interactive graphics program CBM04, which issues the graphics orders to plot the man-model on the IBM 2250 CRT, uses the x, y, and z coordinates which define the endpoints of each link with respect to the SRP of the model. It uses the coordinates two at a time, however, to project the X-Z (side) plane, and the Y-Z (top) plane of the model (giving two orthogonal views). One view is completely generated, combining the link vertex data with the elliptical projection and tangent line coordinates for that view. The generation of and use of data for X-Y (top) plane is optional, but the user may decide to calculate this extra set of projectsions and tangent lines for use in hard copy - plots of the man-model/workspace configuration. The hard copy plots are discussed in the next paragraph.

2.2 PLOT COMBIMAN

In order to obtain hard-copy representations of the man-model and workstation configuration currently being displayed on the IBM 2250 Cathode Ray Tube (CRT), subroutines were developed and added to the COMBIMAN interactive graphics program CBM04 to generate two to three two dimensional plots on the HESS's on-line GOULD electrostatic plotter. The subroutines use the data arrays of three dimensional real world coordinates which are contained in computer memory and which represent the configuration of the link system of the model, the points on the elliptical projections, and the panels of the workstation. The subroutines also use data on the range of

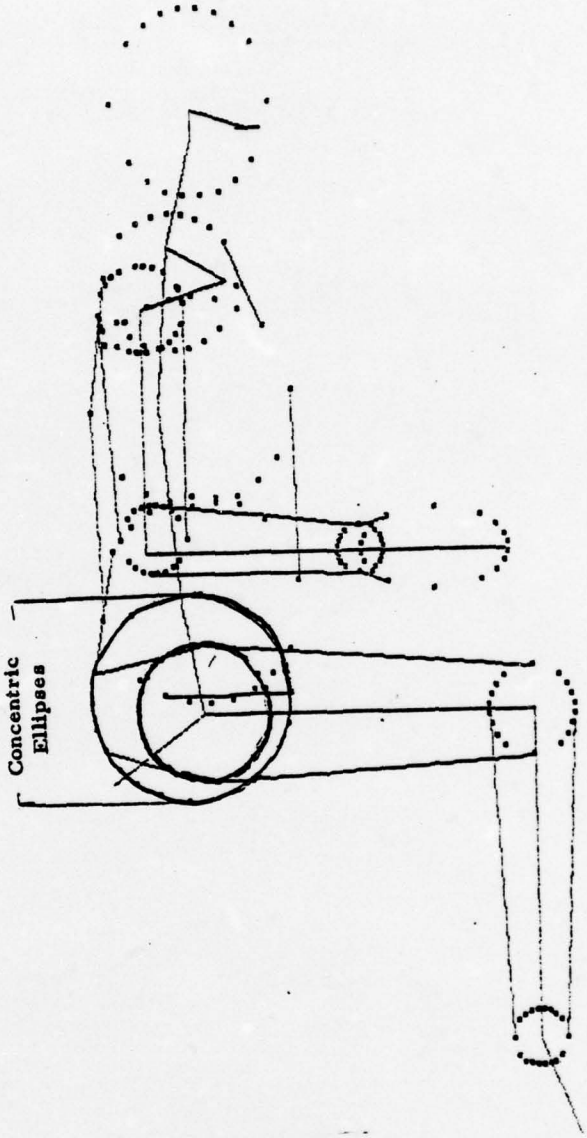


Figure 6. Side View of Model With Concentric Ellipses at Mid-Hip and Right Hip Identified.

x, y, and z-values contained in the arrays. These data were originally calculated by the subroutine which scales coordinate data to fit in the display area of the CRT and issues the graphics orders to generate the display. The range-data used include the maximum x, y, and z-coordinates found among the points, the ranges over x, y, and z-values, and the maximum of the three ranges.

2.2.1 Data Preparation

The user of the interactive graphics program has two options for specifying the size of the plots to be generated. The user can specify a scale factor from 0. to 1. or can omit any scale factor. For specific instructions on entering scale factors, see Paragraph 2.2.8 of the User's Guide for the Programs of COMBIMAN, AMRL-TR-76-117 (Reference 1). If no scale factor was supplied, the subroutine uses a factor which will scale the coordinates so as to make optimum use of a nine by nine inch plot area for each view. Once a scale factor has been established, the x-coordinates in the data arrays are scaled as follows:

NEWX = (R-WX - XMAX + (MAXDIF - XDIF)/2.0) * SCALE

where:

NEWX	is the scaled x-coordinate value
R-WX	is the unscaled x-coordinate value in the COMBIMAN base system of coordinates
XMAX	is the maximum x-coordinate of all the coordinates in the x-coordinate data arrays
MAXDIF	is the maximum range of coordinates in either the x, y, or z direction
XDIF	is the difference between the minimum x-coordinate value and the maximum x-coordinate value
SCALE	is the available scale factor

The y and z values are scaled similarly, using the following equations.

NEWY = (R-W Y - YMAX - (MAXDIF - YDIF)/2.0) * SCALE

and

NEWZ = (R-WZ - ZMAX - (MAXDIF - ZDIF)/2.0) * SCALE

2.2.2 Plotting

Before the plots of the model and workstation are generated, the main subroutine prints the names of the anthropometric and regression survey used in generating the model, and the name of the workstation used, if one is being used on the plotter. From two to three plots are then generated of the two dimensional views of the model and workstation. The two views which will always be generated are of the X-Z plane and the Y-Z plane. If, prior to selecting the plot COMBIMAN function, the user selected State Switch 11, a third view of the X-Y plane will also be generated. A detailed description on setting State Switches is given in Paragraph 2.2.22 of the User's Guide (Reference 1). A general flow diagram of this main subroutine is shown in Figure 7. The actual plots are generated in a second plotter subroutine which calls the routines of the GOULD Plotter Package (see Reference 4), and plots the link system of the model, enfleshment projections, and the workstation panels for the view in question. A flow diagram of this second subroutine is shown in Figure 8. A complete plot, with three views of the model and workstation is shown in Figure 9.

2.3 GROUND VISIBILITY PLOTS

A subroutine has been added to the COMBIMAN interactive graphics program which enables the user to obtain ground visibility plots. The routine uses the eye location of the man-model in place of a camera lens, as used in AMRL-TR-69-123 (see Reference 5). The routine also provides the user with a cockpit visibility record. The boundary coordinates of objects to be plotted are obtained from engineering drawings of typical aircraft cockpits. The boundary coordinates, in the aircraft system, are read into the subroutine and first converted to the seat reference point coordinate system of the man-

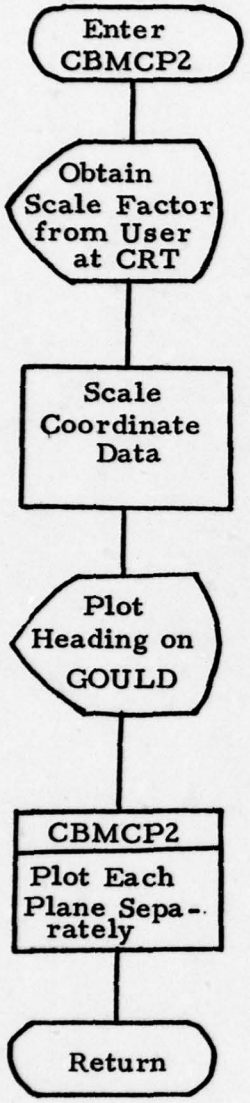


Figure 7. Flow Diagram for Subroutine CBMCP1.

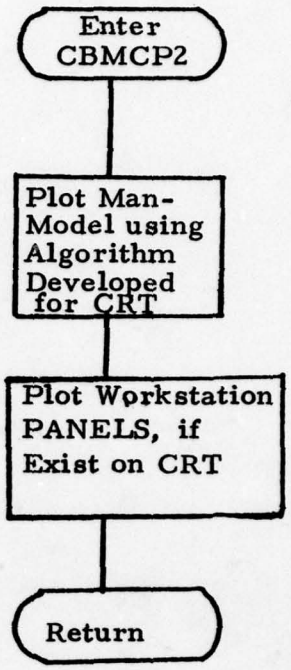


Figure 8. Flow Diagram for Subroutine CBMCP2.

REGRESS=REGRESS01

SURVEY=67SURVEY

WKSP= A7E-01.

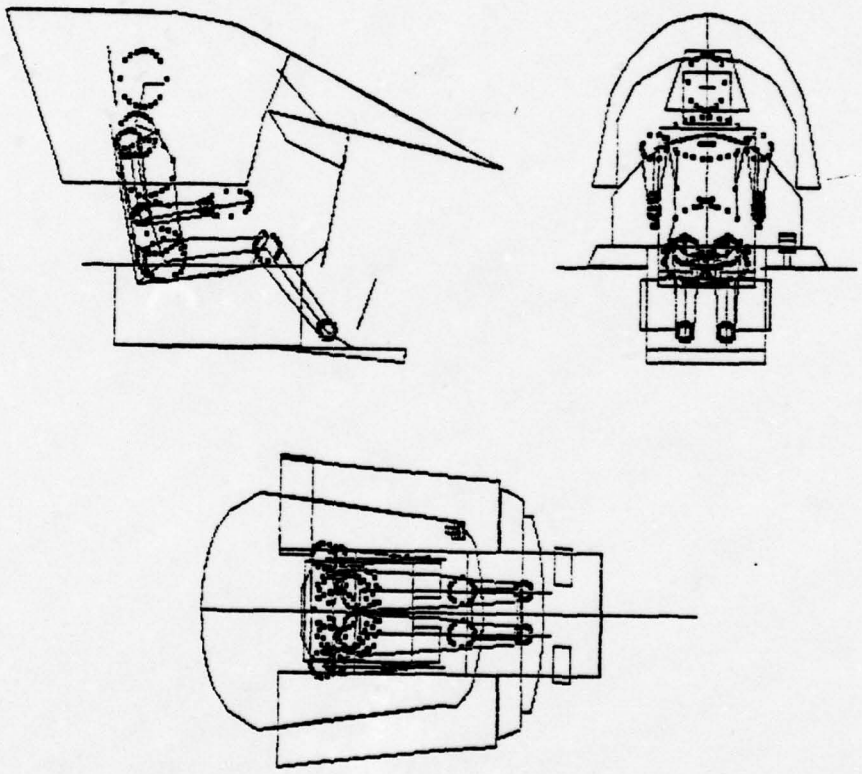


Figure 9. Sample Plot of Man-Model and Workstation from X-Z Y-Z and X-Y Planes.

model, and then to the eye coordinate system of the model, with either the mid-eye, right eye, or left eye point of the man-model being the new origin. The eye point used by the subroutine is determined by the user. The routine then calculates the viewing angle of the model with respect to horizontal and vertical, and uses these angles to establish the cockpit visibility records.

The Visibility Plot subroutine calculates the limits of the fields of vision of the present configuration of the model and superimposes these limits over the boundary coordinates of objects of an existing workspace. It then plots them both on an on-line GOULD plotter. At the present time, the workspace which is being used is that for the A7 cockpit.

As the necessary engineering drawings for more workspaces become available, more boundary coordinates can be typed onto computer cards and added to a special disk file and be made available to the user.

2.3.1 Workspace Outline Coordinate Data Input

Data for use by the visibility plot subroutine are originally obtained from engineering drawings. The three dimensional boundary coordinates of objects to be plotted, such as aircraft canopies, windscreens, and other key outlines, are obtained in the aircraft system of coordinates. The orientation of this system is shown in Figure 10. In addition to gathering coordinate data on the key boundaries in the workspace, the location of the neutral seat reference point in the aircraft coordinate system must also be obtained. When collecting points along the boundaries, it should be noted that the greater the number of points supplied to the subroutine, the smoother the plot will be. The maximum number of points allowed for any one boundary is 200.

Once the data are obtained from the engineering drawings, they should be punched onto computer cards using the formats shown in Figure 11. The first card is punched using the format in Figure 11a. This is done once for the complete set of workspace outlines being considered. The first field on the card, NBND, contains the number of boundaries to be contained in this visibility plot. This value is an integer value, and should be right justified in the five

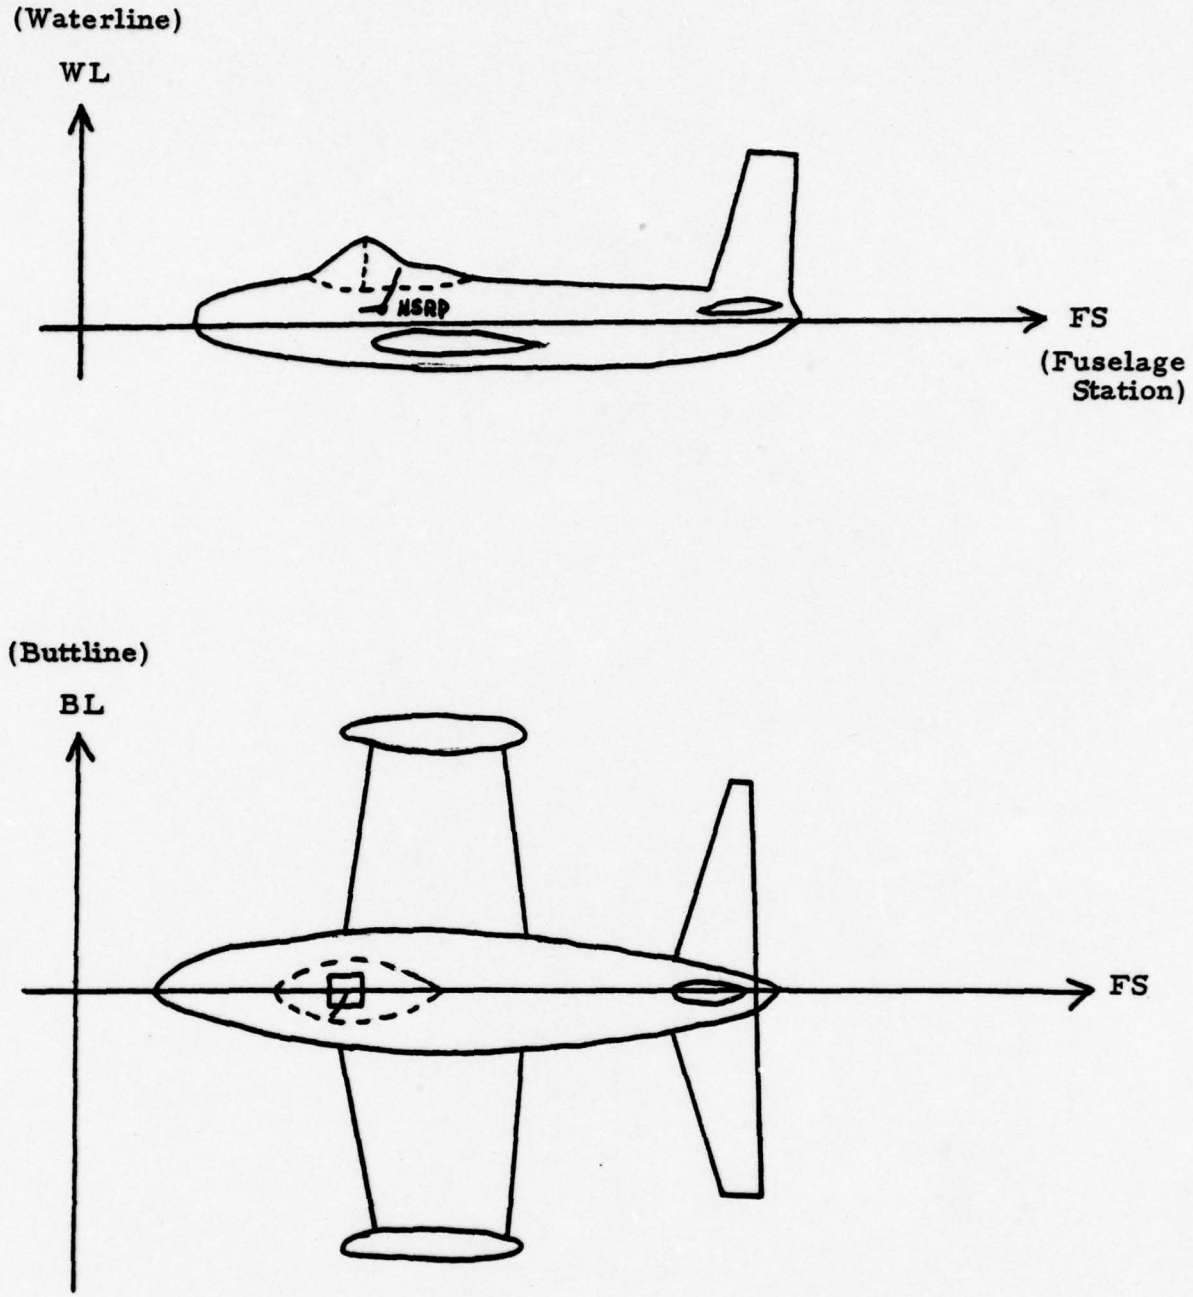


Figure 10. Orientation of Aircraft System of Coordinates.

IBM

INTERNATIONAL BUSINESS MACHINES CORPORATION

Form X24-6592-0
Printed in U. S. A.

MULTIPLE-CARD LAYOUT FORM

Company _____

Application _____ by _____ Date _____ Job No. _____ Sheet No. _____

NBND	XAC	YAC	ZAC	XC	YC	ZC	
9 9 9 9 9	9 9 9 9 9	9 9 9 9 9	9 9 9 9 9	9 9 9 9 9	9 9 9 9 9	9 9 9 9 9	9 9 9 9 9

digit field. The next three fields (XAC, YAC, ZAC) define the location of the neutral seat reference point in the aircraft system of coordinates. These coordinates are real values and assume a format of F5.3 if no decimal point is supplied by the user. The last three fields of this card define the location of the seat reference point of the COMBIMAN model with respect to the neutral seat reference point of the aircraft. At the present time these values should be zero or left blank. In the near future they will be obtained from the interactive graphics program CBM04 to reflect variations in the location of the seat with respect to the original neutral seat reference point.

The second and third formats shown in Figure 11 are used for each boundary. The format in Figure 11b contains the number of coordinate sets, NCOORD, which will be used to define this boundary. It is an integer value, and should be right justified in the five digit field. This card also contains an alphanumeric name for the boundary in field BOUNDARY NAME. The name may not be more than 24 characters long. The format shown in Figure 11c is used to define the three coordinates for each point along the boundary. The three coordinates are to be supplied in the aircraft system, and are typed using a F6.2 format. Sample coordinate data for the A7 cockpit is shown in Figure 12. The workspace is defined in terms of three configurations, the Front Bottom Windscreen, the Front Top Windscreen, and the Cockpit Canopy Clearline.

Once all the data have been punched onto computer cards, they are written onto a disk file for use by the interactive graphics program CBM04. The Job Control Cards (JCL) for accomplishing this are shown in Figure 13. The first outlined area in Figure 13 lists the JCL needed to call an IBM utility "IEHPROGM" which scratches any dataset containing workspace boundary data which may exist on disk. The second outline area shows the JCL needed to call the IBM utility "IEBGENER" and create a new dataset called "SME.VISDATA" which will contain the boundary coordinate data available on cards. The third outlined area lists the JCL used to call the IBM utility "IEBGENER"

```
   3270.6  0.099.15  0.0  0.0  0.0
  17WINDSCREEN, FRNT BOTTOM
22763    544 12535                    101
22379    551 12324                    101
22098    546 12157                    101
21893    519 12059                    101
21579    486 11876                    102
21314    427 11735                    102
21109    362 11616                    102
20914    281 11584                    102
20914    000 11584                    103
20914   -281 11584                    103
21109   -362 11616                    103
21314   -427 11735                    103
21579   -487 11876                    104
21893   -519 12059                    104
22098   -546 12157                    104
22379   -551 12324                    104
22763   -584 12535
  17WINDSCREEN, FRONT TOP
22763    584 12535
23000    578 12665                    201
23212    568 12784                    201
23444    541 12903                    201
23731    470 13059                    202
23941    405 13173                    202
24109    292 13286                    202
24212    200 13341                    202
24212    000 13341                    203
24212   -200 13341                    203
24109   -292 13286                    203
23941   -405 13173                    203
23731   -470 13059                    204
23444   -541 12901                    204
23212   -568 12784                    204
23000   -578 12665
22763   -584 12535                    205
  92COCKPIT CANOPY CLEARLINE
29447    000 13550
29404    247 13460                    301
29361    622 13326                    301
29322    832 13201                    301
29261   1054 13024                    302
29209   1243 12860                    302
29162   1378 12730                    302
29114   1503 12557                    302
29067   1589 12415                    303
29002   1730 12238                    303
28959   1805 12086                    303
28907   1886 11944                    303
28855   1951 11832                    304
28795   1946 11771                    304
28743   1946 11732                    304
28678   1941 11698                    304
28596   1930 11676                    305
28671   1930 11659                    305
28281   1914 11641                    305
28134   1908 11629                    305
27967   1897 11616                    306
27767   1886 11594                    306
27572   1865 11577                    306
27335   1849 11555                    306
27080   1838 11533                    307
26894   1882 11516                    307
26713   1800 11499                    307
26487   1789 11486                    307
26073   1751 11442                    308
25853   1724 11425                    308
25559   1703 11430                    308
25469   1697 11440                    309
25292   1578 11577                    309
25192   1470 11745                    309
25132   1389 11857                    310
25067   1335 11970                    310
25067   1335 11970                    310
24955   1178 12238                    310
24907   1097 12430                    311
24873   1016 12550                    311
24821    881 12700                    311
24782    784 12850                    312
24743    632 13000                    312
24706    497 13200                    312
24678    281 13450                    312
24661    000 13500                    313
24678   -281 13450                    313
24706   -497 13200                    313
24743   -632 13000                    313
24782   -784 12850                    314
24821   -881 12700                    314
24873  -1016 12550                    314
24907  -1097 12430                    314
24955  -1178 12238                    315
25067  -1335 11970                    315
25132  -1389 11857                    315
25192  -1470 11745                    316
25291  -1578 11577                    316
25469  -1697 11440                    316
25559  -1703 11430                    317
25711  -1719 11413                    317
25853  -1724 11425                    317
26073  -1751 11443                    317
26272  -1773 11464                    318
26477  -1789 11486                    318
26713  -1800 11499                    318
26896  -1822 11516                    318
27080  -1838 11533                    319
27335  -1849 11555                    319
27572  -1865 11577                    319
27767  -1886 11594                    319
27967  -1897 11616                    320
28134  -1908 11628                    320
28281  -1914 11641                    320
28471  -1930 11659                    320
28596  -1930 11676                    321
28678  -1941 11698                    321
28743  -1946 11732                    321
28795  -1946 11732                    321
28855  -1951 11832                    322
28907  -1886 11944                    322
28959  -1805 12086                    322
29002  -1730 12238                    323
29067  -1589 12415                    323
29114  -1503 12557                    323
29162  -1378 12700                    323
29209  -1243 12858                    324
29261  -1054 13024                    324
29322  -  832 13201                    324
29361  -  622 13326
29404  -  247 13460
29447    000 13550
```

Figure 12. Punched Data for A7 Cockpit Boundary.

```
//VISFILE  JOB (UDR807,K0),EVANS,MSGLEVEL=1
//SCRATCH EXEC PGM=IEHPROGM
//SYSPRINT DD DUMMY
//PUBLIC DD VOL=SER=PUBLIC,UNIT=3330,DISP=OLD                    1
//SYSIN DD *
 SCRATCH DSNAME=SME.VISDATA,VOL=3330=PUBLIC
/*
//RECRT EXEC PGM=IEBGENER
//SYSUT2 DD DSN=SME.VISDATA,DISP=(NEW,CATLG),UNIT=SYSDA,
//        VOL=SER=PUBLIC,SPACE=(1600,(10,5),RLSE),
//        DCB=(LRECL=80,RECFM=FB,BLKSIZE=1600,DSORG=PS)
//SYSPRINT DD SYSOUT=A,DCB=BLKSIZE=121
//SYSIN DD DUMMY
//SYSUT1 DD *
                                                               2
     BOUNDARY OUTLINE CARDS GO HERE
/*
//PRINT EXEC PGM=IEBGENER
//SYSUT1 DD DSN=SME.VISDATA,DISP=OLD
//SYSPRINT DD SYSOUT=A,DCB=BLKSIZE=121                           3
//SYSUT2 DD SYSOUT=A,DCB=BLKSIZE=81
//SYSIN DD DUMMY
/*
//
```

Figure 13. Job Control Cards Needed to Establish Data Set on Disk Containing Boundary Outlines for Visibility Plots.

again, but this time it prints the contents of the dataset "SME. VISDATA" for verification purposes. A detailed description of each of the IBM utilities used can be found in Reference 6.

Although the boundaries are described separately on computer cards, the individual subsections are automatically recombined before plotting the total visibility plot.

2.3.2 Generating the Vision Angles

The subroutine to generate the visibility plot is activated when the user of the interactive graphics program CBM04 presses the Visibility Plot Function Key (see Reference 1). This subroutine then reads the disk file which has been loaded with workspace boundary coordinates, and stores the available data for the necessary calculations in arrays in memory. If, for some reason, the disk file does not contain any workspace coordinate data, the message "NO DATA AVAILABLE FOR VISIBILITY PLOT ON UNIT 9" will be displayed in the information area of the screen. The routine is ended and the user is asked to depress another function eky.

Once the function key has been depressed and the boundaries read in, the prompting area will display the message "ENTER EYE LOCATION (LINK)". The user must decide on the eye point to be used as a reference for the plots. Possible values are either 8 for Mid-Eye point, 9 for Right Eye point or 10 for the Left Eye point. These values should be typed in, right justified in the eight digit field. Once a valid link number has been specified, the message "PLOTTING" is displayed on the CRT screen.

The routine uses the coordinates which define the endpoint of the Mid-Head link (link 7) and the coordinates of the Mid-Eye point to calculate the angles of sight from horizontal and from vertical. Facing forward and looking straight ahead would be angle of 0° from both horizontal and vertical.

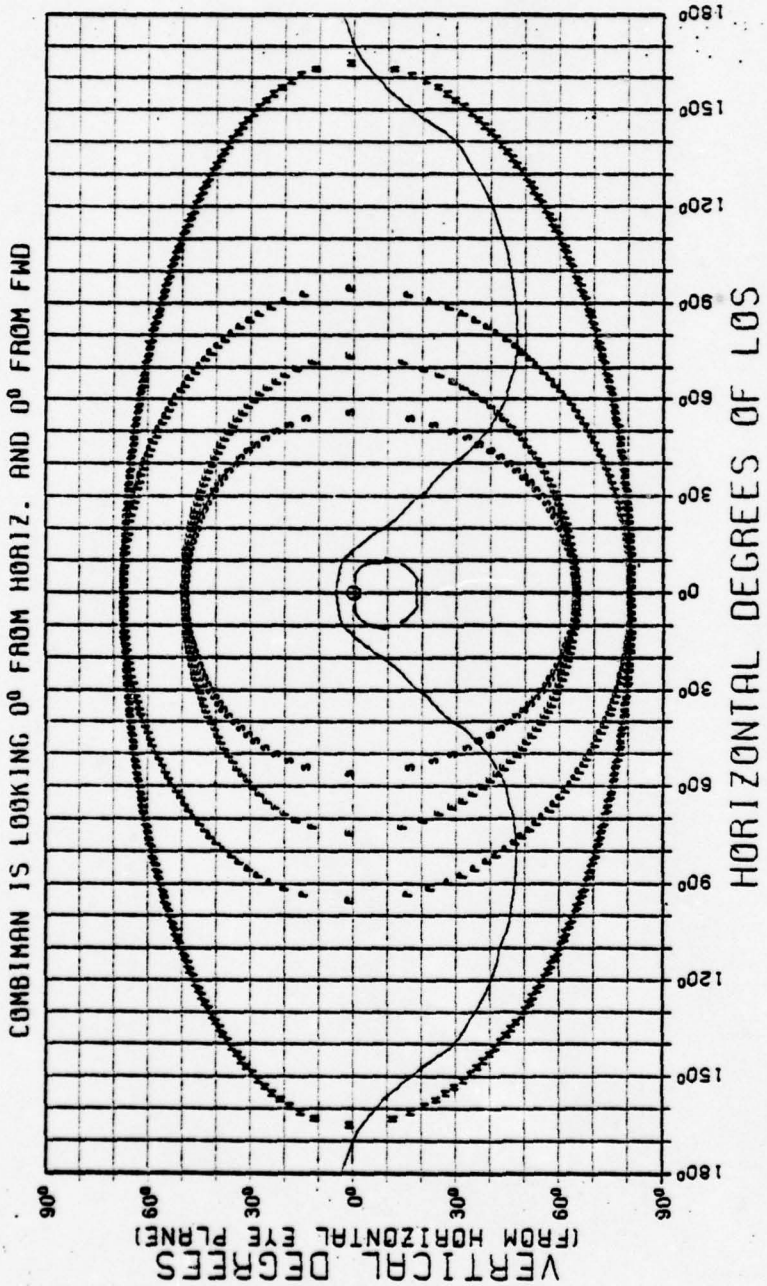


Figure 14. Sample Visibility Plot - Straight Ahead View.

Once the three dimensional coordinates of the boundary have been translated to the eye coordinate system of the model, the subroutine processes the points by iterating over the angular range of the points to determine the intersection of integer angles of horizontal line of sight with the line segment formed by two consecutive points on the workspace boundary. The angular range of points is calculated by the subroutine, and is based on the minimum and maximum horizontal angle of intersection with the workspace boundary being evaluated. The equations which are used to establish the angles of intersection and the coordinates of the boundary at these points were provided by Dr. McDaniel of AMRL.

2.3.3 The Visibility Plot And Printed Output

Figure 14 shows a sample visibility plot with the A7 outline. For this example, the man-model was positioned in a seated erect posutre, looking straight ahead. The vision limits were generated with respect to the angle of sight of the Mid-Eye point (link 8).

The four ellipses on the plot define the limits of various visual fields. The inner most field, plotted with the letter S, defines the field of stereo vision, with both eyes in their normal position. The next field, plotted with the letter F, defines the right and left fixation limits of vision. The third field is plotted with the letter P and defines the limits of peripheral vision associated with the facing forward with respect to the head. The outer-most field, plotted with the letter M, defines the maximum peripheral vision limits for the left and right eye. The symbol © defines the normal line-of-sight of the model.

The contour of the workspace boundaries are plotted with respect to the line-of-sight of the man model. As the model's head is shifted from the foward position the workspace boundaries are shifted in the opposite direction. An angle other than zero degrees from the horizontal eye plane of the model causes the boundaries to be raised or lowered based on a positive or negative angle from horizontal. The label indicating degrees on the vertical axis is

shifted in increments of multiples of ten degrees. This increment is calculated by dividing the angle from horizontal by 10., truncating this quotient to the nearest whole number, and then multiplying this value by 10. The boundaries and the visual limits are shifted slightly, so that value obtained with respect to the vertical axis is always labeled with angles which are multiples of 10. A sample visibility plot which was generated using visual angles of -15° from horizontal and 30° from forward is shown in Figure 15.

In addition to generating a hard copy plot on the GOULD unit, the subroutine also calculates and sends to the printer the three dimensional coordinates of each of the workspace boundaries in five degree angle increments from -180° from horizontal line of sight to +180°. The coordinates are given in the aircraft system of coordinates. The listing also gives the coordinate of the eye location in the aircraft system. Figure 16 shows the coordinate data for the plot in Figure 14.

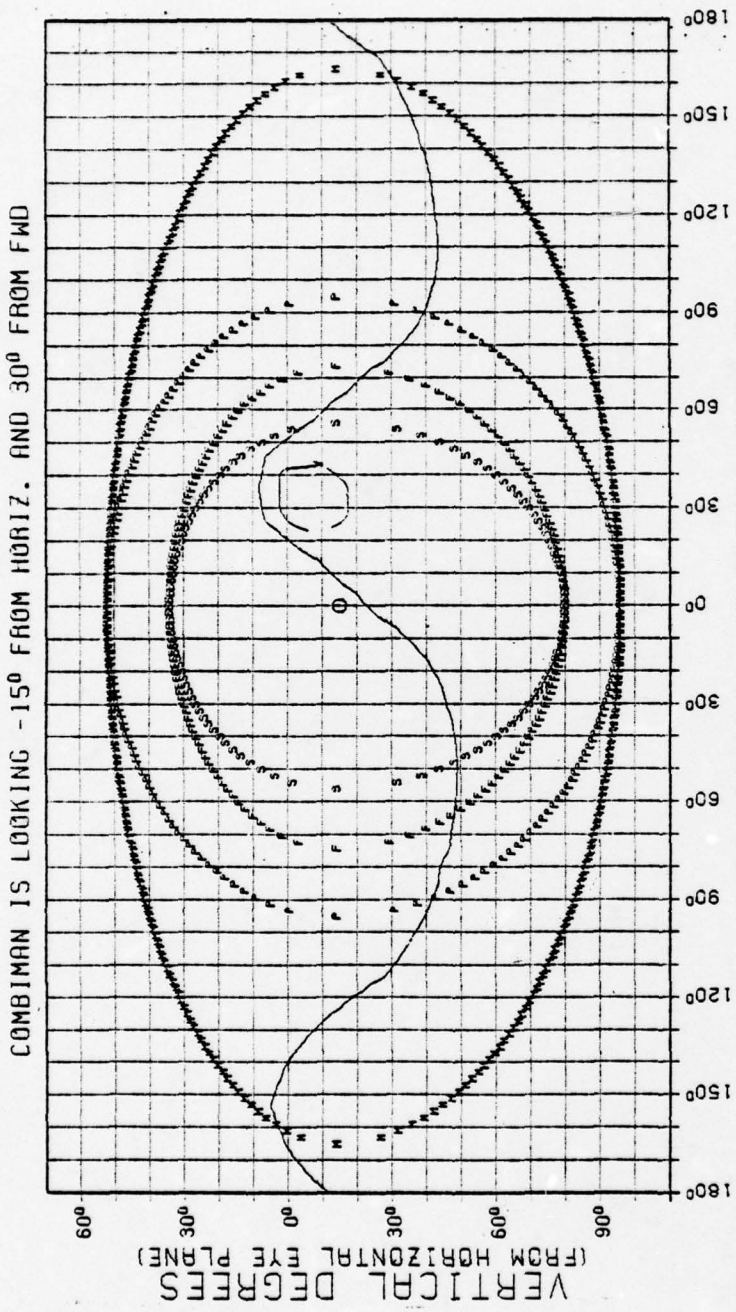


Figure 15. Sample Visibility Plot - Off Angle View.

CBM04 --- COMBIMAN PROGRAM, VERSION 4

VISIBILITY PLOT DATA FOR COCKPIT CANOPY CLEARLINE

EYE LOCATION IN AIRCRAFT SYSTEM (262.26, 0.0 ,133.58)

HORIZ. ANGLE	AIRCRAFT COORDINATES FS	BL	WL	HORIZ. ANGLE	AIRCRAFT COORDINATES FS	BL	WL	HORIZ. ANGLE	AIRCRAFT COORDINATES FS	BL	WL
-180	294.470	-0.000	135.500	-60	253.086	15.891	115.660	60	253.083	-15.896	115.656
-175	294.004	2.777	134.490	-55	251.947	14.729	117.404	65	254.429	-16.795	114.772
-170	293.688	5.541	133.502	-50	250.899	13.540	119.302	70	256.045	-17.078	114.249
-165	293.224	8.297	132.024	-45	249.938	12.323	121.453	75	257.649	-17.209	114.176
-160	292.483	11.000	129.841	-40	249.109	11.036	124.144	80	259.206	-17.323	114.305
-155	291.646	13.703	127.091	-35	248.522	9.620	126.100	85	260.729	-17.510	114.430
-150	290.483	16.294	123.642	-30	247.982	8.244	127.876	90	262.261	-17.679	114.592
-145	289.109	18.799	119.546	-25	247.567	6.852	129.475	95	263.819	-17.816	114.758
-140	285.261	19.300	116.665	-20	247.212	5.477	131.248	100	265.420	-17.920	114.896
-135	281.341	19.080	116.290	-15	246.959	4.100	133.007	105	267.083	-17.998	114.987
-130	278.104	18.882	115.983	-10	246.775	2.731	134.514	110	268.890	-18.214	115.155
-125	275.300	18.622	115.731	-5	246.692	1.362	134.758	115	270.832	-18.381	115.333
-120	272.925	18.472	115.513	0	277.911	0.0	135.000	120	272.925	-18.472	115.513
-115	270.832	18.381	115.333	5	246.692	-1.362	134.758	125	275.300	-18.622	115.731
-110	269.097	18.783	115.174	10	246.775	-2.731	134.514	130	278.104	-18.882	115.983
-105	267.083	17.998	114.987	15	246.959	-4.100	133.007	135	281.341	-19.080	116.280
-100	265.419	17.913	114.887	20	247.212	-5.477	131.248	140	285.261	-19.300	116.665
-95	263.817	17.787	114.740	25	247.567	-6.852	129.475	145	289.109	-18.799	119.546
-90	262.261	17.647	114.579	30	247.982	-8.244	127.876	150	290.483	-16.294	123.642
-85	260.729	17.510	114.420	35	248.522	-9.620	126.100	155	291.646	-13.703	127.090
-80	259.206	17.323	114.302	40	249.109	-11.036	124.144	160	292.483	-11.000	129.836
-75	257.658	17.178	114.265	45	249.938	-12.323	121.453	165	293.224	-8.297	132.024
-70	256.050	17.063	114.292	50	250.899	-13.540	119.302	170	293.688	-5.541	133.502
-65	254.429	16.795	114.772	55	251.947	-14.729	117.404	175	293.986	-2.776	134.489

Figure 16. Sample Visibility Plot Printed Output for Cockpit Clearline Boundary in Figure 14.

SECTION 3
STRENGTH CAPABILITIES OF SEATED OPERATORS

The University of Dayton Research Institute supported a study to determine the capabilities of human subjects to exert forces on a triaxial force handle located within the subjects' reach. This study is being conducted by Dr. J. W. McDaniel of AMRL/HED. UDRI personnel performed modification, calibration, and maintenance of the HERCULES (Human Engineering Research to Cull Efficient Strength) apparatus located in AMRL/HED. UDRI personnel were also responsible for the collection of strength data from human subjects and the preliminary data analysis.

3.1 HERCULES LAB

The HERCULES apparatus and associated equipment has been made completely operational after a period of inactivity. Using a triaxial strain gauge transducer handle, this system can measure and record forces exerted by seated human subjects with 2% accuracy on forces up to 300 pounds in any direction. The handle was positioned in 76 locations relative to the SRP (Seat Reference Point) of the seated subject.

The equipment used for the data collection is shown in Figure 17 and consists of the triaxial force handle, a Honeywell Accudata 113 bridge amplifier system, a Honeywell 5600B 7-channel FM tape recorder, a Brush Mark 200 strip chart recorder, an audio amplifier and power supply, and a remote control unit.

3.1.1 Contractor-Built Equipment

3.1.1.1 Remote Control Unit

To simplify the experimenter's task, a remote control unit (shown in Figure 18) was designed and built to contain an exertion timer, dial encoder, strip chart ON/OFF switch, data switch, and tape

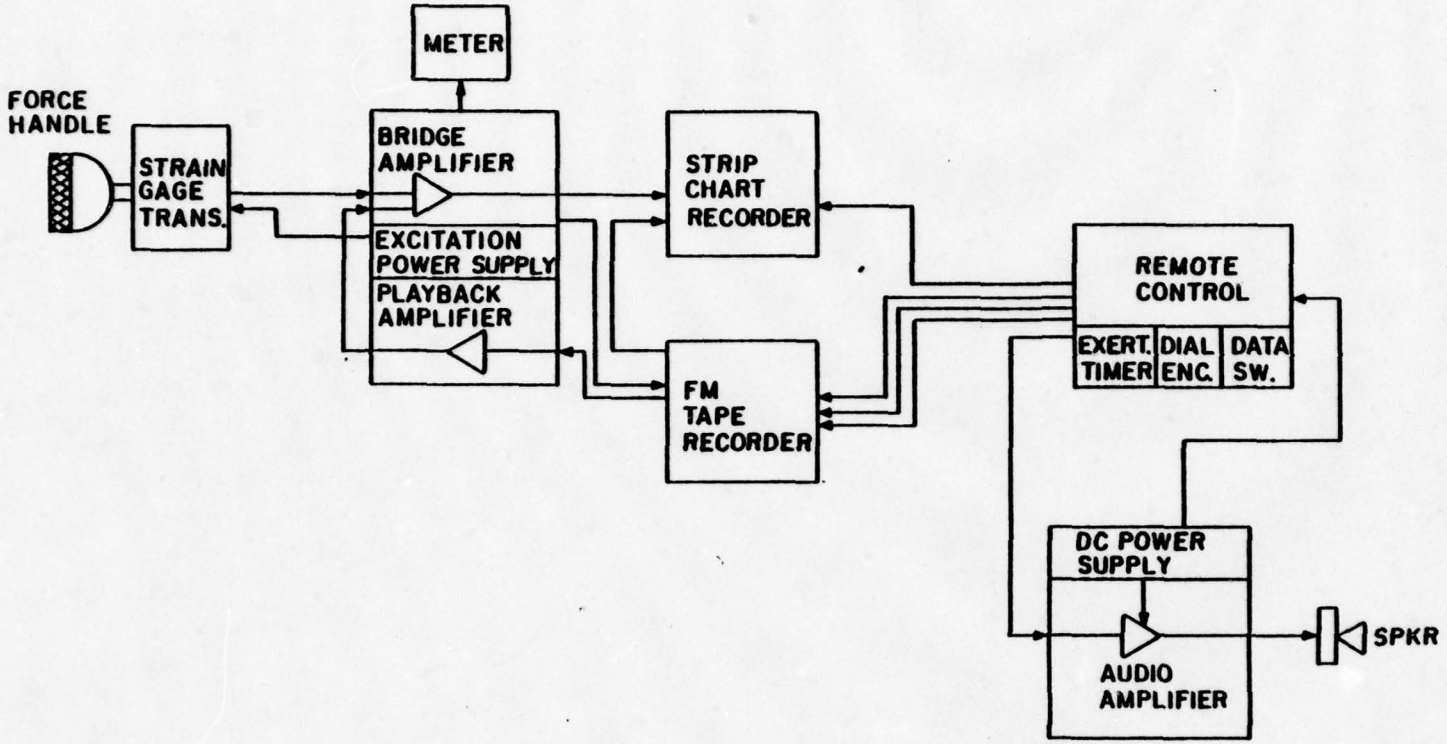


Figure 17. HERCULES System Component Diagram.

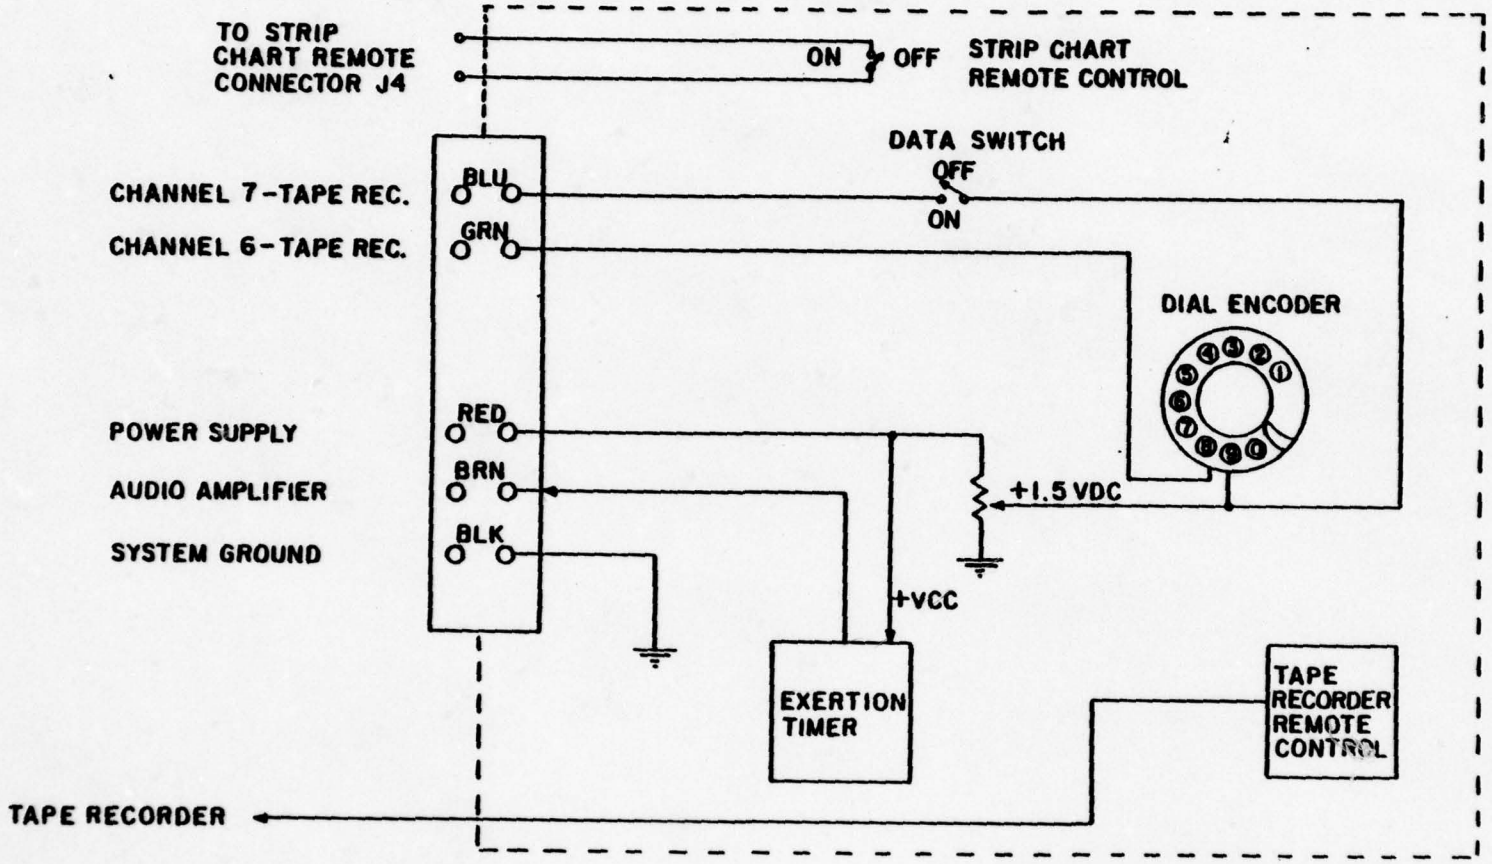


Figure 18. HERCULES System Remote Control Unit.

recorder remote control. These functions were connected to the system with a ten-foot cable. The controls on the panel were arranged according to order and frequency of use. This arrangement places all frequently used functions at the experimenter's fingertips.

To provide an edit function, a data switch was installed on the remote control unit and was used to indicate valid (ON) or invalid (OFF) data on one channel of the tape recorder.

3.1.1.2 Timer Controlled Tone Generator

An electronic timer was designed and constructed to provide an auditory tone to cue the subject as to when to terminate the exertion. The timer consisted of three ECG-955 ICs (integrated circuits) performing three basic functions within the timer. The circuit diagram is shown in Figure 19.

IC1 was triggered by a pushbutton at the beginning of a force exertion and performed the main timing function of controlling the delay interval. This interval was adjustable from zero to two minutes but was normally set to five seconds. Triggered by IC1, IC2 controlled the duration of the auditory tone and was also variable from zero to 2 minutes in length, but was normally set to a $\frac{1}{2}$ second burst. IC3 was used as an audio oscillator and was turned on and off by IC2. The output of IC3 was connected to the input of the audio amplifier as shown in Figure 20.

3.1.1.3 Audio Amplifier

The audio amplifier was on LM380 IC capable of one watt audio output and was normally set well below this level. The audio output was coupled to a common speaker. The speaker was attached to the HERCULES handle mainframe assembly near the subject.

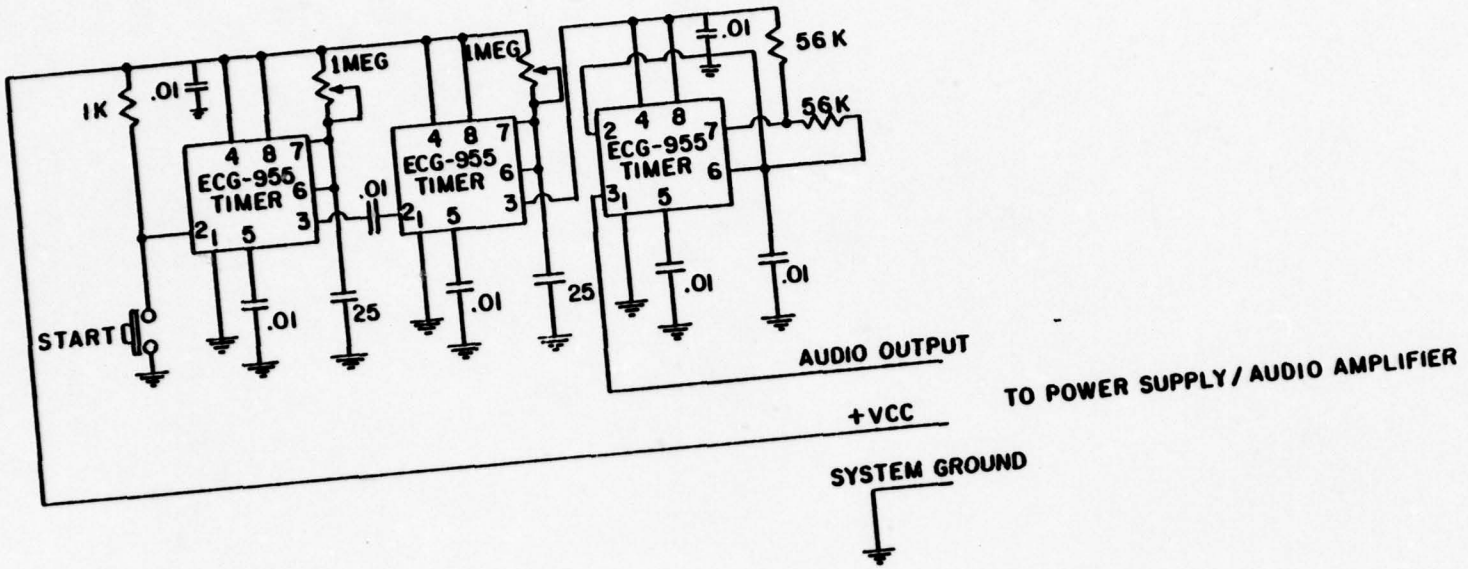


Figure 19. Circuit Diagram for Electronic Timer.

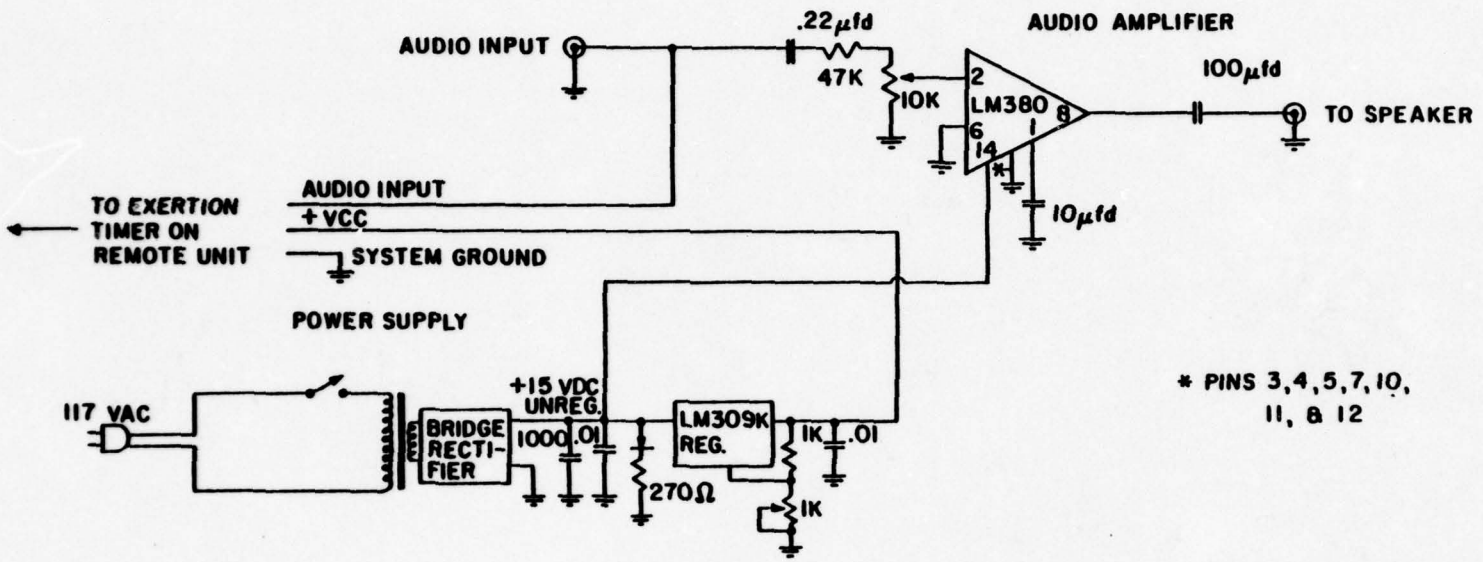


Figure 20. Diagram of the Power Supply and Audio Amplifier.

3.1.1.4 Power Supply

A power supply was built for the timer, audio amplifier, data switch, and dial encoder and is shown in Figure 20. Using an LM309K voltage regulator IC, the supply is adjustable from five to fifteen volts DC at up to 1 amp output current with internal overload protection.

3.1.2 Modifications to the Existing Equipment

3.1.2.1 Reference Resistors

The accuracy of the system has been improved through various modifications. Calibration efficiency required high-stability reference potentiometers as shown in Figure 21, to be installed and calibrated to simulate known forces in six directions. A weight stand was build to facilitate applying known forces on the handle. Its pulley system allowed a 100-pound force to be exerted on the handle in six orthogonal directions. A digital voltmeter was used to calibrate the reference potentiometers against the 100-pound weights.

3.1.2.2 Noise Level Reduction

The system originally had a high noise level due to several unshielded connections. When these were corrected, the noise was reduced significantly.

3.1.2.3 Dial Encoder

A telephone-type dial encoder was used to generate pulses to identify calibrations, subjects, and handle positions during data collection. This was installed on the remote control unit.

3.1.2.4 Tape Recorder Remote Control

This unit was installed on the remote control unit. However, there were no further modifications to it.

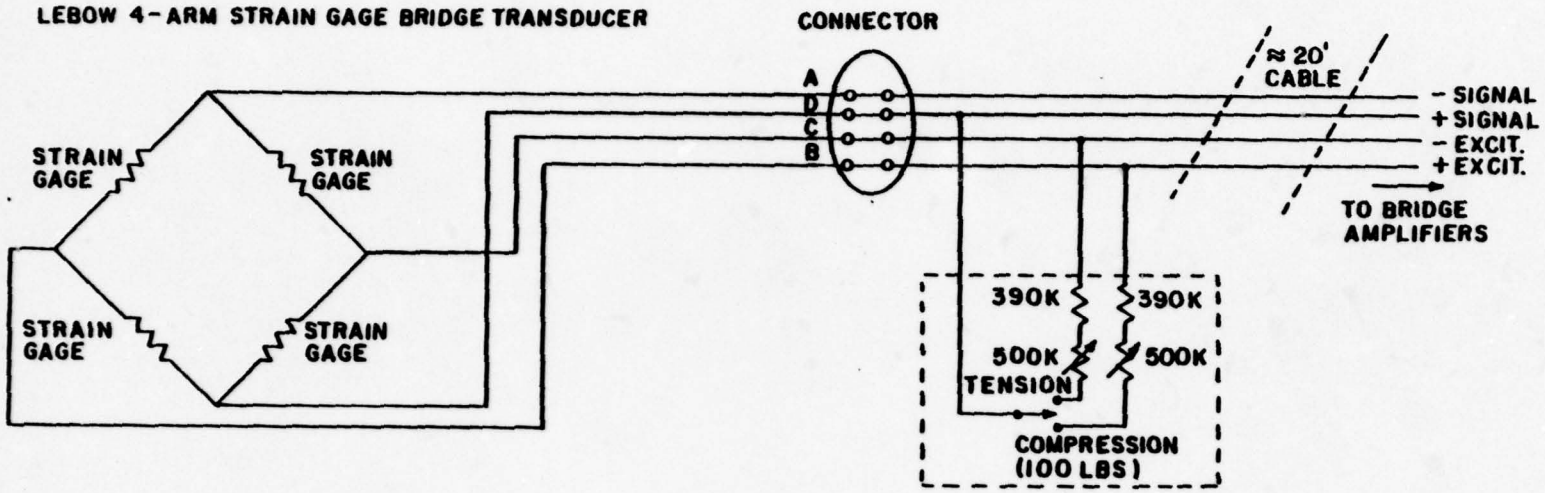


Figure 21. Diagram Representing a Single Channel of a 3-Channel HERCULES Bridge Transducer System.

3.1.2.5 Remote Strip Chart ON/OFF Switch

A toggle switch was installed on the remote control unit to provide for remotely activating the strip chart paper drive mechanism.

3.2 PROCEDURES

Data collection procedures required modifications for two reasons: the equipment modifications, and analog data processing constraints. Because of constraints of equipment capabilities of the ASD Computer Center Hybrid Simulation Division, data collection procedures were modified to facilitate the conversion of analog data.

Through the process of identifying sources of errors in the data analysis system, several procedural improvements to the analog-to-digital conversion process were recommended. Additionally, a computer program was prepared to provide a means of organizing the data collection procedure and to provide an automated check of the digital data.

3.2.1 Computer-Generated Data Collection Format

A program named RANDM has been developed for the HERCULES experiment to print an experimental data collection sequence which contains information the experimenter needs to position the force handle, select a direction of exertion, and select a subject to perform that exertion. The programmer uses the IBM System Subroutine RANDU to generate the random numbers which, in turn, are used to generate the sequence of steps to be followed in the procedure. A detailed description of the subroutine RANDU can be found in the IBM Scientific Subroutine Manual (Reference 7). All random numbers generated by RANDU are 15 digit decimal numbers between 0. and 1.

3.2.1.1 Method

In order to assure a unique set of random numbers throughout each execution of the program RANDM a new 15 digit seed number is supplied to the random number generator the first time it is called by

RANDM. A random handle position number is found by multiplying the first random number obtained from RANDU by a number which is one greater than the number of positions possible, and truncating the result to an integer value. All exertion directions are then randomized for each subject within each position using the same randomization process. If the number of simultaneous subjects is n, subject i will start as the first subject of the first position, and subject i+1 will start as the first subject of the next position. This sequence is continued until the n^{th} subject is reached. At this point the same sequence is repeated until all handle positions have been used. The last exertion is a sequence for a given handle position is a repetition of the first exertion direction/subject combination. For this repeated exertion, a constant (100) is added to the subject number to set it apart from the other subject numbers. This repetition is performed to provide a verification of the subject's performance reliability (see Figure 22). At the end of the program, the seed number to be used when the program is run again is printed out. This is done to make sure all numbers are randomized properly (see Figure 23). A flowchart of program RANDM is shown in Figure 24.

3.2.1.2 Program Input Data

The first data card read by the program RANDM gives information on the number of exertion directions (nexr), handle positions (npos) and simultaneous subjects (nsub) which are to follow. Any number up to 9 exertion directions, 99 handle positions, and 5 simultaneous subjects are possible. These numbers are right justified (see Figure 25a).

The following group of nexr cards will be the exertion directions. Each card contains one exertion direction number (iexr) and its 8 character name (exertion-direction name). The exertion direction number is an integer and is right justified in the field (see Figure 25b).

The second group of npos cards read will each have one handle position number (ipos) and the three dimensional coordinates of that handle position (lat dim, fwd dim, vert dim), as shown in Figure 25c.

POSITION 4 LATERAL= -20 FORWARD= 30 VERTICAL= 30

	SUBJECT NO.	NAME	EXERTION	DIRECTION
1	7301	PAT	404	CCWN
2	7302	TOM	204	RIGHT
3	7301	PAT	504	FORWARD
4	7302	TOM	304	UP
5	7301	PAT	104	LEFT
6	7302	TOM	504	FORWARD
7	7301	PAT	304	UP
8	7302	TOM	604	BACKWARD
9	7301	PAT	204	RIGHT
10	7302	TOM	104	LEFT
11	7301	PAT	604	BACKWARD
12	7302	TOM	404	CCWN
13	7401	PAT	404	CCWN

Figure 22. Sample Data Collection Sequence, with Subject 1 Repeated.

Copy available to DDC does not permit fully legible reproduction

POSITION 7 LATERAL= -20 FORWARD= 30 VERTICAL= 20

	SUBJECT NO.	NAME	EXERTION	DIRECTION
144	7302	TOM	5G7	FOREWARD
145	7301	PAT	6G7	BACKWARD
146	7302	TOM	2G7	RIGHT
147	7301	PAT	5G7	FOREWARD
148	7302	TOM	6G7	BACKWARD
149	7301	PAT	2G7	RIGHT
150	7302	TOM	3G7	UP
151	7301	PAT	1G7	LEFT
152	7302	TOM	1G7	LEFT
153	7301	PAT	4G7	CCWN
154	7302	TOM	4G7	CCWN
155	7301	PAT	3G7	UP
156	7402	TOM	5G7	FOREWARD

NEW SEED TO BE USED = 727020975.

Figure 23. Sample Data Collection Sequence, with New Seed Number Printed.

Copy available to DDC does not permit fully legible reproduction

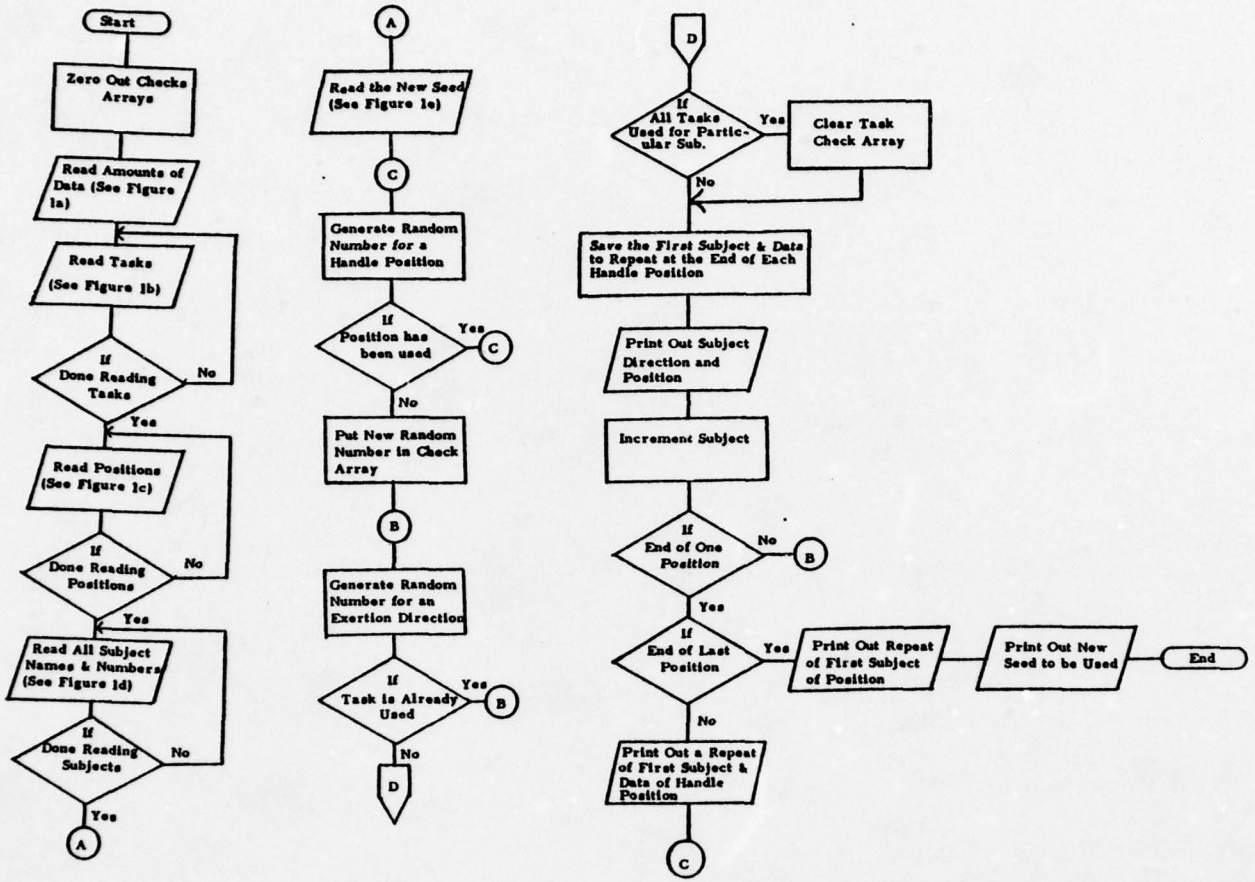


Figure 24. Flow Diagram for Program RANDM.

Copy available to DDC does not permit fully legible reproduction

IBM

INTERNATIONAL BUSINESS MACHINES CORPORATION

Form X24-6597-0
Printed in U.S.A.

MULTIPLE-CARD AYOUT FORM

Company _____

Application _____ by _____ Date _____ Job No. _____ Sheet No. _____

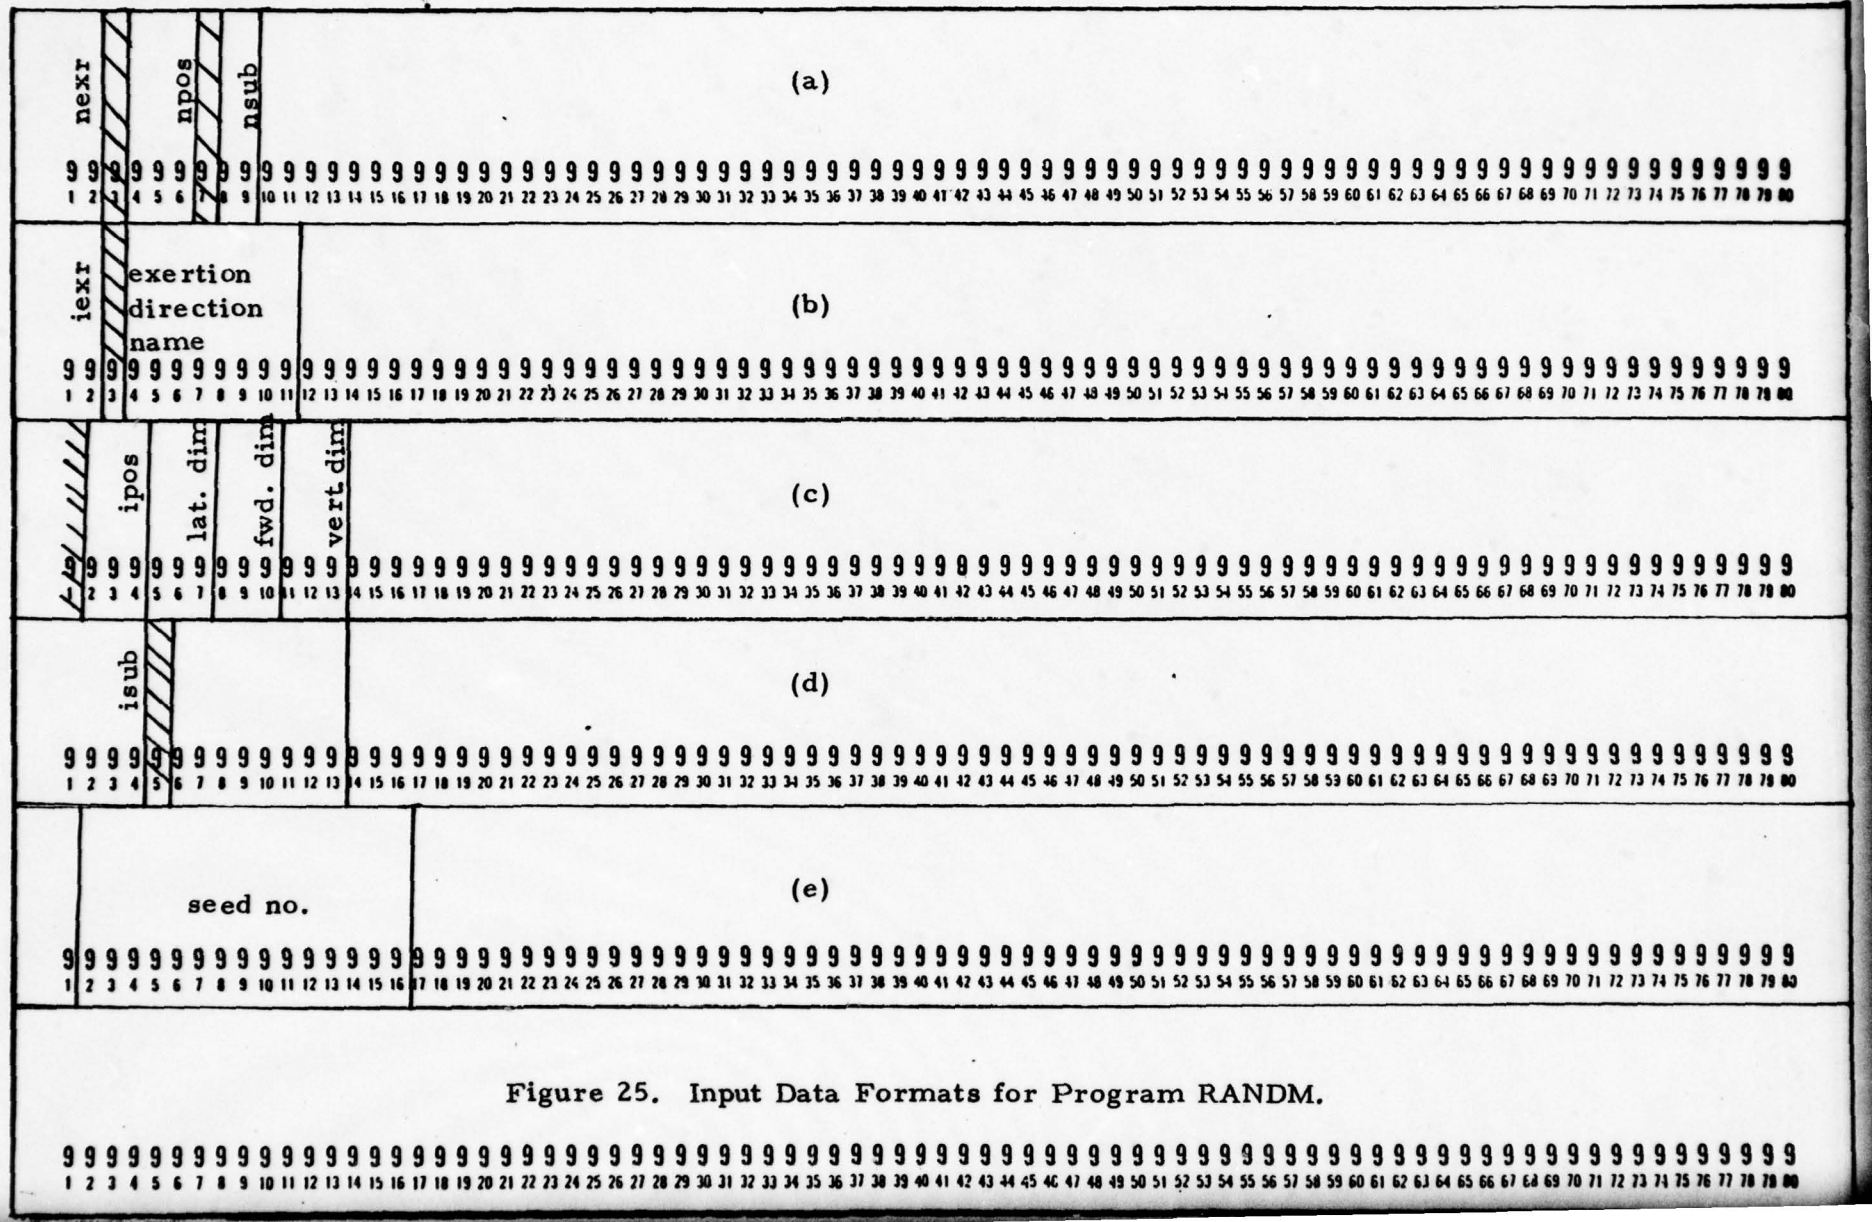


Figure 25. Input Data Formats for Program RANDM.

Copy available to DDC does not permit fully legible reproduction

The third group of nsub cards read will each contain one subject number (isub) and the subject's first name (subject name). The subject number is an integer value and should be right justified (see Figure 25 d).

The last card read should be the initial seed number for the program. The seed is right justified and must have a decimal point at the right-most position (see Figure 25e).

3.2.1.3 Program Output

The first output format generated is a repeat of the input data. This provides a means of verifying the input data (see Figure 26).

The second output format contains random position number, its three-dimensional coordinates, and its associated experimental data collection sequence. This consists of all exertion directions, randomized for each subject. This format will be used for all handle positions. No handle positions are repeated, and for each position no exertion directions are repeated for any one subject.

In addition to printing the output on paper this program will also punch the output data on cards for use in verifying the experimentally gathered digital data.

```
INPUT
-----
 0   12   2
 1 LEFT
 2 RIGHT
 3 UP
 4 DOWN
 5 FOREWARD
 6 BACKWARD
   1-20 20 40
   2-20 10 40
   3-20  0 40
   4-20 30 30
   5-20 20 30
   6-20 10 30
   7-20 30 20
   8-20 20 20
   9-20 10 20
  10-20 30 10
  11-20 20 10
  12-20 10 10
7301 PAT
7302 TCM
        1397643.
```

Figure 26. Repeat of Input to Program RANDM.

SECTION 4

MULTIPLE BIVARIATE PLOTTING PROGRAM (BIVPLOT)

A considerable effort was made during this contract period to develop a plotting program (BIVPLOT) to plot the frequencies of two anthropometric variables which the user has selected from two surveys. The frequency data from the two surveys are plotted within the same table. Built into BIVPLOT is the capability of producing single survey tables as well. Both of these can be used with data in either English or metric units. Only the general layout and statistical computations could be used from the existing AMRL bivariate program which was made to produce single surveys on a computer line printer. An example of the output of this program is shown in Figure 27. While attempting to adapt this program for multi-survey plots on the printer it was found that the maximum number of print-characters contained in one print-line was not large enough to accommodate the number required by the multi-survey plots. Because of this, it was necessary to write the program for a computer plotter, rather than printer. The change from single to multiple survey tables necessitated a new input routine be established to handle the data from two surveys simultaneously.

4.1 THE PLOT

Subroutine TABLE was then written to produce a suitable table outline in which to plot the frequencies for the surveys' selected variables. Written for a general case, it produces only as many rows and columns for frequencies as are needed for each individual table. Control is returned to program BIVPLOT where the frequencies are then plotted and summary statistics for each survey can be calculated and plotted with each table. An example of this output is shown in Figure 28.

BIVARIATE TABLE FOR

HEIGHT HEIGHT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	TTL
267.50																															
257.50																								1							1
247.50																															
237.50																															
227.50																		1		1											2
217.50																						1			1						2
207.50																				1		1			2						4
197.50																						2					1				3
187.50																		1							1			1			3
177.50						1													2	2		1	2	1							9
167.50															1			1	2	1											5
157.50													1	1	3			1	1			1	1	1							10
147.50									1				2	2	1	2		1	1	1		1							1		13
137.50									2				4	1	5	2		1					1								16
127.50	1					1		1	1		2		2	4	2	3		1													18
117.50						2		3	3	4	6		3	2	1																24
107.50	1				2	4			5	4	2		3	2																	23
97.50					2	2		2	3	1	1		1																		12
TOTAL	2				4	10		6	12	12	11		16	12	13	7		7	6	6		7	4	3	4		1	1	1		145

MIDVALUES FOR COLUMNS

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1397.5	1417.5	1437.5	1457.5	1477.5	1497.5	1517.5	1537.5	1557.5	1577.5	1597.5	1617.5	1637.5	1657.5	1677.5


16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
1697.5	1717.5	1737.5	1757.5	1777.5	1797.5	1817.5	1837.5	1857.5	1877.5	1897.5	1917.5	1937.5	1957.5	1977.5

ASSORTED STATISTICS	MEAN	ST DEV	R	REGRESSION EQUATIONS & STD ERROR		
HEIGHT	1677.25	114.46	.778	= (2.747)* HEIGHT	1297.736	71.93
WEIGHT	138.16	32.42	.778	= (.220)* HEIGHT	-231.347	71.93

Copy available to DDC does not permit fully legible reproduction

Figure 27. Line Printer Output for a Single Survey from Program BARE BIVAR.

A BIVARIATE FREQUENCY TABLE FOR
SITTING HEIGHT AND STATURE
USAF MEN/USAF WOMEN

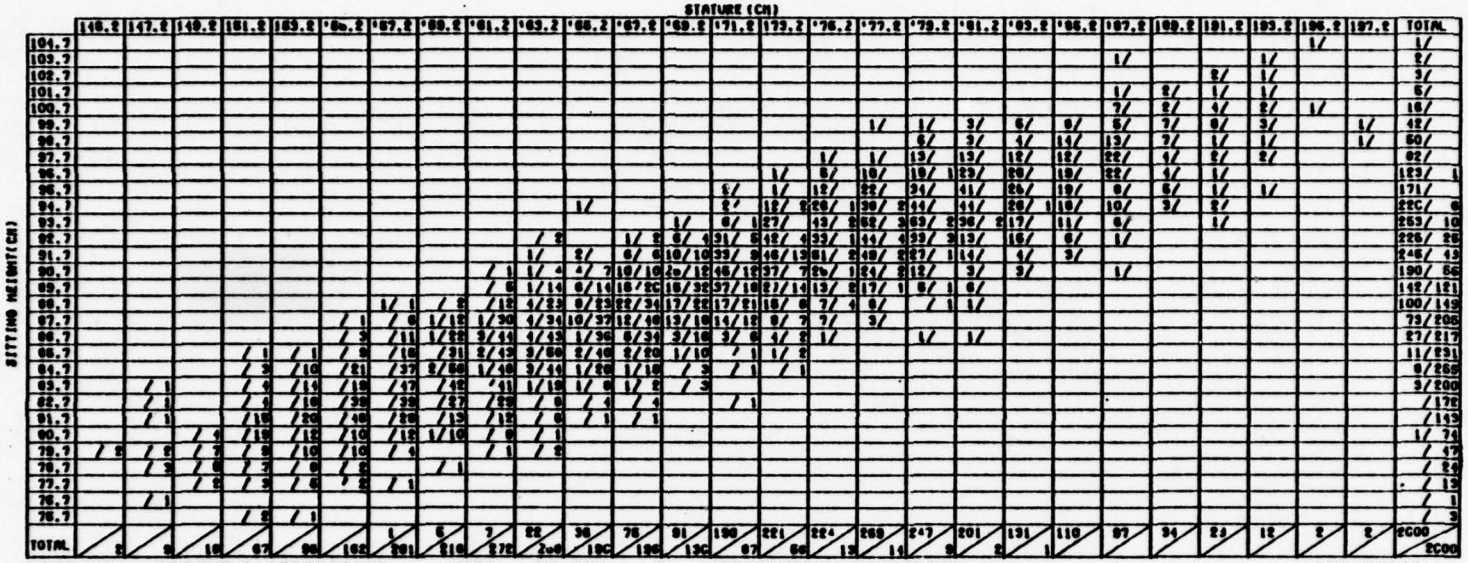

USAF MEN ASSORTED STATISTICS	MEAN	ST DEV	R	REGRESSION EQUATIONS	STD ERROR
STATURE(CM)	177.34	6.19	0.788	= (1.535)*SITTING HEIGHT(CM)+(34.31)	3.81
SITTING HEIGHT(CM)	93.18	3.18	0.788	= (0.404)*STATURE(CM)+(21.54)	1.96

USAF WOMEN ASSORTED STATISTICS	MEAN	ST DEV	R	REGRESSION EQUATIONS	STD ERROR
STATURE(CM)	162.10	6.00	0.801	= (1.517)*SITTING HEIGHT(CM)+(32.25)	3.60
SITTING HEIGHT(CM)	85.60	3.17	0.801	= (0.423)*STATURE(CM)+(17.03)	1.90

DATE: 11/16/76
METRIC
PLOT: 48

Figure 28. Metric BIVPLOT Output.

Copy available to DDC does not permit fully legible reproduction

4.2 TABLE OF CONTENTS

Each bivariate table is also dated, numbered, and labeled as containing either METRIC or ENGLISH data. The numbering is done to keep track of the large volume of plots which are anticipated. Program CONTENTS was written to keep track of these plots. It uses the variable number of the sets of user-selected anthropometric variables with their respective plot numbers to produce a cross-reference table of contents for the plots. A sample cross-reference table is shown in Figure 29.

4.3 BIVPLOT MULTIPLE SURVEY TAPES

Data surveys used in generating bivariate tables are stored primarily on individual magentic tapes. Handling two complete data survey tapes simultaneously, to generate a set of plots takes a considerable amount of computer time. The two surveys of interest have been the 1967 USAF MEN and the 1968 USAF WOMEN surveys. The primary interest in these surveys has been to see the relationship between sizes of men and women, to assist in the process of sizing uniforms and equipment to fit both males and females. To reduce input time for the plots using these surveys, 72 variables, which were common to both surveys were selected from the 204 variables in the men's survey and the 156 variables in the women's survey. These 72 selected variables were judged to be most useful for the sizing procedures. The common variables from the two survey tapes were combined into one tape containing all the pertinent information needed to run any combination of these variables over both surveys. In combining the tapes, all data were converted to metric units (cm/kg/years). The pertinent information for each variable included new range data based on the overall minimum and maximum values over both surveys, a plot step size factor, and a conversion factor for converting the metric unit to an English unit. Figure 30 shows the comparable variables from both surveys, and gives the range of values for each variable in the original unit of measurement. Figure 31 shows the data contained on the combined tape.

BIVARIATES FOR USAF MEN VS. WOMEN
(METRIC/ENGLISH PLOT NO.)

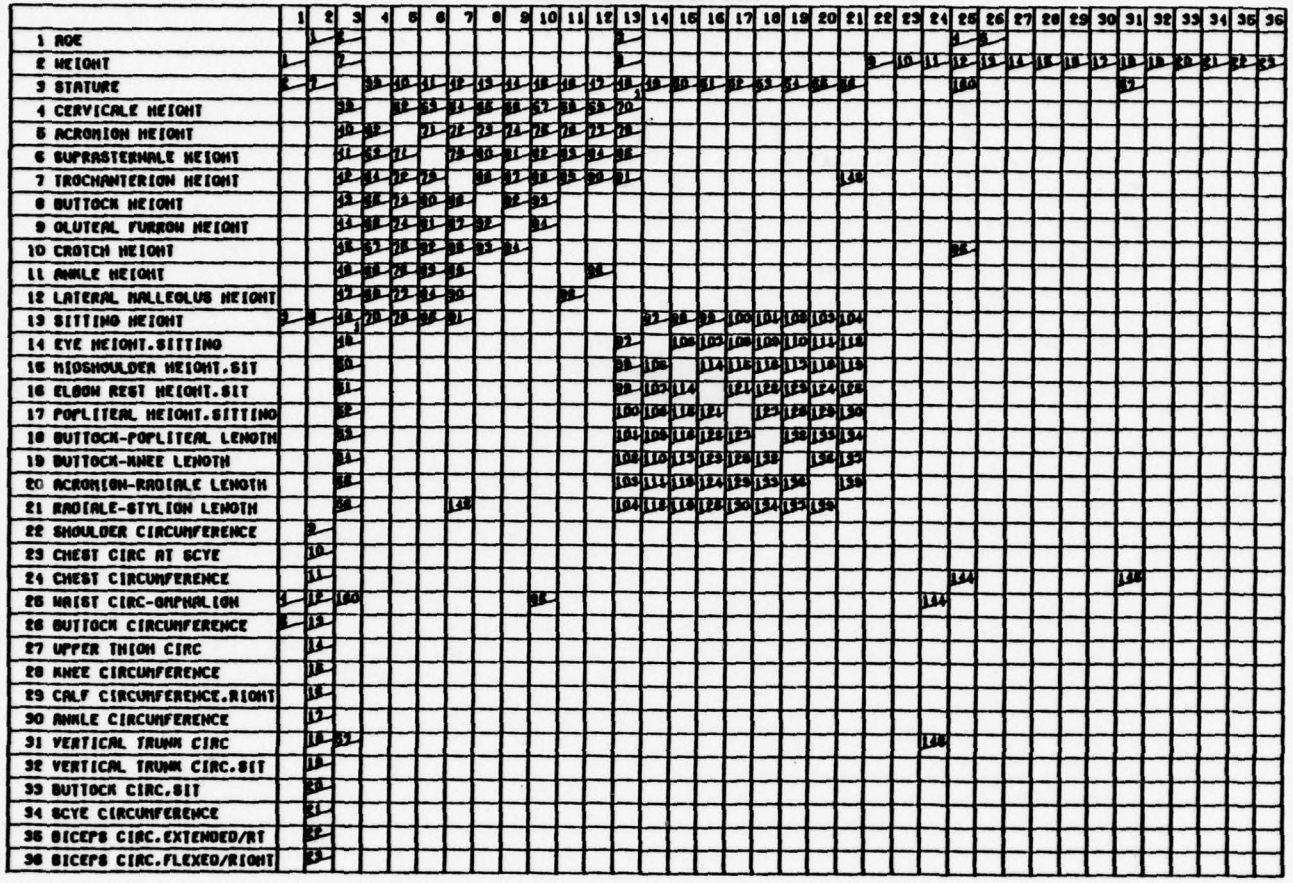


Figure 29. Table of Contents for 1967 USAF Men Vs. 1968 USAF Women Plots; Plotted by Program Contents.

Copy available to DDC does not permit fully legible reproduction

BIVARIATES FOR USAF MEN VS. WOMEN
(METRIC/ENGLISH PLOT NO.)

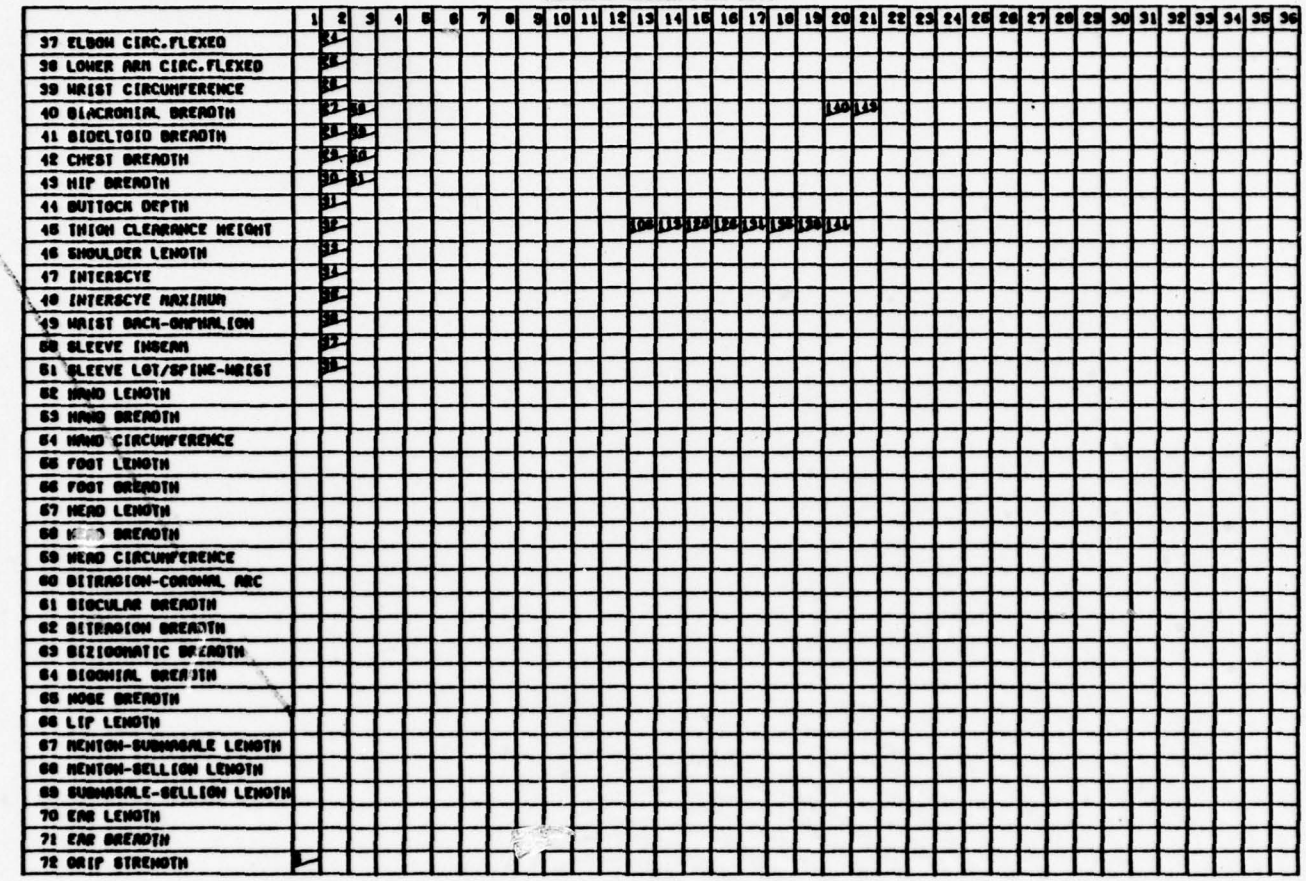


Figure 29 (Continued)

Copy available to DDC does not permit fully legible reproduction

BIVARIATES FOR USAF MEN VS. WOMEN
(METRIC/ENGLISH PLOT NO.)

	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72
1 AGE																																				72
2 HEIGHT	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38																					
3 STATURE				38	39	40	41																													
4 CERVICALE HEIGHT																																				
5 ACROMION HEIGHT																																				
6 SUPRASTERNALE HEIGHT																																				
7 TROCHANTERION HEIGHT																																				
8 BUTTOCK HEIGHT																																				
9 GLUTEAL FURROW HEIGHT																																				
10 CROTCH HEIGHT																																				
11 ANKLE HEIGHT																																				
12 LATERAL MALLEOLUS HEIGHT																																				
13 SITTING HEIGHT									106																											
14 EYE HEIGHT.SITTING									113																											
15 MIDSHOULDER HEIGHT.SIT									120																											
16 ELBOW REST HEIGHT.SIT									128																											
17 POPLITEAL HEIGHT.SITTING									131																											
18 BUTTOCK-POPLITEAL LENGTH									136																											
19 BUTTOCK-KNEE LENGTH									138																											
20 ACROMION-RADIALE LENGTH				140					141																											
21 RADIALE-STYLION LENGTH				145																																
22 SHOULDER CIRCUMFERENCE																																				
23 CHEST CIRC AT SCYE																																				
24 CHEST CIRCUMFERENCE																																				
25 WAIST CIRC-OMPHALION																																				
26 BUTTOCK CIRCUMFERENCE																																				
27 UPPER THIGH CIRC																																				
28 KNEE CIRCUMFERENCE																																				
29 CALF CIRCUMFERENCE.RIGHT																																				
30 ANKLE CIRCUMFERENCE																																				
31 VERTICAL TRUNK CIRC																																				
32 VERTICAL TRUNK CIRC.SIT																																				
33 BUTTOCK CIRC.SIT																																				
34 SCYE CIRCUMFERENCE																																				
35 BICEPS CIRC.EXTENDED/RT																																				
36 BICEPS CIRC.FLEXED/RIGHT																																				

Figure 29 (Continued)

Copy available to DDC does not permit fully legible reproduction

BIVARIATES FOR USAF MEN VS. WOMEN
(METRIC/ENGLISH PLOT NO.)

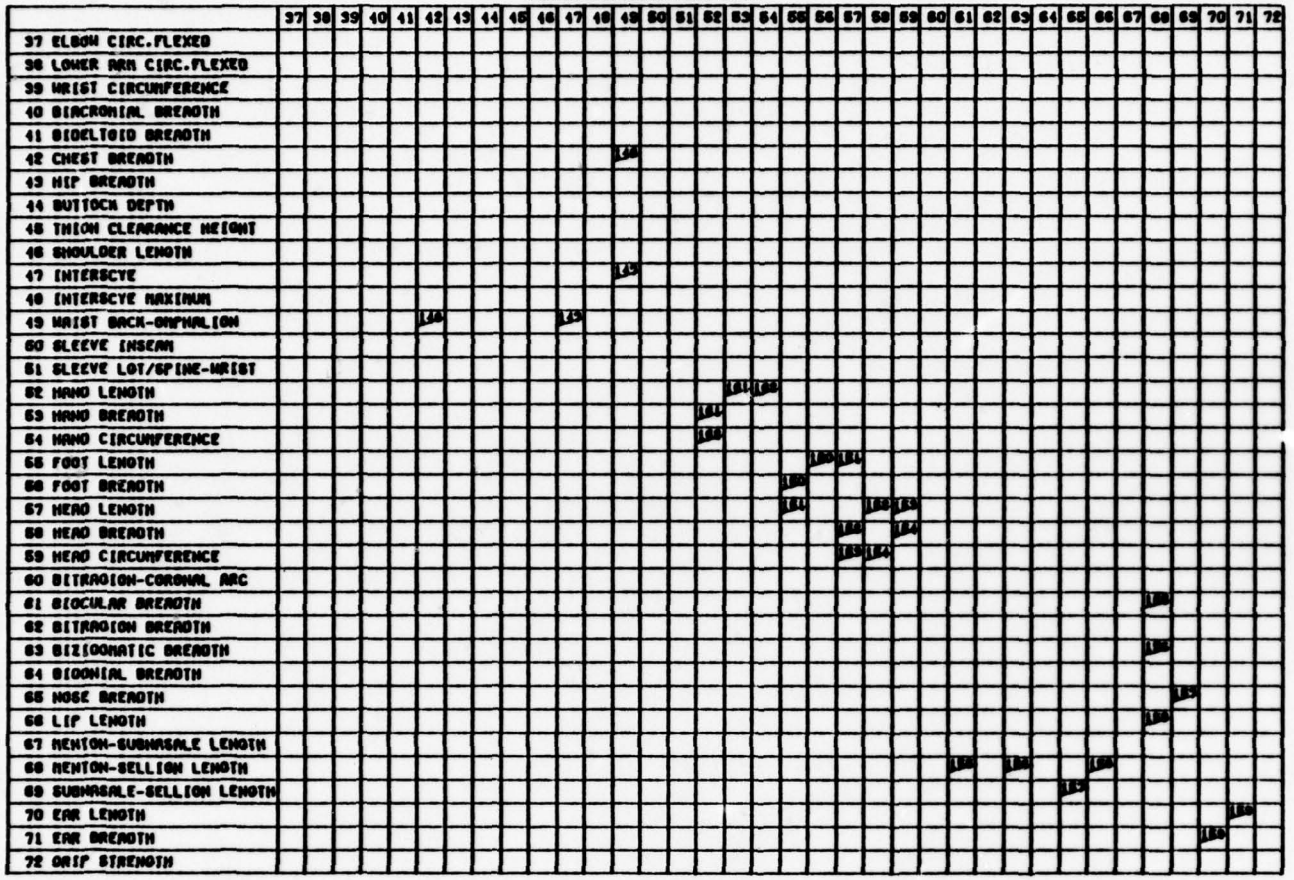


Figure 29 (Continued)

Copy available to DDC does not permit fully legible reproduction

NO.	1967 USAF MEN SURVEY NO.	VARIABLE NAME	MINIMUM	MAXIMUM	1968 USAF WOMEN SURVEY NO.	VARIABLE NAME	MINIMUM	MAXIMUM
1	1	AGE	2100.00	5050.00	1	AGE	177.50	505.00
2	2	WEIGHT	117.50	264.00	2	WEIGHT	82.50	200.00
3	13	HEIGHT (STATURE)	1577.50	1972.00	7	STATURE	1442.50	1830.00
4	14	CERVICALE HEIGHT	1342.50	1702.00	9	CERVICALE HEIGHT	1202.50	1560.00
5	15	ACROMION HEIGHT	1277.50	1644.00	10	ACROMIAL HEIGHT	1142.50	1520.00
6	19	SUPRASTERNALE HGHT	1267.50	1623.00	11	SUPRASTERNALE HGHT	1102.50	1506.00
7	24	TROCHANTERION HGHT	787.50	1119.00	15	TROCHANTERIC HGHT	682.50	965.00
8	23	BUTTOCK HEIGHT	767.50	1098.00	16	BUTTOCK HEIGHT	642.50	900.00
9	25	GLUTEAL FURROW HGT	682.50	986.00	17	GLUTEAL FURROW HGT	582.50	864.00
10	26	CROTCH HEIGHT	712.50	1035.00	19	CROTCH HEIGHT	602.50	875.00
11	31	ANKLE HEIGHT	103.50	183.00	20	ANKLE HEIGHT	72.50	160.00
12	132	LAT L MALLEOLUS HT	53.50	89.00	21	LAT L MALLEOLUS HT	47.50	87.00
13	32	SITTING HEIGHT	867.50	1048.00	23	SITTING HEIGHT	752.50	964.00
14	33	EYE HEIGHT/SITTING	682.50	910.00	24	EYE HEIGHT,SITTING	632.50	831.00
15	34	MIDSHOULDER HT/SIT	537.50	746.00	25	MIDSHOULDER HT,SIT	502.50	672.00
16	36	ELBOW REST HGT/SIT	152.50	351.00	27	ELBOW REST HEIGHT	142.50	295.00
17	38	POPLITEAL HGHT/SIT	362.50	512.00	28	POPLITEAL HEIGHT	332.50	471.00
18	40	BUTTOCK-POPLITEAL	422.50	598.00	29	BUTTOCK-POPLIT L L	382.50	585.00
19	39	BUTTOCK-KNEE LNGTH	517.50	696.00	30	BUTTOCK-KNEE LNGTH	482.50	664.00
20	43	ACROMION-RADIALE L	271.50	393.00	31	ACROMION-RADIALE L	252.50	365.00
21	45	RADIALE-STYLION LH	224.50	314.00	32	RADIALE-STYLION L	187.50	280.00
22	67	SHOULDER CIRCUM CE	997.50	1367.00	37	SHOULDER CIRCUMFER	862.50	1221.00
23	68	CHEST CIRC AT SCYE	792.50	1243.00	38	CHEST CIRC AT SCYE	702.50	1035.00
24	69	CHEST CIRCUMF ENCE	772.50	1214.00	39	BUST CIRCUMFERENCE	742.50	1139.00
25	70	WAIST CIR-OMPHAL N	677.50	1246.00	41	WAIST CIRCUMFERNCE	522.50	951.00
26	72	BUTTOCK CIRCUMF CE	812.50	1244.00	44	HIP C-9 BLW WAIST	762.50	1201.00
27	96	UPPER THIGH CIRCUM	452.50	759.00	45	UPPER THIGH CIRCUM	422.50	720.00
28	98	KNEE CIRCUMFERENCE	312.50	482.00	46	KNEE CIRCUMFERENCE	302.50	457.00
29	100	CALF CIRCUMF/RIGHT	297.50	452.00	47	CALF CIRCUM, RIGHT	262.50	445.00
30	102	ANKLE CIRCUMF ENCE	181.50	267.00	49	ANKLE CIRCUMFERNCE	172.50	256.00
31	74	VERTICAL TRUNK CIR	1422.50	1975.00	50	VERTICAL TRUNK CIR	1342.50	1782.00
32	75	VERT TRUNK CIR/SIT	1367.50	1856.00	51	VERTICAL TRK C,SIT	1322.50	1705.00
33	73	BUTTOCK CIRCUM/SIT	867.50	1411.00	52	BUTTOCK CIRC, SIT	642.50	1284.00
34	103	SCYE CIRCUMFERENCE	402.50	594.00	53	SCYE CIRCUMFERENCE	282.50	490.00
35	104	BICEPS C-EXTEND/RT	227.50	388.00	55	BICEPS C,RELAXED,R	192.50	374.00
36	106	BICEPS C-FLEXED/RT	252.50	408.00	56	BICEPS C,FLEXED, R	192.50	390.00
37	109	ELBOW CIRC-FLEXED	258.50	369.00	59	ELBOW CIRC, FLEXED	212.50	358.00
38	111	LOWER ARM C-FLEXED	241.50	354.00	61	FOREARM C, FLEXED	192.50	328.00
39	112	WRIST CIRCUMF ENCE	150.50	208.00	62	WRIST CIRCUMFERNCE	122.50	176.00
40	50	BIACROMIAL BREADTH	337.50	474.00	63	BIACROMIAL BREADTH	307.50	410.00
41	51	BIDELTOID BREADTH	397.50	567.00	64	BIDELTOID BREADTH	342.50	501.00
42	52	CHEST BREADTH	257.50	415.00	65	CHEST BREADTH	222.50	359.00
43	55	HIP BREADTH	282.50	446.00	68	HIP BREADTH	282.50	441.00
44	64	BUTTOCK DEPTH	170.50	338.00	77	BUTTOCK DEPTH	152.50	306.00
45	65	THIGH CLEARANCE HT	124.50	217.00	78	THIGH CLEARANCE	87.50	169.00
46	118	SHOULDER LENGTH	131.50	217.00	79	SHOULDER LENGTH	112.50	188.00
47	120	INTERSCYE	270.50	514.00	82	INTERSCYE	272.50	442.00
48	121	INTERSCYE MAXIMUM	492.50	713.00	83	INTERSCYE, MAXIMUM	372.50	605.00
49	124	WAIST BACK-OMPHL N	402.50	563.00	85	WAIST BACK	332.50	481.00
50	49	SLEEVE INSEAM	397.50	578.00	87	SLEEVE INSEAM	362.50	535.00
51	115	SLVE L/SPINE-WRIST	787.50	1045.00	90	SPINE-TO-WRIST LTH	672.50	912.00
52	134	HAND LENGTH	166.50	222.00	91	HAND LENGTH	152.50	220.00
53	136	HAND BR/METACARPLE	75.50	102.00	92	HAND BREADTH	60.50	88.00
54	138	HAND C/METACARPALE	183.50	247.00	93	HAND CIRCUMFERENCE	147.50	215.00
55	125	FOOT LENGTH	231.50	313.00	94	FOOT LENGTH	207.50	278.00
56	127	FOOT BREADTH	83.50	117.00	95	FOOT BREADTH	67.50	110.00
57	150	HEAD LENGTH	174.50	226.00	96	HEAD LENGTH	162.50	207.00
58	156	HEAD BREADTH	138.50	176.00	97	HEAD BREADTH	122.50	171.00
59	141	HEAD CIRCUMFERENCE	526.50	620.00	98	HEAD CIRCUMFERENCE	497.50	617.00
60	144	BITRAGION-CORONAL	320.50	402.00	112	BITRAGION-CORONAL	287.50	392.00
61	162	BIOCULAR BREADTH	77.50	108.00	113	BIOCULAR BREADTH	78.50	112.00
62	158	BITRAGION BREADTH	123.50	161.00	115	BITRAGION BREADTH	112.50	152.00
63	159	BIZYGOMATIC BR DTH	123.50	159.00	116	BIZYGOMATIC BRDTH	108.50	149.00
64	160	BIGONIAL BREADTH	94.50	142.00	117	BIGONIAL BREADTH	80.50	122.00
65	165	NOSE BREADTH	26.50	51.00	118	NASAL BREADTH	22.50	46.00
66	166	LIP LENGTH	38.50	66.00	119	LIP LENGTH	30.50	58.00
67	171	MENTON-SUBNASALE L	52.50	89.00	120	MENTON-SUBNASALE L	38.50	75.00
68	172	MENTON-NASAL ROOT	97.50	143.00	121	MENTON-SELLION LTH	86.50	128.00
69	168	SUBNASALE-NASAL RT	38.50	64.00	122	SUBNASALE-SELLION	30.50	61.00
70	154	EAR LENGTH	48.50	83.00	123	EAR LENGTH	34.50	69.00
71	153	EAR BREADTH	26.50	51.00	124	EAR BREADTH	18.50	42.00
72	12	GRIP STRENGTH	32.50	86.00	125	GRIP STRENGTH	9.50	53.00

Figure 30. Survey Variable Names, Numbers and Ranges from the Individual Survey Tapes.

Copy available to DDC does not permit fully legible reproduction

```
REC 0001.. ********** A COMBINED TAPE FOR USAF WOMEN(1968), AND USAF MEN(1967) **********
REC 0002..  72 VARIABLES  USAF MEN/USAF WOMEN                          19  2420 MEN  1905 WOMEN
REC 0003.. (I3,1X,6A4,I3,3F9.2,F11.7,3X,2A4)
REC 0004.. (I4,19F4.1,/,(20F4.1))
REC 0005..   1 AGE                          3    18.50    57.00    1.50  1.0000000  (YR) (YR)
REC 0006..   2 WEIGHT                       6    37.42   119.75    3.00  2.2046223  (KG) (LB)
REC 0007..   3 STATURE                      7   144.25   197.20    2.00  0.3937008  (CM) (IN)
REC 0008..   4 CERVICALE HEIGHT            16   120.25   170.20    2.00  0.3937008  (CM) (IN)
REC 0009..   5 ACROMION HEIGHT             15   114.25   164.40    2.00  0.3937008  (CM) (IN)
REC 0010..   6 SUPRASTERNALE HEIGHT        20   116.25   162.30    2.00  0.3937008  (CM) (IN)
REC 0011..   7 TROCHANTERION HEIGHT        20    68.25   111.90    1.50  0.3937008  (CM) (IN)
REC 0012..   8 BUTTOCK HEIGHT              14    64.25   109.80    2.00  0.3937008  (CM) (IN)
REC 0013..   9 GLUTEAL FURROW HEIGHT       21    58.25    98.60    1.50  0.3937008  (CM) (IN)
REC 0014..  10 CROTCH HEIGHT               13    60.25   103.50    1.50  0.3937008  (CM) (IN)
REC 0015..  11 ANKLE HEIGHT                12     7.25    18.30    0.40  0.3937008  (CM) (IN)
REC 0016..  12 LATERAL MALLEOLUS HEIGHT    24     4.75     8.90    0.20  0.3937008  (CM) (IN)
REC 0017..  13 SITTING HEIGHT              14    75.25   104.80    1.00  0.3937008  (CM) (IN)
REC 0018..  14 EYE HEIGHT,SITTING          18    63.25    91.00    1.00  0.3937008  (CM) (IN)
REC 0019..  15 MIDSHOULDER HEIGHT,SIT      22    50.25    74.60    1.00  0.3937008  (CM) (IN)
REC 0020..  16 ELBOW REST HEIGHT,SIT       21    14.25    35.10    0.80  0.3937008  (CM) (IN)
REC 0021..  17 POPLITEAL HEIGHT,SITTING    24    33.25    51.20    0.60  0.3937008  (CM) (IN)
REC 0022..  18 BUTTOCK-POPLITEAL LENGTH    24    38.25    59.80    0.80  0.3937008  (CM) (IN)
REC 0023..  19 BUTTOCK-KNEE LENGTH         19    48.25    69.60    0.80  0.3937008  (CM) (IN)
REC 0024..  20 ACROMION-RADIALE LENGTH     23    25.25    39.30    0.60  0.3937008  (CM) (IN)
REC 0025..  21 RADIALE-STYLION LENGTH      22    18.75    31.40    0.60  0.3937008  (CM) (IN)
REC 0026..  22 SHOULDER CIRCUMFERENCE      22    86.25   136.70    2.00  0.3937008  (CM) (IN)
REC 0027..  23 CHEST CIRC AT SCYE          18    70.25   124.30    2.00  0.3937008  (CM) (IN)
REC 0028..  24 CHEST CIRCUMFERENCE         19    74.25   121.40    2.00  0.3937008  (CM) (IN)
REC 0029..  25 WAIST CIRC-OMPHALION        20    52.25   124.60    2.50  0.3937008  (CM) (IN)
REC 0030..  26 BUTTOCK CIRCUMFERENCE       21    76.25   124.40    2.00  0.3937008  (CM) (IN)
REC 0031..  27 UPPER THIGH CIRC            16    42.25    75.90    1.50  0.3937008  (CM) (IN)
REC 0032..  28 KNEE CIRCUMFERENCE          18    30.25    48.20    0.60  0.3937008  (CM) (IN)
REC 0033..  29 CALF CIRCUMFERENCE,RIGHT    24    25.25    45.20    0.80  0.3937008  (CM) (IN)
REC 0034..  30 ANKLE CIRCUMFERENCE         19    17.25    26.70    0.40  0.3937008  (CM) (IN)
REC 0035..  31 VERTICAL TRUNK CIRC         19   134.25   197.50    2.50  0.3937008  (CM) (IN)
REC 0036..  32 VERTICAL TRUNK CIRC,SIT     23   132.25   185.60    2.00  0.3937008  (CM) (IN)
REC 0037..  33 BUTTOCK CIRC,SIT            16    84.25   141.10    2.00  0.3937008  (CM) (IN)
REC 0038..  34 SCYE CIRCUMFERENCE          18    28.25    59.40    1.50  0.3937008  (CM) (IN)
REC 0039..  35 BICEPS CIRC,EXTENDED/RT     23    19.25    38.80    0.80  0.3937008  (CM) (IN)
REC 0040..  36 BICEPS CIRC,FLEXED/RIGHT    24    19.25    40.80    0.80  0.3937008  (CM) (IN)
REC 0041..  37 ELBOW CIRC,FLEXED           17    21.25    36.90    0.60  0.3937008  (CM) (IN)
REC 0042..  38 LOWER ARM CIRC,FLEXED       21    19.25    35.40    0.60  0.3937008  (CM) (IN)
REC 0043..  39 WRIST CIRCUMFERENCE         19    12.25    20.80    0.40  0.3937008  (CM) (IN)
REC 0044..  40 BIACROMIAL BREADTH          18    30.75    47.40    0.60  0.3937008  (CM) (IN)
REC 0045..  41 BIDELTOID BREADTH           17    34.25    56.70    0.80  0.3937008  (CM) (IN)
REC 0046..  42 CHEST BREADTH               13    22.25    41.50    0.80  0.3937008  (CM) (IN)
REC 0047..  43 HIP BREADTH                 11    28.25    44.60    0.60  0.3937008  (CM) (IN)
REC 0048..  44 BUTTOCK DEPTH               13    15.25    33.80    0.80  0.3937008  (CM) (IN)
REC 0049..  45 THIGH CLEARANCE HEIGHT      22     8.75    21.70    0.60  0.3937008  (CM) (IN)
REC 0050..  46 SHOULDER LENGTH             15    11.25    21.70    0.40  0.3937008  (CM) (IN)
```


Copy available to DDC does not permit fully legible reproduction

Figure 31. Combined Tape for Input to BIVPLOT.

```
REC 0051.. 47 INTERSCYE                    9    27.05    51.40    1.00  0.3937008   (CM) (IN)
REC 0052.. 48 INTERSCYE MAXIMUM           17    37.25    71.30    1.50  0.3937008   (CM) (IN)
REC 0053.. 49 WAIST BACK-OMPHALION        20    33.25    56.30    0.80  0.3937008   (CM) (IN)
REC 0054.. 50 SLEEVE INSEAM               13    36.25    57.80    0.80  0.3937008   (CM) (IN)
REC 0055.. 51 SLEEVE LGT/SPINE-WRIST      22    67.25   104.50    1.50  0.3937008   (CM) (IN)
REC 0056.. 52 HAND LENGTH                 11    15.25    22.20    0.40  0.3937008   (CM) (IN)
REC 0057.. 53 HAND BREADTH                12     6.85    10.20    0.20  0.3937008   (CM) (IN)
REC 0058.. 54 HAND CIRCUMFERENCE          18    14.75    24.70    0.40  0.3937008   (CM) (IN)
REC 0059.. 55 FOOT LENGTH                 11    20.75    31.30    0.40  0.3937008   (CM) (IN)
REC 0060.. 56 FOOT BREADTH                12     6.75    11.70    0.20  0.3937008   (CM) (IN)
REC 0061.. 57 HEAD LENGTH                 11    16.25    22.60    0.40  0.3937008   (CM) (IN)
REC 0062.. 58 HEAD BREADTH                12    12.25    17.60    0.20  0.3937008   (CM) (IN)
REC 0063.. 59 HEAD CIRCUMFERENCE          18    49.75    62.00    0.60  0.3937008   (CM) (IN)
REC 0064.. 60 BITRAGION-CORONAL ARC       21    28.75    40.20    0.40  0.3937008   (CM) (IN)
REC 0065.. 61 BIOCULAR BREADTH            16     7.75    11.20    0.20  0.3937008   (CM) (IN)
REC 0066.. 62 BITRAGION BREADTH           17    11.25    16.10    0.20  0.3937008   (CM) (IN)
REC 0067.. 63 BIZIGOMATIC BREADTH         19    10.85    15.90    0.20  0.3937008   (CM) (IN)
REC 0068.. 64 BIGONIAL BREADTH            16     8.05    14.20    0.40  0.3937008   (CM) (IN)
REC 0069.. 65 NOSE BREADTH                12     2.25     5.10    0.20  0.3937008   (CM) (IN)
REC 0070.. 66 LIP LENGTH                  10     3.05     6.60    0.20  0.3937008   (CM) (IN)
REC 0071.. 67 MENTON-SUBNASALE LENGTH     23     3.85     8.90    0.20  0.3937008   (CM) (IN)
REC 0072.. 68 MENTON-SELLION LENGTH       21     8.65    14.30    0.20  0.3937008   (CM) (IN)
REC 0073.. 69 SUBNASALE-SELLION LENGTH    24     3.05     6.40    0.20  0.3937008   (CM) (IN)
REC 0074.. 70 EAR LENGTH                  10     3.45     8.30    0.20  0.3937008   (CM) (IN)
REC 0075.. 71 EAR BREADTH                 11     1.85     5.10    0.20  0.3937008   (CM) (IN)
REC 0076.. 72 GRIP STRENGTH               13     9.50    86.00    3.00  2.2046223   (KG) (LB)
REC 0077..  15 415 812171114781435141 7 911 866 796 807 130  73 906 802 647 248 409 465 581
REC 0078.. 343 275116811221125 995 974 559 359 359 2211682162710 4 466 286 306 311 287 169
REC 0079.. 407 485 344 339 260 156 148 418 592 462 490 915 188  89 216 260  94 192 152 563
REC 0080.. 347  89 137 137 111  36  53  78 132  55  70  38 490
REC 0081..  16 415 771176615141427144 4 942 892 798 837 148  74 914 788 609 208 415 495 605
REC 0082.. 329 26811511026 975 941 957 578 384 373 2231701158510 2 487 326 332 308 289 180
REC 0083.. 404 477 336 343 222 165 165 426 622 456 488 899 193  92 221 249 101 202 156 580
REC 0084.. 341  91 143 141 121  39  54  74 136  57  65  36 520
REC 0085..  17 425 780183415661486148 8 948 889 804 830 130  76 969 859 671 278 439 515 629
REC 0086.. 325 2611142 997 931 805 981 591 399 393 2331754169610 8 466 297 312 310 300 177
REC 0087.. 427 500 337 350 241 152 173 454 613 467 479 928 187  92 228 268 101 190 161 569
REC 0088.. 350  91 156 149 117  39  55  66 121  56  76  40 530
REC 0089..  18 445 830177915361455146 4 946 926 833 839 136  72 932 802 640 239 442 501 616
REC 0090.. 335 282114110571034 9531043 618 380 367 2151730165211 5 442 326 349 332 294 185
REC 0091.. 408 487 349 382 258 153 160 422 576 461 499 902 186  92 214 272  97 195 148 557
REC 0092.. 325  91 145 138 106  33  49  66 121  52  68  40 510
REC 0093..  19 425 953186016031536154010 8 996 892 911 158  72 939 824 668 275 474 531 647
REC 0094.. 346 295124511521115102010 8 615 402 385 2241742167011 5 491 330 344 339 324 182
REC 0095.. 421 515 372 377 274 166 179 442 643 469 507 966 200  98 232 288 106 206 159 596
REC 0096.. 357  92 151 141 116  37  48  71 124  50  68  39 620
REC 0097..  20 395 953195616691607160510 1 963 875 896 160  761048 900 714 289 474 530 630
REC 0098.. 350 279124511051066 8451016 582 409 392 2441864175510 7 492 344 357 342 322 204
REC 0099.. 451 520 369 369 240 156 178 488 655 512 504 937 210  98 229 297  96 221 160 618
REC 0100.. 394 100 152 155 117  41  59  80 143  64  79  43 640
```

Figure 31 (Continued)

Copy available to DDC does not permit fully legible reproduction

In a like manner, the Health Examination Survey of men and women were put on another tape for their analyses.

4.4 EQUALIZING SAMPLE SIZES

In order to make these multiple bivariate plots (multi-bivplots) as useful as possible, the sample sizes were equalized. It was decided that only the first 2000 subjects from the 1967 USAF Male survey would be used, and datasets for 95 subjects would be added to the 1905 subjects on the 1968 USAF Female survey. These 95 datasets were chosen at random using a UDRI-written program, RANDOM, which, in turn, employed a random number generating routine from the CDC 6600 computer system. The original 2420-subject data values from the 1967 survey and the 1905-subject data values from the 1968 survey were used to caluclate the summary statistics.

4.5 SUMMARY

To date one English and 162 metric plots have been generated from the 1967 versus 1968 USAF surveys tape. Each plot is approximately 14"x10" in size and is plotted using a .2 mm India ink pen on the offline CALCOMP plotter at the ASD Computer Center (Building 676). Plot tapes are generated on the CDC 6600 computer system at Building 676 using the CDC 1700 remote job entry terminal at Building 441. These plot tapes are then read by the CALCOMP 780 magnetic tape unit and plotted with a CALCOMP 763 digital incremental zip-mode plotter. This route has offered the best resolution and quality of output. However, because of the time required to generate these plots on the CALCOMP plotter, only ten plots can be produced a day. Once the plots have been produced, they are reduced to $8\frac{1}{2}$x11 inch size on a reducing copy machine in Building 676 for their general use.

The original and primary use for these plots by AMRL has been for the recent series of chemical warfare clothing and personal equipment sizing and fit tests. These multi-bivplots have been an aid in sizing face respirators, protective garments, and gloves for both men and women in the ground forces.

Further multi-bivplots are expected to be produced and used in the future. Program BIVPLOT, however, is not fully documented and further changes are to be made to BIVPLOT during the next contract period. A series of these bivariate plots will be published in 1977 along with a more extensive documentation of program BIVPLOT and its accompanying subroutines. At that time the input formats for BIVPLOT will also be documented in full.

SECTION 5
BIOSTEREOMETRIC DATA

This section contains the analysis of a new set of data obtained during this contract period. This set of data was collected for AMRL/HED by R. E. Herron et al., of the Biostereometrics Laboratory at the Texas Institute for Rehabilitation and Research, for the purpose of collecting mass distribution measurements for six anatomical specimens using biostereometrics (see Reference 8). This was done in conjunction with Chandler et al. (see Refer-9) who used the pendelum method to gather mass distribution data on these same specimens.

5.1 HERRON'S BIOSTEREOMETRIC DATA

Herron's biostereometric cadaver data were obtained from AMRL during the contract period covered in this report, and some preliminary statistical analyses were performed on the data using program HER1. The substance of Herron's data was published in AMRL-TR-75-18 pages 56-193 (Reference 8).

Statistical analyses performed on these data have been the following:

A. New densities, called DENSITY 4, were calculated using Herron's volumes and measured cadaver weights, as reported in the Department of Transportation (DOT) report DOT HS-801 430, for each segment.
B. A mean DENSITY 4 was calculated for each segment.
C. Segment weights were recalculated using the DENSITY 4 mean value and Herron's volumes.

5.2 INPUT

Input for HER1 consisted of: a numbered variable name card for each segment, using a format of (I4, 1X, 3A4); a card for each segment with the DOT reported densities and weights for each of the six cadavers, using format

(I2, 2X, 6(F6.4, F6.1)); tables 9, 21, 33, 45, 57, and 69 from Herron's data, each followed by a blank card. Format information for Herron's data is shown in Figure 32.

5.3 SUMMARY

Figure 33 shows the general flow of program HER1, which was used to perform the original data analyses. Figures 34, 35, and 36 show the DOT input, the first two tables of the Herron input, and the output for the first three cadaver segments respectively.

No further analyses of the biostereometric data has been planned, pending discussions with Dr. Herron at the Biostereometrics laboratory regarding his data.

Each punched card corresponds to one line of the data in the tables. The first two numbers of the cards represent the table number and the data line of that table, respectively. The numbers that follow are the same as those of the data in the tables. (Disregard the last 8 digits of each pink card.)

For example a card with: 34 19 3 1206388.6 1491587.0 3717724.4

is from the 34th table, the 19th data line (column headings, titles, and subtitles were not numbered) and the next 4 fields are the data.

Twelve different formats were used for the cards:

Format #	Table #
1	Table 1, lines 1-16
2	Table 1, lines 17-22
3	Tables 2-7, odd lines
4	Tables 2-7, even lines
5	Table 8
6	Tables 9,13,17,21,25,29,33,37,41,45,49,53,57,61,65, 69,73,77
7	Tables 10-80, except those listed above
8	Tables 81-116, lines 1,4,7,10,13,16,19,22,25
9	Tables 81-116, all other lines
10	Tables 117,119,121
11	Tables 118,120,122
12	All table titles, subtitles, column headings

The Fortran coding for the above formats is as follows:

Format (1)	I3,I6,3X,I2,F27.3,2F16.3
Format (2)	I3,I6,3X,I2,F27.3,F16.3,F6.3,F10.3,F6.3
Format (3)	I3,I6,3X,I2,F10.1,F12.2,F13.1,F10.1,F12.1
Format (4)	I3,I6,25X,F15.1,F10.1,F12.1
Format (5)	I3,I6,3X,I2,F17.1,F6.1,F7.1,F13.1,F6.1,F7.1
Format (6)	I3,I6,3X,I2,F10.3,F10.1,F9.2,F11.1,F8.1,F9.1
Format (7)	I3,I6,3X,I2,F17.1,F20.1,F20.1
Format (8)	I3,I6,3X,I2,F17.10,2F20.10
Format (9)	I3,I6,5X,F17.10,2F20.10
Format (10)	I3,I6,3X,I2,F14.1,F17.1,F16.1,F14.1
Format (11)	I3,I6,3X,I2,F12.2,F14.2,F16.2,F15.2
Format (12)	20A4

Figure 32. Format Information for Herron's Data (Reference 8).

Copy available to DDC does not permit fully legible reproduction


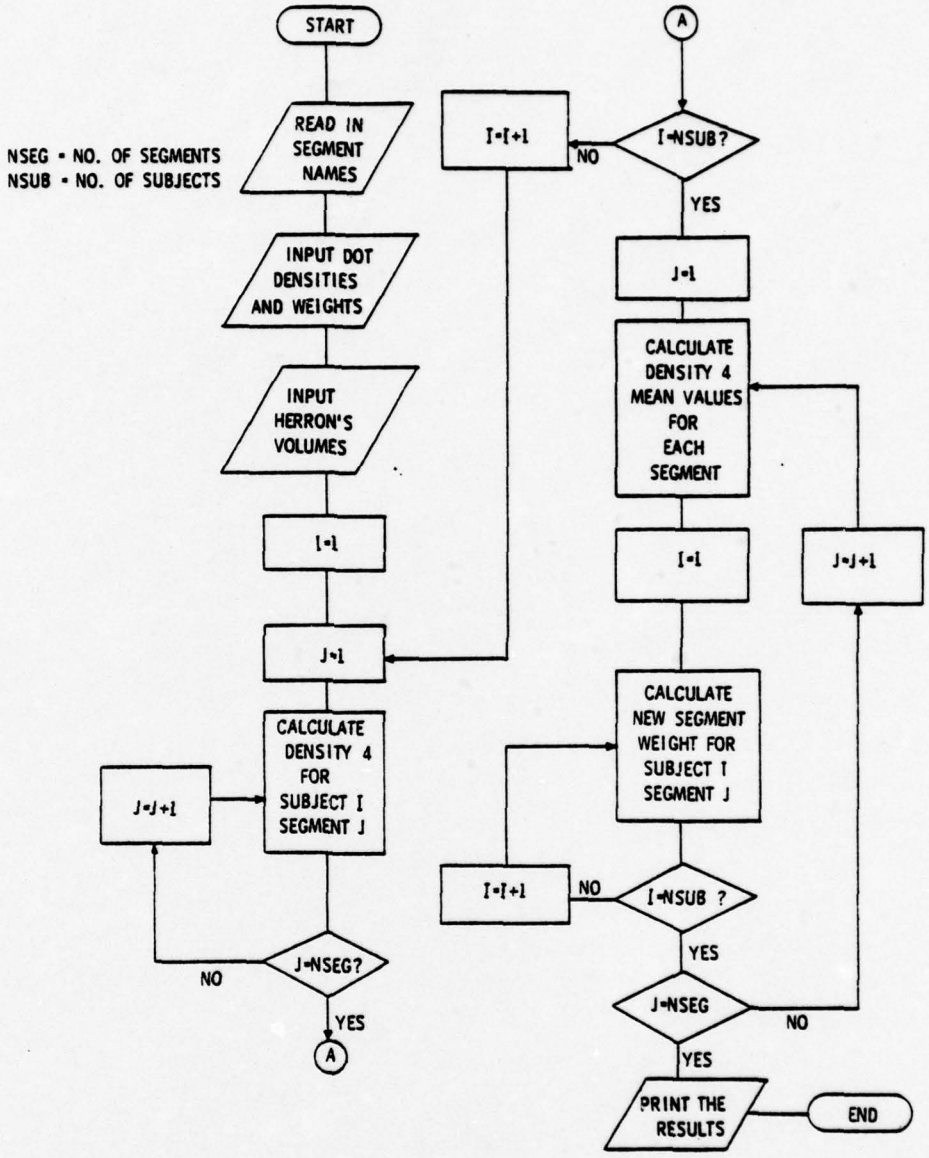


Figure 33. General Flow of Program HER1.

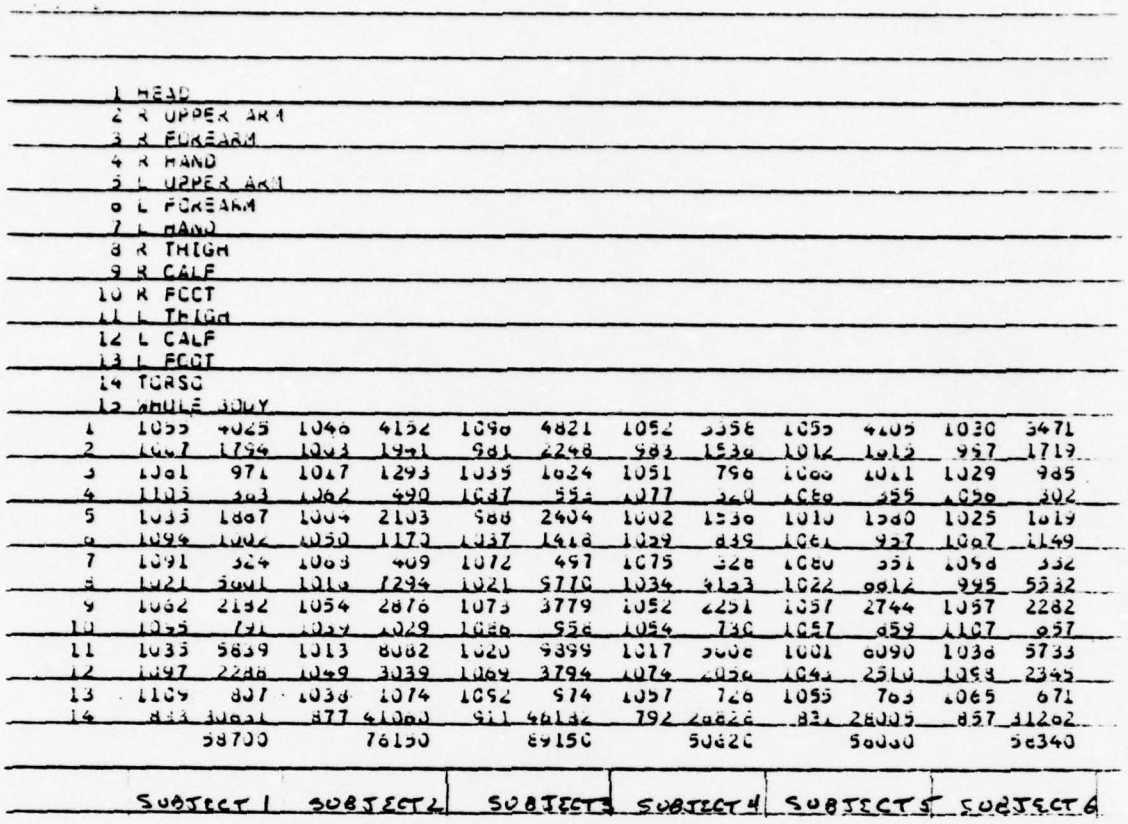

	1 HEAD											
	2 R UPPER ARM											
	3 R FOREARM											
	4 R HAND											
	5 L UPPER ARM											
	6 L FOREARM											
	7 L HAND											
	8 R THIGH											
	9 R CALF											
	10 R FOOT											
	11 L THIGH											
	12 L CALF											
	13 L FOOT											
	14 TORSO											
	15 ANKLE JOINT											
1	1055	4025	1046	4152	1090	4821	1052	3356	1059	4105	1030	3471
2	1007	1794	1043	1991	981	2248	983	1530	1012	1013	957	1719
3	1061	971	1017	1293	1035	1024	1051	796	1066	1041	1029	985
4	1103	303	1062	490	1037	554	1077	340	1080	355	1050	302
5	1033	1807	1004	2103	988	2404	1002	1530	1010	1540	1025	1819
6	1094	1002	1050	1172	1037	1418	1029	839	1061	927	1007	1149
7	1091	324	1068	409	1072	497	1075	328	1080	351	1054	332
8	1021	5001	1014	7294	1021	9770	1034	4163	1022	5012	995	5532
9	1062	2192	1054	2876	1073	3779	1052	2251	1057	2744	1057	2282
10	1033	791	1034	1029	1068	956	1054	730	1057	859	1107	957
11	1035	5859	1013	8082	1020	9899	1017	5006	1001	6090	1038	5733
12	1097	2248	1049	3039	1064	3794	1074	2052	1043	2510	1093	2345
13	1109	807	1038	1074	1092	974	1057	720	1055	705	1065	671
14	833	30031	877	41080	911	48136	792	28826	834	28005	857	31202
		58700		76150		89150		50620		50060		56340
	SUBJECT 1		SUBJECT 2		SUBJECT 3		SUBJECT 4		SUBJECT 5		SUBJECT 6	

Figure 34. Input from Report DOT-HS-801:430 Variable Names and Density/Weight Values for Each Segment (Reference 9).

Copy available to DDC does not permit fully legible reproduction

TABLE 9 SUBJECT 1 DENSITY 1.0000

MASS AND CENTER OF GRAVITY (UNITS: C.G.S.)

			DENSITY	MASS	MASS	X C.G.	Y C.G.	Z C.G.
		SEGMENTS						
9	1	1	1.000	4641.0	4.47	-.7	2.0	56.9
9	2	2	1.000	2090.1	43.06	-.6	-1.1	21.8
9	3	3	1.000	1077.2	10.04	.2	1.0	-11.1
9	4	4	1.000	1920.7	3.08	21.6	-5.2	28.1
9	5	5	1.000	963.1	1.54	32.8	-4.4	5.4
9	6	6	1.000	410.2	.00	33.3	-.4	-14.6
9	7	7	1.000	2017.4	3.23	-23.0	-4.4	28.9
9	8	8	1.000	941.8	1.51	-31.8	-2.7	5.9
9	9	9	1.000	347.9	.56	-29.3	.9	-12.8
9	10	10	1.000	6200.9	9.93	12.0	1.0	-30.5
9	11	11	1.000	2212.2	3.54	16.1	2.2	-71.4
9	12	12	1.000	811.5	1.30	17.5	8.8	-100.2
9	13	13	1.000	5950.3	9.52	-10.4	1.4	-31.9
9	14	14	1.000	2204.6	3.53	-13.7	2.7	-71.5
9	15	15	1.000	771.9	1.23	-15.4	3.7	-99.9
9	16	16	1.000	33075.3	53.90	-.4	-.7	15.2
		PARTS						
9	17	1	1.000	37710.3	60.36	-.5	-.4	19.7
9	18	2	1.000	3300.0	5.28	25.7	-4.3	18.2
9	19	3	1.000	3367.1	5.29	-20.7	-3.2	17.8
9	20	4	1.000	9220.6	14.77	11.5	2.0	-46.2
9	21	5	1.000	8920.3	14.29	-11.7	2.3	-47.5
		WHOLE BODY						
9	22	1	1.000	62480.4	100.00	.0	.0	.0

TABLE 21 SUBJECT 2 DENSITY 1.0037

MASS AND CENTER OF GRAVITY (UNITS: C.G.S.)

			DENSITY	MASS	MASS	X C.G.	Y C.G.	Z C.G.
		SEGMENTS						
21	1	1	1.000	4190.4	5.33	.1	1.8	62.8
21	2	2	1.000	34681.3	44.07	.0	-1.3	29.9
21	3	3	1.000	8150.3	10.37	.0	.7	-9.0
21	4	4	1.000	2169.5	2.68	24.0	-3.0	30.8
21	5	5	1.000	1165.8	1.48	34.5	-2.4	4.9
21	6	6	1.000	494.1	.63	42.4	.7	-17.1
21	7	7	1.000	2328.4	2.96	-24.1	-5.3	33.5
21	8	8	1.000	1100.0	1.47	-30.1	-3.8	8.1
21	9	9	1.000	422.0	.54	-41.1	-.5	-15.0
21	10	10	1.000	7532.9	9.04	11.9	1.7	-31.5
21	11	11	1.000	2687.0	3.07	19.5	4.2	-77.0
21	12	12	1.000	1090.5	1.39	14.0	9.2	-109.9
21	13	13	1.000	8278.9	10.52	-10.7	1.2	-30.3
21	14	14	1.000	3010.1	3.83	-13.0	3.5	-77.0
21	15	15	1.000	1113.5	1.42	-12.9	10.3	-110.2
21	16	16	1.000	42887.9	54.44	.0	-1.1	18.2
		PARTS						
21	17	1	1.000	47034.3	59.77	.0	-.9	22.4
21	18	2	1.000	3709.4	4.79	29.7	-2.5	16.4
21	19	3	1.000	3911.1	4.97	-29.5	-4.4	20.7
21	20	4	1.000	11300.4	14.70	12.0	3.0	-50.3
21	21	5	1.000	12406.6	15.77	-11.0	2.0	-45.3
		WHOLE BODY						
21	22	1	1.000	78689.7	100.00	.0	.0	.0

Figure 35. First Two Tables of Herron's Data Input for HER1.

Copy available to DDC does not permit fully legible reproduction

DENSITY DOT AND OLD WEIGHT ARE FROM DOT HS-801 430
HERRON'S VOLUMES ARE THE MASS VALUES FROM HIS MASS AND CENTER OF GRAVITY TABLES WITH DENSITY=1.0
DENSITY 4 WAS CALCULATED FROM THE OLD WEIGHTS AND HERRON'S VOLUMES
THE NEW WEIGHTS WERE CALCULATED FROM THE DENSITY 4 MEAN VALUES AND HERRON'S VOLUMES

SUBJECT	DENSITY DOT	DENSITY 4	HERRON'S VOLUME	OLD WEIGHT	NEW WEIGHT
1	1.0550	0.9980	4041.0	4025.0	4079.7
2	1.0660	0.9854	4196.4	4152.0	4230.8
3	1.0590	1.0591	4552.1	4821.0	4595.7
4	1.0520	1.0380	3235.1	3356.0	3200.1
5	1.0550	0.9842	4154.0	4105.0	4194.3
6	1.0300	0.9808	3517.6	3671.0	3551.3

THE HEAD DENSITY 4 MEAN VALUE IS 1.0099

SUBJECT	DENSITY DOT	DENSITY 4	HERRON'S VOLUME	OLD WEIGHT	NEW WEIGHT
1	1.0070	0.9311	1926.7	1794.0	1764.4
2	1.0030	0.9201	2109.5	1941.0	1931.8
3	0.9810	0.9187	2446.9	2246.0	2240.7
4	0.9830	0.8845	1736.8	1536.0	1592.3
5	1.0120	0.9225	1907.4	1815.0	1801.6
6	0.9970	0.9174	1873.7	1719.0	1715.8

THE R UPPER ARM DENSITY 4 MEAN VALUE IS 0.9157

SUBJECT	DENSITY DOT	DENSITY 4	HERRON'S VOLUME	OLD WEIGHT	NEW WEIGHT
1	1.0010	1.0382	963.1	971.0	956.3
2	1.0170	1.1091	1163.8	1293.0	1172.2
3	1.0350	0.9904	1625.2	1624.0	1634.0
4	1.0510	0.9014	820.4	756.0	837.5
5	1.0000	0.9791	1057.0	1011.0	1038.2
6	1.0290	0.9761	1009.1	985.0	1014.0

THE R FOREARM DENSITY 4 MEAN VALUE IS 1.0054

Figure 36. HER1 Output.

Copy available to DDC does not permit fully legible reproduction

SECTION 6

THE AEROSPACE MEDICAL RESEARCH LABORATORY DATA BANK AND RELATED MATERIALS

Since the formulation of the AMRL Data Bank, five anthropometric data tapes have been documented and published in AMRL Technical Reports, several others are near publication form, and several programs are now being prepared for publication as AMRL Technical Reports. Two publications, referenced later in this section, have been submitted which fully document four anthropometric survey data tapes, and the correlation tape which contains correlation information for seven anthropometric surveys. Also two correlation tapes of a comparison format, each containing two groups of survey data, which were prepared independent of the AMRL Data Bank are described.

6.1 THE AMRL DATA BANK LIBRARY OF COMPUTER PROGRAMS

Work is progressing steadily on the library of computer programs. A large portion of the documentation has been written and several programs await final touchup, including the XVAL and MSDP programs. Work towards completion of this library is at this time picking up speed. The programs, with complete documentation, will be published during the coming year as part of an AMRL Technical Report.

6.2 THE AMRL DATA BANK TAPE LIBRARY

The standardization of the AMRL Data Bank Tape Library is progressing steadily. Five tapes have been fully documented and published in AMRL-TR-77-2 in September 1976 (see Reference 10). The first four tape volumes in the Technical Report contain the basic survey data from the four most important USAF anthropometric surveys: the 1950 and 1967 surveys of flying personnel, the 1968 survey of Air Force Women, and the 1965 survey of male personnel. The fifth tape is the tape of U.S. correlations which is documented in Paragraph 6.3 of this report.

6.2.1 Tape Format

Since the AMRL report on these tapes is rather complete, this report will only attempt to familiarize the reader with their basic format and content. These tapes have been prepared in essentially a common format for ease in their use not only in AMRL, but in research efforts elsewhere as well. All records on the tape are in 80-character card-image form. The tapes have been made relatively self-explanatory in as much as only one format statement to read in text and other format statements contained in the tape, need be supplied by the user. Each tape contains a heading record, an identification record, a small amount of historical background information on the data, coding information, data variable names, ranges, suitable interval widths for frequency tables, conversion factors for the data, and all but one format statement for reading the tape. Several relevant constants are also provided in the third record of each tape. Figures 37a-f show a listing of the first five subjects of the 1968 USAF female personnel survey tape. The text explaining the different sections of the tape is quoted directly from AMRL-TR-77-2.

6.2.2 Summary

Since the publication of the AMRL Technical Report on the first five volumes of the Data Bank Tape library, nine other tapes are in near-standard form, lacking only historical background and coding information. These nine and several others will be completed during the next contract period.

6.3 INTERCORRELATIONS OF ANTHROPOMETRIC MEASUREMENTS

Three correlation tapes have been prepared during the past year. Two of them have been comparison oriented tapes, each containing the information from two different correlation matrices. The third tape contains eleven files of correlation matrices based on data from seven large U.S. anthropometric surveys.

```
REC 0001.. **    AMRL DATA BANK LIBRARY - VOLUME I - 1964 SURVEY OF AIR FORCE WOMEN    **
```

Line 1, as it appears, is simply the name of the survey. This is repeated as the last line of the tape heading so that it can be used as a heading for any output generated by the use of this tape.

```
REC 0002.. (6(9H         ,I4))
```

Line 2 is a format statement for reading in and writing out the next line.

```
REC 0003.. NSURVEY= 101;   NVØ = 140;   NVT = 156;  NSB = 1905;   NLS =  47;NDATE = 7608
```

Line 3 provides several constants relevant to the contents of the tape:
- NSURVEY - an identifying number for the survey; here, NSURVEY=101
- NVØ - the number of ordinal variables; NVØ=140.
- NVT - the total number of variables; NVT-156.

(Non-ordinal variables always follow the ordinal ones.)
- NSB - the number of subjects; NSB=1905.
- NLS - the number of lines of the description of the survey and its coding; NLS=43.
- NDATE - the date at which this tape was prepared; NDATE=7608, i.e., August 1976.

```
REC 0004.. (I4,2X,2A9,3F8.2,2F6.2,2F10.7)
REC 0005.. (I4,2X,3A6,3F8.2,2F6.2,2F10.7)
REC 0006.. (I4,2X,4A4,A2,3F8.2,2F6.2,2F10.7)
```

Lines 4, 5, and 6 are three alternate formats for use in reading in the name-range-conversion constant records. The first of these reads in the name as two 9-character words, the second as three 6-character words, and the third a four 4-character and one 2-character words. The user of these tapes will presumably use the format most appropriate for his computer, or simply use the last of the three.

Figure 37a. The Heading and Identification Records and Some Formats (Reference 10).

The next several lines (i.e., NLS lines) are background material of some value, we hope, to the user of the tape's data but irrelevant to the computer's treatment of these data. The last of these NLS lines is a repeat of the initial line.

```
REC 0007.. THE SURVEY OF WOMEN OF THE AIR FORCE WAS MADE IN THE SPRING OF 1968 BY THE ANTH
REC 0008.. ROPOLOGY BRANCH, AEROSPACE MEDICAL RESEARCH LABORATORY, WRIGHT-PATTERSON AFB, O
REC 0009.. HIO AND THE ANTHROPOLOGY RESEARCH PROJECT(THEN AT ANTIOCH COLLEGE, YELLOW SPRIN
REC 0010.. GS, OHIO).  DATA FOR AGE(VARIABLE 1), 123 BODY SIZE MEASUREMENTS(VARIABLES 2-12
REC 0011.. 4), AND GRIP STRENGTH(VARIABLE 125) WERE OBTAINED FROM A SAMPLE OF 1905 WOMEN.
REC 0012.. 13 MEASUREMENTS WERE REPEATED ON 1513 SUBJECTS WITH THE SUBJECTS WEARING FOUNDA
REC 0013.. TION GARMENTS(VARIABLES 126-138).  AGE, AGE AT MENARCHE, AND YEAR OF BIRTH(AFTE
REC 0014.. R 1900) ARE RECORDED IN TENTHS OF YEARS; YEAR OF MEASUREMENT(AFTER 1900) IN HUN
REC 0015.. DREDTHS OF YEARS.  SKINFOLDS ARE RECORDED IN TENTHS OF MILLIMETERS, WEIGHT AND
REC 0016.. REPORTED WEIGHT IN POUNDS, REPORTED STATURE IN INCHES, GRIP STRENGTH IN KILOGRA
REC 0017.. MS.  ALL OTHER METRIC VARIABLES WERE RECORDED IN MILLIMETERS.
REC 0018.. CODED VARIABLES----
REC 0019.. 1.AGE
REC 0020..   AS REPORTED PLUS 0.5
REC 0021.. 141.FOUNDATION GARMENT
REC 0022..   1-REGULAR PANTY GIRDLE / 2-LONG LEG PANTY GIRDLE / 3-REGULAR GIRDLE / 4-LONG
REC 0023..   LEG GIRDLE / 5-CORSET / 6-PANTY / 7-MISCELLANEOUS OR NOT SPECIFIED /
REC 0024.. 142.AIR FORCE SPECIALTY CODE (SEE TAPE BOOKLET)
REC 0025.. 143.MARITAL STATUS
REC 0026..   1-SINGLE / 2-MARRIED / 3-DIVORCED / 4-OTHER /
REC 0027.. 145.RANK
REC 0028..   11-BASIC AIRMAN / 12-AIRMAN / 13-AIRMAN FIRST CLASS / 14-SERGEANT / 15-STAFF
REC 0029..   SERGEANT / 16-TECHNICAL SERGEANT / 17-MASTER SERGEANT / 18-SENIOR MASTER
REC 0030..   SERGEANT / 21-OFFICER TRAINEE / 31-2D LT / 32-1ST LT / 33-CAPTAIN / 34-MAJOR/
REC 0031..   35-LT-COL / 36-COLONEL /
REC 0032.. 146.COMMAND
REC 0033..   1-AFSC / 2-AFLC / 3-ATC / 4-SAC / 5-AOC / 6-TAC /
REC 0034.. 147.LOCATION
REC 0035..   1-CARSWELL / 2-LACKLAND / 3-RANDOLPH / 4-SHEPPARD / 5-WRIGHT-PATTERSON /
REC 0036..   6-SEWARD /
REC 0037.. 148.BLOOD TYPE
REC 0038..   1-A / 2-B / 3-AB / 4-O /
REC 0039.. 149.RH FACTOR
REC 0040..   1-NEG / 2-POS /
REC 0041.. 150.HANDEDNESS
REC 0042..   1-RIGHT / 2-LEFT / 3-AMBIDEXTROUS /
REC 0043.. 151-153.BIRTHPLACE(SUBJECT,FATHER, AND MOTHER)
REC 0044..  11-MAINE / 12-NEW HAMP / 13-VERMONT / 14-MASS / 15-RHODE IS / 16-CONN / 21-NEW
REC 0045..  YORK / 22-NEW JERSEY / 23-PENN / 31-DELAWARE / 32-MARYLAND/ 33-DC/ 34-VIRGINIA
REC 0046..  41-OHIO / 42-INDIANA / 43-ILLINOIS / 44-MICHIGAN / 45-WISCONSIN / 51-KENTUCKY
REC 0047..  52-TENNESSEE / 53-MISSISSIPPI / 54-ALABAMA / 61-MINNESOTA / 62-IOWA
REC 0048..  63-MISSOURI / 64-N DAKOTA / 65-S DAKOTA / 66-NEBRASKA / 67-KANSAS / 71-ARKANAS
REC 0049..  72-LOUISIANA / 73-OKLAHOMA / 74-TEXAS / 81-MONTA A / 82-IDAHO / 83-WYOMING
REC 0050..  84-COLORADO / 85-UTAH / 86-NEVADA / 87-ARIZONA / 88-N MEXICO / 91-CALIFORNIA
REC 0051..  92-OREGON / 93-WASHINGTON / 94-ALASKA / 95-HAWAII / SEE TAPE BOOKLET FOR
REC 0052..  FOREIGN CODES. /
REC 0053.. **    AMRL DATA BANK LIBRARY - VOLUME I - 1968 SURVEY OF AIR FORCE WOMEN     **
```

Figure 37b. The Historical Background and Coding Information (Reference 10).

Copy available to DDC does not permit fully legible reproduction

The following NVT (as read from line 3) lines provide information about each variable: names, ranges, conversion constants, and the like. This information can be ignored, in whole or part, by both the human users of these tapes and the computers. The I-th of these lines contains, in order:

I, (Name(I,L),L=1,NLGTH), (A(I,L),L=1,7)

where NLGTH is the length of the name in words. NLGTH depends on the computer word length and must be supplied by the user of the tape.

The quantities A(I,L) are these--we illustrate using the values for weight:

A(I,1)=82.50 a value slightly lower than the smallest value of weight recorded. This value was selected as an appropriate lower limit for the first interval when weights are grouped for frequency tables containing up to but not in excess of 50 intervals.

A(I,2)=200.00 the largest weight recorded.

A(I,3)=126.00 an approximation to the mean weight, included for use in reducing the size of summations of squares and higher powers.

A(I,4)=3.00 a suggested interval width for frequency tables which are limited to a maximum of 50 intervals. In this case, a table of 40 intervals will result; an interval of 2 pounds would have been too fine, and would have resulted in almost 60 intervals. Intervals for linear measurement have generally been restricted to values of 1, 2, 5, 10, 15 or 20 mm.

A(I,5)=5.00 a suggested interval width for frequency tables which are limited to a maximum of 30 intervals.

A(I,6)=0.4535924 a constant to convert the summary statistics from the units in which they were measured to the desired metric units for output. Here the conversion is from pounds to kilograms. Since the measurements are generally made in metric units, the function of A(I,6) is usually to adjust the location of the decimal point.

A(I,7)=2.2046223 a constant to convert the metric output to English units. For weight, this constant converts from kilograms back into pounds.

Figure 37c. The Variable Name-Range Records (Reference 10).

Copy available to DDC does not permit fully legible reproduction

REC	0054..	1	AGE	18000	57500	23000	1000	2000	1000000	10000000
REC	0055..	2	WEIGHT	8250	20000	12600	300	500	4535924	22046223
REC	0056..	3	TRICEPS SKINFOLD	5250	46800	18000	1000	2000	1000000	3937008
REC	0057..	4	SUBSCAPULAR SKINFD	4250	37200	12000	1000	2000	1000000	3937008
REC	0058..	5	SUPRAILIAC SKINFLD	4250	50000	19000	1000	2000	1000000	3937008
REC	0059..	6	MEDIAL CALF SKINFD	1250	37200	15000	1000	2000	1000000	3937008
REC	0060..	7	STATURE	144250	183000	162000	1000	2000	1000000	3937008
REC	0061..	8	STATURE, MAXIMUM	144250	184000	162000	1000	2000	1000000	3937008
REC	0062..	9	CERVICALE HEIGHT	120250	156000	139000	1000	2000	1000000	3937008
REC	0063..	10	ACROMIAL HEIGHT	114250	152000	131000	1000	2000	1000000	3937008
REC	0064..	11	SUPRASTERNALE HGHT	116250	150600	131000	1000	2000	1000000	3937008
REC	0065..	12	BUST POINT HEIGHT	100250	136300	115000	1000	2000	1000000	3937008
REC	0066..	13	WAIST HEIGHT	86250	115500	100000	1000	2000	1000000	3937008
REC	0067..	14	ABDOMINAL EXT HGT	78250	108000	93000	1000	2000	1000000	3937008
REC	0068..	15	TROCHANTERIC HGHT	68250	96500	82000	1000	2000	1000000	3937008
REC	0069..	16	BUTTOCK HEIGHT	64250	96600	82000	1000	2000	1000000	3937008
REC	0070..	17	GLUTEAL FURROW HGT	58250	86400	72000	1000	2000	1000000	3937008
REC	0071..	18	TIBIALE HEIGHT	33250	49600	41000	500	1000	1000000	3937008
REC	0072..	19	CROTCH HEIGHT	60250	87500	74000	1000	2000	1000000	3937008
REC	0073..	20	ANKLE HEIGHT	7250	16000	11000	500	500	1000000	3937008
REC	0074..	21	LATL MALLEOLUS HT	4750	8700	6700	500	500	1000000	3937008
REC	0075..	22	SITTING HT,RELAXED	73250	96000	84000	500	1000	1000000	3937008
REC	0076..	23	SITTING HEIGHT	75250	96400	85500	500	1000	1000000	3937008
REC	0077..	24	EYE HEIGHT,SITTING	63250	83100	73600	500	1000	1000000	3937008
REC	0078..	25	MIDSHOULDER HT,SIT	50250	67200	57600	500	1000	1000000	3937008
REC	0079..	26	WAIST HGHT,SITTING	17750	29200	23100	500	500	1000000	3937008
REC	0080..	27	ELBOW REST HEIGHT	14250	29500	22500	500	1000	1000000	3937008
REC	0081..	28	POPLITEAL HEIGHT	33250	47100	40800	500	1000	1000000	3937008
REC	0082..	29	BUTTOCK-POPLITAL L	38250	58500	47600	500	1000	1000000	3937008
REC	0083..	30	BUTTOCK-KNEE LNGTH	48250	66400	57200	500	1000	1000000	3937008
REC	0084..	31	ACROMION-RADIALE L	25250	36500	30900	500	500	1000000	3937008
REC	0085..	32	RADIALE-STYLION L	18750	28000	23200	500	500	1000000	3937008
REC	0086..	33	THUMB-TIP REACH	62250	87200	74000	1000	1000	1000000	3937008
REC	0087..	34	THUMB-TIP,EXTENDED	70250	100000	83000	1000	2000	1000000	3937008
REC	0088..	35	OVERHEAD REACH	174250	227600	198000	1500	3000	1000000	3937008
REC	0089..	36	NECK CIRCUMFERENCE	28250	39900	33600	500	500	1000000	3937008
REC	0090..	37	SHOULDER CIRCUMFER	86250	122100	103000	1000	2000	1000000	3937008
REC	0091..	38	CHEST CIRC AT SCYE	70250	103500	84000	1000	2000	1000000	3937008
REC	0092..	39	BUST CIRCUMFERENCE	74250	113900	89000	1000	2000	1000000	3937008
REC	0093..	40	CHEST C BELOW BUST	60250	97000	74000	1000	2000	1000000	3937008
REC	0094..	41	WAIST CIRCUMFERNCE	52250	95100	67000	1000	2000	1000000	3937008
REC	0095..	42	ABDOMINAL EXT CIRC	64250	119000	85500	1500	2500	1000000	3937008
REC	0096..	43	HIP C-7""BLW WAIST	76250	117000	93000	1000	2000	1000000	3937008
REC	0097..	44	HIP C-9""BLW WAIST	76250	120100	95000	1000	2000	1000000	3937008
REC	0098..	45	UPPER THIGH CIRCUM	42250	72000	55000	1000	2000	1000000	3937008
REC	0099..	46	KNEE CIRCUMFERENCE	30250	45700	36000	500	1000	1000000	3937008
REC	0100..	47	CALF CIRCUM, RIGHT	26250	44500	34000	500	1000	1000000	3937008
REC	0101..	48	CALF CIRCUM, LEFT	26250	44000	34000	500	1000	1000000	3937008
REC	0102..	49	ANKLE CIRCUMFERNCE	17250	25600	21000	500	500	1000000	3937008
REC	0103..	50	VERTICAL TRUNK CIR	134250	178200	154000	1000	2000	1000000	3937008
REC	0104..	51	VERTICAL TRK C,SIT	132250	170500	150000	1000	2000	1000000	3937008
REC	0105..	52	BUTTOCK CIRC, SIT	84250	128400	99000	1000	2000	1000000	3937008
REC	0106..	53	SCYE CIRCUMFERENCE	28250	49000	37000	500	1000	1000000	3937008
REC	0107..	54	AXILLARY ARM CIRC	20250	39100	27200	500	1000	1000000	3937008
REC	0108..	55	BICEPS C,RELAXED,R	19250	37400	25200	500	1000	1000000	3937008
REC	0109..	56	BICEPS C,FLEXED: R	19250	39000	25400	500	1000	1000000	3937008
REC	0110..	57	BICEPS C,RELAXED,L	19250	37800	25600	500	1000	1000000	3937008
REC	0111..	58	BICEPS C,FLEXED, L	19250	39200	25400	500	1000	1000000	3937008
REC	0112..	59	ELBOW CIRC, FLEXED	21250	35800	26700	500	1000	1000000	3937008
REC	0113..	60	FOREARM C, RELAXED	19250	30000	23400	500	500	1000000	3937008
REC	0114..	61	FOREARM C, FLEXED	19250	32800	24900	500	1000	1000000	3937008
REC	0115..	62	WRIST CIRCUMFERNCE	12250	17600	14800	500	500	1000000	3937008
REC	0116..	63	BIACROMIAL BREADTH	30750	41600	35700	500	500	1000000	3937008
REC	0117..	64	BIDELTOID BREADTH	34250	50100	41700	500	1000	1000000	3937008
REC	0118..	65	CHEST BREADTH	22250	35900	27900	500	1000	1000000	3937008
REC	0119..	66	BUST PT-BUST PT BR	12750	24600	18300	500	500	1000000	3937008
REC	0120..	67	WAIST BREADTH	18250	32700	24000	500	1000	1000000	3937008
REC	0121..	68	HIP BREADTH	28250	44100	34800	500	1000	1000000	3937008
REC	0122..	69	THIGH-THIGH BR,SIT	28250	50200	38000	500	1000	1000000	3937008
REC	0123..	70	HUMERAL BREADTH, R	5150	7500	6100	100	100	1000000	3937008

Figure 37d. (Reference 10).

Copy available to DDC does not permit fully legible reproduction

REC 0124..	71	HUMERAL BREADTH, L	5150	7400	5100	100	100	1000000	3937008
REC 0125..	72	FEMORAL BREADTH, R	6650	9900	8100	200	200	1000000	3937008
REC 0126..	73	FEMORAL BREADTH, L	6651	9900	8100	200	200	1001000	3937008
REC 0127..	74	CHEST DEPTH	18250	32300	23400	500	1000	1000000	3937008
REC 0128..	75	WAIST DEPTH	12250	25500	16800	500	1000	1000000	3937008
REC 0129..	76	ABDOMINAL EXT DPTH	15250	30300	20700	500	1000	1000000	3937008
REC 0130..	77	BUTTOCK DEPTH	15250	30600	21000	500	1000	1000000	3937008
REC 0131..	78	THIGH CLEARANCE	6750	16900	12400	500	500	1000000	3937008
REC 0132..	79	SHOULDER LENGTH	11250	18800	14600	500	500	1000000	3937008
REC 0133..	80	NECK-BUST POINT L	19250	32000	25200	500	1000	1000000	3937008
REC 0134..	81	STRAP LENGTH	52250	79700	65000	1000	2000	1000000	3937008
REC 0135..	82	INTERSCYE	27250	44200	34800	500	1000	1000000	3937008
REC 0136..	83	INTERSCYE, MAXIMUM	37250	60500	49000	500	1000	1000000	3937008
REC 0137..	84	BACK CURVATURE	33250	53500	42400	500	1000	1000000	3937008
REC 0138..	85	WAIST BACK	33250	48100	40500	500	1000	1000000	3937008
REC 0139..	86	ANTERIOR WAIST LTH	27250	41500	33300	500	1000	1000000	3937008
REC 0140..	87	SLEEVE INSEAM	36250	53500	44000	500	1000	1000000	3937008
REC 0141..	88	SPINE-TO-SCYE LGTH	15250	25500	20100	500	500	1000000	3937008
REC 0142..	89	SPINE-TO-ELBOW LTH	44250	62500	53200	500	1000	1000000	3937008
REC 0143..	90	SPINE-TO-WRIST LTH	67250	91200	79500	500	1000	1000000	3937008
REC 0144..	91	HAND LENGTH	15250	22000	18200	200	500	1000000	3937008
REC 0145..	92	HAND BREADTH	6450	8800	7500	100	200	1000000	3937008
REC 0146..	93	HAND CIRCUMFERENCE	14750	21500	18200	500	500	1000000	3937008
REC 0147..	94	FOOT LENGTH	20750	27600	24000	500	500	1000000	3937008
REC 0148..	95	FOOT BREADTH	6750	11000	8800	500	500	1000000	3937008
REC 0149..	96	HEAD LENGTH	16250	20700	18400	200	200	1000000	3937008
REC 0150..	97	HEAD BREADTH	12250	17100	14500	200	200	1000000	3937008
REC 0151..	98	HEAD CIRCUMFERENCE	49750	61700	54600	500	500	1000000	3937008
REC 0152..	99	TRAGION-TOP HEAD	10250	16100	12600	200	500	1000000	3937008
REC 0153..	100	ECTOCANTHUS-TOP HD	8250	15700	11600	200	500	1000000	3937008
REC 0154..	101	PRONASALE-TOP HEAD	10250	19300	14600	200	500	1000000	3937008
REC 0155..	102	SUBNASALE-TOP HEAD	12250	20500	15800	200	500	1000000	3937008
REC 0156..	103	STOMION-TOP HEAD	14250	23100	17800	200	500	1000000	3937008
REC 0157..	104	MENTON-TOP HEAD	18250	26800	21800	200	500	1000000	3937008
REC 0158..	105	TRAGION TO WALL	7250	14600	10000	200	500	1000000	3937008
REC 0159..	106	ECTOCANTHUS-WALL	13250	21200	16200	200	500	1000000	3937008
REC 0160..	107	PRONASALE TO WALL	18250	25000	21000	200	500	1000000	3937008
REC 0161..	108	SUBNASALE TO WALL	16250	24000	19600	200	500	1000000	3937008
REC 0162..	109	LIP PROTRUSION-WALL	16250	24100	19200	200	500	1000000	3937008
REC 0163..	110	MENTON TO WALL	14250	22900	18200	200	500	1000000	3937008
REC 0164..	111	SAGITTAL CURVATURE	29750	41500	34500	500	500	1000000	3937008
REC 0165..	112	BITRAGION-CORONAL	29750	39200	33900	500	500	1000000	3937008
REC 0166..	113	BIOCULAR BREADTH	7850	11200	9600	200	200	1000000	3937008
REC 0167..	114	BIAURICULAR BRDTH	13250	20100	15800	200	500	1000000	3937008
REC 0168..	115	BITRAGION BREADTH	11250	15200	12800	200	200	1000000	3937008
REC 0169..	116	BIZYGOMATIC BRDTH	10850	14900	12800	200	200	1000000	3937008
REC 0170..	117	BIGONIAL BREADTH	9650	12200	10100	200	200	1000000	3937008
REC 0171..	118	NASAL BREADTH	2250	4600	3100	200	200	1000000	3937008
REC 0172..	119	LIP LENGTH	3650	5800	4300	200	200	1000000	3937008
REC 0173..	120	MENTON-SUBNASALE L	3850	7500	5500	100	200	1000000	3937008
REC 0174..	121	MENTON-SELLION LTH	6650	12800	10600	100	200	1000000	3937008
REC 0175..	122	SUBNASALE-SELLION	3050	6100	4500	100	200	1000000	3937008
REC 0176..	123	EAR LENGTH	3450	6900	5200	100	200	1000000	3937008
REC 0177..	124	EAR BREADTH	1850	4200	2900	100	200	1000000	3937008
REC 0178..	125	GRIP STRENGTH	950	5300	2900	100	200	1000000	3937008
REC 0179..	126	WAIST HEIGHT, OFG	86250	115300	100000	1000	2000	1000000	3937008
REC 0180..	127	ABDOM EXT HGT, OFG	78250	107900	92000	1000	2000	1000000	3937008
REC 0181..	128	WAIST CIRCUM, OFG	54250	89000	66000	1000	2000	1000000	3937008
REC 0182..	129	ABDOM EXT CIRC,OFG	64250	118200	87000	1500	2500	1000000	3937008
REC 0183..	130	HIP C-7""BLW W,OFG	76250	118800	93000	1000	2000	1000000	3937008
REC 0184..	131	HIP C-9""BLW W,OFG	76250	120200	95000	1000	2000	1000000	3937008
REC 0185..	132	WAIST BREADTH, OFG	17250	30800	21300	500	1000	1000000	3937008
REC 0186..	133	HIP BREADTH, OFG	27250	42700	33600	500	1000	1000000	3937008
REC 0187..	134	WAIST DEPTH, OFG	11250	24700	15600	500	1000	1000000	3937008
REC 0188..	135	ABDOM EXT DPTH,OFG	13250	30200	19600	500	1000	1000000	3937008
REC 0189..	136	BUTTOCK DEPTH, OFG	16250	30400	21300	500	1000	1000000	3937008
REC 0190..	137	BUTTOCK C, SIT,OFG	82250	128800	99000	1000	2000	1000000	3937008
REC 0191..	138	THI-THI BR,SIT,OFG	28250	48300	37200	500	1000	1000000	3937008
REC 0192..	139	STATURE REPORTED	5750	7400	5400	100	100	25400350	3937008
REC 0193..	140	WEIGHT REPORTED	8150	19500	12000	500	500	4535924	22046223

Figure 37e. (Reference 10).

Copy available to DDC does not permit fully legible reproduction

```
REC 0194.. 141  FOUNDATION GARMENT          50      900      300     100     100   10000000  10000000
REC 0195.. 142  AFSC                      8750 99128000 55580000 98500396500   10000000  10000000
REC 0196.. 143  RACE                        50      300      200     100     100   10000000  10000000
REC 0197.. 144  MARITAL STATUS             50      400      100     100     100   10000000  10000000
REC 0198.. 145  RANK (NUMERICAL)         1050     3600     1700     100     200   10000000  10000000
REC 0199.. 146  COMMAND                     50      600      200     100     100   10000000  10000000
REC 0200.. 147  LOCATION                    50      600      200     100     100   10000000  10000000
REC 0201.. 148  BLOOD TYPE                  50      400      200     100     100   10000000  10000000
REC 0202.. 149  RH FACTOR                   50      200      100     100     100   10000000  10000000
REC 0203.. 150  HANDEDNESS                  50      300      100     100     100   10000000  10000000
REC 0204.. 151  BIRTHPLACE,SUBJECT         -50    18000     4800    1000    1000   10000000  10000000
REC 0205.. 152  BIRTHPLACE,FATHER          -50    18000     4800    1000    1000   10000000  10000000
REC 0206.. 153  BIRTHPLACE,MOTHER          -50    18000     4800    1000    1000   10000000  10000000
REC 0207.. 154  YEAR OF BIRTH           11500    50500    50500    1000    1000   10000000  10000000
REC 0208.. 155  AGE AT MENARCHE            8500    20800    13000     500     500   10000000  10000000
REC 0209.. 156  YEAR MEASURED              3900     5200     4500     100     100   10000000  10000000
REC 0210.. (I4,19F4.0/2(20F4.0/),2(25F3.0,F5.0/),20F4.0/9F4.0,F3.0,F6.0,8F2.0,5F3.0,F4.0)
```

At the end of the list of name-range-conversion unit records is the format statement for reading in the data. While the data were written on the tape in integer format to save space, the format statement provided assumes that everything except the subject number is to be treated as floating decimal values. This format statement is, therefore, not suitable for listing data read from the tape.

This material is followed by the data. Each data record consisting of a subject number (increasing but not always consecutive) followed by NVT data values. The last data record is followed by a pseudo-data record for which the subject number is negative. Thus the user can read in all the data by reading the data for NSB subjects or by reading data until a negative subject number is sensed. Care should be taken in reading the data until an end of file (EØF) is sensed to insure that the pseudo-data record is not treated as a normal data record.

```
REC 0211..   1 285 112 124  78  86 150156715811315126912511130 928 658 778 763 675 406 703
REC 0212.. 120  65 835 855 722 573 234 204 389 459 536 388 238 729 9021886 345 966 793 905
REC 0213.. 749 642 848 882 897 524 357 326 330 21115061474 945 343 252 228 239 229 232 231
REC 0214..2212281483613922761912333333382 62 62 86 852531832271991201432576493484624 25  376
REC 0215..3394391925328021691 74179230 861531625651401221521631822231061662091951951 88  392
REC 0216.. 372  95 169 133 126  97  35  43  55 109  50  56  32  25 913 842 612 843 875 878
REC 0217.. 214 328 177 223 215 922 357  62 116  2  9754 2 132 2 5 4 2 1  9  9  93941256839
REC 0218..   2 315 127 182 106 108 108162416411406131013271179100 937 830 800 764 405 736
REC 0219.. 113  60 850 873 769 603 261 255 397 476 585 307 235 745 9301953 345 996 845 922
REC 0220.. 741 669 820 943 986 568 358 338 332 196161215271050 391 279 251 257 260 263 252
REC 0221..2252371463604092881942393554125 55 55 80 80254170204239142164273657352471395  419
REC 0222..3434342145418051751 76171230 861851445391231071331401662091101712182022321345  355
REC 0223.. 325  94 166 125 111  93  33  46  57 106  51  53  34  32 987 926 637 830 948 981
REC 0224.. 228 358 168 204 244 986 399  64 122  2  9754 2 232 2 5 3 2 1 43 42 413681556839
REC 0225..   3 455 126 160 164 326 6816221630137912961300116 968 887 857 795 705 406 731
REC 0226.. 125  68 887 899 788 588 220 223 394 441 548 310 237 737 8411951 3601057 934 957
REC 0227.. 831 747 900 925 930 525 350 330 331 195161715571011 391 295 265 270 266 281 271
REC 0228..2422521553794203291772753333762 62 80 76 7525118321818812015927971431855504511  420
REC 0229..3594322215568181841 81_022422 871841505531221111401501672051011164210196194184  373
REC 0230.. 351  97 160 132 130 111  32  42  54 106  46  60  35  33 969 902 718 886 911 909
REC 0231.. 260 335 185 221 216 995 362  64 126  3  9735 2 135 2 5 4 2 1 43 43 432271456839
REC 0232..   4 295 143 352 192 456 3521614161913701294123931171 971 876 819 771 684 385 731
REC 0233.. 103  65 883 896 790 615 254 275 390 450 578 291 220 658 8801950 356 970 864 964
REC 0234.. 760 702 905 9701045 598 396 355 366 2301645156411095 304 304 298 304 294 295 290
REC 0235..2632751603604073001982513824236 63 62 85 8725418322023314215525966233050439 4  415
REC 0236..3574102015227651 74 73183233 8018115257013011114014016520912418322321320820 0  345
REC 0237.. 370 105 165 129 135 112  28  43  60 115  50  50  36  24   0   0   0   0   0   0
REC 0238..   0   0   0   0   0   0   0  65 144   7  9754 2 233 2 5 1 1 1 37 36 373931096839
REC 0239..   5 235 146 180 110 132 1701701701714421375138612331037 958 866 954 777 461 794
REC 0240.. 127  77 876 901 784 614 261 235 433 475 605 327 240 754 9042032 3651065 890 950
REC 0241.. 779 702 890 9591000 593 385 364 359 2201634196611038 380 286 274 291 271 280 280
REC 0242..2432661553734372971822553553884 65 63 87 8625217121723315516227669735553460  411
REC 0243..3634672055378121 93 80193249 9219615258013513116717920022810517022120319518 3  383
REC 0244.. 336  98 176 133 126  95  28  48  60 114  50  57  25  371058 970 657 905 955 975
REC 0245.. 230 357 177 242 2531013 392  68 145  4  9754 2 232 2 5 1 1 1 41 41 414491356839
```

Figure 37f. The Subject Data Format and the Data Itself for the First Five Subjects (Reference 10).

Copy available to DDC does not permit fully legible reproduction

6.3.1 Two Tapes for Comparison

The first two correlation tapes contain information from the 1968 USAF WOMEN survey versus 1967 USAF MEN survey, and from the 1965 USAF survey's black basic trainees versus white basic trainees. One hundred similar variables from the three surveys were chosen by Edmund Churchill of Webb Associates for the basis of these tapes. The first two records on the tape are 80-character card images and contain the formats needed for reading the tape. Header information is contained in the next three records which describe the layout of the variable names and statistical information. Original survey variable names are listed for each survey along with their survey numbers (SR NO), mean values for each variables (X-BAR), and standard deviations (SD). Both surveys are listed side-by-side, as shown in Figure 38, with the two right-most columns listing the arithmetic differences between X-BAR (DELTA XBAR) and SD(DELTA SD) for the two surveys for each variable. Following the variable names is a table, which is 22 card-image records long, which illustrates the layout of the correlations. The correlations for both surveys are listed in one 100X 100 element matrix. The diagonal elements of the matrix were all set to zero while the correlations of one survey occupy the upper right section of the matrix and those for the second survey the lower left section of the matrix. Figure 38 is a partial printout of the 1967 USAF MEN versus 1968 USAF WOMEN (WAF) tape. Thus far no analyses have been done using these two tapes.

6.3.2 U.S. Correlations

The third correlation tape of correlation matrices was documented and published in September 1976 in AMRL-TR-77-1 (see Reference11). The following is a portion of the abstract from that publication.

"Correlation matrices based on data from USAF anthropometric surveys of women (1968, 125 variables), flying personnel (1950, 128 variables; 1967, 190 variables), and basic trainees (1965, 161 variables); a U.S. Army survey of women separatees (1946, 60 variables); the Health Examination

(8A10,/,2(13A10,/),100(2(2I4,2X,2A9,2F11.5,5X),2F11.5),22(/))
(16F8.5)

THE 1967 USAF AND WAF CORRELATION FILE

SR NO		WAF NAME	WAF X-BAR	WAF SD	SR NO		1967 USAF NAME	1967 USAF X-BAR	1967 USAF SD	DELTA X-BAR	DELTA SD
1	1	AGE	22.92756	6.45184	1	1	AGE	30.02882	6.29563	-7.10126	.15621
2	2	WEIGHT	127.28189	16.56658	2	2	WEIGHT	173.57594	21.41646	-46.29405	-4.82988
3	3	TRICEPS SKINFOLD	190.32441	54.41558	4	3	SKF TRICEPS-LANGE	12.74211	5.13204	177.58230	49.28354
4	4	SUBSCAPULAR SKINFD	128.59108	48.47749	3	4	SKF SUBSCAP"R-LNGE	13.66639	5.33002	114.92469	43.14747
5	5	SUPRAILIAC SKINFLD	197.23465	70.12367	11	5	SKF SUPRAILIAC-HPN	242.16197	103.36749	-44.92732	-33.24382
7	6	STATURE	1621.03307	60.03850	13	6	HEIGHT (STATURE)	1773.53049	61.73432	-152.49742	-1.69582
9	7	CERVICALE HEIGHT	1391.95748	55.19079	14	7	CERVICALE HEIGHT	1520.74547	58.12487	-128.78799	-2.93409
10	8	ACROMIAL HEIGHT	1318.60053	54.79437	15	8	ACROMION HEIGHT	1452.19394	57.48096	-133.59341	-2.68659
11	9	SUPRASTERNALE HGHT	1320.01365	53.01889	19	9	SUPRASTERNALE HGHT	1452.04416	54.91285	-132.03051	-1.89396
12	10	BUST POINT HEIGHT	1153.18793	52.13736	20	10	NIPPLE HEIGHT	1292.59108	52.24976	-109.40315	-.11240
13	11	WAIST HEIGHT	1062.78740	44.98502	21	11	WAIST HT-OMPHALION	1064.82582	47.11151	-62.03842	-2.12649
15	12	TROCHANTERIC HGHT	826.72441	42.67776	24	12	TROCHANTERION HGHT	939.69036	43.46657	-112.96595	-.78881
16	13	BUTTOCK HEIGHT	822.12703	41.62904	23	13	BUTTOCK HEIGHT	901.19520	43.83550	-79.06816	-2.20646
17	14	GLUTEAL FURROW HGT	727.00840	39.61141	25	14	GLUTEAL FURROW HGT	811.27808	40.04578	-84.26968	-.43438
18	15	TIBIALE HEIGHT	419.82467	23.76293	28	15	KNEE CIRC HEIGHT	496.48001	24.85706	-76.65534	-1.09413
19	16	CROTCH HEIGHT	745.04409	40.29395	26	16	CROTCH HEIGHT	850.82288	41.44373	-105.77879	-1.14978
20	17	ANKLE HEIGHT	111.86719	13.54234	31	17	ANKLE HEIGHT	137.18763	11.48895	-25.32044	2.05339
21	18	LAT"L MALLEOLUS HT	67.73858	5.87042	132	18	LAT"L MALLEOLUS HT	70.39882	5.42078	-2.66024	.44964
23	19	SITTING HEIGHT	855.99948	31.68807	32	19	SITTING HEIGHT	931.82709	31.70558	-75.82761	-.01750
24	20	EYE HEIGHT,SITTING	737.04462	30.58081	33	20	EYE HEIGHT/SITTING	809.47833	30.12741	-72.43371	.45340
25	21	MIDSHOULDER HT,SIT	579.97638	26.58103	34	21	MIDSHOULDER HT/SIT	645.93774	27.40611	-65.96136	-.82508
27	22	ELBOW REST HEIGHT	227.06142	24.61521	36	22	ELBOW REST HGT/SIT	251.63904	26.07191	-24.57762	-1.45670
28	23	POPLITEAL HEIGHT	410.47454	18.60513	38	23	POPLITEAL HGHT/SIT	437.07404	22.40403	-26.59950	-3.79891
29	24	BUTTOCK-POPLIT"L L	477.10709	27.58567	40	24	BUTTOCK-POPLITEAL	503.83845	25.73078	-26.73136	1.85489
30	25	BUTTOCK-KNEE LNGTH	574.28137	26.33893	39	25	BUTTOCK-KNEE LNGTH	604.12157	26.97580	-29.84021	-.63687
31	26	ACROMION-RADIALE L	310.05932	16.25687	43	26	ACROMION-RADIALE L	329.47244	17.00262	-19.41312	-.74575
32	27	RADIALE-STYLION L	233.86667	13.68019	45	27	RADIALE-STYLION LH	268.83635	14.20863	-34.96968	-.52845
33	28	THUMB-TIP REACH	741.31234	38.76264	47	28	THUMB-TIP REACH	803.15986	39.75051	-61.84752	-.98787
34	29	THUMB-TIP,EXTENDED	838.33176	48.77919	48	29	THUMB-TIP R"CH/XTD	895.94194	45.15364	-57.61018	3.62554
36	30	NECK CIRCUMFERENCE	337.49344	16.76671	66	30	NECK CIRC -MAXIMUM	383.42406	19.12700	-45.93062	-2.36029
37	31	SHOULDER CIRCUMFER	1004.12703	51.38271	67	31	SHOULDER CIRCUM"CE	1176.91249	58.07640	-172.78546	-6.69369
38	32	CHEST CIRC AT SCYE	842.48976	49.63574	68	32	CHEST CIRC AT SCYE	1022.47917	60.56760	-179.98941	-10.93185
41	33	WAIST CIRCUMFERNCE	672.03202	54.76685	70	33	WAIST CIR-OMPHAL"N	875.95456	73.67513	-203.92254	-18.90828
45	34	UPPER THIGH CIRCUM	554.75381	42.19422	96	34	UPPER THIGH CIRCUM	588.15313	44.32350	-33.39932	-2.12928
46	35	KNEE CIRCUMFERENCE	363.01470	22.65447	98	35	KNEE CIRCUMFERENCE	386.74716	20.74432	-23.73246	1.91015
47	36	CALF CIRCUM, RIGHT	341.43570	22.46598	100	36	CALF CIRCUMF/RIGHT	371.91418	22.73158	-30.47848	-.26560
49	37	ANKLE CIRCUMFERNCE	210.85039	12.88973	102	37	ANKLE CIRCUMF"ENCE	224.10012	12.64359	-13.24973	.24614
50	38	VERTICAL TRUNK CIR	1544.26299	68.69405	74	38	VERTICAL TRUNK CIR	1680.66849	71.57992	-136.40550	-2.88588
51	39	VERTICAL TRK C,SIT	1500.65984	65.56054	75	39	VERT TRUNK CIR/SIT	1613.05888	69.43687	-112.39904	-3.87633
52	40	BUTTOCK CIRC, SIT	999.97323	60.88607	73	40	BUTTOCK CIRCUM/SIT	1076.30121	67.24605	-76.32798	-6.35998
53	41	SCYE CIRCUMFERENCE	370.97848	22.86439	103	41	SCYE CIRCUMFERENCE	483.60959	27.76742	-112.63111	-4.88243
55	42	BICEPS C,RELAXED,R	256.11391	22.93311	104	42	BICEPS C-EXTEND/RT	307.81321	23.34424	-51.69930	-.41113
56	43	BICEPS C,FLEXED, R	267.94016	23.15454	106	43	BICEPS C-FLEXED/RT	327.41691	22.57789	-59.47675	.57666
59	44	ELBOW CIRC, FLEXED	269.76430	17.82747	109	44	ELBOW CIRC-FLEXED	312.39293	17.45950	-42.62863	.36756
60	45	FOREARM C, RELAXED	234.76379	13.78454	110	45	LOWER ARM C-EXTEND	281.52797	14.61580	-46.76419	-.83126
61	46	FOREARM C, FLEXED	249.75066	15.19692	111	46	LOWER ARM C-FLEXED	297.67396	15.80570	-47.92330	-.60878

Copy available to DDC does not permit fully legible reproduction

Figure 38. Listing of Correlation Tape of 1967 USAF Men Vs. 1968 USAF Women (WAF) for 100 Variables.

62	47	WRIST CIRCUMFERNCE	149.62520	7.11526	112	47	WRIST CIRCUMF"ENCE	175.86832	9.22987	-26.24312	-2.11461
63	48	BIACROMIAL BREADTH	358.43307	16.39323	50	48	BIACROMIAL BREADTH	407.27724	19.41351	-48.84417	-3.02028
64	49	BIDELTOID BREADTH	418.73648	23.13384	51	49	BIDELTOID BREADTH	482.35759	25.61348	-63.62111	-2.47964
65	50	CHEST BREADTH	279.94908	19.14410	52	50	CHEST BREADTH	327.83929	21.20119	-47.89021	-2.05709
67	51	WAIST BREADTH	241.27979	19.35696	53	51	WAIST BRDTH-OMPH"N	309.58645	23.82195	-68.30666	-4.46499
68	52	HIP BREADTH	349.68504	22.16016	55	52	HIP BREADTH	352.63063	18.83757	-2.94559	3.32259
70	53	HUMERAL BRLADTH, R	61.33596	3.06809	57	53	ELBOW BRDTH BONE/R	70.82793	3.61485	-9.49198	-.54686
72	54	FEMORAL BREADTH, R	81.16430	4.51149	60	54	BUTTOCK CIRCUMF"CE	986.11274	55.03811	-904.94844	-50.52662
75	55	WAIST DEPTH	170.14436	16.71806	63	55	WAIST DEPTH-OMPH"N	223.00463	21.79307	-52.86027	-5.07500
77	56	BUTTOCK DEPTH	211.53333	17.89843	64	56	SCROTALE-A WAIST/S	254.35423	16.98753	-42.82089	.91090
78	57	THIGH CLEARANCE	124.36273	12.52023	65	57	SCRTL-SUPRASTERNLE	688.48586	34.11433	-564.12313	-21.59410
79	58	SHOULDER LENGTH	146.60787	10.21260	118	58	SHOULDER LENGTH	166.03618	12.60748	-19.42830	-2.39488
82	59	INTERSCYE	350.57165	24.40531	120	59	INTERSCYE	397.48043	37.62552	-36.90878	-13.22021
83	60	INTERSCYE, MAXIMUM	493.90341	32.86887	121	60	INTERSCYE MAXIMUM	615.39629	30.17511	-121.49288	2.69376
85	61	WAIST BACK	405.11181	22.15890	124	61	WAIST BACK-OMPHL"N	469.16870	23.74216	-64.05689	-1.58326
87	62	SLEEVE INSLAM	441.27192	24.15305	49	62	SCRTL-WAIST/BUIT/S	395.20993	29.17263	46.06199	-5.01959
88	63	SPINE-TO-SCYE LGTH	203.66142	13.57075	113	63	SLVE L/SPINE-SCYE	284.50904	18.10506	-80.84763	-4.53431
89	64	SPINE-TO-ELBOW LTH	533.17218	24.06219	114	64	SLVE L/SPINE-ELBOW	605.77997	26.16635	-72.60779	-2.10417
90	65	SPINE-TO-WRIST LTH	795.83832	33.18881	115	65	SLVE L/SPINE-WRIST	908.19562	35.18134	-112.35730	-1.99253
91	66	HAND LENGTH	183.83202	9.59008	134	66	HAND LENGTH	191.08666	8.19930	-7.25464	1.39078
92	67	HAND BREADTH	75.54121	3.89407	136	67	HAND BR/METACARPLE	89.01052	4.14629	-13.46931	-.25222
93	68	HAND CIRCUMFERENCE	183.18005	9.07175	138	68	HAND C/METACARPALE	215.53008	9.38321	-32.35003	-.31146
94	69	FOOT LENGTH	240.68609	11.27779	125	69	FOOT LENGTH	270.34118	11.89037	-29.65509	-.61258
95	70	FOOT BREADTH	88.67612	4.97739	127	70	FOOT BREADTH	97.66260	4.94664	-8.98648	.03074
96	71	HEAD LENGTH	184.10184	6.78907	150	71	HEAD LENGTH	198.70088	6.74496	-14.59905	.04411
97	72	HEAD BREADTH	145.15433	5.94739	156	72	HEAD BREADTH	155.98612	5.41646	-10.83179	.53093
98	73	HEAD CIRCUMFERENCE	548.65459	16.23607	141	73	HEAD CIRCUMFERENCE	575.14724	14.25937	-26.49265	1.97670
99	74	TRAGION-TOP HEAD	127.25144	7.64118	160	74	TRAGION-TO-VERTEX	134.44131	6.09917	-7.18987	1.54202
100	75	ECTOCANTHUS-TOP HD	117.64777	9.16908	175	75	XTRNL CANTHUS-VRTX	119.49853	7.70147	-1.85076	1.46761
101	76	PRONASALE-TOP HEAD	147.60525	11.71497	176	76	PRONASALE-TO-VRTX	147.42238	11.02870	.18287	.68627
102	77	SUBNASALE-TOP HEAD	159.12389	10.97692	177	77	SUBNASALE-TO-VRTX	160.87842	10.26629	-1.75453	.71063
103	78	STOMION-TOP HEAD	178.26194	11.21225	178	78	STOMION-TO-VERTEX	183.64114	10.00654	-5.37920	1.20571
104	79	MENTON-TOP HEAD	219.07034	11.39334	179	79	MENTON-TO-VERTEX	227.70509	10.24193	-8.63475	1.15141
105	80	TRAGION TO WALL	101.72441	8.99934	188	80	TRAGION-TO-WALL	103.35339	6.48766	-1.62898	2.51168
106	81	ECTOCANTHUS-WALL	163.65722	9.66342	183	81	XTRNL CANTHUS-WALL	177.87084	6.59513	-14.21363	3.08829
107	82	PRONASALE TO WALL	211.88871	9.60781	184	82	PRONASALE-TO-WALL	226.78797	7.49986	-14.89925	2.10795
108	83	SUBNASALE TO WALL	196.62415	9.81356	185	83	SUBNASALE-TO-WALL	209.90366	7.83880	-13.27951	1.97476
109	84	LIP PROTRUS"N-WALL	193.01102	10.58511	186	84	LIP PROMIN"CE-WALL	211.61296	8.55613	-18.60193	2.02898
110	85	MENTON TO WALL	182.33333	11.36097	187	85	CHIN PROMINCE-WALL	204.72865	10.46713	-22.39532	.89384
111	86	SAGITTAL CURVATURE	347.85984	14.86556	142	86	SAGITTAL ARC/INION	346.45015	16.54723	1.40970	-1.66167
112	87	BITRAGION-CORONAL	339.22257	14.04592	144	87	BITRAGION-CORONAL	357.55953	12.60126	-18.33696	1.44467
113	88	BIOCULAR BREADTH	96.72756	4.91864	162	88	BIOCULAR BREADTH	91.70593	4.84959	5.02163	.06905
114	89	BIAURICULAR BRDTH	158.33543	9.49797	161	89	EAR-TO-EAR BREADTH	188.30837	8.07816	-29.97294	1.41981
115	90	BITRAGION BREADTH	128.89239	4.99895	158	90	BITRAGION BREADTH	142.51914	5.55189	-13.62675	-.55294
116	91	BIZYGOMATIC BRDTH	128.99108	5.78027	159	91	BIZYGOMATIC BR"DTH	142.24653	5.14941	-13.25545	.63086
117	92	BIGONIAL BREADTH	101.86352	5.62440	160	92	BIGONIAL BREADTH	117.30332	6.91508	-15.43981	-1.29068
118	93	NASAL BREADTH	31.94278	3.29979	165	93	NOSE BREADTH	35.42280	2.93343	-3.48002	.36636
119	94	LIP LENGTH	43.78478	4.21083	166	94	LIP LENGTH	52.29617	3.74275	-8.51139	.46808
120	95	MENTON-SUBNASALE L	55.41207	5.10239	171	95	MENTON-SUBNASALE L	69.00210	5.26796	-13.59003	-.16557
121	96	MENTON-SELLION LTH	106.29556	6.12060	172	96	MENTON-NASAL ROOT	120.31679	6.08862	-14.03122	.03198
122	97	SUBNASALE-SELLION	45.46924	4.10213	168	97	SUBNASALE-NASAL RT	51.34287	3.72202	-5.87463	.38011
123	98	EAR LENGTH	52.36795	4.43874	154	98	EAR LENGTH	65.96929	4.25970	-13.60131	.17904
124	99	EAR BREADTH	29.81207	3.33019	153	99	EAR BREADTH	37.97350	3.01304	-8.16142	.31715
125	100	GRIP STRENGTH	29.89186	5.70287	12	100	GRIP STRENGTH	56.40429	7.59344	-26.51243	-1.89057

Figure 38 (Continued)

Copy available to DDC does not permit fully legible reproduction

DATA FORM IS

WAF(1,1) WAF(1,2) WAF(1,3) . . . WAF(1,100)

USF(2,1) WAF(2,2) WAF(2,3) . . . WAF(2,100)

USF(3,1) USF(3,2) WAF(3,3) . . . WAF(3,100)

USF(99,1) ...USF(99,98) WAF(99,99) WAF(99,100)

USF(100,1)...USF(100,98) USF(100,99) WAF(100,100)

```
0.00000  .22300  .14773  .16119  .01056  .04811  .04354  .06760  .04802 -.02257  .03874  .01015 -.03459 -.04991 -.00291 -.05527
 .04366 -.00222  .09088  .10888  .13417  .04566 -.07248  .08601  .06330  .04660  .00250  .08606  .03664  .15902  .23298  .29059
 .23427  .15469  .14510  .04740 -.02340  .27232  .23543  .27651  .26181  .28793  .29278  .13128  .19445  .17518  .10172  .14854
 .22658  .23148  .14615  .19438  .13712  .11505  .28917  .16379 -.00923  .02766  .19376  .17067  .00952 -.08284  .15085  .12736
 .07696  .08018  .13986  .13752  .05550  .00664  .11775  .19046  .09454  .06679  .06056  .09613  .06943  .05749  .06486  .08616
 .13783  .14604  .06372  .06907  .14457  .09669  .06660  .08637  .12329  .24534  .08884  .14638  .06335  .04385  .03776  .18853
 .25853  .27144  .13694  .15006
 .11296 0.00000  .59666  .56456  .58205  .53251  .54055  .55221  .55275  .45714  .49651  .45993  .46763  .36556  .40794  .43052
 .15765  .24643  .48131  .44781  .49730  .16027  .37010  .56509  .69408  .44117  .37585  .43258  .42210  .58195  .83502  .80318
 .82440  .84043  .81940  .75241  .59125  .78718  .73704  .90398  .77628  .80264  .80540  .57218  .80773  .77934  .64562  .49510
 .79804  .70183  .76760  .77036  .53821  .48686  .73635  .80482  .71353  .27336  .53411  .55276  .29826  .28820  .42983  .56886
 .56613  .38300  .41710  .49499  .51002  .39260  .30386  .28964  .40285  .22175  .16778  .14543  .18325  .18588  .27225  .20412
 .29121  .34448  .31114  .26956  .30327  .23689  .30295  .23407  .21599  .39189  .35797  .34697  .10002  .08298  .21067  .26449
 .16549  .28140  .13922  .36086
 .16887  .53395 0.00000  .61048  .60431  .07451  .09085  .09664  .10151  .03693  .07405  .05035  .08543  .01731  .04729  .03585
-.00080  .08378  .10451  .11153  .14680  .09677  .01484  .22469  .28955  .06801  .02317  .08429  .06804  .30582  .52992  .50289
 .54177  .63900  .56406  .48769  .31959  .41102  .35414  .59750  .49510  .71740  .69185  .30068  .55948  .53731  .30805  .14907
 .52916  .40163  .46907  .52971  .20218  .28181  .49844  .59831  .41914  .03787  .30182  .29427  .02060 -.05565  .18377  .17766
 .13281  .00650  .05736  .15427  .05225  .05525  .05795  .15559  .10667  .05969  .02191  .01341  .01414  .00414  .03306  .07540
 .09226  .09324  .08177  .06427  .13174  .03531  .12437  .08116  .11629  .20756  .20672  .23530 -.04703 -.04872  .05174  .05412
 .03070  .12228  .04212  .09411
 .17951  .56632  .57489 0.00000  .65914  .00605  .02744  .04055  .03837 -.02130  .02641  .01399  .05640 -.02088  .00602  .00044
 .04809  .03770  .02599  .02025  .09443  .03968 -.01270  .18128  .22507  .03747  .00204  .04688  .06370  .36439  .58153  .60901
 .64612  .52262  .41022  .34277  .17579  .37461  .32312  .54902  .53263  .63179  .60581  .28025  .48377  .46578  .27295  .15578
 .55630  .47194  .53533  .42513  .11843  .20589  .60847  .57724  .32933  .03223  .36359  .32436 -.03401 -.08099  .19812  .13861
 .10110 -.01367  .04552  .12404  .03845  .04061  .02104  .13283  .09866  .07002  .01224 -.01964 -.00139 -.01433  .00932  .08499
 .09868  .10366  .11963  .12086  .19698  .03326  .12917  .06438  .10453  .20663  .18929  .22165  .05488 -.01200  .04172  .03548
 .00325  .13599  .02868  .06419
-.01560  .62267  .67542  .68515 0.00000  .09785  .12362  .12194  .12666  .05705  .10973  .07797  .14430  .07014  .09060  .03196
 .02910  .08357  .08956  .09649  .11978  .07105  .10145  .23273  .28435  .10819  .03790  .10534  .06254  .30926  .53978  .55337
 .64087  .56381  .44390  .37484  .22552  .35684  .32670  .55080  .48717  .58515  .56502  .29850  .47941  .47237  .31194  .14035
 .52984  .42339  .57276  .44394  .19738  .23909  .56613  .53734  .41641  .04042  .34007  .33108  .03632 -.02974  .23334  .17840
 .14457  .04356  .08400  .16836  .10015  .06587  .05159  .14155  .09680  .06307  .01990 -.02650 -.01943 -.02086  .00599  .08089
 .08604  .09343  .10372  .10456  .16196 -.02520  .12393  .11842  .05309  .16587  .23441  .27232 -.00676  .00877  .03463  .02520
-.02746  .08258  .11000  .06389
```

Figure 38 (Continued)

Copy available to DDC does not
permit fully legible reproduction

Survey of civilian adults (1960-1962, 20 variables); and a survey of law enforcement officers (1974, 23 variables) are presented for the use by engineers who need them in solving design problems and by anthropologists and statisticians, whose analyses and understanding of the interrelationships of body size data depend significantly on these coefficients. Sample sizes in these surveys ranged from 2000 upward...."

Ten correlation matrices are included on the tape, four from the Health Examination Survey of civilian adults and one each from the remaining six surveys. Matrices were produced one at a time on separate tapes and then merged into one eleven-file tape. The first file is a table of contents and includes a routine for abstracting data from the tape. Paul Kikta of UDRI is directly responsible for the programming runs needed to produce the matrices and the final tape, as well as the table of confidence limits included in AMRL-TR-77-1.

REFERENCES

1. Evans, S. M., User's Guide for the Programs of COMBIMAN (COMputerized BIomechanical MAN-model), AMRL-TR-76-117, Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, in preparation, 1976.

2. McDaniel, J. W., COMputerized BIomechanical MAN-model, AMRL-TR-76-30 (AD A032402), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, July 1976.

3. Bates, F. J., Evans, S. M., Krause, E. E., Luming, E., Three Dimensional Display of the COMBIMAN Man-Model and Workspace, AMRL-TR-74-15 (AD A027175), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio.

4. Gould, Inc., Gould 4800/5000 Series, IBM System 360/370 Plot Package-Programming Manual, 92-1-10108, November 1974.

5. Kennedy, K. W., and McKechnie, D., Visibility Toward the Ground from Selected Aircraft, AMRL-TR-69-123 (AD880-934), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, October 1970.

6. International Business Machines Corporation, Systems Reference Library, O.S. Utilities, IBM Form GC 20-6704-3.

7. International Business Machines Corporation, System/360 Scientific Subroutine Package, Version 3, Programming Manual, IBM Application Program GH 20-0205-4.

8. Herron, R. E., Cozzi, J. R., and Hugg, J., Mass Distribution of the Human Body Using Biostereometrics, AMRL-TR-75-18 (AD A029402), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, June 1976.

9. Chandler, R. F., Clauser, C. E., McConville, Reynolds, H. M., and Young, J. W., Investigation of Inertial Properties of the Human Body, DOT HS-801 430, March 1975. (Also Published as AMRL-TR-74-137) AD A016 485.

10. Churchill, E., and Kikta, P., The Aerospace Medical Research Laboratory Anthropometric Data Bank Library, Volumes I-V, AMRL-TR-77-2, Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, in preparation, 1977.

11. Churchill, E., Kikta, P., and Churchill, T., Intercorrelations of Anthropometric Measurements: A Source Book for USA Data, AMRL-TR-77-1, Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, in preparation, 1977.