

AD A068977

HDL-TM-79-4
April 1979

LEVEL


12
P.S.

Design Considerations for Improved Fluidic Input Servovalve Performance

By Richard Deadwyler
Francis M. Manlon



DDC FILE COPY

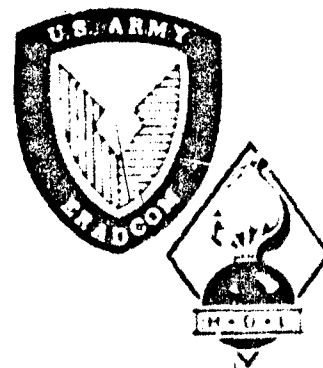

U.S. Army Electronics Research
and Development Command
Harry Diamond Laboratories
Adelphi, MD 20783

Approved for public release; distribution unlimited.

The findings in this report are not to be construed as an official ~~Department~~ of the Army position unless so designated by other authorized documents.

Citation of manufacturers' or trade names does not constitute an official indorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 14) HDL-TM-79-4	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) 6) Design Considerations for Improved Fluidic Input Servovalve Performance.	5. TYPE OF REPORT & PERIOD COVERED 9) Technical Memorandum	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) 10) Richard Deadwyler Francis M. Manion	8. CONTRACT OR GRANT NUMBER(s) DA-11L161102AH44	9. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Ele: 6.11.02.A
10. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Materiel Development and Readiness Command Alexandria, VA 22333	11. REPORT DATE 11) April 1979	12. NUMBER OF PAGES 28
13. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	14. SECURITY CLASS. (of this report) Unclassified	15. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES HDL Project: A44834 DRCMS Code: 611102.H.44011		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Servovalve Fluidic		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A study has been made to determine how the performance of two-stage fluidic input servovalves can be improved. The first stage of the servovalve consists of a fluidic amplifier that is coupled to a set of input bellows, which in turn is coupled to a flapper nozzle valve, and the second stage consists of a sliding spool. At present, fluidic input servovalves have time constants of approximately 15 ms. This study is primarily concerned with determining the first-stage design changes needed to (1) obtain overall fluidic input servovalve time constants of 1 to 5 ms and (2) reduce leakage flow.		

DD FORM 1 JAN 79 1473 EDITION OF 1 NOV 68 IS OBSOLETE

UNCLASSIFIED

1 SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

111 020

52

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Analysis of the first-stage flapper indicates that the servovalve time constant can be minimized by minimizing the area of the input bellows. The bellows area is the only first-stage servovalve parameter that can be changed to decrease the servovalve time constant without necessitating additional parameter changes. Moreover, minimizing the bellows area also reduces the leakage flow in the servovalve.

ACCESSION for	
NTIS	White Section ☒
DDC	Buff Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY COPIES	
Dist.	SPECIAL
A	

UNCLASSIFIED

2 SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

CONTENTS

	<u>Page</u>
1. INTRODUCTION	5
2. DESIGN CONSIDERATIONS	7
2.1 Derivation of Servovalve Transfer Function	7
2.2 Fluidic Amplifier Leakage Flow	17
3. TEST RESULTS	18
4. CONCLUSIONS	20
LITERATURE CITED	21
NOMENCLATURE	23
DISTRIBUTION	25

FIGURES

1 Two-stage electrohydraulic servovalve	6
2 Two-stage fluidic input servovalve	9
3 Fluidic input servovalve	10
4 Torques acting on flapper	11
5 Flapper deflection and bending angle	12
6 Fluidic input servovalve block diagram	14
7 Fluidic input servovalve frequency response	19

1. INTRODUCTION

The control or power element in many hydraulic feedback control systems is the servovalve. The servovalve varies the rate and the direction of flow of fluid to a fluid motor or an actuator by metering the hydraulic fluid through controlled orifices.¹ A large number of servovalves are electrohydraulic. This type is widely used because electrical devices are ideal for sensing, signal amplification, and computation. On the other hand, the power output and the compactness of hydraulic actuators make them ideally suited as power devices. Thus, the electrohydraulic servovalve serves as an interface as well as a power element in control systems. It converts low-power electrical signals into motion of a valve, which in turn controls large flows or pressures to a hydraulic actuator.²

The two-stage electrohydraulic valve (fig. 1) has wide usage and is of primary interest in this study. The two-stage servovalve usually has a nozzle flapper valve for the first or primary stage. The flapper valve is used with the torque motor (fig. 1) to provide a hydraulic pressure or force to move the second- or power-stage spool. The combined torque motor-flapper valve is frequently called a hydraulic amplifier. This type of hydraulic amplifier is well suited for use as a first stage because it has an extremely lightweight moving element (the flapper), which requires very small magnetic forces, thus minimizing the electrical input power required for any given response characteristic. It has comparatively high leakage flow, but since the first stage need not be large, its flow consumption may be held to less than 10 percent of the total flow across the power spool.

The second or power stage in the servovalve in figure 1 employs a spool or a sliding element that moves in a direction perpendicular to the static pressure force or the flow of fluid. It meters the flow of high-pressure fluid to the actuator. This sliding valve has relatively little leakage flow and can be built with very high power gains. Servovalves with the torque motor-flapper nozzle first-stage, spool valve second-stage arrangement can be built with up to 11 kW (15 hp) in capacity with inputs of as little as 10 mW into the torque motor and with outputs of up to 0.001 m³/s (20 g/m) and time constants of 3 to 5 ms. A two-stage valve of this type is practically insensitive to accelerations and vibrations because the forces available to drive the spool are many times greater than the weight of the spool itself. However, the "stiction" force (the force required to break the spool loose and get it moving) is high with the sliding spool type of second stage, and it can easily be jammed by dirt and impurities.¹

The invention and the development of fluoric amplifiers and fluoric or fluidic control elements that can sense, amplify, and compute make it possible to build pneumatic-hydraulic or all-hydraulic control systems. However, the servovalve in such systems must be designed for fluidic, rather than electrical, input signals. Pneumatic-hydraulic and all-hydraulic control systems are of interest because:

- a. They have the potential for high-frequency response (time constants of 1 to 5 ms).
- b. They may be more reliable than conventional systems since they are more rugged.³

¹A. C. Morse, *Electrohydraulic Servomechanisms*, McGraw-Hill Book Co., New York (1963).

²H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons, Inc., New York (1967).

³R. V. Burton, *Design Study—Fluidic Armament Control System (FACS)*, Honeywell, Inc., Minneapolis, MN, TR-69-2440 (1969).

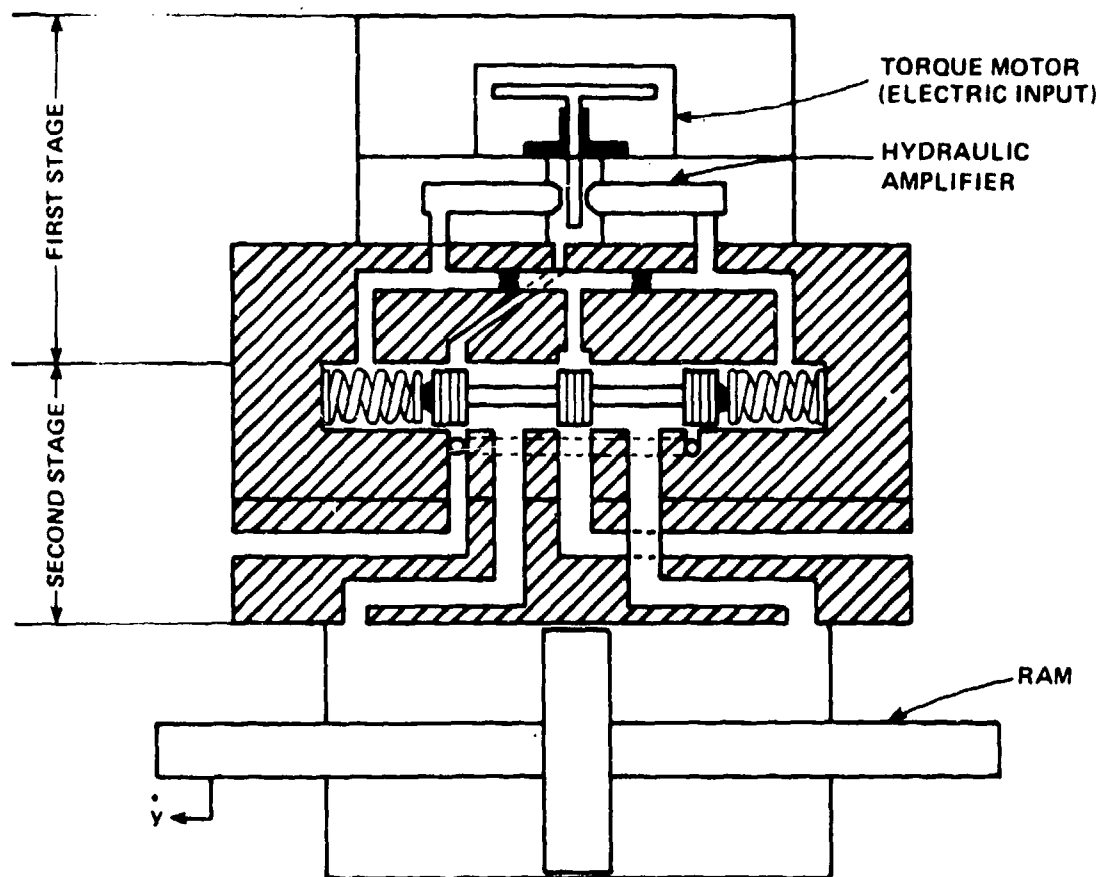


Figure 1. Two-stage electrohydraulic servovalve.

- c. They will eliminate electrical-to-hydraulic, mechanical-to-hydraulic, etc., interface devices for all-hydraulic systems.
- d. They can be powered by the existing hydraulic transmission power supply.
- e. They can possibly be produced and operated at lower cost (few moving parts and no auxiliary power supply for electrical or mechanical components).⁴

At present, fluidic input servovalves have time constants of approximately 15 ms. This study is primarily concerned with the design changes needed to obtain time constants of 1 to 5 ms for fluidic input servovalves and to reduce leakage flow.

⁴L. R. Kelly and W. H. Booth, *Hydraulic Fluidics*, American Society of Mechanical Engineers (1968).

2. DESIGN CONSIDERATIONS

One or more of the following reasons are usually given for using fluidic elements in servovalve design: (1) increasing reliability, (2) lowering production cost, and (3) providing for fluidic input.

There are many possible fluidic servovalve designs. One design⁵ calls for an inverted flapper nozzle first or input stage and a vortex valve second stage. A second design⁶ uses a fluidic power amplifier (of one or more stages) as a first stage to drive a second-stage spool. A third design calls for the use of a fluidic amplifier cascade and a "jet pipe" to drive the second-stage spool.⁷

A fourth design calls for eliminating the torque motor from the two-stage valve (fig. 1) and attaching mechanical bellows to the flapper arm (fig. 2). The bellows can then be driven by a fluidic amplifier. The operations of the two-stage electrohydraulic servovalve (fig. 1) and the fluidic input servovalve (fig. 2) are basically the same. They differ only in that the input torque applied to the flapper by the torque motor induced magnetic forces in the electrohydraulic version is provided by the fluidic amplifier output pressure used to alternately charge and discharge the bellows in the fluidic version. This fourth servovalve design seems the most promising in terms of minimizing the servovalve time constant and the leakage flow. This two-stage fluidic servovalve arrangement was studied because of its promise and its similarity to the conventional two-stage electrohydraulic servovalve (fig. 1). The design changes needed to minimize the servovalve time constant and the leakage flow in this arrangement are derived in the following sections.

2.1 Derivation of Servovalve Transfer Function

This study is specifically concerned with "simple" first-stage design changes that will minimize the servovalve time constant and the leakage flow. Attention is directed to the first stage of the valve because simple first-stage design changes can probably be made without necessitating redesign of other portions of the valve. Therefore, the transfer function for the fluidic input servovalve (fig. 3) is derived to determine the design parameters that can be adjusted to increase the servovalve frequency response. Neglecting fluidic amplifier input dynamics and transport delay, a pressure difference between the amplifier outputs and the bellows results in a flow between the amplifier and the bellows given by equation (1):

$$P_{A1} - P_{B1} = (L_A s + R_A) Q_1, \quad (1)$$

where

P_A = amplifier output pressure (Pa),

P_B = bellows pressure (Pa),

⁵T. S. Honda and P. S. Halbousky, *Fluidic Vortex Valve Servoactuator Development*, General Electric Co., Schenectady, NY, USAAVLABS Technical Report 69-23 (May 1969).

⁶H. C. Kent and J. R. Sjölund, *Hydrofluidic Servoactuator Development*, Honeywell Inc., Minneapolis, MN, USAAMRDL Technical Report 73-12 (May 1973).

⁷J. R. Granan, *Research and Development on a Fluidic Servoactuator*, General Electric Co., Binghamton, NY, AFFDL-TR-70-23 (July 1970).

L_A = amplifier output inductance (Ns^2/m^3),

s = Laplace transform variable ($1/\text{s}$),

R_A = amplifier output resistance (Ns/m^3),

Q_i = flow into bellows (m^3/s).

The sum of the flows into the bellows is

$$Q_i - Q_o = CsP_B, \quad (2)$$

where

$Q_o = r_B A_B s \theta$, outflow caused by extension of bellows (m^3/s),

r_B = bellows moment arm (m),

A_B = bellows cross-sectional area (m^2),

θ = angular deflection of flapper or torque arm (rad),

C = fixed volume capacitance of bellows (m^3/N).

Substituting equation (2) into equation (1) for both sides (fig. 3 shows a push-pull system), noting that outflow on one side is inflow to the opposite side, gives the differential bellows pressure:

$$\Delta P_B(s) = \frac{\Delta P_A}{L_A C s^2 + R_A C s + 1} - \frac{2(r_B A_B)(L_A s + R_A)s\theta(s)}{L_A C s^2 + R_A C s + 1}. \quad (3)$$

From figure 4, the fluidic input torque, T_I (Nm), is equal to the restoring torque as shown below:

$$T_I = \Delta P_B(s)(r_B A_B) = (Js^2 + K_{an} + 2k_B r_B^2)\theta(s), \quad (4)$$

where

J = polar moment of inertia of flapper (m-N-s^2),

K_{an} = net torque spring rate due to torsional spring, magnetic effects, and flow forces on flapper (m-N/rad),

k_B = spring rate of bellows (N/m).

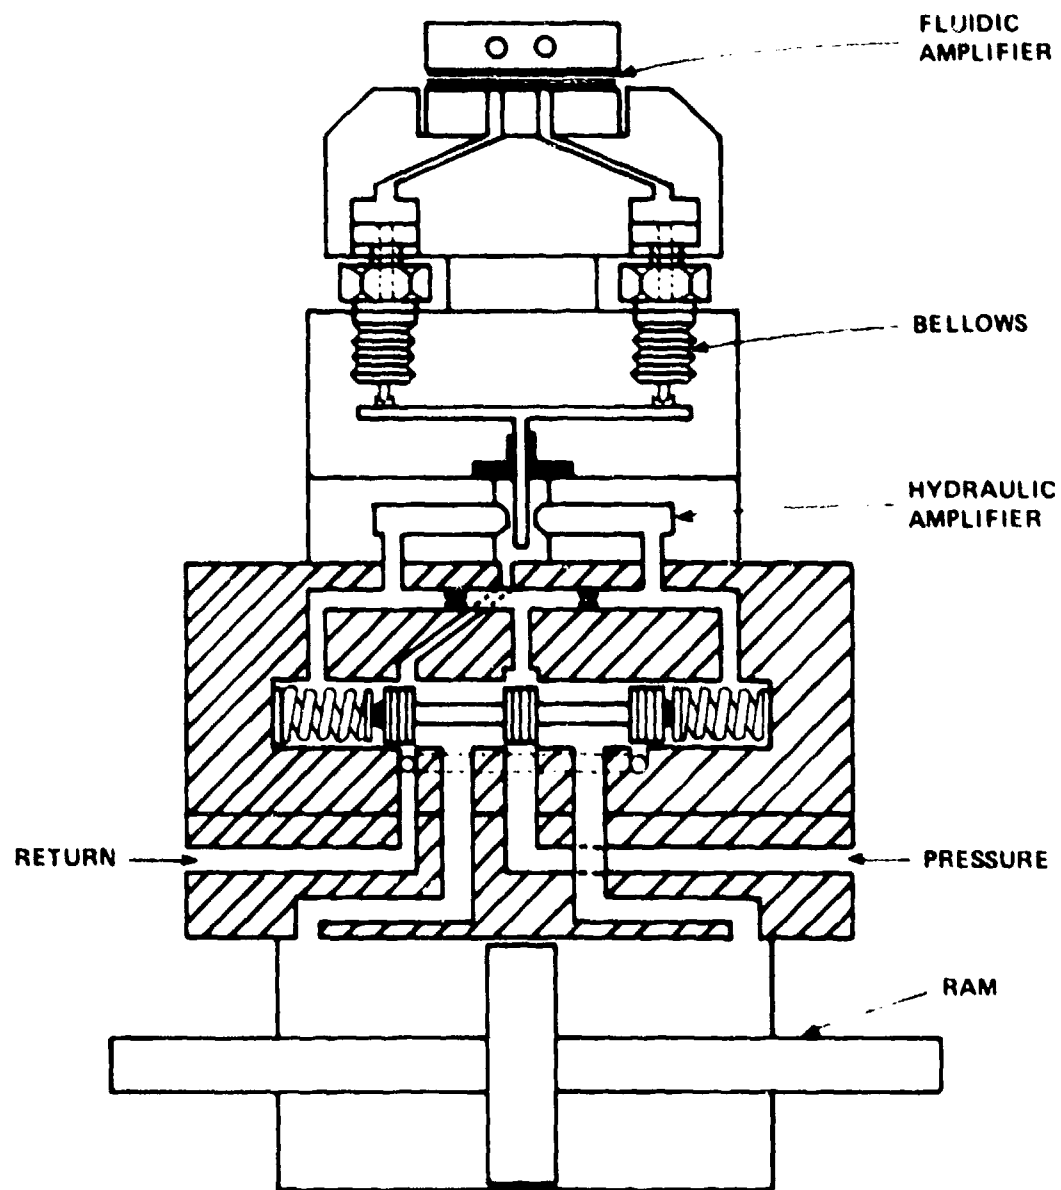


Figure 2. Two-stage fluidic input servovalve (schematic from D. Lee and D. N. Wormley, Massachusetts Institute of Technology HDL-CR-77-191-1, December 1977).

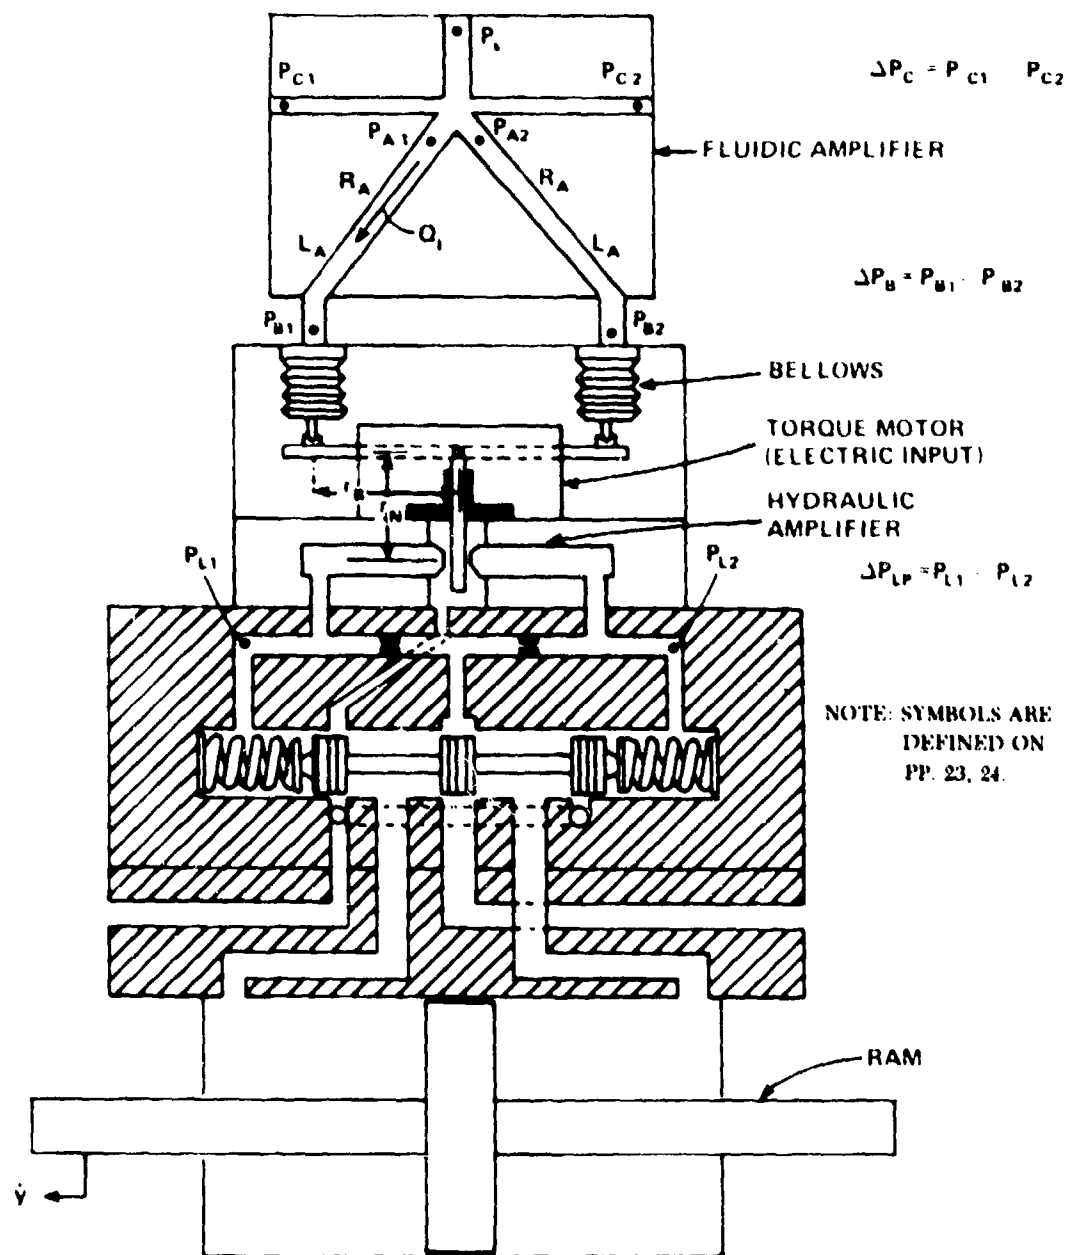


Figure 3. Fluidic input servovalve (schematic from D. Lee and D. N. Wormley, Massachusetts Institute of Technology HDL-CR-77-191-1, December 1977).

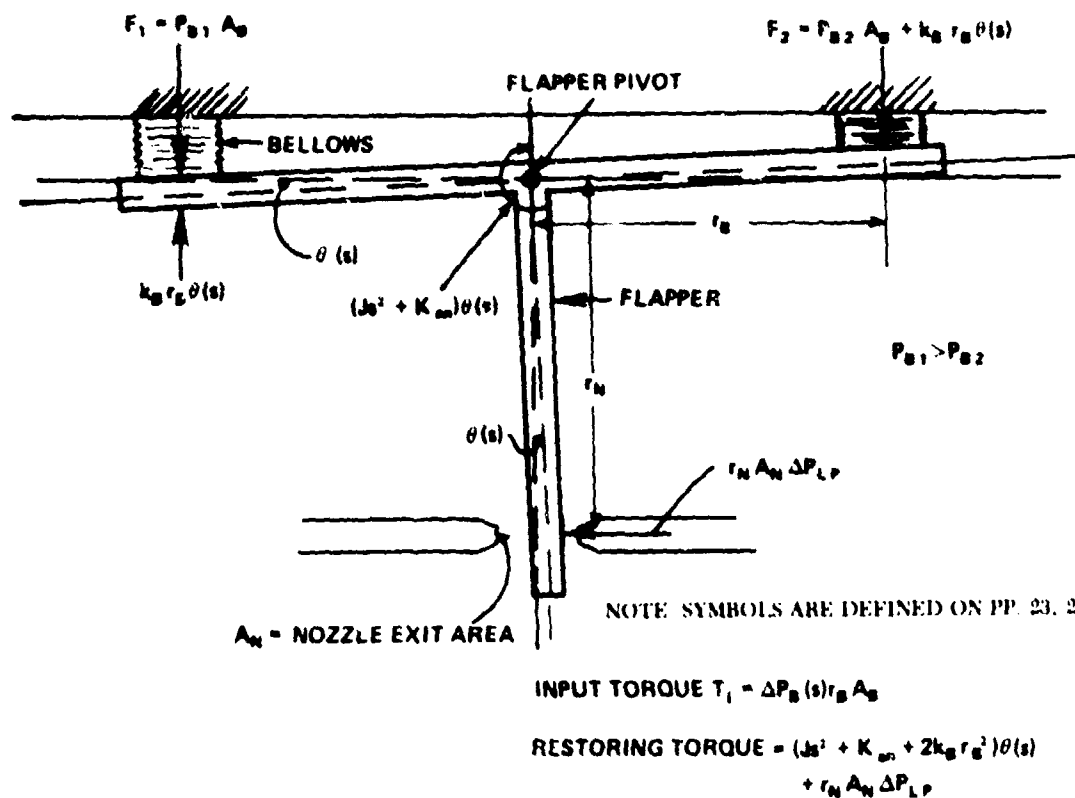


Figure 4. Torques acting on flapper.

If the flapper arm bends as shown in figure 5, the torque summation on the flapper must include the bending term, $K_{cf} r_N \phi(s)$, as shown below:

$$\Delta P_B(s) (r_B A_B) = (J_s^2 + K_m + 2k_B r_B^2) [\theta(s)] + K_{cf} r_N \phi(s) \quad (5)$$

where

K_{cf} = spring constant of cantilevered flapper arm, which is assumed to be fixed at pivot (N/rad).

r_N = flapper moment arm (m).

$\phi(s)$ = single side flapper bending angle (rad).

Substituting equation (3) into equation (5) gives the flapper deflection, $\theta(s)$ (rad).

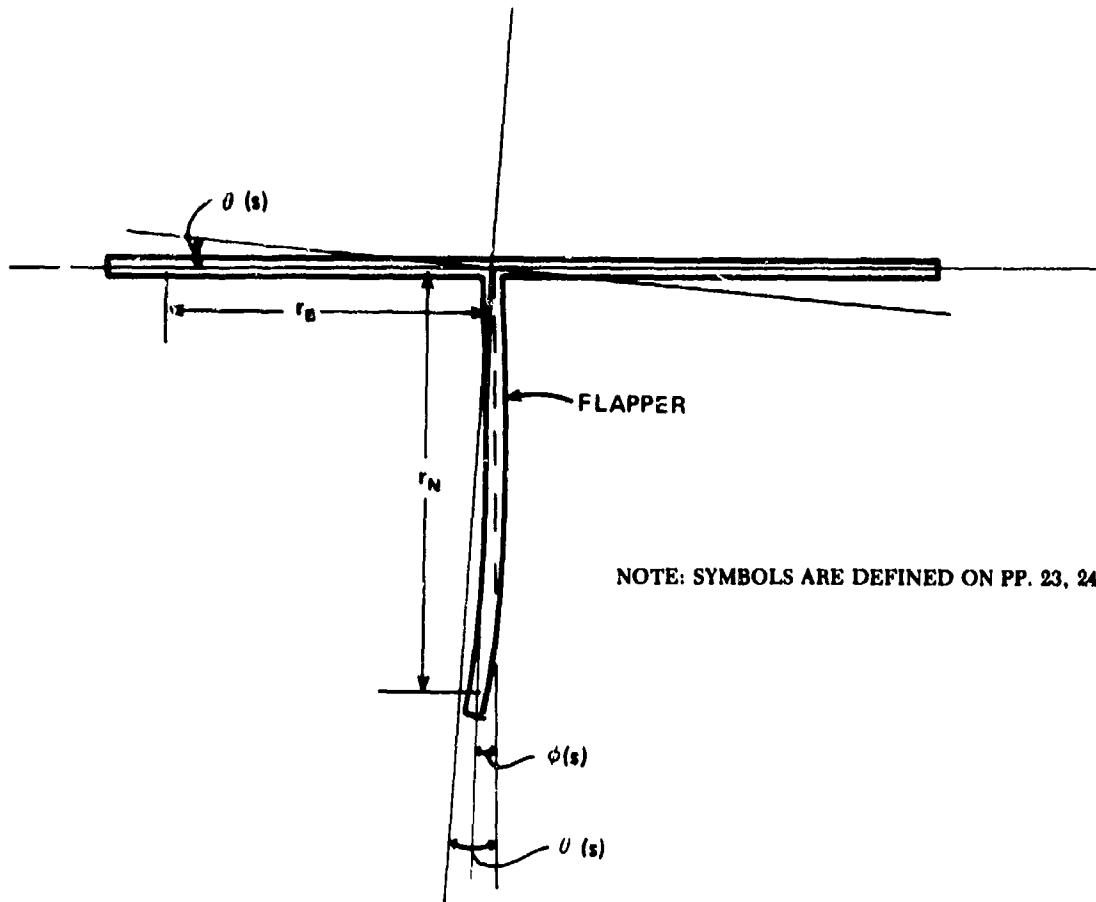


Figure 5. Flapper deflection and bending angle.

$$\theta(s) = \frac{\Delta P_A(r_B A_B) \frac{1}{L_A C s^2 + R_A C s + 1} - K_{cf} r_B \phi(s)}{J s^2 + \left[\frac{2(r_B A_B)^2 (L_A s + R_A)}{L_A C s^2 + R_A C s + 1} \right] s + K_{an} + 2k_B r_B^2} \quad (6)$$

However, if the flapper arm cantilever spring constant, K_{cf} , is very high, then $\phi(s)$ is negligible, and equation (6) reduces to

$$\theta(s) = \frac{\Delta P_A(r_B A_B) \frac{1}{L_A C s^2 + R_A C s + 1}}{J s^2 + \left[\frac{2(r_B A_B)^2 (L_A s + R_A)}{L_A C s^2 + R_A C s + 1} \right] s + K_{an} + 2k_B r_B^2} \quad (7)$$

For hydraulic applications, $C = (\text{volume/bulk modulus}) \ll 1$ and equation (7) becomes

$$\theta(s) = \frac{\Delta P_A (r_B A_B)}{[J + 2(r_B A_B)^2 L_A] s^2 + [2(r_B A_B)^2 R_A] s + K_{an} + 2k_B r_B^4} \quad (8)$$

The flapper displacement, x_f (rad), at the nozzles is given as

$$x_f = r_N \theta \quad (9)$$

When the flapper is deflected from its centered position, a differential pressure, ΔP_{LP} (Pa), is generated at the ends of the spool:

$$\Delta P_{LP} = K_f x_f \quad (10)$$

where

K_f = flapper nozzle pressure gain (N/m³).

The differential pressure acts against the centering springs at the ends of the spool. Neglecting sliding friction, the spool displacement, x_s (m), as a function of ΔP_{LP} is given as

$$x_s = \Delta P_{LP} A_s / K_s \quad (11)$$

where

A_s = spool end area (m²),

K_s = differential spring constant of centering springs attached to ends of spool (N/m).

Finally, the spool displacement generates a load flow, Q_L (m³/s), given by

$$Q_L = K_{sp} x_s \quad (12)$$

where

K_{sp} = spool flow constant (m³/s).

A block diagram description of the complete two-stage servovalve is shown in figure 6. The spool position feedback term, $r_N A_N \Delta P_{LP}$, is negligible so that this is essentially an open loop type of servovalve.¹ The complete valve transfer function is given as

¹A. C. Morse, *Electrohydraulic Servomechanisms*, McGraw-Hill Book Co., New York (1963).

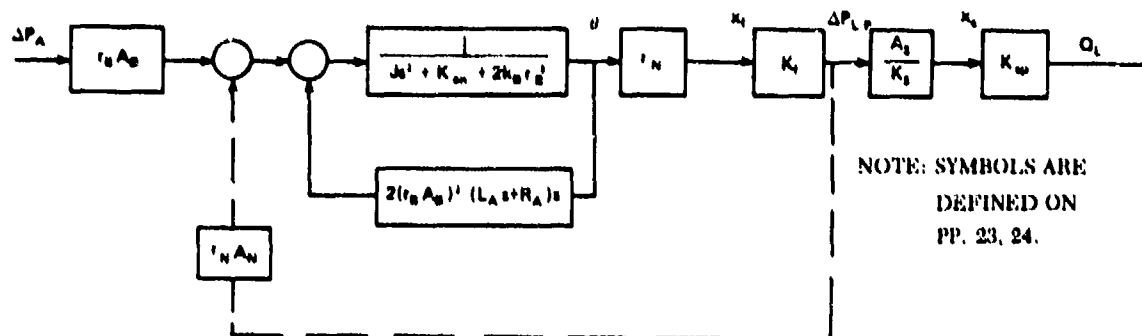


Figure 6. Fluidic input servovalve block diagram.

$$\frac{Q_L(s)}{\Delta P_A(s)} = \frac{r_B A_B r_N K_v A_2 K_{sp}}{K_s} \cdot \frac{1}{[J + 2(r_B A_B)^2 I_A]s^2 + [2(r_B A_B)^2 R_A]s + K_{un} + 2k_B r_B^2} \quad (13)$$

Two-stage electrohydraulic servovalves are complex devices that exhibit high-order, nonlinear response. If a first-, second-, or third-order transfer function, $H(s)$ (m^3/Ns) is selected to represent servovalve dynamics, only an approximation to the actual response is possible. First-order approximations result in the expression "equivalent time constant" of the servovalve, τ . This approximation assumes that the servovalve can be described as a first-order system given by equation (14):

$$H_1(s) = \frac{K_1}{\tau s + 1} \quad (14)$$

where

$$K_1 = \text{servovalve gain (m}^3/\text{Ns)}.$$

This approximation should correspond to the 45-deg phase point rather than the 0.7 amplitude point (-3 dB). This representation of the servovalve dynamics is good through the low-frequency range, approximately 0 to 50 Hz.⁸ If the low-frequency range of the fluidic input valve is of interest, then the s^2 term in equation (13) can be neglected compared with the $(K_{un} + 2k_B r_B^2)$ term. This approximation implies that the fluidic amplifier output inductance, L_A , and the flapper polar moment of inertia, J , are negligible in this frequency range. The valve transfer function then becomes

⁸D. J. Thayer, *Transfer Functions for Moog Servovalves*, Rev. ed., Moog Inc., East Aurora, NY, Technical Bulletin 103 (1965).

$$H_1(s) = \frac{Q_L(s)}{\Delta P_A(s)} = \frac{\frac{A_B K_f A_s K_{sp}}{\left(\frac{K_{an}}{r_B^2} + 2k_B\right) K_s}}{\left(\frac{2A_B^2}{\frac{K_{an}}{r_B^2} + 2k_B}\right) R_A s + 1} \quad (15)$$

where

$$r_B \cong r_N.$$

Thus, the servovalve time constant, τ , is given as

$$\tau = \left(\frac{2A_B^2}{\frac{K_{an}}{r_B^2} + 2k_B}\right) R_A \quad (16)$$

where

$$2A_B^2 / \left(\frac{K_{an}}{r_B^2} + 2k_B\right) = \text{effective capacitance of bellows.}$$

A phase lag of 45 deg occurs at the first-order break frequency, f_B (1/s), given by

$$f_B = \frac{1}{2\pi\tau} \quad (17)$$

Therefore, τ should be minimized to achieve favorable high-frequency response. From equation (16), the design parameters affecting τ are A_B , K_{an} , r_B , k_B , and R_A . R_A is determined by the available system flow, and K_{an} is fixed by the flapper nozzle and the second-stage spool design. Parameters A_B , r_B , and k_B can all be used to minimize τ . Decreasing r_B decreases τ ; however, it decreases also the servovalve gain $\{A_B K_f A_s K_{sp} / [(\frac{K_{an}}{r_B^2} + 2k_B) K_s]\}$ from equation (15) by the same magnitude. Increasing k_B decreases τ , but it decreases also the servovalve gain by the same magnitude. Decreasing the bellows area decreases τ by the area squared, A_B^2 . It decreases also the servovalve gain, but to the first power, A_B . Since usually $A_B < 1$, then for any decrease in A_B , the decrease is greater in τ , which has the factor A_B^2 , than in the servovalve gain, which has the factor A_B . Therefore, as a first step, the bellows area should be reduced to minimize τ .

A second-order approximation to servovalve dynamics is used when response near the 90-deg phase lag point is of interest. This approximation is usually used in describing position control servomechanisms, that is, closed-loop position control systems. The 90-deg phase lag point is best associated with the apparent natural frequency (or natural frequency), ω_n (1/s), of the servovalve, and the damping ratio, ξ , is best associated with the amplitude characteristic.* The second-order approximation to servovalve dynamics has the form

*D. J. Thayer, *Transfer Functions for Moog Servovalves*, Rev. ed., Moog Inc., East Aurora, NY, Technical Bulletin 103 (1965).

$$H_2(s) = \frac{\left(\frac{1}{\omega_n}\right)^2 K_2}{\left(\frac{s}{\omega_n}\right)^2 + \left(\frac{2\xi}{\omega_n}\right)s + 1} \quad (18)$$

where

K_2 = servovalve gain (m^3/Ns^2).

If the frequency response near the 90-deg phase lag point is of interest for the fluidic input servovalve, then equation (13) can be rewritten to approximate the servovalve transfer function, $Q_L(s)/\Delta P_A(s)$, as

$$\frac{Q_L(s)}{\Delta P_A(s)} = \frac{\frac{r_B^2 \Lambda_B K_f A_s K_{sp}}{(K_{an} + 2k_B r_B^2) K_s}}{\left[\frac{J + 2(r_B \Lambda_B)^2 L_A}{K_{an} + 2k_B r_B^2} \right] s^2 + \left[\frac{2(r_B \Lambda_B)^2 R_A}{K_{an} + 2k_B r_B^2} \right] s + 1} \quad (19)$$

where

$$\omega_n^2 = \frac{K_{an} + 2k_B r_B^2}{J + 2(r_B \Lambda_B)^2 L_A}$$

$$K_2 = \frac{\frac{r_B^2 \Lambda_B K_f A_s K_{sp}}{K_s}}{J + 2(r_B \Lambda_B)^2 L_A}$$

$$\frac{2\xi}{\omega_n} = \frac{2(r_B \Lambda_B)^2 R_A}{K_{an} + 2k_B r_B^2}$$

$$\xi = \frac{(r_B \Lambda_B)^2 R_A}{\{ (K_{an} + 2k_B r_B^2) [J + 2(r_B \Lambda_B)^2 L_A] \}^{1/2}}$$

A better second-order approximation of servovalve response requires that the input dynamics and the transport delay of the fluidic amplifier be included in equation (19). A high-performance servovalve calls for the natural frequency to be as large as possible and the damping ratio to be in the range $0.7 \leq \xi \leq 1.0$. From equation (19), a high natural frequency requires that the bellows area be as small as possible and, for a given bellows area, that the amplifier output resistance be adjusted so that ξ is in the desired range. Good first- or second-order servovalve dynamics call for the bellows area to be as small as possible.

2.2 Fluidic Amplifier Leakage Flow

The fluidic amplifier portion of the fluidic input servovalve (fig. 2) is part of the first stage of the valve. Therefore, the fluidic amplifier leakage flow adds to the existing first-stage leakage flow of the flapper nozzle valve. The amplifier leakage flow is the amplifier supply flow, Q_s (m^3/s). The necessary supply flow is a function of the amplifier output resistance and the desired servovalve time constant. The supply flow is derived in terms of these parameters.

The amplifier supply flow can be written as

$$Q_s = \frac{P_s}{R_s} = \frac{a\Delta P_A}{nR_A} \quad (20)$$

where

P_s = amplifier supply pressure (Pa),

R_s = amplifier power nozzle resistance (Ns/m^2),

a = constant (with values in range $0.5 \leq a \leq 0.6$),

n = constant (determined by amplifier height and number of parallel laminates used).

From equation (8), the maximum flapper deflection, θ_{max} (rad), occurs when $s \rightarrow 0$ and is given as

$$\theta_{max} = \frac{r_B A_B \Delta P_A}{K_{an} + 2k_B r_B} \quad (21)$$

From equation (21), ΔP_A can be written as

$$\Delta P_A = \frac{\left[\frac{K_{an}}{r_B} + 2k_B \right] r_B \theta_{max}}{A_B} \quad (22)$$

If a first-order approximation is used to describe the servovalve dynamics, the time constant from equation (16) is

$$\tau = \frac{2A_B^2 R_A}{\frac{K_{an}}{r_B^2} + 2k_B}$$

From equation (16), R_A can be written as

$$R_A = \frac{\left[\frac{K_{an}}{r_B^2} + 2k_B \right] \tau}{2A_B^2} \quad (23)$$

and, by using equations (22) and (23), the supply flow can be written as

$$Q_s = \frac{2ar_B\theta_{\max}A_B}{\pi\tau} \quad (24)$$

Thus, minimizing the bellows area minimizes also the amplifier supply flow or the first-stage servovalve leakage flow.

3. TEST RESULTS

The Harry Diamond Laboratories (HDL) purchased two fluidic input servovalves with essentially identical performance specifications (fig. 2). cursory tests were conducted on one servovalve at HDL. Since HDL does not have the facilities for thoroughly testing servovalves, the other one was further developed and thoroughly tested on contract.⁹ The additional development allowed the servovalve to be driven by an electrical signal or a fluidic signal. The electrical signal energized the torque motor, which in turn drove the flapper nozzle valve. The fluidic signal was amplified by a fluidic amplifier, which drove a set of bellows, which in turn drove the flapper nozzle valve. This servovalve had an initial set of bellows with an area smaller than normal, $A_B = 31.9 \text{ mm}^2$. The test program called for replacing this set of bellows with a smaller set, $A_B' = 18.1 \text{ mm}^2$, and then with a larger set, $A_B'' = 44.5 \text{ mm}^2$. This procedure was set up as a means of verifying the conclusions reached in the design considerations (sect. 2). The servovalve was tested with the initial set of bellows, $A_B = 31.9 \text{ mm}^2$. Figure 7 shows the dynamic response of the servovalve driven by an electrical signal and by a fluidic signal.⁹ The curve of phase lag versus frequency for the fluidically driven servovalve shows 45 deg of phase lag at 20 Hz. From equation (16), the servovalve time constant can be given as

$$\tau = \frac{1}{\omega} \tan \theta = \frac{1}{2\pi f} \tan 45 = 8 \text{ ms} \quad (25)$$

⁹D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, HDL-CR-77-191-1 (December 1977).

where

$$\theta = 45 \text{ deg.}$$

$$f = 20 \text{ Hz.}$$

This servovalve response to fluidic input represents a significant improvement over previous fluidic input valve responses. This improvement was accomplished by using (1) smaller bellows and (2) a fluidic amplifier with little low-frequency phase shift. The initial set of bellows, A_H , was not replaced after the testing reported by Lee and Wormley,⁹ that is, with the smaller set of bellows, A'_H , or the larger set of bellows, A''_H , because the servovalve response with the initial set of bellows was close to the desired response and because the bellows were a cost and reliability problem. For a normal production run of bellows, the spring rates vary ± 30 percent from the nominal value. To obtain two bellows with identical spring rates increases the cost considerably. Moreover, the bellows ruptured very easily due to either overpressuring or mishandling.

Even though the servovalve response to fluidic input represents a significant improvement, the response is not comparable to the response to electrical input as seen in figure 7. The added phase shift using fluidic input is due to phase lag in the fluidic amplifier and the amplifier output

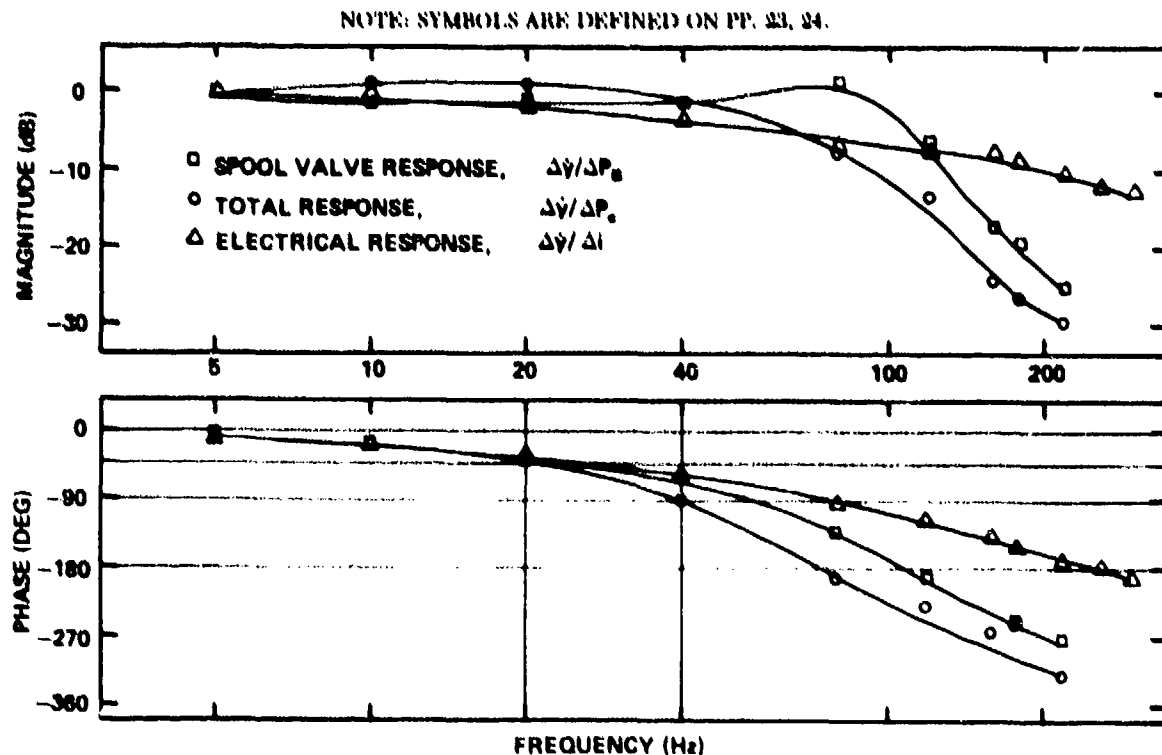


Figure 7. Fluidic input servovalve (fig. 2) frequency response (data from D. Lee and D. N. Wormley, Massachusetts Institute of Technology HDL-CR-77-191-1, December 1977).

⁹D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, HDL-CR-77-191-1 (December 1977).

resistance and bellows capacitance time constant. The phase shift observed with the fluidic input valve due to the time constant is described by equation (15), and the added phase shift due to the fluidic amplifier dynamics can be described by equation (13) with the addition of the amplifier input dynamics and transport delay. The added phase shift observed using fluidic input to the servovalve in the 20- to 120-Hz region became significant when the valve was tested⁹ in a closed-loop servo control system. These results indicate that servovalve response to fluidic input cannot be meaningfully approximated as a first-order system (sect. 2). The frequency response of the amplifier must be considered. The results indicate also that further development is needed to make the valve response to fluidic input comparable to valve response to electrical input, possibly by using an approach that does not require bellows. This development is crucial because, at present, fluidic control system performance is degraded by the servovalve, and this degradation is independent of any fluidic sensing, amplification, and signal processing errors.

4. CONCLUSIONS

This design study is concerned with two-stage fluidic input servovalves using bellows to drive a first-stage flapper nozzle valve. The study shows that minimizing the bellows area reduces (1) the servovalve time constant and (2) the first-stage fluidic amplifier leakage flow. A reduced fluidic input servovalve time constant in the 1- to 5-ms range is desired. Experimental tests were conducted to verify the results of the design study. These tests of a dual-input (electrical and fluidic) servovalve conducted at the Massachusetts Institute of Technology show that a time constant, $\tau = 8$ ms, was obtained by using very small bellows. The first-order approximation to a servovalve response used in the design consideration was found to be valid up to 20 Hz or for a phase lag to 45 deg. This servovalve response to fluidic input represents a significant improvement over previous fluidic input servovalve response. However, the response of the servovalve to fluidic input is not comparable to the response to electrical input beyond 20 Hz. The two servovalve responses differ in that there is additional phase lag by using fluidic input. The added phase shift was due to (1) the fluidic amplifier phase lag and (2) the amplifier output resistance and bellows capacitance time constant. This added phase lag degraded the system performance when the servovalve was used with fluidic input in a closed-loop servo system. The experimental results indicate that servovalve response to fluidic input must be approximated as a second- or higher-order system when used in a closed-loop servo system. The approximate response must take into account (1) the phase shift of the fluidic amplifier and (2) the amplifier output resistance and bellows capacitance time constant. The results indicate also that further development is needed to make the fluidic input valve response comparable to the electrical input valve response.

⁹D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, HDL-CR-77-191-1 (December 1977).

LITERATURE CITED

- (1) A. C. Morse, *Electrohydraulic Servomechanisms*, McGraw-Hill Book Co., New York (1963).
- (2) H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons, Inc., New York (1967).
- (3) R. V. Burton, *Design Study—Fluidic Armament Control System (FACS)*, Honeywell, Inc., Minneapolis, MN, TR-69-2440, (1969).
- (4) L. R. Kelly and W. H. Booth, *Hydraulic Fluidics*, American Society of Mechanical Engineers (1968).
- (5) T. S. Honda and P. S. Ralbousky, *Fluidic Vortex Valve Servoactuator Development*, General Electric Co., Schenectady, NY, USAAVLABS Technical Report 69-23 (May 1969).
- (6) H. C. Kent and J. R. Sjolund, *Hydrofluidic Servoactuator Development*, Honeywell Inc., Minneapolis, MN, USAAMRDL Technical Report 73-12 (May 1973).
- (7) J. R. Granan, *Research and Development on a Fluidic Servoactuator*, General Electric Co., Binghamton, NY, AFFDL-TR-70-23 (July 1970).
- (8) D. J. Thayer, *Transfer Functions for Moog Servovalves*, Rev. ed., Moog Inc., East Aurora, NY, Technical Bulletin 103 (1965).
- (9) D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, HDL-CR-77-191-1 (December 1977).

NOMENCLATURE

a	Constant (with values in range $0.5 \leq a \leq 0.6$)
A_B	Bellows cross-sectional area (m^2)
A_s	Spool end area (m^2)
A_N	Nozzle exit area (m^2)
C	Fixed volume capacitance of bellows (m^3/N)
f	Frequency (Hz)
f_B	Break frequency (1/s)
$H(s)$	Transfer function (m^3/Ns)
$H_1(s)$	Servo valve transfer function, first-order approximation (m^3/Ns)
$H_2(s)$	Servo valve transfer function, second-order approximation (m^3/Ns)
J	Polar moment of inertia of flapper ($m-N-s^2$)
k_B	Spring rate of bellows (N/m)
K_{an}	Net torque spring rate due to torsional spring, magnetic effects, and flow forces on flapper ($m-N/rad$)
K_{cf}	Spring constant of cantilevered flapper arm, which is assumed to be fixed at pivot (N/rad)
K_f	Flapper nozzle pressure gain (N/m^3)
K_s	Differential spring constant of centering springs attached to ends of spool (N/m)
K_{sp}	Spool flow constant (m^3/s)
K_1	Servo valve gain, first-order approximation (m^3/Ns)
K_2	Servo valve gain, second-order approximation (m^3/Ns^2)
L_A	Amplifier output inductance (Ns^2/m^3)
n	Constant (determined by amplifier height and number of parallel laminates used)
P_A	Amplifier output pressure (Pa)
P_B	Bellows pressure (Pa)
P_c	Amplifier control pressure (Pa)
P_{LP}	Differential pressure (Pa)
P_s	Amplifier supply pressure (Pa)
Q_i	Flow into bellows (m^3/s)
Q_L	Load flow (m^3/s)
Q_o	Flow out of bellows (m^3/s)
Q_s	Amplifier supply flow (m^3/s)
r_B	Bellows moment arm (m)
r_N	Flapper moment arm (m)
R_A	Amplifier output resistance (Ns/m^3)
R_s	Amplifier power nozzle resistance (Ns/m^3)

NOMENCLATURE (Cont'd)

s	Laplace transform variable (1/s)
T_I	Fluidic input torque (Nm)
x_f	Flapper displacement (m)
x_s	Spool displacement (m)
$\dot{y}$	Load velocity (m/s)
θ	Angular deflection of flapper or torque arm (rad)
θ_{max}	Maximum flapper deflection (rad)
$\theta(s)$	Flapper deflection (rad)
ξ	Damping ratio
τ	Equivalent servovalve time constant (s)
$\phi(s)$	Single side flapper bending angle (rad)
ω_n	Apparent natural frequency or natural frequency (1/s)

DISTRIBUTION

ADMINISTRATOR
DEFENSE DOCUMENTATION CENTER
ATTN DDC-DA (12 COPIES)
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22314

COMMANDER
US ARMY RSCH & STD GP (EUR)
ATTN LTC JAMES M. KENNEDY, JR.
CHIEF, PHYSICS & MAT. BRANCH
FPO NEW YORK 09510

COMMANDER
US ARMY MATERIEL DEVELOPMENT &
READINESS COMMAND
ATTN DRAM-TL, HQ TECH LIBRARY
5001 EISENHOWER AVENUE
ALEXANDRIA, VA 22333

COMMANDER
US ARMY MISSILE & MUNITIONS
CENTER & SCHOOL
ATTN ATSK-CTD-F
REDSTONE ARSENAL, AL 35809

DIRECTOR
US ARMY MATERIEL SYSTEMS
ANALYSIS ACTIVITY
ATTN DRMSY-MP
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
US ARMY BALLISTIC RESEARCH
LABORATORY
ATTN DRDAR-TSB-5 (STINFO)
ABERDEEN PROVING GROUND, MD 21005

COMMANDER IDOREE
PENTAGON, ROOM 3D 1089
WASHINGTON, DC 20310
ATTN LTC G. KOPESAK

OFFICE OF THE DEPUTY CHIEF OF
STAFF FOR RESEARCH, DEVELOPMENT &
ACQUISITION
DEPARTMENT OF THE ARMY
WASHINGTON, DC 20310
ATTN DAMA-ARP-P, DR. V. GARBER
ATTN MR. JOHN HILL, ROOM 3D424

US ARMY R&D GROUP (EUROPE)
BOX 15
FPO NEW YORK 09510
ATTN CHIEF, AERONAUTICS BRANCH
ATTN CHIEF, ENGINEERING SCIENCES

US ARMY RESEARCH OFFICE
P.O. BOX 12211
RESEARCH TRIANGLE PARK, NC 27709
ATTN JAMES J. MURRAY, ENG SCI DIV

RND ADVANCED TECHNOLOGY CENTER
P.O. BOX 1500
MUNTSVILLE, AL 35807
ATTN J. PAPADOPOULOS

COMMANDER
USA FOREIGN SCIENCE &
TECHNOLOGY CENTER
FEDERAL OFFICE BUILDING
220 7th STREET, NE
CHARLOTTEVILLE, VA 22901
ATTN DRKST-SD1

DIRECTOR
APPLIED TECHNOLOGY LABORATORY
FORT EUSTIS, VA 23604
ATTN GEORGE W. FORDICK, DAVDL-EU-SYA

COMMANDER
USA MISSILE RES & DEV COMMAND
REDSTONE ARSENAL, AL 35809
ATTN REDSTONE SCIENTIFIC
INFORMATION CENTER, DRSMI-RSD
ATTN DRDMI-TGC, WILLIAM GRIFFITH
ATTN DRDMI-TGC, J. C. DUNAWAY
ATTN DRCPM-TOE, FRED J. CHEPLEN

COMMANDER
USA MOBILITY EQUIPMENT R&D CENTER
FORT BELVOIR, VA 22060
ATTN TECHNICAL LIBRARY (VAULT)
ATTN DRDME-EM, R. N. MARE

COMMANDER
EDGEWOOD ARSENAL
ABERDEEN PROVING GROUND, MD 21010
ATTN SAREA-MT-T, MR. D. PATTON

COMMANDER
US ARMY ARRADCOM
DOVER, NJ 07801
ATTN SARPA-TS-S-859
ATTN DRDAR-LCN-F, A. E. SCHMIDLIN
ATTN DRDAR-LCN-E, MR. J. CONNOR

COMMANDER
WATERVLIET ARSENAL
WATERVLIET ARSENAL, NY 12189
ATTN SARUV-RDT-L

COMMANDER
USA TANK AUTOMOTIVE RES &
DEV COMMAND
ARMOR & COMP DIV, DROTA-RKT
BLOC 215
WARREN, MI 48090
ATTN T. KOZOMIK
ATTN M. STEELE

COMMANDER
WHITE SANDS MISSILE RANGE, NM 88002
ATTN STMS-AD-L, TECHNICAL LIBRARY

COMMANDER
US ARMY ARMAMENT MATERIEL READINESS
COMMAND
ROCK ISLAND, IL 61299
ATTN DRBAR-RDG-T, MR. R. SPENCER
ATTN DRBAR-ARF

COMMANDER/DIRECTOR
ATMOSPHERIC SCIENCES LABORATORY
USA ERADCOM
WHITE SANDS MISSILE RANGE, NM 88002
ATTN DELAS-AE (MOLT)

OFFICE OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ARLINGTON, VA 22217
ATTN STANLEY W. DOROFF, CODE 438
ATTN D. S. SIEGEL, CODE 211

DEPARTMENT OF THE NAVY
R&D PLANS DIVISION
ROOM 5D760, PENTAGON
WASHINGTON, DC 20350
ATTN BENJ R. PETRIE, JR.
OP-987P4

COMMANDER
NAVAL AIR DEVELOPMENT CENTER
WASHINGT. PA 18974
ATTN R. MCGIBONEY, 30424
ATTN CODE 8134, LOIS GUISE

NAVAL AIR SYSTEMS COMMAND
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20360
ATTN CODE AIR-52022A,
J. BURNS
ATTN CODE AIR-52022E,
D. HOUCK

COMMANDER
PACIFIC MISSILE RANGE
NAVAL MISSILE CENTER
POINT MUGU, CA 93042
ATTN CODE 3123, ABE J. GARRETT
ATTN CODE 1243, A. ANDERSON

COMMANDER
NAVAL SHIP ENGINEERING CENTER
PHILADELPHIA DIVISION
PHILADELPHIA, PA 19112
ATTN CODE 6772, D. KEYSER

COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK, MD 20910
ATTN CODE 413, CLAYTON MCKINDRA
ATTN CODE WA-33, J. O'STEEN

COMMANDER
NAVAL ORDNANCE STATION
INDIANHEAD, MD 20640
ATTN CODE 5123B, J. MORRIS

NAVAL SHIP RES & DEV CENTER
CODE 1619, MR. K. READER
BETHESDA, MD 20084

NAVAL SEA SYSTEMS COMMAND
SEA0331H
WASHINGTON, DC 20362
ATTN A. CHALKIN

COMMANDER
NAVAL WEAPONS CENTER
CHINA LAKE, CA 93555
ATTN CODE 533, LIBRARY DIVISION
ATTN CODE 5536, MR. M. D. JACOBSON

COMMANDER
AF AERO PROPULSION LABORATORY, AFSC
WRIGHT-PATTERSON AFB, OH 45433
ATTN LESTER SMALL 1TBC

COMMANDER
AIR FORCE AVIONICS LABORATORY
WRIGHT-PATTERSON AFB, OH 45433
ATTN RRM-2, RICHARD JACOB

DIRECTOR
AF OFFICE OF SCIENTIFIC RESEARCH
1400 WILSON BLVD
ARLINGTON, VA 22209
ATTN ME, MR. GEORGE KHAUSENBERGER

COMMANDER
AIR FORCE FLIGHT DYNAMICS LABORATORY
WRIGHT-PATTERSON AFB, OH 45433
ATTN AF7DL/PGL, H. SNOWBALL

DISTRIBUTION (Cont'd)

COMMANDER
AF WEAPONS LABORATORY, AFSC
KIRTLAND AFB, NM 87117
ATTN SUL, TECHNICAL LIBRARY

COMMANDER
ARMAMENT DEVELOPMENT AND TEST CENTER
EGLIN AIR FORCE BASE, FL 32542
ATTN ADTC (DLOSL), TECH LIBRARY

AIR FORCE FLIGHT TEST CENTER
6510 ABG/SSD
EDWARDS AFB, CA 93523
ATTN TECHNICAL LIBRARY

AF INSTITUTE OF TECHNOLOGY, AU
WRIGHT-PATTERSON AFB, OH 45433
ATTN LIBRARY AFIT(LD),
BLDG 640, AREA B
ATTN AFIT(ENH), MILTON E. FRANKS

AEROSPACE MEDICAL DIVISION
BROOKS AFB, TX 78235
ATTN AMD/MDM, CPT G. JAMES

DIV. OF REACTOR RES & DEV
P-309 USERDA
WASHINGTON, DC 20545
ATTN FRANK C. LEGLER

OAK RIDGE NATIONAL LABORATORY
CENTRAL RES LIBRARY
BLDG 4500N, RM 175
P.O. BOX X
OAK RIDGE, TN 37830
ATTN E. NOMANO

DEPT OF HEW
PUBLIC HEALTH SERVICE
NATIONAL INSTITUTE OF HEALTH
BLDG 13, RM 3W-13
BETHESDA, MD 20014
ATTN C. J. MCCARTHY

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
WASHINGTON, DC 20234
ATTN DR. JAMES SCHOOLEY, CHIEF,
TEMPERATURE SECTION
ATTN DR. T. NEGAS,
MATERIALS DIVISION

DEPARTMENT OF COMMERCE
BUREAU OF EAST-WEST TRADE
OFFICE OF EXPORT ADMINISTRATION
WASHINGTON, DC 20230
ATTN WALTER J. RUSHACK

SCIENTIFIC LIBRARY
US PATENT OFFICE
WASHINGTON, DC 20231
ATTN MRS. CURETON

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
WASHINGTON, DC 20234
ATTN GUSTAVE SHAPIRO, 425.00

NASA AMES RESEARCH CENTER
MOFFETT FIELD, CA 94035
ATTN MS 244-13, DEAN CHISEL

NASA LANGLEY RESEARCH CENTER
HAMPTON, VA 23665
ATTN MS 494, H. D. GARNER
ATTN MS 494, R. R. HELLBAUM
ATTN MS 185, TECHNICAL LIBRARY

NASA LEWIS RESEARCH CENTER
21000 BROOKPARK ROAD
CLEVELAND, OH 44135
ATTN VERNON D. GEBBEN

NASA SCIENTIFIC & TECH INFO FACILITY
P.O. BOX 8657
BALTIMORE/WASHINGTON INTERNATIONAL
AIRPORT, MD 21240
ATTN ACQUISITIONS BRANCH

UNIVERSITY OF ALABAMA
CIVIL & MINERAL ENGINEERING DEPT.
P.O. BOX 1468
UNIVERSITY, AL 35486
ATTN DR. HAROLD R. MERRY

ARIZONA STATE UNIVERSITY
ENGINEERING CENTER
TEMPE, AZ 85281
ATTN PETER K. STEIN, LABORATORY
FOR MEASUREMENT SYSTEMS ENGR.

UNIVERSITY OF ARKANSAS
TECHNOLOGY CAMPUS
P.O. BOX 3017
LITTLE ROCK, AR 72203
ATTN PAUL C. MCLERO

UNIVERSITY OF ARKANSAS
MECHANICAL ENGINEERING
FAYETTEVILLE, AR 72701
ATTN JACK M. COLE, ASSOC PROF

CARNEGIE-MELLON UNIVERSITY
SCHENLEY PARK
PITTSBURGH, PA 15213
ATTN PROF W. T. ROULEAU,
MECH ENGR DEPT

CASE WESTERN RESERVE UNIVERSITY
UNIVERSITY CIRCLE
CLEVELAND, OH 44106
ATTN PROF P. A. ORNER

THE CITY COLLEGE OF THE CITY
UNIVERSITY OF NY
DEPT OF MECH ENGR
139th ST. AT CONVENT AVE
NEW YORK, NY 10031
ATTN PROF L. JIJU
ATTN PROF G. LOWEN

DUKE UNIVERSITY
COLLEGE OF ENGINEERING
DURHAM, NC 27706
ATTN C. P. HARMAN

ENGINEERING SOCIETIES LIBRARY
345 EAST 47TH STREET
NEW YORK, NY 10017
ATTN HOWARD GORDON
ATTN ACQUISITIONS DEPARTMENT

FRANKLIN INSTITUTE OF THE STATE
OF PENNSYLVANIA
20TH STREET & PARKWAY
PHILADELPHIA, PA 19103
ATTN KA-CHUUNG TSUI, ELEC ENGR DIV
ATTN C. A. BELSTERLING

HUGHES HELICOPTERS
DIVISION OF SUMMA CORPORATION
CENTINELA & TRALE STREETS
CULVER CITY, CA 90230
ATTN LIBRARY 2/T2124

IIT RESEARCH INSTITUTE
10 WEST 35th STREET
CHICAGO, IL 60616
ATTN DR. K. E. MCKEE

JOHNS HOPKINS UNIVERSITY
APPLIED PHYSICS LABORATORIES
LAUREL, MD 20810
ATTN MR. MAYNARD HILL
ATTN MR. THOMAS RANKIN
ATTN MR. JOSEPH WALL

LEHIGH UNIVERSITY
DEPARTMENT OF MECHANICAL ENGINEERING
BETHLEHEM, PA 18015
ATTN PROF FORBES T. BROWN

LINDA HALL LIBRARY
5109 CHERRY STREET
KANSAS CITY, MO 64110
ATTN DOCUMENTS DIVISION

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
77 MASSACHUSETTS AVENUE
CAMBRIDGE, MA 02139
ATTN ENGINEERING TECHNICAL REPORTS,
RM 10-408
ATTN DAVID WORMLEY, MECH ENGR DEPT,
RM 3-146

MICHIGAN TECHNOLOGICAL UNIVERSITY
LIBRARY, DOCUMENTS DIVISION
HOUGHTON, MI 49931
ATTN J. HANTHORNE

UNIVERSITY OF MISSISSIPPI
201 CARRIER HALL, DEPT OF MECH ENGR
UNIVERSITY, MS 38677
ATTN DR. JOHN A. FOX

MISSISSIPPI STATE UNIVERSITY
DRAWER ME
STATE COLLEGE, MS 39672
ATTN DR. C. J. BELL, MECH ENG DEPT

UNIVERSITY OF NEBRASKA LIBRARIES
ACQUISITIONS DEPT, SERIALS SECTION
LINCOLN, NE 68508
ATTN ALAN GOULD

UNIVERSITY OF NEW HAMPSHIRE
MECH ENGR DEPT, KINGSBURY HALL
DURHAM, NH 03824
ATTN PROF CHARLES TATE

DISTRIBUTION (Cont'd)

DEPARTMENT OF MECHANICAL ENGINEERING
NEWARK COLLEGE OF ENGINEERING
323 HIGH STREET
NEWARK, NJ 07102
ATTN DR. R. Y. CHEN

OHIO STATE UNIVERSITY LIBRARIES
SERIAL DIVISION, MAIN LIBRARY
1858 NEIL AVENUE
COLUMBUS, OH 43210

OKLAHOMA STATE UNIVERSITY
SCHOOL OF MECH & AEROSPACE ENGR.
STILLWATER, OK 74074
ATTN PROF KARL N. REID

MIAMI UNIVERSITY
DEPT OF ENG TECH
SCHOOL OF APPLIED SCIENCE
OXFORD, OH 45056
ATTN PROF S. B. FRIEDMAN

PENNSYLVANIA STATE UNIVERSITY
215 MECHANICAL ENGINEERING BLDG
UNIVERSITY PARK, PA 16802
ATTN DR. J. L. SHEARER

PENNSYLVANIA STATE UNIVERSITY
ENGINEERING LIBRARY
201 HAMMOND BLDG
UNIVERSITY PARK, PA 16802
ATTN M. BENNETT,
ENGINEERING LIBRARIAN

PURDUE UNIVERSITY
SCHOOL OF MECHANICAL ENGINEERING
LAFAYETTE, IN 47907
ATTN PROF. VICTOR W. GOLDSCHMIDT
ATTN PROF. ALAN T. McDONALD

ROCK VALLEY COLLEGE
3301 NORTH MULFORD ROAD
ROCKFORD, IL 61101
ATTN KEN BARTON

RUTGERS UNIVERSITY
LIBRARY OF SCIENCE & MEDICINE
NEW BRUNSWICK, NJ 08903
ATTN GOVERNMENT DOCUMENTS DEPT
MS. SANDRA R. LIVINGSTON

SYRACUSE UNIVERSITY
DEPT OF MECH & AEROSPACE ENGINEERING
139 E. A. LINK HALL
SYRACUSE, NY 13210
ATTN PROFESSOR D. S. DOSANJH

UNIVERSITY OF TEXAS AT AUSTIN
DEPT OF MECHANICAL ENGINEERING
AUSTIN, TX 78712
ATTN DR. A. J. HEALEY

THE UNIVERSITY OF TEXAS AT ARLINGTON
MECHANICAL ENGINEERING DEPARTMENT
ARLINGTON, TX 76019
ATTN DR. ROBERT L. WOODS

TULANE UNIVERSITY
DEPT OF MECHANICAL ENGINEERING
NEW ORLEANS, LA 70118
ATTN H. F. HRUBECKY

UNION COLLEGE
MECHANICAL ENGINEERING
SCHENECTADY, NY 12308
ATTN ASSOC PROF W. C. AUBREY
MECH ENGR DEPT, STEINMETZ HALL

VIRGINIA POLYTECHNIC INSTITUTE
OF STATE UNIV
MECHANICAL ENGINEERING DEPARTMENT
BLACKSBURG, VA 24061
ATTN PROF H. MOSES

WASHINGTON UNIVERSITY
SCHOOL OF ENGINEERING
P.O. BOX 1185
ST. LOUIS, MO 63130
ATTN W. M. SWANSON

WEST VIRGINIA UNIVERSITY
MECHANICAL ENGINEERING DEPARTMENT
MORGANTOWN, WV 26505
ATTN DR. RICHARD A. BAJURA

WICHITA STATE UNIVERSITY
WICHITA, KS 67208
ATTN DEPT AERO ENGR,
E. J. RODGERS

UNIVERSITY OF WISCONSIN
MECHANICAL ENGINEERING DEPARTMENT
1513 UNIVERSITY AVENUE
MADISON, WI 53706
ATTN FEDERAL REPORTS CENTER
ATTN NORMAN H. BEACHLEY, DIR,
DESIGN ENGINEERING LABORATORIES

WORCESTER POLYTECHNIC INSTITUTE
WORCESTER, MA 01609
ATTN GEORGE C. GORDON LIBRARY (TR)
ATTN TECHNICAL REPORTS

AIRSEARCH
P.O. BOX 5217
402 SOUTH 36th STREET
PHOENIX, AZ 85034
ATTN DAVID SCHAFER
ATTN TREVOR SUTTON
ATTN TOM TIPPETTS

AVCO SYSTEMS DIVISION
201 LOWELL STREET
WILMINGTON, MA 01887
ATTN W. K. CLARK

BELL HELICOPTER COMPANY
P.O. BOX 482
FORTWORTH, TX 76101
ATTN MR. R. D. YEARY

BENDIX CORPORATION
ELECTRODYNAMICS DIVISION
11600 SHERMAN WAY
M. HOLLYWOOD, CA 90605
ATTN MR. D. COOPER

BENDIX CORPORATION
RESEARCH LABORATORIES DIV.
BENDIX CENTER
SOUTHFIELD, MI 48075
ATTN C. J. AHERN

BOEING COMPANY, THE
P.O. BOX 3707
SEATTLE, WA 98124
ATTN HENRIK STRAUB

BOWLES FLUIDICS CORPORATION
9347 FRASER AVENUE
SILVER SPRING, MD 20910
ATTN VICE PRES./ENGR.

DR. RONALD BOWLES
2105 SONORA COURT
SILVER SPRING, MD 20904

CONTINENTAL CAN COMPANY
TECH CENTER
1350 W. 76TH STREET
CHICAGO, IL 60620
ATTN P. A. BAUER

CORDIS CORPORATION
P.O. BOX 428
MIAMI, FL 33137
ATTN STEPHEN F. VADAS, K-2

CORNING GLASS WORKS
FLUIDIC PRODUCTS
HOUGHTON PARK, B-2
CORNING, NY 14830
ATTN MR. W. SCHEMERHORN

CHRYSLER CORPORATION
P.O. BOX 118
CIMS-418-33-22
DETROIT, MI 48231
ATTN MR. L. GAU

EMX ENGINEERING, INC
BOX 216 - 216 LITTLE FALLS RD
CEDAR GROVE, NJ 07009
ATTN ANTHONY P. CORRADO, PRESIDENT

FLUIDICS QUARTERLY
P.O. BOX 2989
STANFORD, CA 94305
ATTN D. H. TARUMOTO

GENERAL ELECTRIC COMPANY
SPACE/RES DIVISIONS
P.O. BOX 8555
PHILADELPHIA, PA 19101
ATTN MGR LIBRARIES, LARRY CHASEN

GENERAL MOTORS CORPORATION
DELCO ELECTRONICS DIV
MANFRED G. WRIGHT
NEW COMMERCIAL PRODUCTS
P.O. BOX 1104
KOKOMO, IN 46901
ATTN R. E. SPARKS

GRUMMAN AEROSPACE CORPORATION
TECHNICAL INFORMATION CENTER
SOUTH OYSTER BAY ROAD
BETHPAGE, L. I., NY 11714
ATTN C. W. TURNER, DOCUMENTS
LIBRARIAN

HAMILTON STANDARD
DIVISION OF UNITED AIRCRAFT CORPORATION
WINDSOR LOCKS, CT 06096
ATTN MR. PHILIP BARNES

DISTRIBUTION (Cont'd)

MONMETHWELL, INC.
1625 BARTHAM AVE
MINNEAPOLIS, MI 55413
ATTN J. KEDERN

JOHNSON CONTROLS, INC
507 E. MICHIGAN
MILWAUKEE, WI 53201
ATTN WARREN A. LEDERMAN

MOORE PRODUCTS COMPANY
SPRING HOUSE, PA 19477
ATTN MR. R. ADAMS

MARTIN MARIETTA CORPORATION
AEROSPACE DIVISION
P.O. BOX 5817
ORLANDO, FL 32805
ATTN R. K. BRIDGEMAN, MP 326
ATTN VITO O. BRAVO, MP 326

MCDONNELL AIRCRAFT COMPANY
GUIDANCE AND CONTROL MECHANICS DIVISION
ST. LOUIS, MO 63166
ATTN MR. LOVAL GUNTHER

NATIONAL FLUID POWER ASSOCIATION
3333 NORTH MAYFAIR ROAD
MILWAUKEE, WI 53222
ATTN JOHN R. LUERKE
DIR OF TECH SERVICES

FLESSEY AEROSPACE LTD
500 NORTHWEST PLAZA
SUITE 814
ST. AMO, MO 63074
ATTN MR. GEORGE UPTON

RICHARD WHITE & ASSOCIATES
ELECTRO/MECHANICAL ENGINEERS
77 PELHAM ISLE ROAD
SUDBURY, MA 01776
ATTN RICHARD P. WHITE

ROCKWELL INTERNATIONAL CORPORATION
COLUMBUS AIRCRAFT DIVISION
P.O. BOX 1259
4300 E. 5TH AVENUE
COLUMBUS, OH 43216
ATTN MR. MARVIN SCHWEIGER

SANDIA CORPORATION
KIRTLAND AFB, EAST
ALBUQUERQUE, NM 87115
ATTN WILLIAM R. LEUBENBERGER, DIV 2323

TRITEC, INC
P.O. BOX 56
COLUMBIA, MD 21045
ATTN L. STERNACKI

UNITED TECHNOLOGIES RESEARCH CENTER
400 MAIN STREET
E. HARTFORD, CT 06104
ATTN R. E. OLSON, MER FLUID
DYNAMICS LABORATORY

US ARMY ELECTRONICS RESEARCH
& DEVELOPMENT COMMAND
ATTN WISEMAN, ROBERT E., DR., UNDEL-C7
ATTN PAO
ATTN F. M. MANION, DRDEL-AP-CCN (3 COPIES)

HARRY DIAMOND LABORATORIES
ATTN 00100, COMMANDER/TECHNICAL DIR/TSC
ATTN CHIEF, 00210
ATTN CHIEF, DIV 10000
ATTN CHIEF, DIV 20000
ATTN CHIEF, DIV 30000
ATTN CHIEF, DIV 40000
ATTN CHIEF, LAB 11000
ATTN CHIEF, LAB 13000
ATTN CHIEF, LAB 14000
ATTN CHIEF, LAB 21000
ATTN CHIEF, LAB 34000
ATTN CHIEF, LAB 36000
ATTN CHIEF, LAB 47000
ATTN CHIEF, LAB 48000
ATTN RECORD COPY, 94100
ATTN NDL LIBRARY, 41000 (5 COPIES)
ATTN NDL LIBRARY, 41000 (WOODBRIDGE)
ATTN CHAIRMAN, EDITORIAL COMMITTEE
ATTN TECHNICAL REPORTS BRANCH, 41300
ATTN LEGAL OFFICE, 97000
ATTN LAMMAM, C., 00210
ATTN WILLIS, B., 47400
ATTN CHIEF, 13400 (10 COPIES)
ATTN DRENNICKI, T., 13400
ATTN MCN, G., 13400 (10 COPIES)
ATTN DEADWYLER, R., 13400 (3 COPIES)