

AD-A069 736

NAVAL RESEARCH LAB WASHINGTON DC
DESIGN PARAMETERS FOR A GYRO-TWA OPERATING AT THE SECOND CYCLOT--ETC(U)
MAY 79 K R CHU, V L GRANATSTEIN, A T DROBOT MIPR-FY7619-70026
NRL-MR-3950 NL

UNCLASSIFIED

| OF |
. AD
A069 736



END
DATE
FILMED
7-79
DDC

12

NRL Memorandum Report 3950

LEVEL

Design Parameters for a Gyro-TWA Operating at the Second Cyclotron Harmonic

K. R. CHU AND V. L. GRANATSTEIN

*Electron Beam Applications Branch
Plasma Physics Division*

AND

A. T. DROBOT

*Science Applications, Inc.
McLean, Virginia 22101*

DDC
JUN 11 1979
C

AD A 069736

May 14, 1979

DDC FILE COPY



NAVAL RESEARCH LABORATORY
Washington, D.C.

Approved for public release; distribution unlimited.

79 06 08 012

14) NRL-MR-3950

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

9) REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Memorandum Report 8850	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6) DESIGN PARAMETERS FOR A GYRO-TWA OPERATING AT THE SECOND CYCLOTRON HARMONIC		5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.
7. AUTHOR(S) 10) K. R. Chu, V. L. Granatstein, A. T. Drobot		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, DC 20375		8. CONTRACT OR GRANT NUMBER(S) 15) MIPR-FY7619-70026
11. CONTROLLING OFFICE NAME AND ADDRESS Rome Air Development Center/OCTP, Griffiss AFB, NY 13441 and Naval Electronic Systems Command/304, Washington, DC 20360		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem R18-10 & R08-92 MIPR No. FY761970026 Subtask XF54 581-007
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE May 14, 1979 11) 14 MAY 79
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		13. NUMBER OF PAGES 15 12) 16 p.
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
18. SUPPLEMENTARY NOTES This work was supported by Rome Air Development Center, MIPR No. FY761970026. *Science Applications, Inc., McLean, VA 22101 Ballistic Missile Defense Advanced Technology Center, Huntsville, Ala. 35807, NRL Problem R08-95 (Continues)		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE 79
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Gyrotron travelling wave amplifier Second electron cyclotron harmonic frequency		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Designs for a 10 GHz gyrotron travelling wave amplifier are made on the basis of recent gyrotron theory. The amplifier operates on the TE ₀₁ waveguide mode at the second electron cyclotron harmonic frequency. Although the designs are for specific systems, the design procedures as well as the trend shown in the various design options are of general interest.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

251950

79 06 08 012

18. Supplementary Notes (Continued)

MIPR No. W31RPD-93-Z082 and Nava. Electronics Systems Command, XF54-581.

Accession For	
NTIS G.A.&I	<input checked="" type="checkbox"/>
DDC TAB	
Unannounced Justification	
By	
Distribution/ Availability Codes	
Dist	Avail and/or special
A	

In a recent report,¹ we presented analytical and simulation studies of the gyrotron travelling wave amplifier (gyro-TWA) operating on the TE_{0n} mode where n is the radial eigenmode number of a wave in a cylindrical waveguide) at a harmonic of the electron cyclotron frequency. In the present report, we shall apply the theory and techniques developed in Ref. 1 to design a 10 GHz gyro-TWA operating on the TE_{01} mode and at the second cyclotron harmonic. The design is subject to the restriction that the electron gun to be used has fixed dimensions.

Following the notations of Ref. 1, we outline, step by step, the procedures used for the present design.

- (1) Determining the beam frame wave number \bar{k}'_z .

In general the waveguide characteristic curve intersects with the beam characteristic curve at two points in the $\bar{\omega}' - \bar{k}'_z$ plane. One point corresponds to the operating mode, a forward wave, while the other point corresponds to a backward wave which may cause oscillations. In order to eliminate the backward wave, we have chosen $\bar{k}'_z = 0$ so that the two curves intersect at only one point (i.e. at a grazing angle, see Fig. 4 of Ref. 1).

- (2) Determining the beam electron guiding center position with respect to the waveguide wall.

It is shown in Ref. 1 that for $n = 1$ and $s = 2$, the optimum choice for \bar{r}_0 is $\bar{r}_0 = 0.8$. Here, however, the fixed electron gun dimensions have necessitated a choice of $\bar{r}_0 = 0.48$. From Eq. (50) of Ref. 1, we estimate that the efficiency for $\bar{r}_0 = 0.48$ will be approximately 75% of that for the optimum \bar{r}_0 .

Note: Manuscript submitted March 22, 1979.

(3) Determining the beam density parameter ν .

Considering the operating voltage and current of the electron gun, we have fixed ν at two values, i.e., $\nu = 1.5 \times 10^{-3}$ and $\nu = 2 \times 10^{-3}$.

(4) Determining the magnetic field fine tuning parameter X' ($\propto B_0$).

By choosing the wave number $\bar{k}'_z = 0$, we have already specified a magnetic field corresponding to a grazing or near grazing intersection between the beam characteristic curve and the waveguide characteristic curve (see Fig. 4 of Ref. 1). It is shown in Ref. 1 that $X' = 1$ (exact grazing intersection) gives the larger bandwidth and power gain per unit distance, while $X' = X'_h$ (near grazing intersection) gives a higher efficiency, where X'_h , a parameter near unity, corresponds to the magnetic field which gives half the growth rate as compared with $X' = 1$. For maximum flexibility, we shall present design options based on either choice of X' .

(5) Evaluating the beam frame efficiency η' as a function of the beam energy W'_b .

This was done with our numerical simulation code. Fig. 1 shows the η' vs. W'_b curves for the chosen values of ν' and X'_h . In Fig. 1, 24 data points have been numbered. These are the points to be converted into experimental designs.

(6) Calculating the properties of the designed systems.

For each data point marked on Fig. 1, we calculate the corresponding bandwidth, power gain, and tolerance to the beam energy and axial velocity spreads, etc., on the basis of the dispersion relation [Eq. (18) of Ref. 1]. Fig. 2 shows a typical plot of the growth rate \bar{W} versus \bar{k}'_z (in lab frame) for a 60 kV, 7 Amp beam with $V_{10}/V_{z0} = 2$. Bandwidth and power gain/unit length

can be derived from this figure. Note that the unstable spectrum is restricted in the positive \bar{k}'_z region. This is also the case for all the data points shown in Fig. 1.

(7) Converting the beam frame normalized design data into lab frame physical design parameters.

Table IV of Ref. 1 has been used to convert the data points marked on Fig. 1 into actual design parameters. In carrying out the conversion, we have assumed a waveguide wall radius of 1.842 cm to be consistent with the desired 10 GHz wave frequency and we have used three values of α ($\equiv v_{10}/v_{z0}$), i.e., $\alpha = 2.0, 1.5,$ and 1.0 .

The final designs can be divided into two categories - optimum bandwidth ($X' = 1$) and optimum efficiency ($X' = X'_h$). Tables I through III list the design parameters in the former category, while Table IV through VI list the design parameters in the second category. In each category, three optional values of α have been given, each generating a separate table. In each table, there are six optional designs for various values of beam voltage and current. Note that all the designs have the same waveguide radius (1.842 cm or 0.725 inch), but the wave frequencies are slightly different because of the difference in beam parameters and applied magnetic fields. Generally speaking, for the same beam used, optimum efficiency operation gives an efficiency higher than that of the optimum bandwidth operation by a factor of ~ 1.5 , but it gives a bandwidth and power gain/unit length lower than those of the optimum bandwidth operation by a factor of ~ 3.5 and ~ 2 , respectively. One can change from optimum efficiency operation to optimum bandwidth operation or vice versa by fine tuning the magnetic field and the driver frequency according to the design specifications. In order to reach

a 20 dB total power gain, an interaction length of 30-140 cm is required depending on which design option is used. The upper bound conditions on the beam energy and axial velocity spreads [the last two numbers in the design, cf. Eq. (53) of Ref. 1] indicate that the allowable beam energy spread and the allowable beam axial velocity spread are greater for larger α and $X' = X'_h$ than for smaller α and $X' = 1$. To achieve the design performance when $\alpha = 2$ and $X' = X'_h$, one requires $\Delta V_z/V_{z0} \ll 50\%$ and $\Delta W'_b/W'_b \ll 20\%$, while for $\alpha = 1$ and $X' = 1$, the requirement is $\Delta V_z/V_{z0} \ll 8\%$ and $\Delta W'_b/W'_b \ll 8\%$.

TABLE I - Design Parameters for $X' = 1$, $\alpha = 2$.

data no.	4	5	6	10	11	12
V(kV)	49.54	55.68	61.80	49.54	55.68	61.80
I (Amp)	4.83	5.09	5.33	6.44	6.79	7.11
Wave frequency (GHz)	10.15	10.17	10.19	10.15	10.17	10.19
Efficiency (%)	10.40	9.98	9.58	11.35	10.88	10.45
Beam power (kW)	239.58	283.64	329.64	319.44	378.19	439.52
Wave power (kW)	24.92	28.32	31.59	36.27	41.16	45.94
Magnetic field (kG)	1.91	1.93	1.95	1.91	1.93	1.95
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.363	0.383	0.401	0.363	0.383	0.401
Inner radius (cm)	0.521	0.502	0.484	0.521	0.502	0.484
Avg. beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.247	1.267	1.285	1.247	1.267	1.285
k_z (cm ⁻¹)	0.39	0.41	0.43	0.39	0.41	0.43
V_{10}/C	0.37	0.39	0.40	0.37	0.39	0.40
V_{20}/C	0.18	0.19	0.20	0.18	0.19	0.20
e-fold time (nsec)	2.66	2.50	2.36	2.45	2.29	2.17
power gain (dB/cm)	0.58	0.59	0.60	0.63	0.64	0.65
20 dB gain bandwidth	0.043	0.046	0.049	0.044	0.048	0.051
$\Delta V_z/V_{z0} \ll$	0.23	0.22	0.21	0.26	0.25	0.24
$\Delta W_D/W_{D0} \ll$	0.09	0.09	0.08	0.10	0.10	0.09

TABLE II - Design Parameters for $X' = 1$, $\alpha = 1.5$

data no.	3	4	5	9	10	11
v(kV)	49.84	56.85	63.84	49.84	56.85	63.84
I (Amp)	6.07	6.44	6.79	8.09	8.59	9.05
Wave frequency (GHz)	10.24	10.28	10.32	10.25	10.29	10.32
Efficiency (%)	9.59	9.18	8.83	10.46	10.02	9.63
Beam power (kW)	302.67	366.58	433.67	403.56	488.78	578.22
Wave power (kW)	29.05	33.67	38.32	42.23	49.00	55.69
Magnetic field (kG)	1.90	1.91	1.93	1.90	1.91	1.93
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.342	0.363	0.383	0.342	0.363	0.383
Inner radius (cm)	0.542	0.521	0.502	0.542	0.521	0.502
Avg. beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.226	1.247	1.267	1.226	1.247	1.267
k_z (cm^{-1})	0.49	0.52	0.55	0.49	0.52	0.55
$v_{\perp 0}/c$	0.34	0.36	0.38	0.34	0.36	0.38
v_{z0}/c	0.23	0.24	0.25	0.23	0.24	0.25
e-fold time (nsec)	2.91	2.70	2.53	2.67	2.48	2.33
power gain (dB/cm)	0.43	0.43	0.44	0.46	0.47	0.48
20 dB gain bandwidth	0.051	0.056	0.060	0.050	0.057	0.063
$\Delta v_z/v_{z0} \ll$	0.14	0.13	0.12	0.16	0.15	0.14
$\Delta W_D/W_{D0} \ll$	0.08	0.08	0.08	0.10	0.09	0.08

TABLE III - Design Parameters for $X' = 1$, $\alpha = 1$

data no.	1	2	3	7	8	9
V(kV)	48.86	58.39	67.84	48.86	58.39	67.84
I (Amp)	7.80	8.49	9.10	10.41	11.32	12.14
Wave frequency (GHz)	10.42	10.50	10.58	10.42	10.50	10.59
Efficiency (%)	8.02	7.63	7.28	8.77	8.33	7.93
Beam power (kW)	381.49	495.88	618.03	508.65	661.17	824.04
Wave power (kW)	30.60	37.84	45.00	44.62	55.11	65.42
Magnetic field (kG)	1.86	1.88	1.90	1.86	1.88	1.90
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.293	0.319	0.342	0.293	0.319	0.342
Inner radius (cm)	0.591	0.565	0.542	0.591	0.565	0.542
Avg. beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.177	1.203	1.226	1.177	1.203	1.226
k_z (cm ⁻¹)	0.63	0.69	0.74	0.63	0.69	0.74
$V_{\perp 0}/C$	0.29	0.31	0.33	0.29	0.31	0.33
V_{z0}/C	0.29	0.31	0.33	0.29	0.31	0.33
e-fold time (nsec)	3.63	3.27	3.00	3.35	3.01	2.76
power gain (dB/cm)	0.27	0.28	0.28	0.29	0.30	0.31
20 dB gain bandwidth	0.056	0.066	0.073	0.059	0.067	0.075
$\Delta V_z/V_{z0} \ll$	0.07	0.06	0.06	0.08	0.07	0.07
$\Delta W_D/W_{D0} \ll$	0.07	0.07	0.06	0.08	0.08	0.07

TABLE IV - Design Parameters for $X' = X'_h$, $\alpha = 2$

data no.	16	17	18	22	23	24
V(kV)	49.54	55.68	61.80	49.54	55.68	61.80
I (Amp)	4.83	5.09	5.33	6.44	6.79	7.11
Wave frequency (GHz)	10.08	10.09	10.11	10.07	10.09	10.11
Efficiency (%)	24.97	24.06	22.80	27.03	25.62	24.79
Beam power (kW)	239.58	283.64	329.64	319.44	378.19	439.52
Wave power (kW)	59.84	68.24	75.18	86.35	96.92	108.96
Magnetic field (kG)	1.89	1.91	1.92	1.89	1.91	1.92
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.367	0.387	0.406	0.368	0.388	0.406
Inner radius (cm)	0.517	0.497	0.479	0.517	0.497	0.478
Avg. beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.251	1.271	1.290	1.252	1.272	1.290
k_z (cm ⁻¹)	0.39	0.41	0.43	0.39	0.41	0.43
V_{10}/C	0.37	0.39	0.40	0.37	0.39	0.40
V_{z0}/C	0.18	0.19	0.20	0.18	0.19	0.20
e-fold time (nsec)	5.31	4.98	4.68	4.88	4.60	4.34
power gain (dB/cm)	0.29	0.29	0.30	0.32	0.32	0.32
20 dB gain bandwidth	0.012	0.013	0.014	0.013	0.013	0.014
$\Delta V_z/V_{z0} \ll$	0.48	0.46	0.44	0.51	0.49	0.48
$\Delta W_D/W_{D0} \ll$	0.19	0.18	0.17	0.20	0.19	0.19

TABLE V - Design Parameters for $X' = X'_h$, $\alpha = 1.5$

data no.	15	16	17	21	22	23
V(kV)	49.84	56.85	63.84	49.84	56.85	63.84
I (Amp)	6.07	6.44	6.79	8.09	8.59	9.05
Wave frequency (GHz)	10.18	10.21	10.24	10.18	10.21	10.24
Efficiency (%)	23.09	22.05	21.29	24.53	23.86	22.67
Beam power (kW)	302.67	366.58	433.67	403.56	488.78	578.22
Wave power (kW)	69.90	80.85	92.33	99.02	116.66	131.12
Magnetic field (kG)	1.88	1.89	1.91	1.87	1.89	1.91
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.346	0.367	0.387	0.346	0.368	0.388
Inner radius (cm)	0.539	0.517	0.497	0.538	0.517	0.497
Avg.beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.230	1.251	1.271	1.230	1.252	1.272
k_z (cm ⁻¹)	0.49	0.52	0.55	0.49	0.52	0.55
V_{\perp}/C	0.34	0.36	0.38	0.34	0.36	0.38
V_{z0}/C	0.23	0.24	0.25	0.23	0.24	0.25
e-fold time (nsec)	5.74	5.38	5.06	5.27	4.95	4.66
power gain (dB/cm)	0.21	0.22	0.22	0.23	0.24	0.24
20 dB gain bandwidth	0.014	0.016	0.017	0.015	0.017	0.017
$\Delta V_z/V_{z0} < \angle$	0.28	0.27	0.26	0.31	0.29	0.28
$\Delta W_b/W_{b0} < <$	0.17	0.17	0.16	0.19	0.18	0.17

TABLE VI - Design Parameters for $X' = X'_h, d = 1$

data no.	13	14	15	19	20	21
V(kV)	48.86	58.39	67.84	48.86	58.39	67.84
I (Amp)	7.80	8.49	9.10	10.41	11.32	12.14
Wave frequency (GHz)	10.36	10.44	10.51	10.36	10.44	10.51
Efficiency (%)	18.93	18.13	17.52	20.38	19.54	18.61
Beam power (kW)	381.49	495.88	618.03	508.65	661.17	824.04
Wave power (kW)	72.23	89.92	108.28	103.66	129.20	153.40
Magnetic field (kG)	1.84	1.86	1.88	1.84	1.86	1.87
Wall radius (cm)	1.842	1.842	1.842	1.842	1.842	1.842
Larmor radius (cm)	0.296	0.322	0.346	0.296	0.322	0.346
Inner radius (cm)	0.589	0.562	0.539	0.588	0.562	0.538
Avg. beam radius (cm)	0.884	0.884	0.884	0.884	0.884	0.884
Outer radius (cm)	1.180	1.206	1.230	1.180	1.206	1.230
k_z (cm ⁻¹)	0.63	0.68	0.73	0.63	0.68	0.73
$V_{\perp 0}/C$	0.29	0.31	0.33	0.29	0.31	0.33
V_{z0}/C	0.29	0.31	0.33	0.29	0.31	0.33
e-fold time (nsec)	7.14	6.54	5.93	7.01	6.00	5.44
Power gain (dB/cm)	0.13	0.14	0.14	0.14	0.15	0.15
20 dB gain bandwidth	0.017	0.019	0.021	0.016	0.020	0.022
$\Delta V_z/V_{z0} <<$	0.13	0.13	0.12	0.15	0.14	0.13
$\Delta W_b/W_{b0} <<$	0.14	0.14	0.13	0.16	0.15	0.14

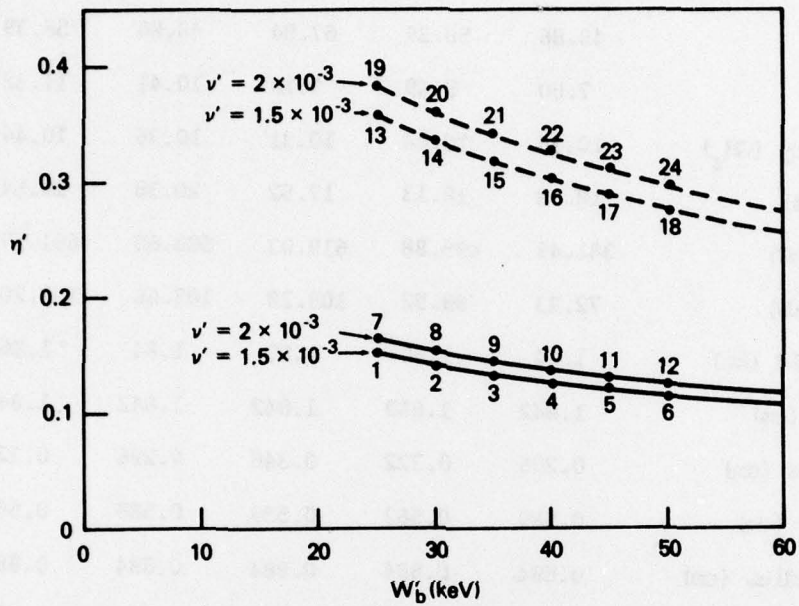


Fig. 1 - Beam frame efficiency η' versus beam energy W'_b . Solid curves are for $X' = 1$ and dashed curves are for $X' = X'_h$.

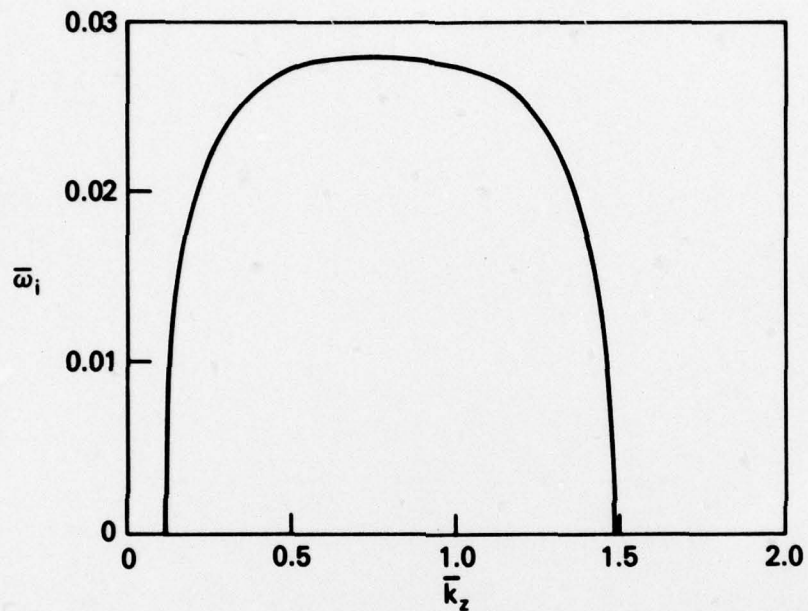


Fig. 2 - Lab frame growth rate $\bar{\omega}_i$ versus wave number \bar{k}_z for a 60 kV, 7 Amp electron beam with $V_{LO}/V_{ZO} = 2$.