

NO-A086 997

NAVAL RESEARCH LAB WASHINGTON DC

F/G 20/5

SPATIAL AND TEMPORAL COHERENCE OF A 35 GHz GYROMONOTRON USING T--ETC(U)

JUN 80 M E READ, R M GILGENBACH, R LUCEY

UNCLASSIFIED

NRL-MR-4244


SBIE-AD-E000 486

NL

1 1 1
01 0000 0000



END
DATE
FILMED
9 80
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

ADA 086992

14/NRL-MR-4244

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

9 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 4244	2. GOVT ACCESSION NO. AD-086 997	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SPATIAL AND TEMPORAL COHERENCE OF A 35 GHz GYROMONOTRON USING THE TE ₀₁ CIRCULAR MODE		5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.
7. AUTHOR(s) M.E. Read, R.M. Gilgenbach, R. Lucey, Jr., K.R. Chu, A.T. Drobot, and V.L. Granatstein		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, D.C. 20375		8. CONTRACT OR GRANT NUMBER(s) 1120 Jun 80
11. CONTROLLING OFFICE NAME AND ADDRESS Dept. of Energy Naval Electronic Systems Command Washington, D.C. 20585 Washington, D.C. 20360		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62762N; DOE EX-77-A-34-1015 & 67-0865-0-0; NAVELEX KF54-581-007 & 67-0863-0-0
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 18 SBI E		12. REPORT DATE June 20, 1980
		13. NUMBER OF PAGES 22
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 19 AD-E000 486		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 17 2F54581 0011		
18. SUPPLEMENTARY NOTES *Present address: JAYCOR, Alexandria, VA 22304 †Present address: Science Applications, Inc., McLean, VA 22101		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Cyclotron maser Gyrotron Millimeter waves		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The characteristics of a 35 GHz oscillator operating with the TE ₀₁ circular waveguide mode are described. The device produced 147 kW, with an efficiency of 31% at 100 kW. The total radiated energy was 2 KJ per pulse. The spectral coherence appears to be equal to those of other high quality microwave tubes. The mode purity is greater than 95%.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

251950
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

CONTENTS

INTRODUCTION	1
DESIGN	1
RESULTS	3
EFFECT OF BEAM VELOCITY SPREAD	4
SPECTRUM AND MODE PURITY	5
CONCLUSION	6
ACKNOWLEDGMENTS	6
REFERENCES	7

ACCESSION for	
NTIS	White Section ☒
DDC	Buff Section ☐
UNANNOUNCED	☐
JUSTIFICATION _____	
BY _____	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

SPATIAL AND TEMPORAL COHERENCE OF A 35 GHz GYROMONOTRON USING THE TE_{01} CIRCULAR MODE

INTRODUCTION

There has been considerable recent interest in cyclotron masers (commonly called gyrotrons) for the production or amplification of high power millimeter wavelength radiation.⁽¹⁻⁵⁾ These devices have demonstrated higher efficiency and average power capabilities at higher frequencies (28-330 GHz) than conventional microwave tubes.⁽⁶⁻⁸⁾ One class of these devices, the single cavity oscillator (gyromonotron) is of interest for radar and to the fusion community for electron cyclotron heating.⁽⁹⁻¹²⁾ Several of these devices have been realized, with the highest power (1 MW at 3.5 mm) reported by Flyagin⁽²⁾ in the USSR.

In this letter we describe a gyromonotron operating at 35 GHz with an output power of 147 kW. This device is the first gyrotron reported at this frequency and is unique in that it operates in the TE_{01} (circular) mode, which is readily converted to a linearly polarized rectangular mode. The gyrotron was specifically designed as a source for electron cyclotron heating (ECH) experiments in tokamaks, and thus has a long pulse length (20 μ s), and utilizes the TE_{011} mode. This latter feature allows the linear polarization of the radiation with a commercial mode converter and will permit the examination of the effect of polarization in ECH experiments. We also report for the first time measurements of the temporal and spatial coherence of a gyromonotron.

Design

The operating parameters of the gyromonotron were determined using the linear theory of Chu⁽¹³⁾ and non-linear calculations employing an orbit integrator developed originally by Drobot⁽¹⁴⁾ and modified by the authors.

The device parameters are given in Table 1. A schematic is shown in Figure 1. To produce the electron beam a magnetron type electron gun designed by Seftor et al⁽¹⁵⁾ was used. The magnetic field for both the gun and microwave interaction

regions was produced by a superconducting solenoid. The field at the cavity was approximately 13.2 kGauss.

The cavity was modified right-circular, with the profile shown in Figure 2a, supporting an electromagnetic field with an electric field profile given in Figure 2b. This profile was measured in the cavity in the absence of the electron beam. The taper, given in Figure 2a, was expected to give some improvement in efficiency but was chosen rather arbitrarily, and is not necessarily optimal.⁽¹⁶⁻²⁰⁾ As in most gyromonotrons,⁽¹⁾ the wave frequency was just slightly above cut-off, and the length was 3.3 free space wavelengths. This length was shorter than that for optimum efficiency (equal to 5.5λ) in order to maximize the output wave power without operating near the diffraction limited Q.⁽²¹⁾ The use of a very low Q was rejected since it was expected that the device would then be influenced excessively by external reflections, which in the case of ECH experiments were of unknown magnitude. Enhancement of the Q over the diffraction limit was produced by a small iris and an abrupt step to the output guide diameter at the output of the cavity.

The output guide was 0.80 cm in radius, a value such that the TE_{02} mode was cut off at 35 GHz. This eliminated the most likely form of mode conversion at the output of the cavity. Two different collector geometries were tried. For short pulses (1 μ sec) the collector was formed by the output guide, while the 20 msec version required a 5 cm diameter collector. No difference in the performance of the tube was observed (other than the ability to dissipate beam energy) with the two collectors. The output window was a tuned disk of Beryllia.

The mode converter was of the type manufactured by Hitachi.⁽²²⁾ It was found to be capable, with pressurization of 2 atm. of SF_6 , of withstanding breakdown to more than 147 kW.

Results

A maximum power of 147 kW was produced, with an efficiency of 31% achieved at 100 kW. (With the large diameter collector, pulses of up to 20 msec were achieved with an output of 100 kW, yielding a total radiated energy of 2 kilojoules.)

The behavior of the device with variations of the beam current and the magnetic field can be compared with theory. Figure 3 shows both the calculated and experimentally observed efficiency as a function of the beam current for optimized magnetic fields. (Here the efficiency of the device is defined as the ratio of the output power to the beam power.) The theoretical efficiencies have been calculated with allowance for cavity, output guide, and window losses, which are expected, in the experimental device, to amount to 12%.

Two theoretical curves are given, corresponding to different values for α , the ratio of the perpendicular to parallel beam electron velocities. The design value for α for the electron gun used in the experiment was 1.5, but small variations in the applied voltages and magnetic fields could result in an α as high as 1.8.⁽¹⁵⁾ (No direct measurement of this parameter has been made.) Additionally, we note that the electromagnetic fields used in the calculation were those of an unperturbed right-circular cavity. These fields are a close approximation to those measured in cold tests, but may not be those existing in the presence of the beam. With the inclusion of these uncertainties, and an estimate of experimental errors, the observed and predicted results are in reasonable agreement.

We note that the peak in efficiency occurs for a beam current of 3 Amperes, and that the efficiency drops to 0.24 for 9 Amperes. The strength of the interaction, and therefore the efficiency, is determined by the magnitude of the

RF electric field strength in the cavity, which is in turn determined by the beam current and cavity Q. Straightforward arguments show that the efficiency will remain constant for a constant value of QI . It is therefore clear that for higher power operation, a lower value of Q is required.

In order to evaluate the effect of changing Q, operation was also attempted with quality factors of 400 and 1600. As expected, a Q of 1600 yielded the same efficiency as that of 800 (Figure 3) but at a current of 1.8 Amperes. Operation with a Q of 400 was plagued by the appearance of a parasitic oscillation in the input guide, as the starting currents for this and the desired cavity mode appeared to be approximately equal. The maximum efficiency for this case was 0.17, and the operation was extremely erratic. It is postulated that the parasitic oscillation occurred in the TE_{21} mode, since this mode is close to cutoff in the input guide at the observed frequency of 31 GHz.

The Q = 400 oscillator also appeared to be sensitive to reflections at the output. Further investigation is desirable to determine if this is due to the low value of Q, since, as is mentioned above, even lower values of Q are required to reach higher output powers.

Figure 4 shows the dependence of both the observed and the theoretically predicted efficiencies on the magnitude of the magnetic field at the cavity for a beam current of 3 Amperes. Agreement between theory and experiment appears good for high values of the field magnitude, but poor for low values. The reason for the discrepancy is not clear, although it may be due to variations of the gun performance with changes in the magnetic field.

Effect of Beam Velocity Spread

The electron gun is predicted to have a spread in velocities parallel to the magnetic field of approximately 11⁽¹⁵⁾ to 15⁽⁵⁾ percent. Initial calculations indicate that the oscillator operation should be substantially unaffected by ve-

locity distributions below 20%. The agreement between the theoretical and observed efficiency supports these calculations. We note that this tolerance to relatively high velocity spreads may be a fundamental difference between the gyrotron oscillator and the gyrotron travelling wave amplifier, as it is theoretically predicted⁽⁵⁾ that the amplifier may require much higher quality beams for efficient operation.

Spectrum and Mode Purity

With the oscillator operating in the long pulse (10 msec) mode, it was possible to obtain a spectrum of the output radiation by sweeping a frequency analyzer during a single pulse. The result, shown in Figure 5, indicates a line width of 1.5 MHz. (This gives a maximum line width of 4 parts in 10^5 .) This appears to be an upper bound, since it was observed that the frequency variations during the analyzer sweep were of the same order. These variations were measured by manually sweeping the analyzer so that different points in the pulse could be observed on a shot-to-shot basis. The variations appeared to be well correlated with modulator voltage fluctuations.

A measure of the mode purity was obtained by observing output power directly in the TE_{01} mode with a calorimeter, with and without a filter preceding the calorimeter. The filter consisted of a tightly wound helix waveguide which strongly attenuated all modes other than the TE_{01} and was cut off to the TE_{02} mode. No difference in the output power was observed when the filter was inserted. This measurement of the power was also in agreement with that mode using the Hitachi mode converter and a calibrated crystal in a WR-28 mount. The mode impurity can then be inferred to be less than 5%, the accuracy of the calorimeter.

Conclusion

The oscillator has been shown to operate as theoretically predicted, and at power levels and pulse lengths useful for ECH and radar applications. Linear polarization of the TE_{01} radiation is straightforward for these powers and pulse lengths. Efficient operation was achieved with little difficulty, although attempts at high power via lower Q factors met with problems in the form of parasitic oscillations and reflections from the load. These difficulties will have to be overcome in order to realize higher power devices. The device has a spectral purity at least comparable with other high quality microwave sources, and appears to be presently limited only by modulator voltage variations.

Acknowledgments

The authors wish to thank H. Jory, S. Hegji, R. Parker, J.L. Seftor and L. Barnett for helpful discussions on the experimental work, and J. Silverstein for assistance with the computer code.

This work was supported by the U.S. Department of Energy (Project No. EX-77-A-34-1015), and Naval Electronic Systems Command (Project No. XF54-581-007, Program Element No. 62762N).

References

1. V.A. Flyagin, A.V. Gaponov, M.I. Petelin and V.K. Yulpatov "The Gyrotron," IEEE Trans. MIT-25, 514-521 (1977).
2. A.A. Andronov, V.A. Flyagin, A.V. Gaponov, A.L. Gol'denburg, M.I. Petelin, V.G. Usov and V.K. Yulpatov, "The Gyrotron; High Power Source of Millimeter and Submillimeter Waves," Infrared Physics, 18, pp. 385-394, Dec. 1978.
3. H.R. Jory, S.J. Evans, S.J. Hegji, J.F. Shively, R.S. Symons, N.J. Taylor, "Gyrotron Amplifiers and Oscillators for High Power at High Frequency," in Proceedings of IEEE International Conference on Plasma Science, (Montreal, Canada, June 1979) p. 11.
4. J.L. Hirshfield and V.L. Granatstein, "The Electron Cyclotron Maser - An Historical Survey," IEEE Trans. MIT-25, 522-527 (1977).
5. J.L. Seftor, V.L. Granatstein, K.R. Chu, P. Sprangle, and M. Read, "The Electron Cyclotron Maser as a High Power Travelling Wave Amplifier of Millimeter Waves," IEEE J. of Quantum Electronics, to be published, 1979.
6. F.A. Kovalev and A.F. Kurin, "Cyclotron - Resonance Maser with a Fabry-Perot Cavity," Radio Engineering and Electronic Physics, 15, No. 10, pp. 1868-1873, 1970.
7. V.V. Alikaev, G.A. Bobrovskii, V.I. Pozyak, K.A. Razumova, V.V. Sannikov, Yu. A. Sokolov, and A.A. Shmarin, "ECR Plasma Heating in TM-3 Tokamak in Magnetic Fields up to 25 kOe," Plazmy, Vol. 2, pp. 390-395, 1976 (Sov. J. Plasma Phys., 2, pp. 212-215, 1977).
8. N.I. Zaystev, T.B. Pankrotova, M.I. Petelin and V.A. Flyagin, "Millimeter and Submillimeter Waveband Gyrotrons," Radio Eng. Electron Physics, 19, pp. 103-107, May 1974.

9. I. Fidone, G. Granata, and R.L. Meyer, "Wave Absorption Near the Electron Cyclotron Frequency," Phys. Fluids 21, pp. 645-652 (1978).
10. O. Eldridge, W. Namkung and A.C. England, "Electron Cyclotron Heating in Tokamaks, "ISX-B ORNL Technical Memorandum TM 6052 Nov., 1977.
11. E. Ott, B. Hui, and K.R. Chu, "Theory of Electron Cyclotron Resonance Heating of Tokamak Plasmas," Phys. Fluids, to be published.
12. B. Hui, E. Ott, K.R. Chu, and T. Antonson, "Theory of Second Harmonic Cyclotron Resonance Heating of a Tokamak Plasma," Phys. Fluids, to be published.
13. K.R. Chu, "Theory of Electron Cyclotron Maser Interaction in a Cavity at the Harmonic Frequencies," Phys. Fluids 21, pp. 2354-2364 (1978).
14. P. Sprangle and A.T. Drobot, "The Linear and Self-Consistent Nonlinear Theory of the Electron Cyclotron Maser Instability," IEEE Trans. Microwave Theory Tech., MIT-25, pp. 528-544, 1977.
15. J.L. Seftor, A.T. Drobot, and K.R. Chu, "An Investigation of a Magnetron Injection Gun Suitable for Use in Cyclotron Resonance Masers," Naval Res. Lab. Memo Rep. No. 3697, to be published.
16. D.V. Kisel, G.S. Korablev, B.G. Navel'Yev, M.I. Petelin and Sh. Ye. Tsimring, "An Experimental Study of a Gyrotron, Operating at the Second Harmonic of the Cyclotron Frequency, with Optimized Distribution of the High-Frequency Field," Radio Engineering and Electronic Physics, 19, No. 4, pp. 95-100, 1974.
17. S.N. Vlasov, G.M. Zhislin, I.M. Orlova, M.I. Petelin, and G.G. Rogacheva, "Irregular Waveguides as Open Resonators," Radiophysics and Quantum Electronics, 12, No. 8, pp. 972-978. August 1969.
18. E.M. Demidovich, I.S. Kovalev, A.A. Kurayev, and F.G. Schevchenko, "Efficiency-Optimized Cascaded Circuits Utilizing the Cyclotron-Resonance," Radio Engineering and Electronic Physics, 18, No. 10, pp. 1542-1549, 1973.

19. S.V. Kolosov and A.A. Kurayev, "Comparative Analysis of the Interaction at the First and Second Harmonics of the Cyclotron Frequency in Gyroresonance Devices," Radio Engineering and Electronic Physics, 19, No. 10, pp. 65-73, 1974.
20. Yu. V. Bykov and A.L. Gol'denburg, "Influence of Resonator Profile on the Maximum Power of a Cyclotron-Resonance Maser," Radiophysics and Quantum Electronics, 18, pp. 791-792, 1975.
21. V.L. Bratman, M.A. Moiseev, M.I. Petelin and R.E. Erm, "Theory of Gyrotrons with a Non-Fixed Structure of the High Frequency Field," Radiophysics and Quantum Electronics, 16, pp. 474-480, 1973.
22. Hitachi Dinshi, LTD, Model R6414.

Table 1

Gyromonotron Design Parameters

Beam Voltage	70 kV
Beam Current	4 - 10 Amperes
Frequency	35 GHz
Cavity Length	2.86 cm
Maximum Cavity Radius	0.53 cm
Cavity Q	800
Cavity Mode	TE ₀₁₁ (modified)




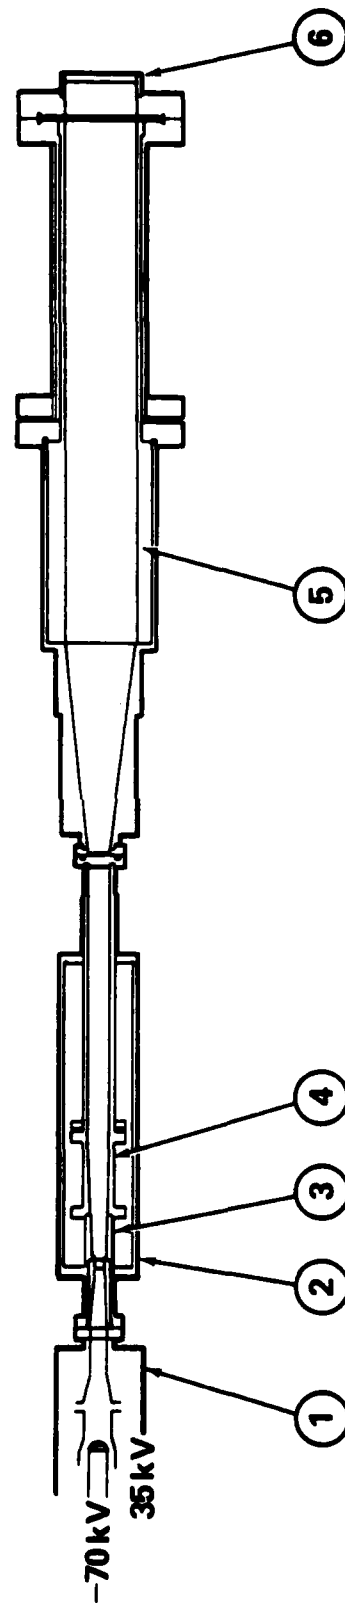


Fig. 1 — Schematic of the long pulse 35 GHz oscillator (1) electron gun, (2) vacuum envelope, (3) cavity, (4) output guide, (5) collector, and (6) output window

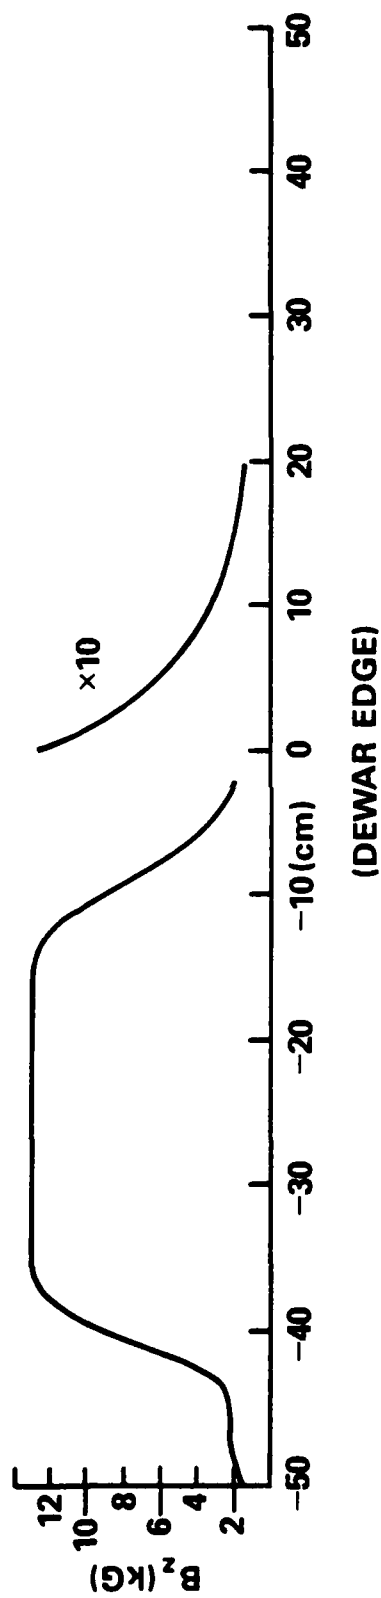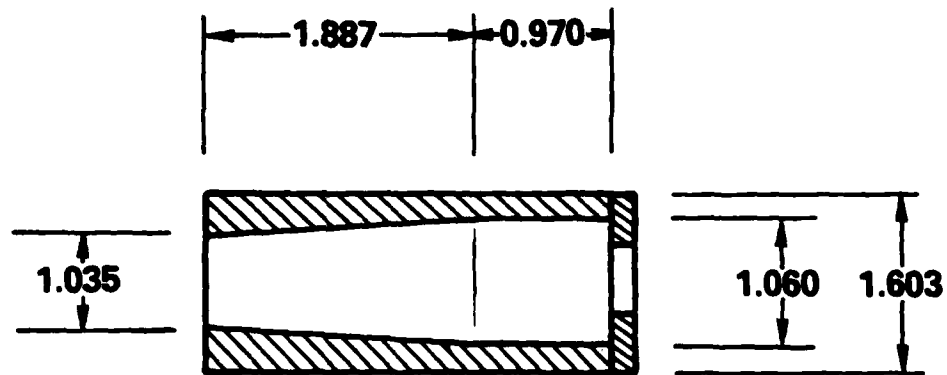

(a) Diagram of the cavity used for the $Q = 800$ oscillator cavity
(the dimensions are in centimeters)

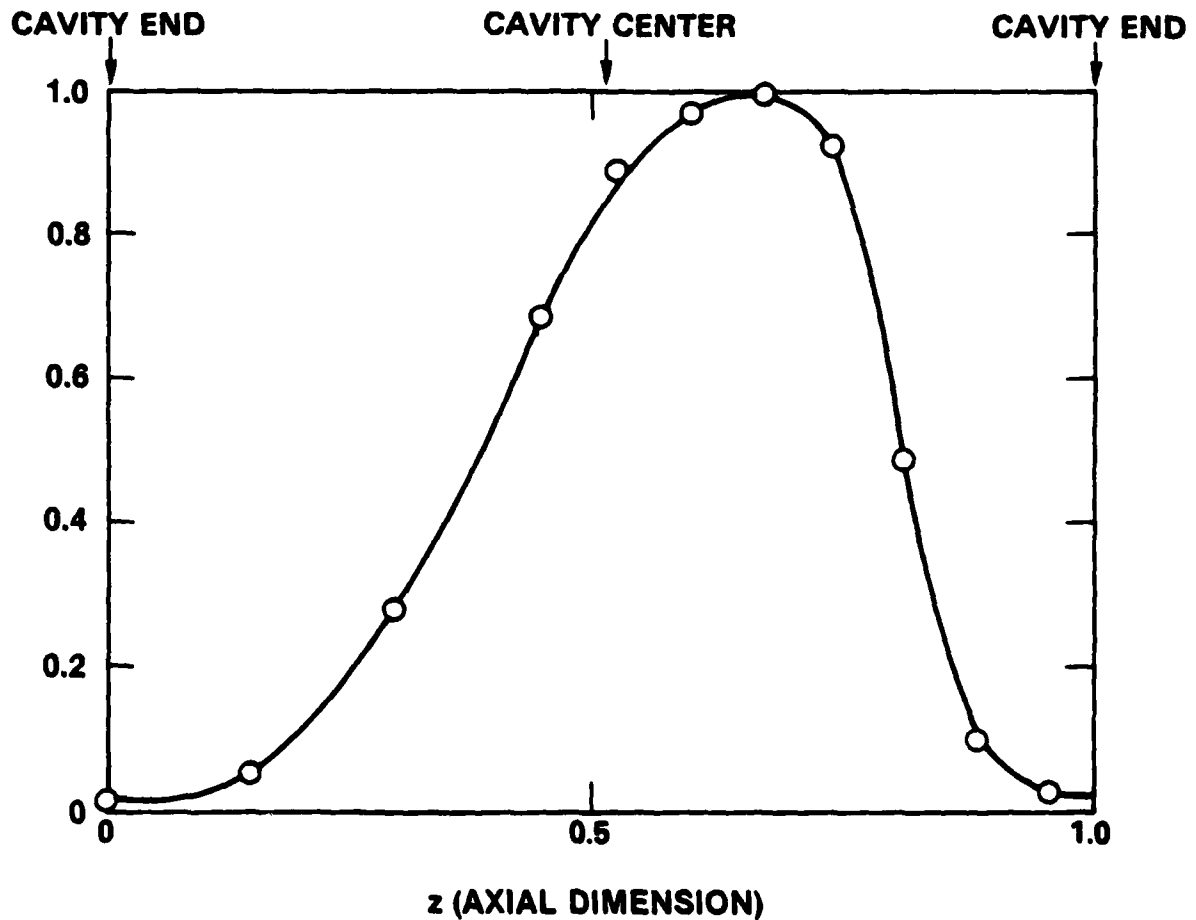

(b) Electric field profile for the cavity of 2(a)

Figure 2

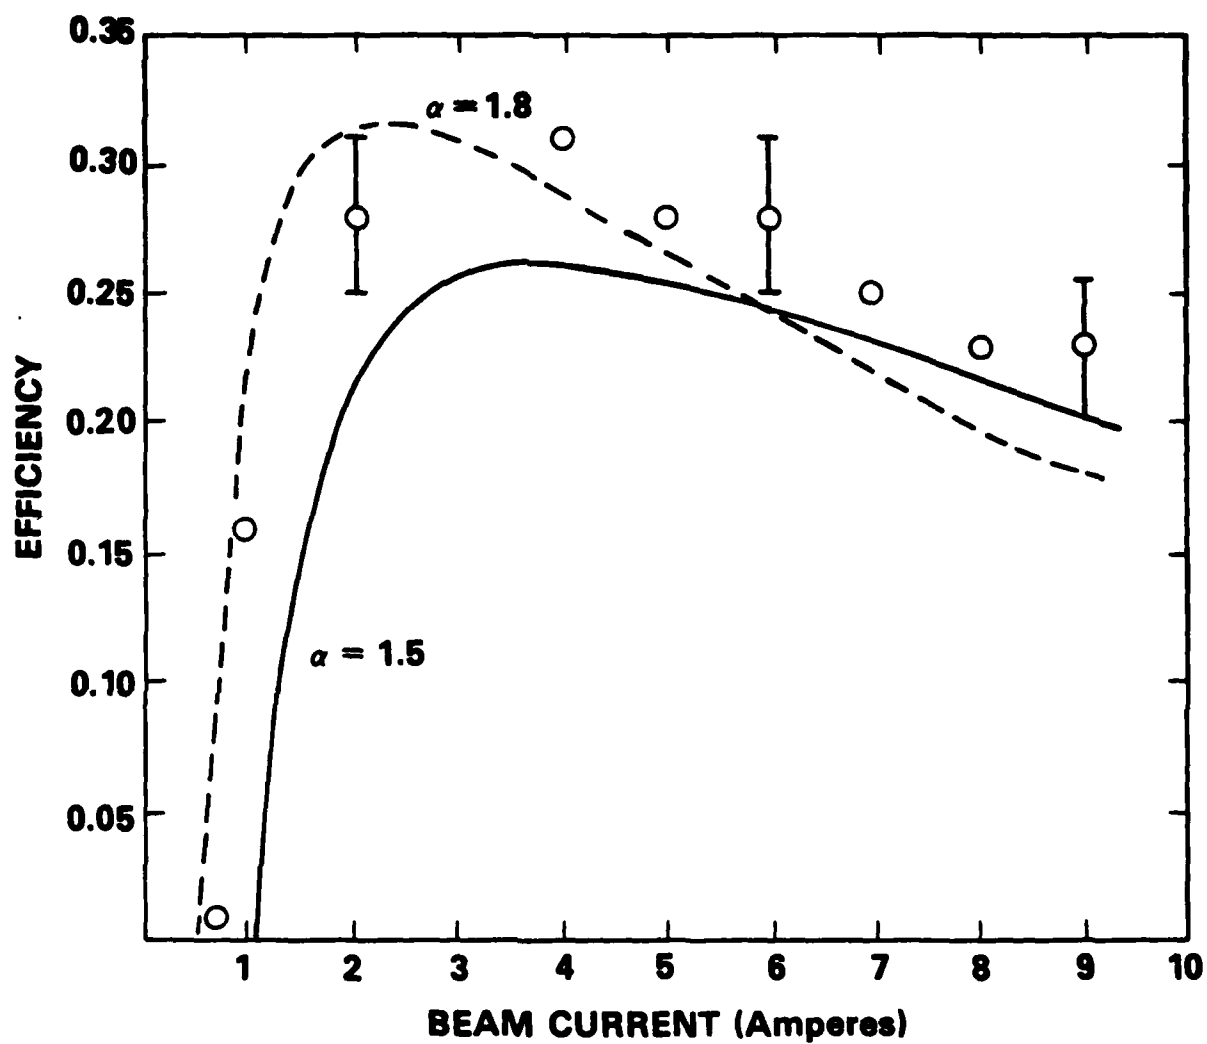


Fig. 3 — Output efficiency of the oscillator with $Q = 800$ as a function of beam current. The magnetic field at the cavity has been optimized for each point. The two curves were generated by the code, using different values of α .

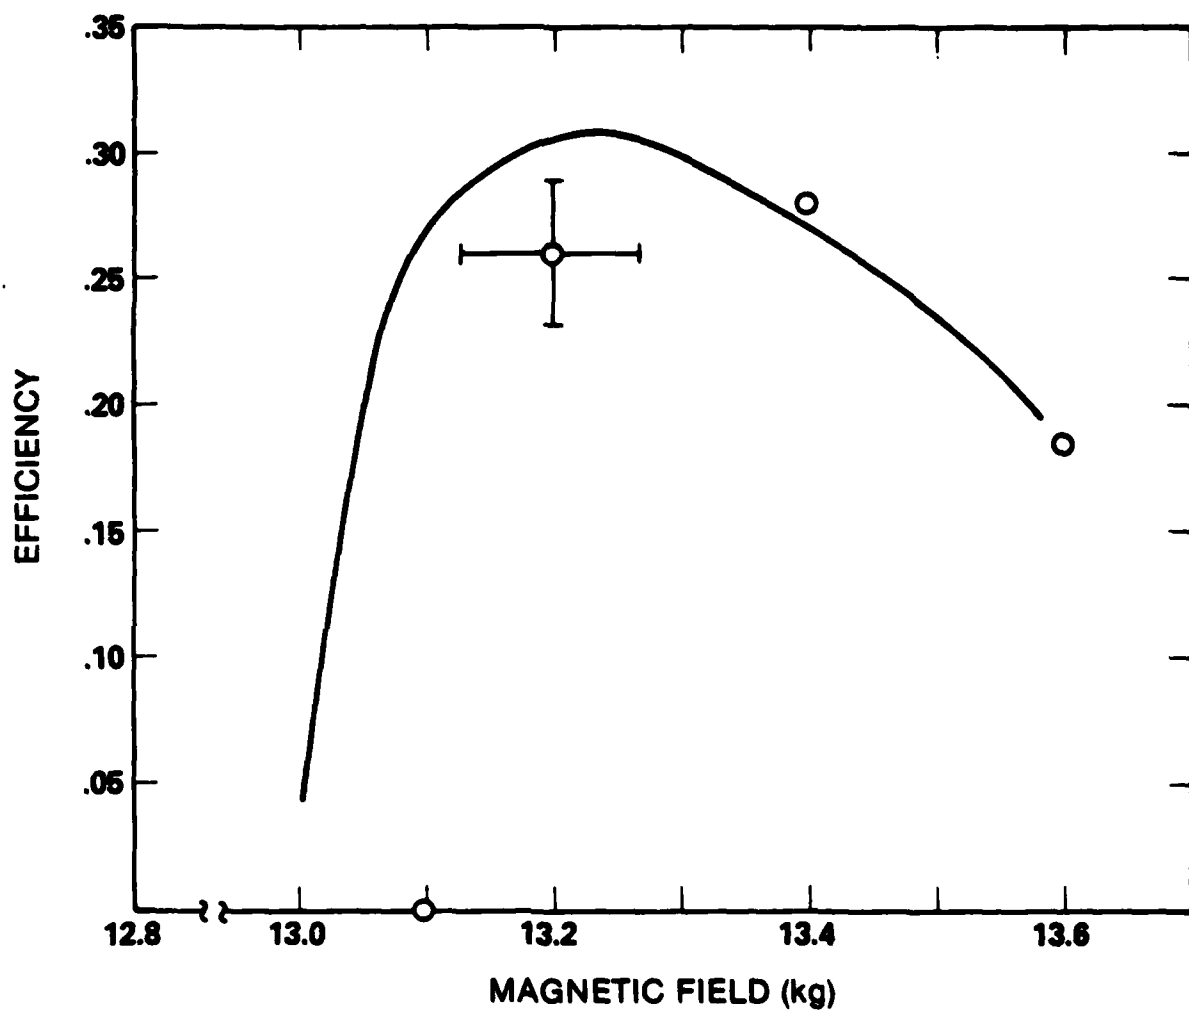


Fig. 4 — Output efficiency of the oscillator with $Q = 800$ as a function of the magnetic field amplitude at the cavity, for a beam current of 3 amperes

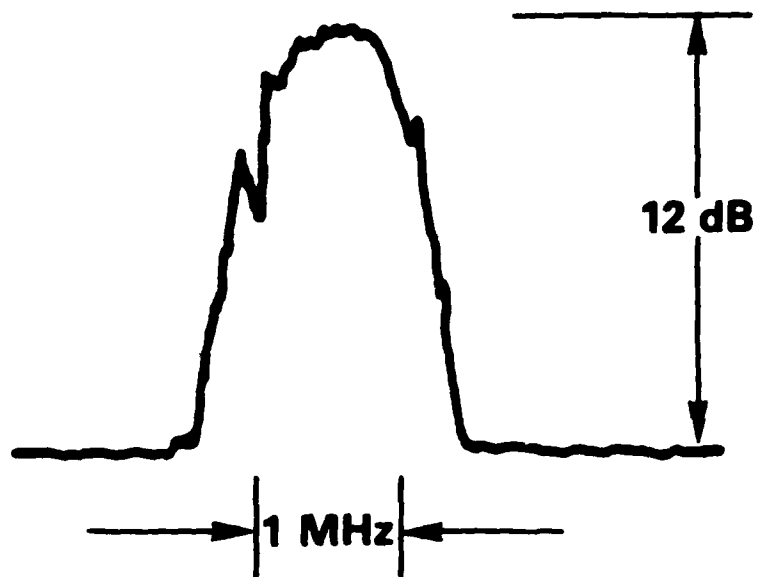


Fig. 5 — Spectrum of the oscillator. The spectrum analyzer sweep time was short compared to the pulse length; therefore, this is a CW spectrum

GYROTRON & ECH DISTRIBUTION LIST

No. of Copies

Addressee

(8)	Naval Research Laboratory Attn: Name/Code 4555 Overlook Avenue, S.W. Washington, D.C. 20375	Code: 4740 - Dr. B. Arfin 4740 - Dr. J.M. Baird 4740 - Dr. K.R. Chu 4740 - Dr. R.M. Gilgenbach 4740 - Dr. V.L. Granatstein 4740 - Dr. K.J. Kim 4740 - Dr. R.K. Parker 4740 - Dr. M.E. Read 4700 - Dr. T. Coffey
(25)		
(3)	Secretary Department of Energy Attn: Washington, D.C. 20545	Dr. M. Johnson (G-234) Dr. M. Murphy (G-234) Dr. J. Willis
(1)	Bell Laboratories Attn: Dr. W.M. Walsh, Jr. 600 Mountain Avenue Murray Hill, New Jersey 07971	
(1)	Columbia University Department of Electrical Engineering Attn: Dr. S.P. Schlesinger New York, New York 10027	
(1)	Dartmouth College Physics Department Attn: Dr. John Walsh Dartmouth, New Hampshire 03755	
(1)	Georgia Institute of Technology Engineering Experimental Station Attn: Dr. James J. Gallagher Atlanta, Georgia 30332	
(3)	Massachusetts Institute of Technology Plasma Fusion Center Attn: 167 Albany St., N.W. 16-200 Cambridge, Massachusetts 02139	Dr. R. Davidson Dr. M. Porkolab Dr. R. Temkin
(12)	Defense Technical Information Center Cameron Station 5010 Duke Street Alexandria, VA 22314	

No. of Copies

Addressee

(1)	Massachusetts Institute of Technology Research Laboratory of Electronics Attn: Dr. G. Bekefi Bldg. 36, Rm. 36-225 Cambridge, Massachusetts 02139	
(2)	Oak Ridge National Laboratories Attn: P.O. Box Y Oak Ridge, Tennessee 37830	Dr. A. England Dr. M. Loring
(1)	Princeton University Plasma Physics Laboratory Attn: Dr. H. Hsuan Princeton, New Jersey 08540	
(1)	University of Arizona Optical Sciences Center Attn: Dr. W.E. Lamb Tucson, Arizona 85720	
(1)	Yale University Mason Laboratory Attn: Dr. J.L. Hirshfield 400 Temple Street New Haven, Connecticut 06520	
(1)	Kings College University of London Attn: Dr. P. Lindsay London, England	
(1)	TFR Group DPH - PFC Attn: Dr. A. Cavallo 92260 Fontenay-aux Roses France	

No. of Copies

Addressee

(2)	Naval Research Laboratory Attn: Name/Code 45555 Overlook Ave., S.W. Washington, D.C. 20375	Code: 4790 - Dr. B. Hui 4790 - Dr. W. Manheimer
(16)	Naval Research Laboratory Attn: Name/Code 4555 Overlook Ave., S.W. Washington, D.C. 20375	Code: 4740 - Dr. L. Barnett 4740 - Dr. D. Dialetis 4740 - A.J. Dudas 4740 - Dr. Y.Y. Lau 4740 - Dr. C. Roberson 4740 - Dr. J.S. Silverstein 4790 - Dr. A.J. Drobot 4790 - Dr. C.M. Hui 4790 - Dr. P. Sprangle 4790 - Dr. J. Vomvoridis 6852A - Dr. S.Y. Ahn 6852V - Dr. N.R. Vanderplaats 6850 - Dr. L.R. Whicker 6853 - Dr. A. Ganguly 6875 - Dr. R. Wagner 5704S - Dr. S. Smith
(1)	Air Force Avionics Laboratory Attn: W. Friz Wright/Patterson AFB, Ohio 45433	
(3)	Hughes Aircraft Co. Attn: Electron Dynamics Division 3100 Lomita Boulevard Torrance, California 90509	J.J. Tancredi K. Arnold K. Amboss
(1)	Los Alamos Scientific Laboratory Attn: Dr. Paul Tallerico P.O. Box 1663 Los Alamos, New Mexico 87545	

No. of Copies

Addressee

(1) Northrop Corporation
Defense System Department
Electronics Division
Attn: G. Doehler
175 W. Oakton St.
Des Plaines, Illinois 60018

(1) Varian Associates
Bldg. 1
Attn: Dr. H. Jory
611 Hansen Way
Palo Alto, California 94303

(2) Raytheon Company
Microwave Power Tube Division
Attn:
Willow St.
Waltham, Massachusetts 02154

R. Edwards
R. Handy

(1) Science Applications Inc.
Attn: Dr. Alvin Trivelpiece
1200 Prospect St.
La Jolla, California 92037

(1) Stanford University
SLAC
Attn: Dr. Jean Lebacqz
Stanford, California 94305

(1) Thompson
C.S.F./DET/TDH
Attn: Dr. G. Mourier
2 Rue Latecoere
78140 Velizy Villa conblay
France

(1) UKAEA Culham Laboratory
Attn: Dr. A.C. Riviere
Abington
Oxfordshire
United Kingdom

DATE
ILMEI
-8