

AD-A111 403

ARMY MISSILE COMMAND REDSTONE ARSENAL AL TEST AND EVA--ETC F/G 20/14
ELECTROMAGNETIC INTERFERENCE (EMI) EVALUATION OF FOUR DIGITAL S--ETC(U)
NOV 81 R A SNEAD

UNCLASSIFIED

DRSMI/RT-81-7-TR


SBI-AD-E950 203

NL

1-1
2-1



			END
			DATE
			10 NOV
			3 82
			DTIC

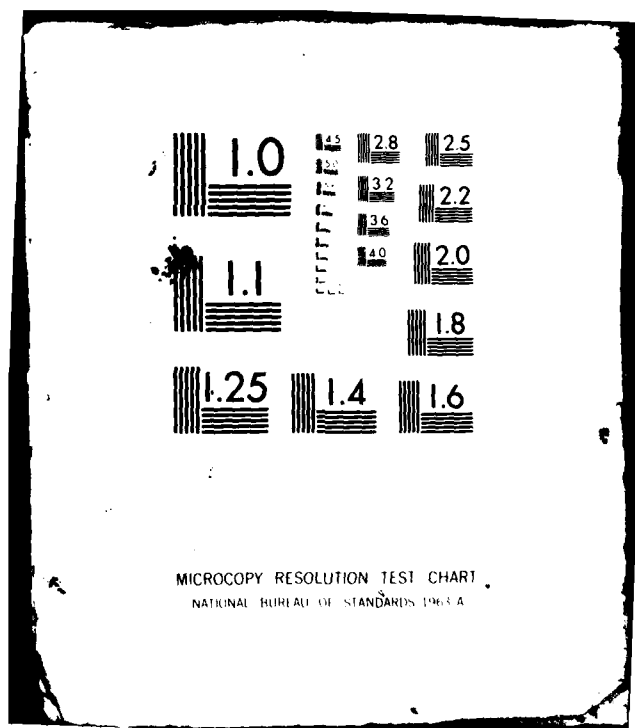

AD A111403



TECHNICAL REPORT RT-81-7

ELECTROMAGNETIC INTERFERENCE (EMI)
EVALUATION OF FOUR DIGITAL SCALES

Robert A. Snead
Test and Evaluation Directorate
US Army Missile Laboratory

1 November 1981

A



U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama 35898

DTC FILE COPY

Approved for public release; distribution unlimited.

DISPOSITION INSTRUCTIONS

**DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT
RETURN IT TO THE ORIGINATOR.**

DISCLAIMER

**THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN
OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY OTHER AUTHORIZED DOCUMENTS.**

TRADE NAMES

**USE OF TRADE NAMES OR MANUFACTURERS IN THIS REPORT DOES
NOT CONSTITUTE AN OFFICIAL INDORSEMENT OR APPROVAL OF
THE USE OF SUCH COMMERCIAL HARDWARE OR SOFTWARE.**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TR-RT-81-7	2. GOVT ACCESSION NO. AD-A111 403	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Electromagnetic Interference (EMI) Evaluation of Four Digital Scales		5. TYPE OF REPORT & PERIOD COVERED Technical Report
7. AUTHOR(s) Robert A. Snead		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Commander, US Army Missile Command ATTN: DRSMI-RT Redstone Arsenal, AL 35898		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Commander, US Army Missile Command ATTN: DRSMI-RPT Redstone Arsenal, AL 35898		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE 1 November 1981
		13. NUMBER OF PAGES 17
		15. SECURITY CLASS. (of this report) Unclassified
		18a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Electromagnetic Interference (EMI) Radio Interference Explosive Safety Ordnance Safety		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) As a result of safety considerations, the Electromagnetic Interference emissions of four digital scales were measured. The results were reviewed to determine the possibility of accidental detonation of live ordnance being weighed on the scales.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
I. BACKGROUND	3
II. TEST PROCEDURES	3
III. TEST RESULTS	4
IV. CONCLUSIONS AND RECOMMENDATIONS	4
APPENDICES	
A. TYPICAL SQUIB CHARACTERISTICS	7
B. MEASURED DATA	11
DISTRIBUTION	17



A

I. BACKGROUND

In April 1981, the Electromagnetic and Nuclear (EM&N) Effects Group (DRSMI-RTS) of the Test and Evaluation (T&E) Directorate, US Army Missile Laboratory, US Army Missile Command, was requested to investigate the Electro-magnetic Interference (EMI) caused by four sets of digital scales used by T&E Directorate's Environmental Test Group, located in Building 7290. The EMI was of concern because the scales were being used to weigh electro explosive devices, and live ordnance.

After the scales were delivered to the Environmental Test Group, and warning stickers were noted, EM&N Effects Group was contacted by the purchaser and asked to evaluate the scales from an EMI standpoint. All four of the scales purchased were provided as follows:

- Pennsylvania Scales Model EWO 4020, Serial #133467
- Pennsylvania Scales Model 4100 T, Serial #135462
- Pennsylvania Scales Model EWO 4020, Serial #133474
- NCI Model 3020, Serial #3230810575

The evaluation of the scales was directed toward two objectives:

- Determine why the warning stickers were on the scales
- Calculate the total power contained in the scales' broadband emission waveform

The first objective was accomplished by placing a phone call to the Pennsylvania Scales plant. Mr. Curt Killheffer, an engineer in their design group, indicated that no EMI control consideration was given in the product design. He also indicated that the reason for the warning sticker was to caution users against using the scales in an explosive or combustible atmosphere.

II. TEST PROCEDURES

The evaluation of the hazard required the development of the following analysis procedure to calculate the power contained in a broadband waveform, since the digital scale emissions were primarily broadband emissions. This procedure is the subject of a forthcoming MICOM technical report.

The total power contained in the EMI waveform was calculated by the following procedure:

- The EMI waveform was recorded using an HP8568A Spectrum Analyzer.
- An approximation using linear equations of the form $y = mx + b$ was used to model the recorded response and generate an approximation of the original curve.

- An approximation of the receiving antenna's antenna factors of the form $y = m \log x + b$ was used to correct the measured signal at each frequency for the receiving antenna gain and convert to an electric field spectral density.

$$V(\text{dBuV}) + AF(\text{dBuV/m}) = E(\text{dBuV/m}) \quad (1)$$

- The logarithmic field spectral density was then converted to a linear field spectral density by a point-by-point application of

$$E(\text{V/M}) = 10^{\frac{E(\text{dBuV})}{20} - 6} \quad (2)$$

- The power spectral density was calculated by a point-by-point application of

$$P_D = E^2 / 377 \quad (3)$$

- The power coupled into the Electroexplosive Devices (EED) by each frequency component was then calculated, assuming no coupling loss and that the EED leads formed a resonant dipole by

$$P = \frac{P_D (1.65) L^2}{4\pi} \quad (4)$$

- The total power coupled into the EED was then calculated by summing the power of each of the spectral components.

III. TEST RESULTS

For the worst of the four scales, this method calculates a worst-case power of approximately 2×10^{-7} watts induced at 1 meter from the source.

IV. CONCLUSIONS AND RECOMMENDATIONS

- On the basis of the data obtained for the four scales tested, it appears that an acceptable safety margin exists between the power contained in the scale EMI, approximately 2×10^{-7} watts, and the no-fire power of the squibs (approximately 1×10^{-3} watt minimum). This would make the chance of accidental ignition due to EMI from the scales extremely remote.
- Some of the scale systems carry a conspicuously mounted warning label: CAUTION: DO NOT USE IN HAZARDOUS LOCATIONS. The manufacturer does no EMI tests, and intends these signs primarily to warn customers against using these scales in explosive atmospheres. Since the switches and buttons are not sealed, unimpeded airflow is allowed between the inside and outside of the instrument, and no explosion or flame suppression devices are provided; however, it should be noted that if an accidental detonation of an EED, warhead, or motor

occurs in the vicinity of one of these scales, the warning stickers would immediately cast suspicion on the scales, whether or not they are actually responsible for the accident.

- Individual digital systems/equipment, even from the same manufacturer, produce differing amounts of EMI due to differences in board layout, components, and construction techniques. Therefore, every scale used in an area where EED's or motors are used should be tested for EMI emissions.
- As the equipment ages, shields deteriorate, chips age, and components change value. Thus, every scale used in a location near EED's or motors should be retested periodically.
- The cases of the scales are plastic and thus can accumulate static charges. The cases should be painted or coated with an antistatic treatment or conductive paint and electrically bonded to the aluminum scale base casting.
- Discussions with Pennsylvania Scales indicate the manufacturer does produce a scales system with a remote weighing platform and load cell. Such a system would significantly reduce the EMI at the object being weighed since the readout and processor would be at least 1 meter away.

APPENDIX A

TYPICAL SQUIB CHARACTERISTICS

PRECEDING PAGE BLANK-NOT RE

TYPICAL SQUIB CHARACTERISTICS

Device	Output	Size (in.)		Ignition (see Section 4.6)		
		Length	O. D.	Resistance (ohms)	MNFC (amp.)	RFC (amp.)
<u>Open-match type, end flash</u>						
M1A1 *	brisk flame burst	0.37	0.27	0.75-1.25	0.25	2.0
S6E0	brisk flame burst	3/8	0.233	1.3-2.0	0.3	1.0
S6H0 *	coruscating, hot slag	3/8	0.233	1.3-2.0	0.3	1.0
S42E0 *	jet flame	1/4	0.193	4-8	0.05	1.0
S55A0 *	brisk flame burst	0.43	0.254	1-2	0.25	2.0
<u>Thin-bottom type, end flash</u>						
MK1 Mod 0*	sharp flame burst	0.45	0.271	0.7-1.3	0.2	1.5
MK2 Mod 0*	sharp flame burst	0.43	0.283	0.14-0.2	1.0	5.0
XM3 *	sharp, coruscating burst	0.35	0.287	0.7-1.0	0.45	5.0
S11A2 *	jet flame	1.36	0.299	1.4-2.6	0.25	2.0
S11F0 *	jet flame	1.36	0.299	1.4-2.6	0.25	2.0
S118A1 *	hot slag and jet flame	0.76	0.306	0.05-0.09	1.0	5.0
<u>Side-burning type</u>						
S26B0 *	coruscating match	1/4	0.15	0.1-0.3	1.5	3.0
S107A0	brisk flame burst	3/4	0.283	0.04-0.06	2.0	5.0
S124A0	sharp burst and hot slag	0.45	0.285	1.0-2.5	0.25	2.0
S135A0	coruscating slag	5/8	0.235	0.1-0.3	1.5	3.0
S31F6	hot gas	0.4	0.179	3-7	0.1	1.0
<u>Screw-in type</u>						
S18A2	coruscating	0.61	3/8x24 threaded	3-9	0.05	1.0
S177A2	thin bottom	1.09	1/2x20 threaded	0.05-0.13 ⁽¹⁾	1.0	4.5
<u>One amp. -one watt no-fire type</u>						
S179A0	screw-in, thin bottom	1.09	1/2x20 threaded	1.0-1.8 ⁽¹⁾	1 a./1 w. 5.0	
S193A0	thin bottom	0.42	0.283	0.75-1.0	1 a./1 w. 4.5	
S205A0	thin bottom	1.36	0.299	0.75-1.0	1 a./1 w. 4.5	

* Stock items (see Section 14.2.2)

(1) Two circuits

APPENDIX B

MEASURED DATA

PRECEDING PAGE BLANK-NOT BLANK

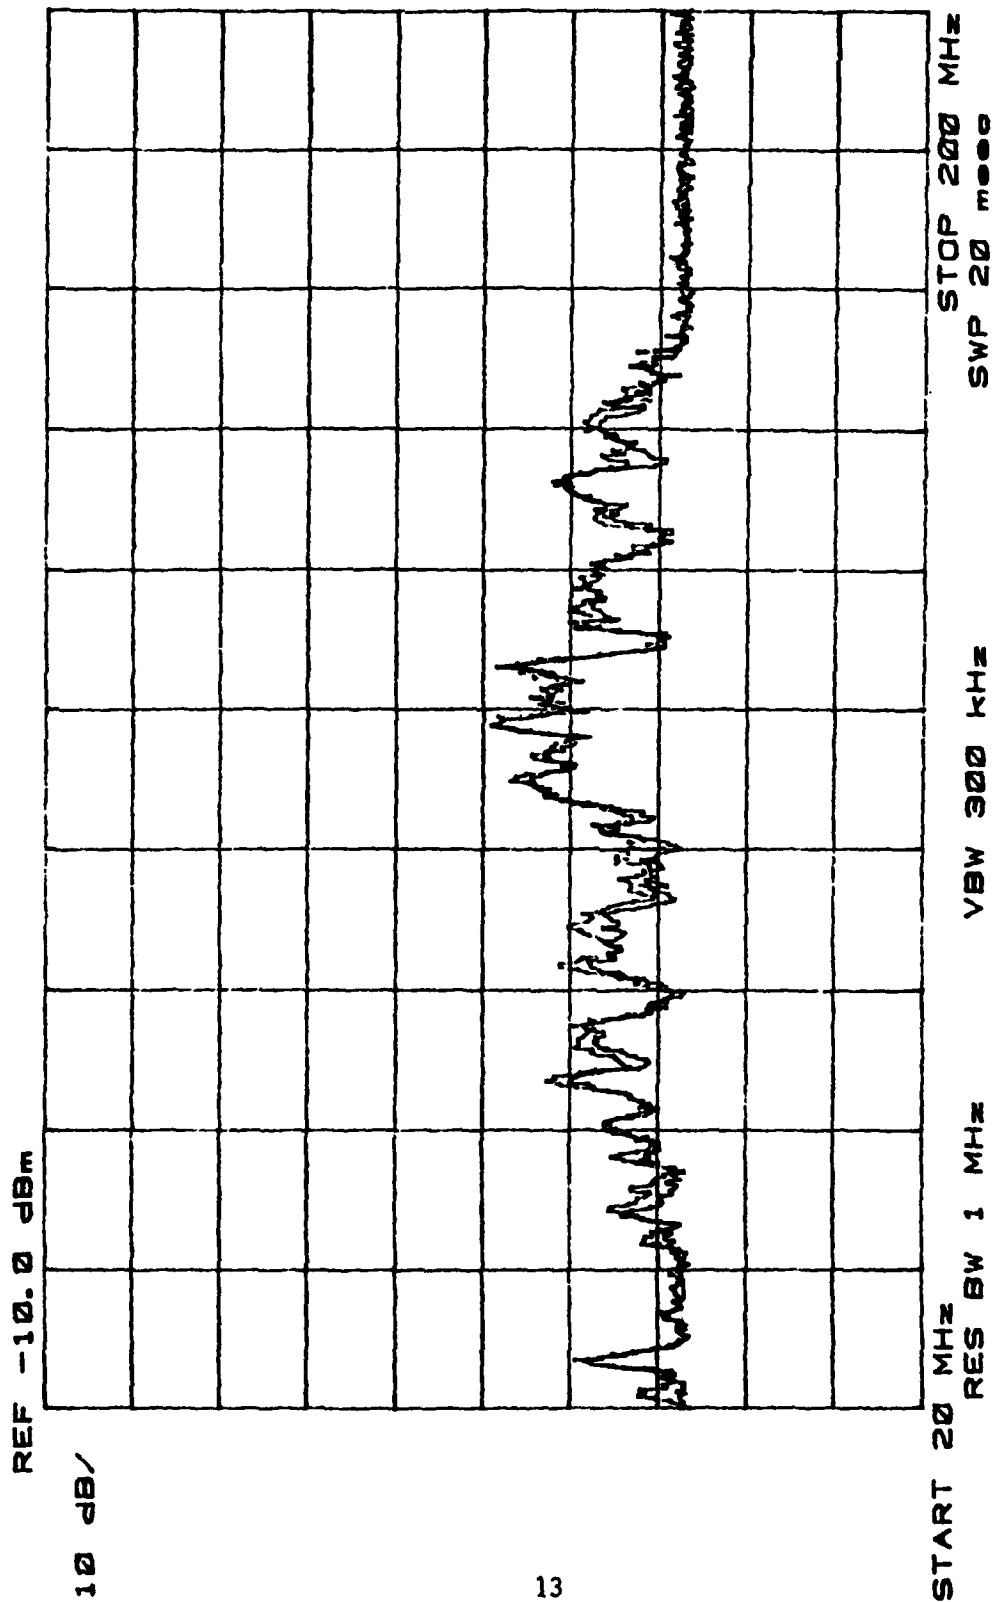


Figure B-1. Pennsylvania Scales, Model EWO 4020, Serial #133467.

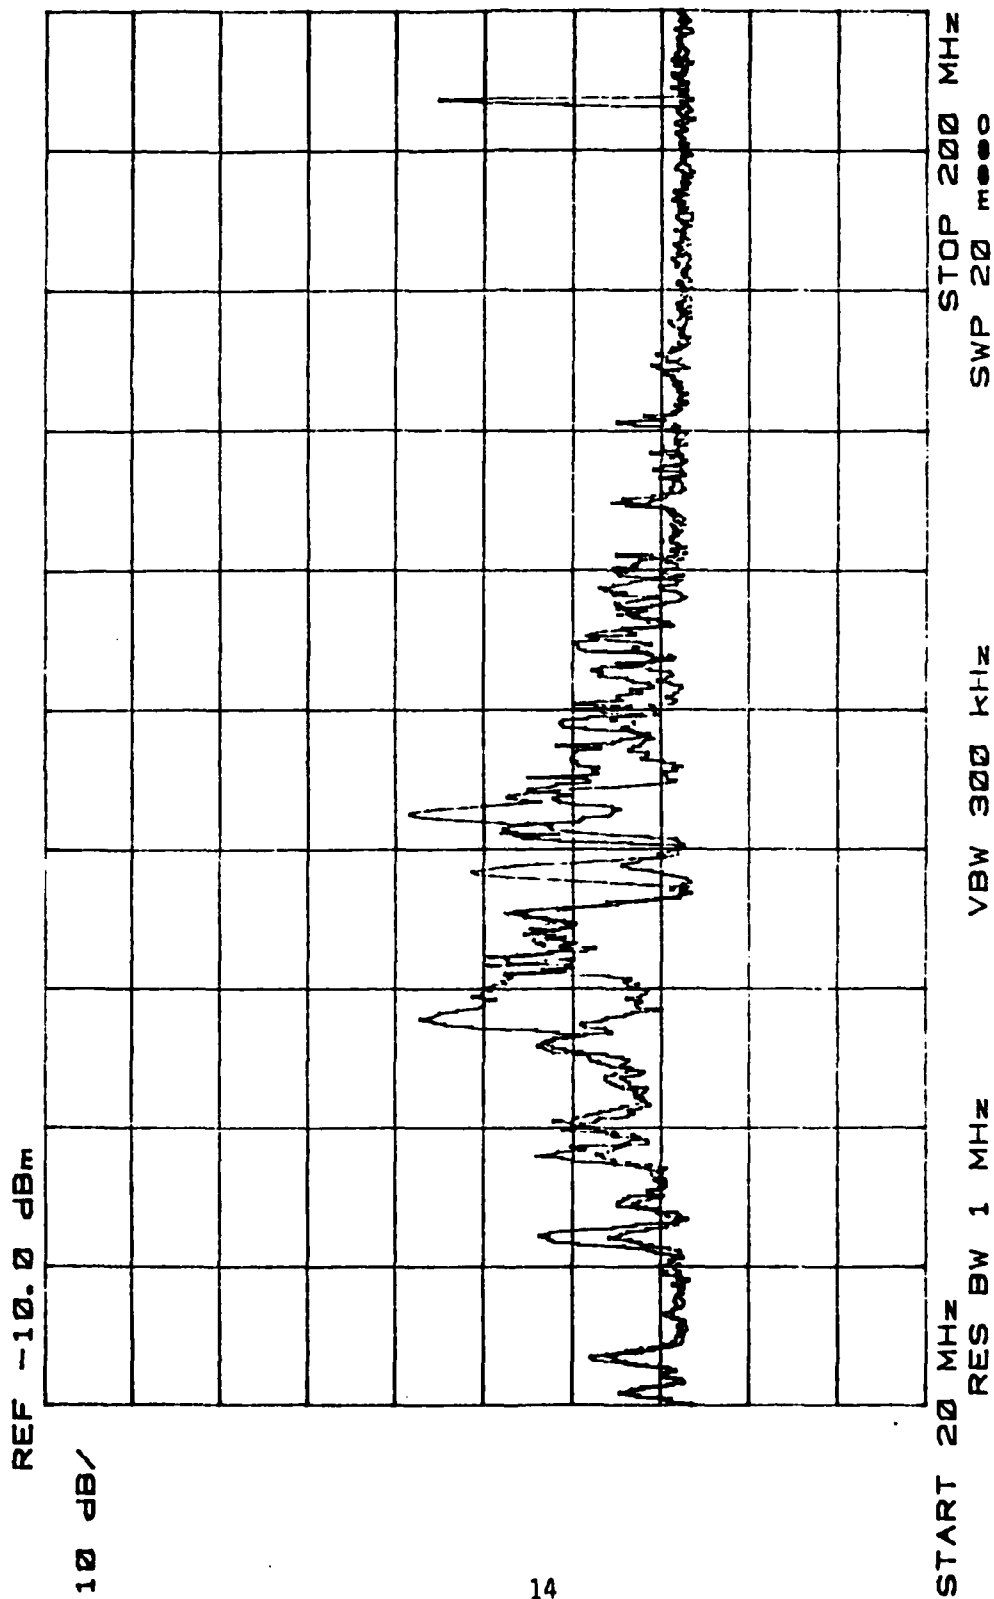


Figure B-2. Pennsylvania Scales, Model 4100 T, Serial #135462.


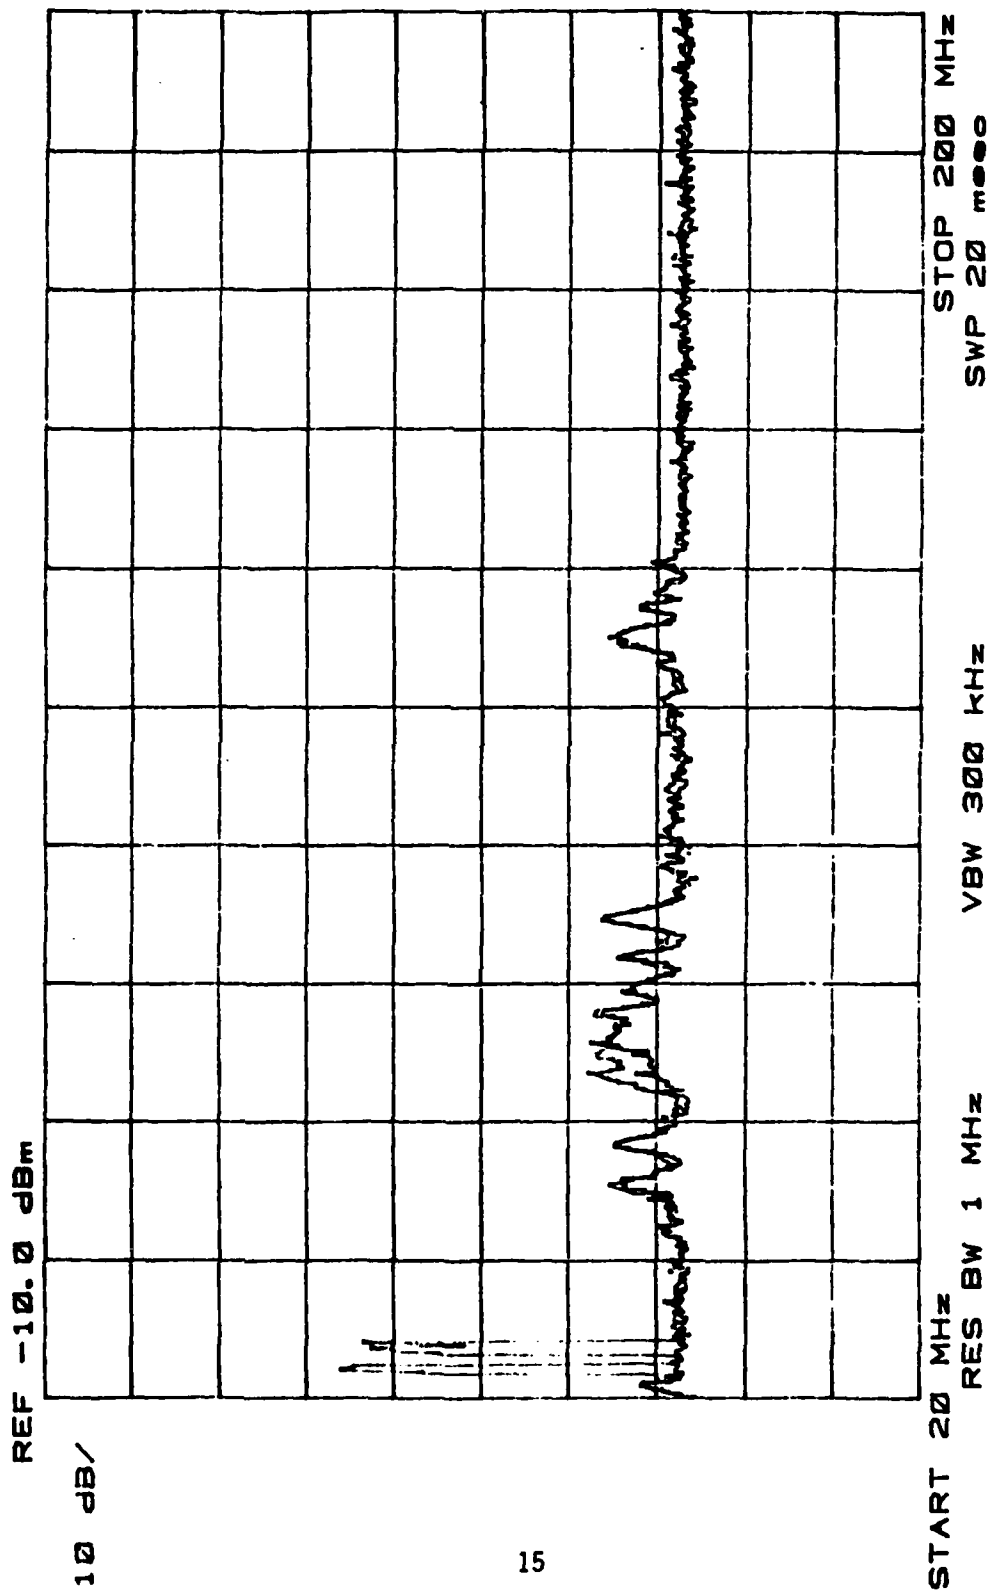


Figure B-3. NCI Model 3020, Serial #3230810575.

REF -10.0 dBm

10 dB/

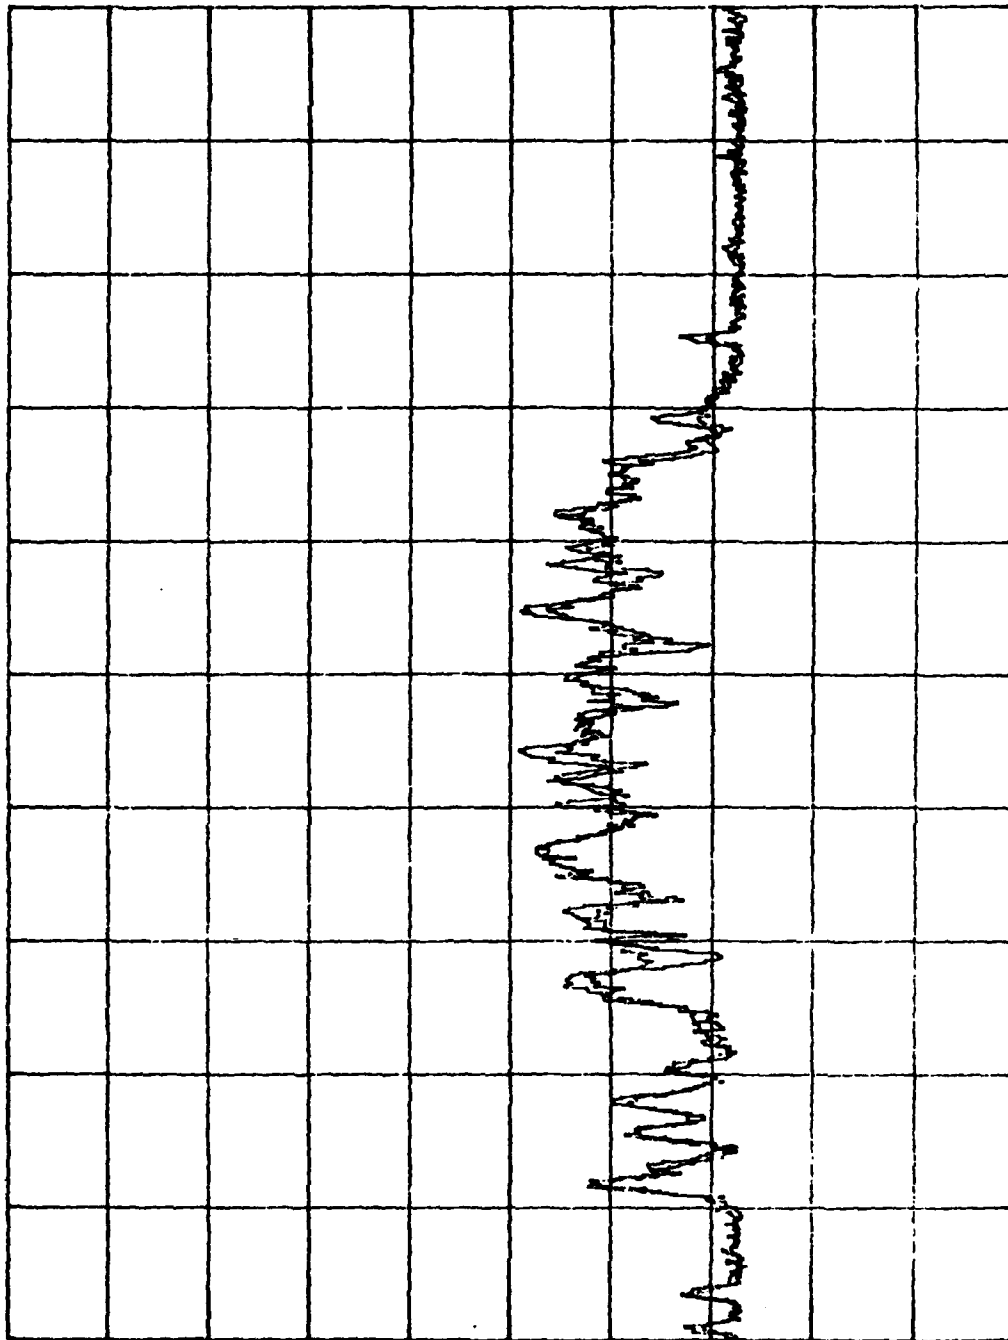

START 20 MHz RES BW 1 MHz VBW 300 kHz STOP 200 MHz SWP 20 m

Figure B-4. Pennsylvania Scales, Model EW 4020, Serial #133474.

DISTRIBUTION

	<u>No. of Copies</u>
DRSMI-R, Dr. McCorkle	1
DRSMI-RT, Mr. Storey	1
DRSMI-RTR, Mr. Daniel	1
DRSMI-RTR, Mr. Snead	5
DRSMI-RTS, Mr. McCombs	1
DRSMI-RPR	13
DRSMI-XO, Mr. Lofton	1
DRSMI-RPT (Record Copy)	1
DRSMI-RPT (Reference Copy)	1

DAT
ILM