

AD-A131 150 MITIGATION OF ANGLE OF ARRIVAL JITTER EFFECTS FOR SITE 1/1
DEFENSE RADAR OPER..(U) MISSION RESEARCH CORP SANTA

UNCLASSIFIED BARBARA CA C J LAUER 01 FEB 82 MRC-N-493 DNA-TR-81-75
DNA001-81-C-0162 F/G 17/9 NL


END

DATE

FILED

9 83

DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

ADA131150

AD-E 301201

(12)

DNA-TR-81-75

MITIGATION OF ANGLE OF ARRIVAL JITTER EFFECTS FOR SITE DEFENSE RADAR OPERATION IN A NUCLEAR DUST CLOUD PEDESTAL

Carl J. Lauer
Mission Research Corporation
P.O. Drawer 719
Santa Barbara, California 93102

1 February 1982

Technical Report

CONTRACT No. DNA 001-81-C-0162

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

THIS WORK WAS SPONSORED BY THE DEFENSE NUCLEAR AGENCY
UNDER RDT&E RMSS CODE B322082466 S99QAXHC00058 H2590D.

Prepared for
Director
DEFENSE NUCLEAR AGENCY
Washington, DC 20305

DTIC
ELECTE
S AUG 8 1983 D
B

DTIC FILE COPY

83 07 08 018

Destroy this report when it is no longer
needed. Do not return to sender.

PLEASE NOTIFY THE DEFENSE NUCLEAR AGENCY,
ATTN: STTI, WASHINGTON, D.C. 20305, IF
YOUR ADDRESS IS INCORRECT, IF YOU WISH TO
BE DELETED FROM THE DISTRIBUTION LIST, OR
IF THE ADDRESSEE IS NO LONGER EMPLOYED BY
YOUR ORGANIZATION.



1

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER DNA-TR-81-75		2. GOVT ACCESSION NO. AD-A131150	
3. TITLE (and Subtitle) MITIGATION OF ANGLE OF ARRIVAL JITTER EFFECTS FOR SITE DEFENSE RADAR OPERATION IN A NUCLEAR DUST CLOUD PEDESTAL		3. RECIPIENT'S CATALOG NUMBER	
4. AUTHOR(s) Carl J. Lauer		5. TYPE OF REPORT & PERIOD COVERED Technical Report	
5. PERFORMING ORGANIZATION NAME AND ADDRESS Mission Research Corporation P. O. Drawer 719 Santa Barbara, California 93102		6. PERFORMING ORG. REPORT NUMBER MRC-N-493	
6. CONTROLLING OFFICE NAME AND ADDRESS Director Defense Nuclear Agency Washington, D. C. 20305		7. CONTRACT OR GRANT NUMBER(s) DNA 001-81-C-0162	
7. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		8. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Task S99QAXHC-00058	
8. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		9. REPORT DATE 1 February 1982	
9. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		10. NUMBER OF PAGES 34	
10. SUPPLEMENTARY NOTES This work was sponsored by the Defense Nuclear Agency under RDT&E RMSS Code B322082466 S99QAXHC00058 H2590D.		11. SECURITY CLASS. (of this report) UNCLASSIFIED	
11. KEY WORDS (Continue on reverse side if necessary and identify by block number) Radar Jitter Angle-of-Arrival Dust Mitigation		12. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A since UNCLASSIFIED	
12. ABSTRACT (Continue on reverse side if necessary and identify by block number) Angle of arrival fluctuations on radar signals can cause inaccuracies in target location. This report examines pulse integration, frequency agility, antenna size, command guidance, and triangulation as mitigants to angle-of- arrival error.			

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
LIST OF ILLUSTRATIONS	2
1 INTRODUCTION	3
2 BACKGROUND	4
3 DISCUSSION OF MITIGATION TECHNIQUES	6
Pulse Integration	6
Frequency Agility	11
Antenna Size Increases	15
Command Guidance	17
Range Triangulation	22
4 CONCLUSIONS	25
REFERENCES	26



Approved		✓
By		
Dist		
Availability Codes		
Avail and/or Special		
Dist		
A		

LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
1. Normalized spectrum of angle-of-arrival fluctuations for a 2 meter diameter antenna.	9
2. Autocorrelation of angle-of-arrival fluctuations for a 2 meter diameter antenna.	10
3. Estimation of the angle-of-arrival by a phase interferometer.	12
4. RMS angle-of-arrival fluctuations vs antenna diameter.	16
5. Command guidance.	18
6. Correlation between AOA jitter for two separate targets as a function of their angular separation for propagation path lengths of 10, 30 and 100 meters.	21
7. Range triangulation.	23

SECTION 1

INTRODUCTION

Angle-of-arrival (AOA) fluctuations from propagation through a nuclear dust cloud pedestal can potentially degrade the tracking precision of a sight defense radar (SDR). This note discusses the applicability of various techniques for mitigating this effect. The emphasis taken here is to estimate their theoretical effectiveness, although comments regarding feasibility are also made.

SECTION 2

BACKGROUND

AOA jitter is caused by turbulence-induced index of refraction fluctuations along the dust cloud propagation path. The magnitude of the jitter may be specified by the standard deviation (σ_α) of its amplitude distribution. For our purposes σ_α does not represent the AOA fluctuations on the received wavefront directly, but instead refers to the AOA jitter measured by an antenna which intercepts some portion of the fluctuating wavefront. As a result, the effects of a finite antenna aperture size are always included when referring to σ_α . The nominal antenna diameter assumed is 2 meters.

Predictions for σ_α have been made by this author (Reference 1) and others. σ_α has been found to be directly proportional to the integrated mass of dust along the radar sight path and this quantity is largely unknown. Uncertainty in our knowledge of the dust turbulence structure and its material properties have led to additional but smaller variations in the predictions. Unfortunately, there is insufficient experimental data to allow accurate forecasts of the nuclear dust cloud pedestal environment. Since the radar propagation effects depend entirely on the dust cloud environment, inaccuracies result in predicting the propagation effects. However, for many situations, using nominal values for the amount of material lofted, σ_α has been found to be large enough to potentially degrade radar performance.

There are various means by which the loss in tracking precision caused by nuclear pedestal cloud AOA jitter may be at least partially mitigated. The techniques we will consider are listed below.

- Pulse integration
- Frequency agility
- Antenna size increases
- Command guidance
- Range triangulation

While the above list is incomplete, it is thought to include those techniques with the most practical importance.

SECTION 3

DISCUSSION OF MITIGATION TECHNIQUES

PULSE INTEGRATION

Integrating or averaging the recorded AOA samples over time is a conventional method to reduce the effect of jitter on an estimation of the mean AOA. For N independent samples, the standard deviation in estimating the mean AOA (σ_{α}) is related to the standard deviation in the raw AOA (σ_{α}) by

$$\sigma_{\alpha} \approx \sigma_{\alpha} / \sqrt{N} \quad (1)$$

With N made sufficiently large, σ_{α} may be made as small as desired. Of course, in any real system the samples would undergo some form of low pass filtering, but for our analysis this is equivalent to averaging a finite number of samples.

Several factors are seen to limit the increased tracking precision attainable for SDR applications through this technique. The radar system must be capable of recording and processing sufficient samples in the available tracking time. Since present radar concepts allow for the ability to meet such a requirement, this is not seen to seriously impact the feasibility unless the necessary decrease in the raw jitter becomes excessive.

A second consideration is that of sampling independence. The reduction in σ_{α} predicted by Equation 1 is valid only when the N samples are uncorrelated. As a means of addressing this subject, calculations were made to predict the temporal response of the AOA jitter. Following Reference 2, the normalized frequency spectrum of the AOA fluctuations is given by

$$W_{\alpha}(f) = C \cdot \frac{\sin^2(\pi D f / V)}{f^{8/3} \left[1 + \left(\frac{1.07 V}{2\pi f L_0} \right)^2 \right]^{4/3}} \quad (2)$$

where

D = antenna diameter

f = frequency

L_0 = outer scale of turbulence

V = mean flow velocity of dust perpendicular to the radar's line of sight

and C = a normalization constant chosen such that

$$\int_0^{\infty} W_{\alpha}(f) df = 1 \quad (3)$$

Here it was assumed that to first order the time behavior could be obtained by Taylor's frozen flow hypothesis. In this approximation, the main contribution to the change in the radar propagation path with time is due to the mean dust flow velocity perpendicular to the radar sight path. The additional assumptions were made of plane wave propagation through a homogeneous layer of turbulence having a Kolmogorov distribution.

Figure 1 shows the frequency spectrum predicted by Equation 2 where the values of V chosen reflect those thought to be reasonable limits for proposed radar operation in a nuclear dust cloud. $V=300$ meters/second roughly corresponds to the peak particle velocity generated for a shock wave peak overpressure of about 30 psi. $V=30$ meters/second would be representative of velocities expected after passage of the blast wave overpressure positive phase.

The time autocorrelation of the AOA fluctuations is obtained by taking the Fourier transform of their frequency spectrum. Figure 2 shows the autocorrelation of the AOA fluctuations predicted by transforming the frequency spectra of Figure 2. It is seen that they are approximately gaussian in shape, with standard deviations $\sigma_T \approx .04, .004$ seconds for $V=30$ and 300 meters/second, respectively.

Using these decorrelation times we may comment on the radar sampling rates allowable that would guarantee sampling independence. For a gaussian autocorrelation with standard deviation σ_T , the necessary time interval for sampling independence (T_I) is given by

$$T_I \approx \sqrt{2\pi} \sigma_T \quad (4)$$

Sampling at a more rapid rate gives practically no new information and no improvement on a true estimate of the mean (see Reference 3). From Equation 4 $T_I \approx .1, .01$ seconds for the cases $V=30, 300$ meters/second respectively. These sampling intervals fall within the interesting range of sampling times under consideration for proposed SDR operation.

We conclude that the subject of sampling independence should be carefully considered when assessing the reduction in angle errors achievable through the use of pulse integration.

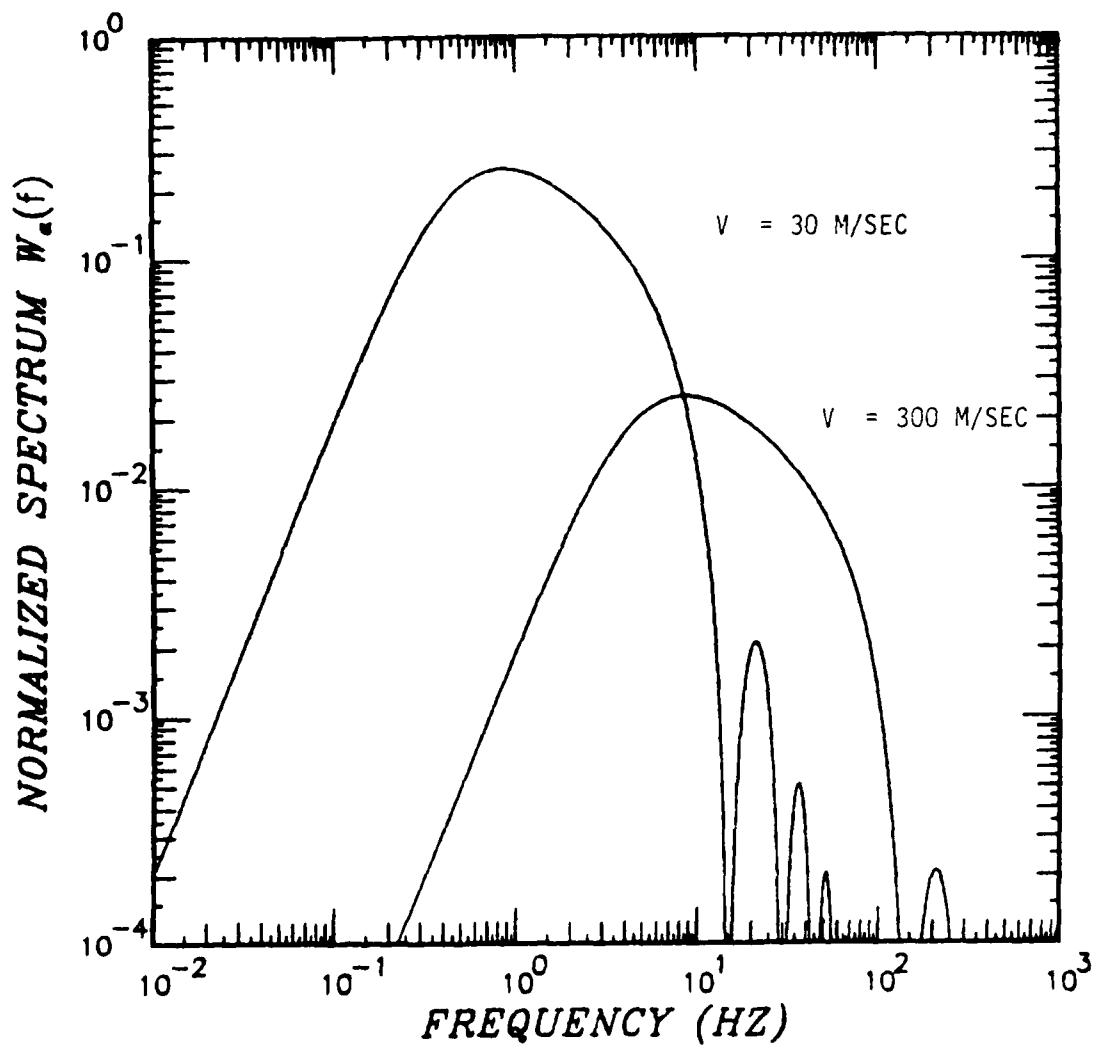


Figure 1. Normalized spectrum of angle-of-arrival fluctuations for a 2 meter diameter antenna. (Assumes Kolmogorov turbulence with an outer scale of 10 meters.)

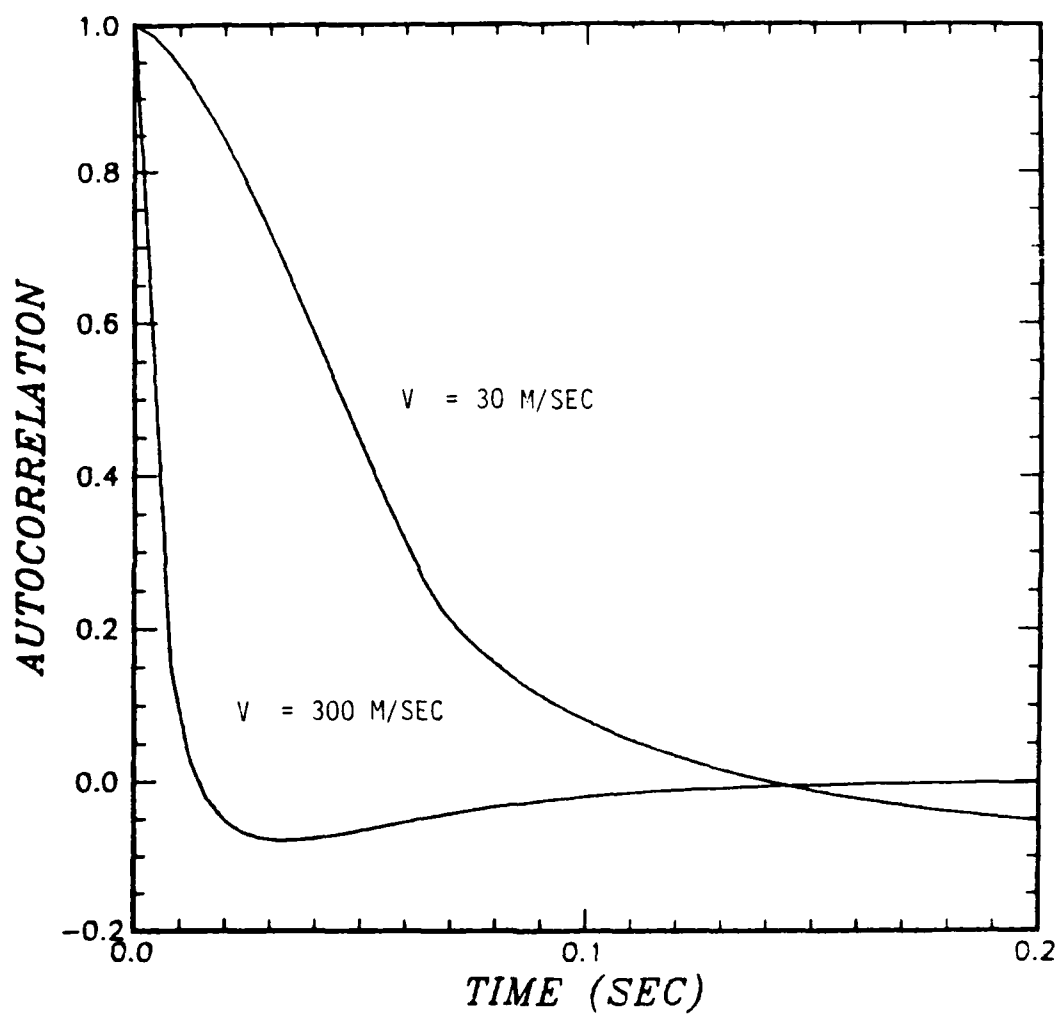


Figure 2. Autocorrelation of angle-of-arrival fluctuations for a 2 meter diameter antenna. (Assumes Kolmogorov turbulence with an outer scale of 10 meters.)

FREQUENCY AGILITY

A frequency agile radar performs multiple frequency RF transmissions during a single look at a target. When the frequency steps result in AOA returns which are uncorrelated, averaging them will allow the equivalent reduction in jitter as is achievable through pulse integration of this number of independent samples recorded over time. The merits of frequency diversity may be evaluated by estimating the correlation between the AOA of two wavefronts received simultaneously after propagating along the same sight path at different RF frequencies.

Figure 3 shows the perturbation in the arrival angle of a received wavefront after propagating a distance L through a dust layer. Using the simple phase interferometer shown to model the antenna angle estimator, the AOA is given in the small angle approximation to be


$$\alpha \approx \frac{\lambda}{2\pi D} \cdot (\phi(L,y) - \phi(L,y+D)) \quad (5)$$

where y is the coordinate transverse to the propagation direction and $(\phi(L,y) - \phi(L,y+D))$ is the difference in phase measured by the interferometer of size D .

A useful simplification for calculating the phase difference is to apply geometrical optics methods. This may be justified by noting that diffraction effects have been found to have very little impact on predictions for phase front perturbations when the propagation path length L is such that (see Reference 4)

$$L \leq \Delta y^2 / \lambda \quad (6)$$

PLANE WAVE INCIDENT

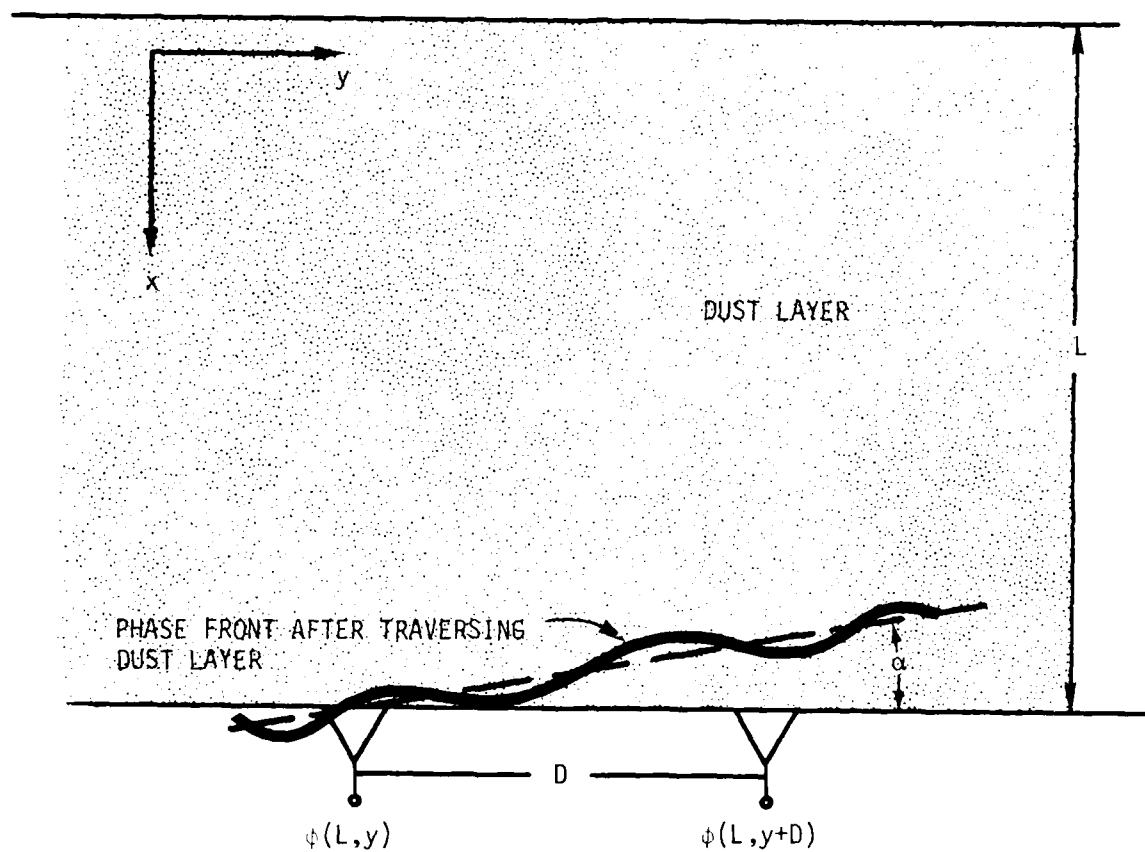

$$\alpha \approx \frac{\lambda}{2\pi D} (\phi(L, y) - \phi(L, y+D))$$

Figure 3. Estimation of the angle-of-arrival by a phase interferometer.

where λ is the RF wavelength, and Δy is the distance perpendicular to the mean phase front over which phase differences are measured. For an AOA measurement, Δy becomes the antenna diameter D . Using the nominal antenna diameter of 2 meters and an RF wavelength of 3 cm, we see that geometrical optics techniques are applicable for path lengths of about 130 meters or less, and this distance is comparable to the longest path lengths of interest.

In the geometrical optics approximation and for plane wave propagation in the x direction, the phase difference is given by

$$\phi(L,y) - \phi(L,y+D) = \frac{2\pi}{\lambda} \int_0^L (n_m(x,y) - n_m(x,y+D)) dx \quad (7)$$

where the integration traverses the pedestal cloud along parallel rays spaced a distance D apart. $n_m(x,y)$ and $n_m(x,y+D)$ are the indices of refraction of the pedestal cloud medium at positions along the parallel rays.

On substitution of Equation 7 into Equation 5 we obtain

$$\alpha = \frac{1}{D} \int_0^L (n_m(x,y) - n_m(x,y+D)) dx \quad (8)$$

and the AOA is seen to not depend on RF frequency except through possible frequency dispersion of the medium.

The frequency dispersion of the medium may be obtained as a function of the properties of the bulk material lofted into the pedestal cloud through the Clausius-Mossotti formula (see Reference 5)

$$n_m = 1 + \frac{3}{2} \frac{\rho_m}{\rho_b} \operatorname{Re} \left[\frac{n_b(F)^2 - 1}{n_b(F)^2 + 2} \right] \quad (9)$$

where

- ρ_m = mass density of the pedestal cloud medium
- ρ_b = mass density of the bulk material
- $n_b(F)$ = complex index of refraction of the bulk material as a function of RF frequency.

Using Equation 9 to substitute for $(n_m(x,y) - n_m(x,y+D))$ in Equation 8 we obtain

$$\alpha = \frac{3}{2\rho_b D} \operatorname{Re} \left[\frac{n_b(F)^2 - 1}{n_b(F)^2 + 2} \right] \int_0^L [\rho_m(x,y) - \rho_m(x,y+D)] dx \quad (10)$$

and the effect of RF frequency variation may be expressed simply as

$$\alpha \approx \operatorname{Re} \left[\frac{n_b(F)^2 - 1}{n_b(F)^2 + 2} \right] \quad (11)$$

In Table 1 we list the bulk indices of refraction for representative materials of interest at UHF and X-band and the resultant variation in AOA predicted by Equation 11. It is observed in Table 1 that the variation in AOA with frequency is small for each of the materials considered. For the approximate decade frequency change from UHF to X-band there is a maximum variation of about 15% in the AOA. Therefore we expect that the frequency dependence of the AOA for a dust cloud consisting of a mixture of these materials would be small also.

Table 1. Variation in AOA predicted by Equation 11.

Material	$n_b(F)$	$\alpha \approx \text{Re} \left[\frac{n_b(F)^2 - 1}{n_b(F)^2 + 2} \right]$	Reference
Sand (UHF)	2.2 - .090j	.56	6
Sand (X-band)	2.0 - .035j	.49	6
Caliche (UHF)	2.5 - .133j	.64	6
Caliche (X-band)	2.2 - .043j	.56	6
Water (UHF)	8.8 - .120j	.96	7
Water (X-band)	7.5 - 2.300j	.96	7

The results of this section may be summarized as follows: In considering the effects of RF frequency variations, we first observe that for the propagation path lengths and antenna size of interest, diffraction effects can be neglected. Then, using geometrical optics theory we show that the remaining RF frequency variation is due to the frequency dispersion properties of the medium, and this effect is also found to be very small. As a result, we predict very little decorrelation in the AOA within the RF frequency ranges of interest. Thus, we do not expect that frequency agility will be an effective mitigation technique.

ANTENNA SIZE

Increasing the size of an antenna has been shown to reduce the level of jitter on the antenna's AOA estimate (Reference 8). The mechanism responsible for this reduction is the antenna aperture averaging of the received phase front.

Calculations were performed to evaluate the dependence of σ_α on antenna size. The results are shown in Figure 4. The formulation described in Reference 1 was utilized to make these calculations. The

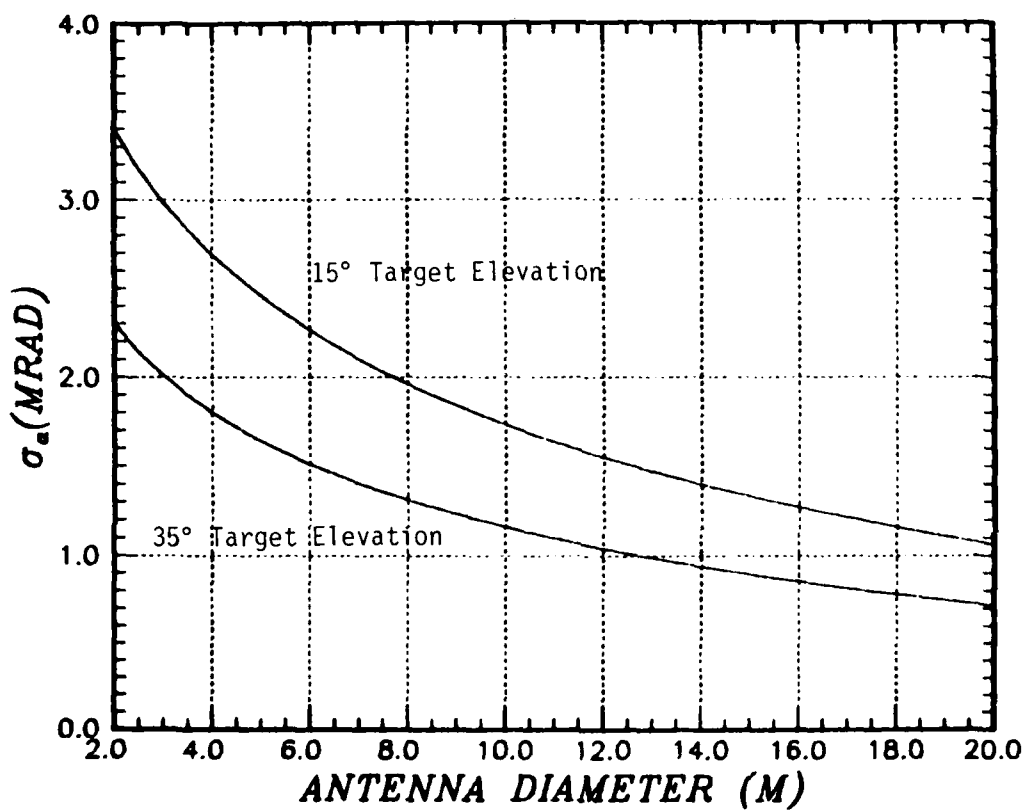


Figure 4. RMS angle-of-arrival fluctuations vs antenna diameter.
(Assumes Kolmogorov spectrum with an outer scale of 10
meters.)

pedestal cloud dust density assumed here represents an environment where 2 centimeters of scoured caliche have been distributed vertically with an exponential scale height of 6 meters. A Kolmogorov turbulence spectrum with an outer scale of 10 meters has also been assumed. Antenna diameter variations of from 2 to 20 meters for target elevations of 15 and 35 degrees are considered. The important trend borne out is that AOA jitter decreases very slowly with increasing antenna size. It is seen that doubling the antenna diameter from the nominal 2 meters to 4 meters achieves less than a 15 percent reduction in σ_α , such a small reduction being insignificant compared to uncertainties in knowing the dust environment. Portability, survivability, and cost put obvious constraints on the maximum allowable antenna size whereas it is suggested by Figure 4 that it would take a very large antenna to achieve substantial reductions in σ_α .

We conclude here that mitigation of AOA effects by merely increasing antenna size is not feasible.

COMMAND GUIDANCE

The location of the SDR and interceptor launch point relative to a "keep-out" zone which they are to defend may impact the effect of AOA errors on miss distance when command guidance is used. Referring to Figure 5, locating the SDR and interceptor launch point in the vicinity of their defended "keep-out" zone results in trajectories where the angular deviation between target and interceptor tends to be small during a significant fraction of the interceptor's flight. For this part of the flight, the AOA jitter on the target echoes will be correlated with the AOA jitter associated with tracking of the interceptor, since the returned signals from each will traverse nearly identical paths through the pedestal cloud. Then, if the guidance commands to the interceptor are proportional to the angular separation between the target and interceptor, the AOA jitter on the two angle estimates would be removed through subtraction

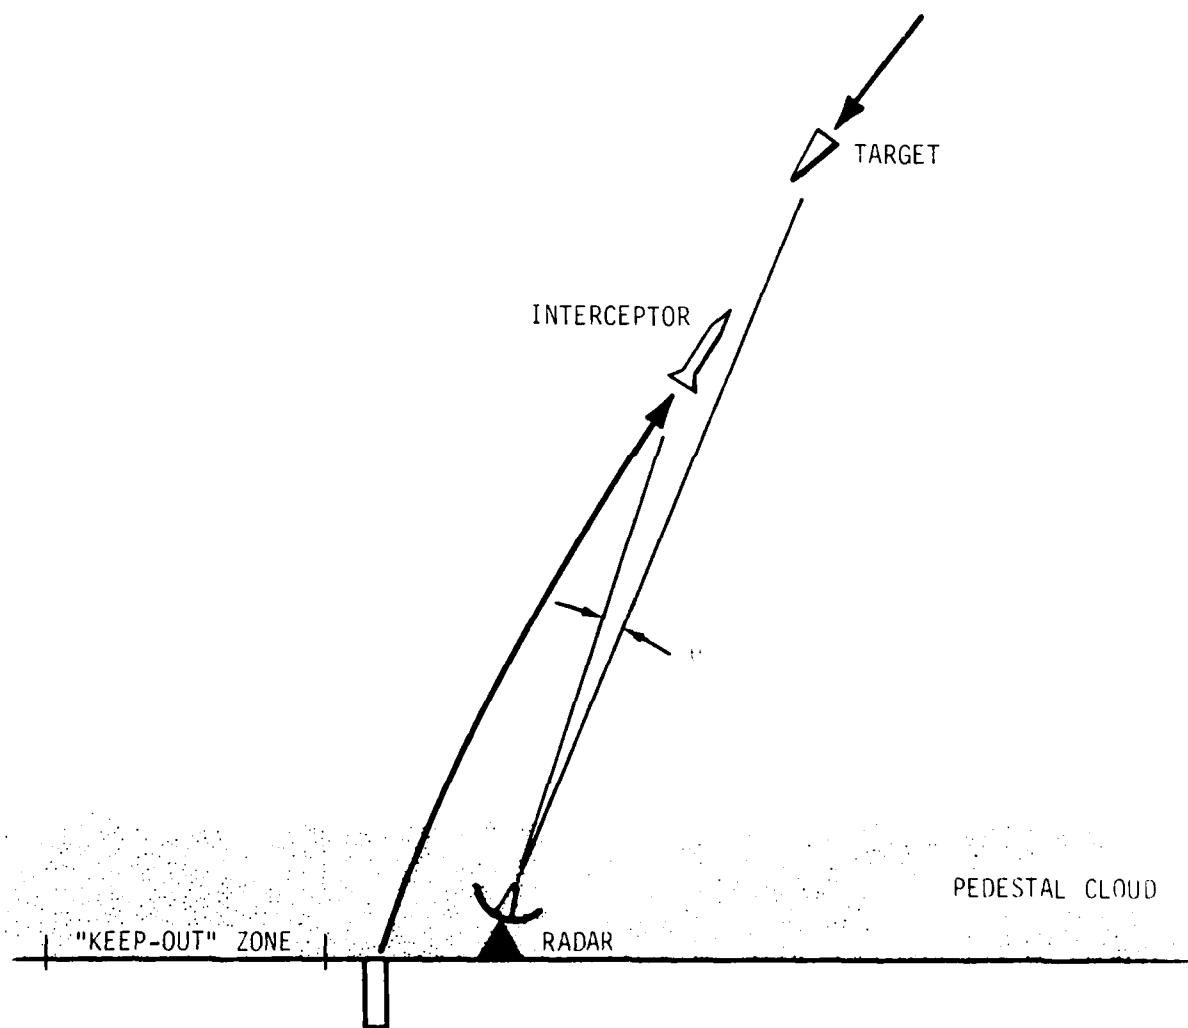


Figure 5. Command guidance.

when constructing the guidance signals. This implies that there is a possible advantage in choice of siting for the SDR and interceptor that would encourage a line of sight type interception geometry.

It is desirable to estimate the angular alignment necessary for this effect to be significant. This may be indicated by calculating the correlation between the fluctuating part of the AOA for the returned signals from two targets as a function of their angular separation. As a simplification we once again apply results from geometrical optics theory which we have previously shown to be applicable.

From Reference 2, the correlation of the AOA jitter for the component of the jitter in the direction of the targets' angular separation may be expressed as

$$R(\theta) = \frac{3}{16} \frac{(1+x)^{8/3} - (1-x)^{8/3} - 2x^{8/3}}{x} ; x \leq 1 \quad (12)$$

$$R(\theta) = \frac{3}{16} \frac{(1+x)^{8/3} + (x-1)^{8/3} - 2x^{8/3}}{x} ; x > 1 \quad (13)$$

where

$$x = \frac{2L}{D} \tan(\theta/2) \quad (14)$$

L = dust cloud propagation path length

D = antenna diameter

θ = angular separation of the targets.

The additional assumption of a Kolmogorov dust cloud turbulence spectrum has been made. The correlation has been normalized to be unity for zero angular separation.

Figure 6 shows the correlation predicted by Equations 12 and 13 as a function of θ for several propagation path lengths and an antenna diameter of 2 meters. It is seen that there is still a high ($\approx 85\%$) correlation in the AOA jitter for an angular separation of 10 degrees for the 10 meter path, and a moderate ($\approx 40\%$) correlation at 10 degrees for the 100 meter path. This implies that significant reductions in the AOA jitter-caused guidance errors could be made for target and interceptor line of sight separations under 10 degrees. It is also seen that the predicted correlation increases quickly with decreasing θ so that even larger reductions in AOA jitter-caused guidance errors would be possible if the angular separations were expected to be much smaller than 10 degrees.

The rather high correlations result from the fact that the pedestal dust cloud is by nature of low height leading to short propagation paths. Accounting for the uncertainty in current knowledge of the dust density scale heights of a nuclear dust cloud pedestal, scale heights under 10 meters are possible. If a scale height under 10 meters is applicable this would also lead to higher predicted correlations. Correspondingly, path lengths longer than 100 meters would decorrelate faster with increasing target separation.

A further remark concerning these predictions is that they apply for comparison of simultaneous returns from the two separated targets. The time delay in sampling which can be safely allowed before there would be a reduction in the predicted correlation can be estimated by referring back to Figure 2.

The practicality of this geometry-sensitive technique depends on many factors. One consideration is how closely the interceptor's trajectory would actually follow the radar's line of sight to the target for this type of engagement. Assuming close alignment during say the last half of the interceptor's flight, then the effect of giving correct guidance over this time only must be assessed as to its impact on miss distance.

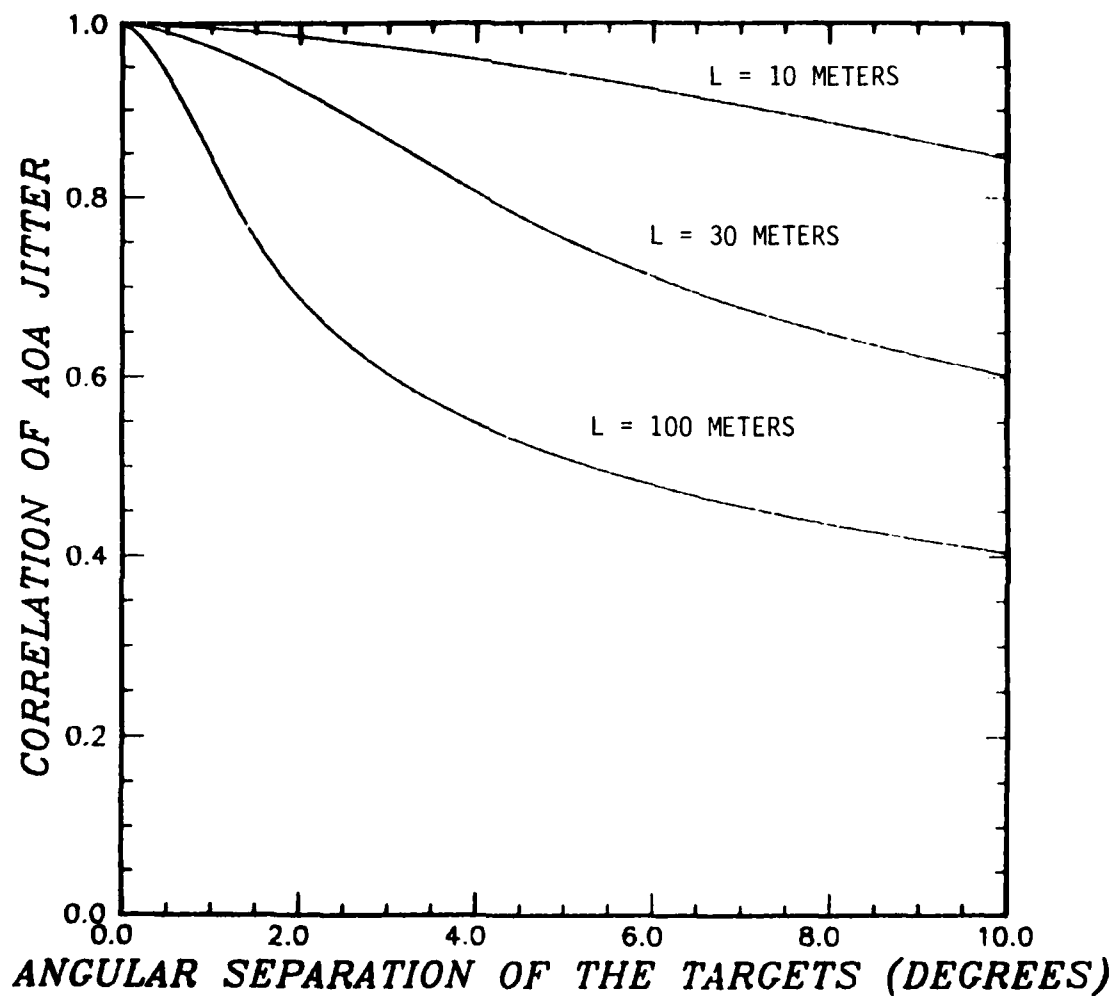


Figure 6. Correlation between AOA jitter for two separate targets as a function of their angular separation for propagation path lengths of 10, 30 and 100 meters.

There is also a possible degradation in the operating environment for the SDR when located close to the zone it is to defend. We will not pursue these questions here.

RANGE TRIANGULATION

The use of netted monostatic radars to determine target direction using range-only data has been suggested (Reference 9) as a possible alternative to conventional methods utilizing a single radar to sample the phase of the returned wave front. The advantage of this technique is that range measurement inaccuracies from propagation through a pedestal dust cloud can be shown to be completely negligible. This implies that the angle errors from dust cloud propagation effects would be small compared to the nominal angle resolution of a range triangulation system.

The design requirements for such a system to perform precision angle tracking must be evaluated in order to assess its feasibility. Target location in 3 dimensions requires a minimum of 3 range measurements, commonly referred to as trilateration. A treatment of the location accuracy for this general case is given by Skolnik in Reference 10.

As a simplification, we assess the angle sensing resolution afforded by a single pair of radars. Referring to Figure 7, the radar ground spacing is X_G and the range estimates R_1 and R_2 are compared to find the target elevation angle (β) which is measured relative to the baseline connecting the radars. Then for a range measurement error ΔR , the error in estimating β is approximately equal to

$$\Delta\beta \approx \frac{\Delta R}{X_G \sin\beta} \quad (15)$$

when the target range is much larger than X_G .

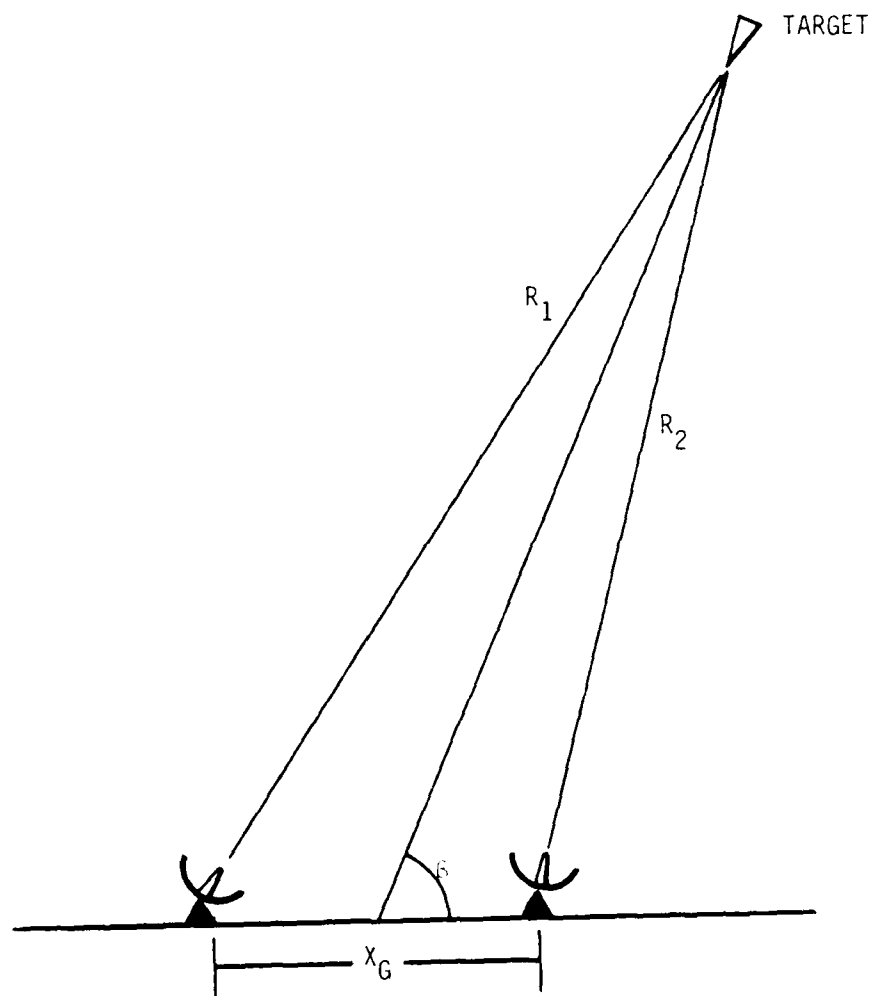


Figure 7. Range triangulation.

Assuming the nominal range error is 5 meters, then for a target elevation of 90° , Equation 15 predicts a required ground spacing of 5 kilometers to achieve milliradian angle accuracy. For milliradian angle accuracy at 15° target elevation the required spacing increases to about 20 kilometers. These examples show that quite large spacings are required to attain milliradian angle accuracy for 5 meters of range error. If greater range accuracy is attainable, the necessary spacing will scale down accordingly.

The main drawback to the feasibility of such a system is the necessity to maintain data communication links between the various radars and a data processing center. These communications links are a source of increased system complexity, cost, and vulnerability not present in the single monostatic case.

SECTION 4

CONCLUSIONS

AOA jitter from radar propagation through a nuclear dust cloud pedestal has previously been identified to be a potential source of degradation for operation of a SDR. A limited list of mitigation techniques has been evaluated. Key results from this analysis may be summarized as follows:

- Predictions for reducing jitter through pulse integration should take account of the time correlation of the fluctuating AOA samples. Maximum sampling rates which would provide independence are estimated to be in the 10 to 100 Hz range.
- Frequency agility has been found to be quite ineffective as a means to generate independent AOA estimates.
- Increasing the antenna size is an ineffective means of reducing jitter.
- A method for reducing the impact of AOA jitter on miss distance has been identified for command guidance applications. The effectiveness is dependent on interception geometries that maintain a small angular separation between target and interceptor. Judicious siting of the SDR and interceptor launch points could encourage favorable interception geometries.
- Using several radars to perform direction finding through range measurements alone would entirely remove the effects of pedestal cloud AOA jitter. However, very large distances (≈ 10 km) between the radars would be required to attain reasonable angle tracking precision. The necessity to maintain data communication links over these distances would increase the vulnerability of the system to a stress environment.

REFERENCES

1. Lauer, C.J., "Angle of Arrival Fluctuations in a Nuclear Dust Cloud Pedestal," MRC-N-476, Mission Research Corporation, August 1981.
2. Fante, R.L., "Electromagnetic Beam Propagation in Turbulent Media," Proceedings of the IEEE, Volume 63, Number 12, December 1975.
3. Nathanson, F.E., Radar Design Principles, McGraw-Hill, 1969.
4. Tatarskii, V.I., The Effects of the Turbulent Atmosphere on Wave Propagation, IT-68-50464, National Science Foundation, Washington D.C., 1971.
5. Jones, D.S., The Theory of Electromagnetism, Pergamon Press, 1964.
6. Gutsche, S. L., "Nuclear Dust Effects on Electromagnetic Wave Propagation - Estimation of Effects from 1 MHz to 100 GHz," DNA 4776F-2, Mission Research Corporation, November 1978.
7. Jackson, J.D., Classical Electrodynamics, John Wiley and Sons, 1975.
8. Valley, G.C., "Angular Jitter in an Amplitude Comparison Monopulse Radar Due to Turbulence," IEEE Transactions on Antennas and Propagation, March 1975.
9. Kusper, R.L., McDonnell Douglas Corporation, Private Communication.
10. Skolnik, M.I., Radar Handbook, McGraw-Hill, 1970.

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE

Assistant to the Secretary of Defense

Atomic Energy

ATTN: Exec Asst

Command & Control Tech Ctr

ATTN: C-650

ATTN: C-312, R. Mason

ATTN: C-650, G. Jones

3 cy ATTN: C-650, W. Heidig

Defense Communications Agency

ATTN: Code 250

ATTN: Code 255

ATTN: J300 for Jern-Sun fu

Defense Communications Engineer Ctr

ATTN: Code R410, N. Jones

ATTN: Code R410

ATTN: Code R410, R. Craighill

ATTN: Code R123

Defense Intelligence Agency

ATTN: DB-40, E. O'Farrell

ATTN: DC-7B

ATTN: DB, A. Wise

ATTN: DT-13

ATTN: DIR

Defense Nuclear Agency

ATTN: STNA

ATTN: NAFO

ATTN: RAEE

ATTN: NAFO

ATTN: RAEE, P. Lunn

3 cy ATTN: RAEE

4 cy ATTN: TITL

Defense Technical Information Ctr

12 cy ATTN: DD

Deputy Under Secretary of Defense

Comm, Cnd, Cont & Intell

ATTN: Dir of Intell Sys

Field Command Defense Nuclear Agency

Det 1

Lawrence Livermore Lab

ATTN: FC-1

Field Command

Defense Nuclear Agency

ATTN: FCPP

ATTN: FCTXE

ATTN: FCTT, W. Summa

ATTN: FCTT, G. Gannon

Interservice Nuclear Wpn School

ATTN: TTV

Joint Chiefs of Staff

ATTN: CJS

ATTN: CJS, Eval Ofc (H000)

Joint Strat Tgt Planning Staff

ATTN: JLA, Threat Appl Div

ATTN: JLTW-2

DEPARTMENT OF DEFENSE (Continued)

National Security Agency

ATTN: W-20, G. Barrlett

ATTN: R-10, J. Skillman

ATTN: B-3, F. Leonard

Under Secretary of Defense for Resch & Engrg

ATTN: Strat & Space Sys (OS)

ATTN: Strat & Theater Nuc Forces, G. Stephan

WAMCOT Engng Org

ATTN: J. Hoff

DEPARTMENT OF THE ARMY

Assistant Chief of Staff for Automation & Comp

ATTN: DAMO-C4, P. Kenny

Atmospheric Sciences Lab

ATTN: DELAS-EO, F. Giles

BMD Advanced Tech Ctr

ATTN: ATC-R, D. Russ

ATTN: ATC-O, W. Davies

ATTN: ATC-R, W. Dickinson

ATTN: ATC-T, M. Gapps

BMD Systems Command

ATTN: BMDSC-HLE, G. Webb

3 cy ATTN: BMDSC-HW

Deputy Chief of Staff for Op. & Plans

ATTN: DAMO-RQC, P. Div

Form. Diamond Labs

ATTN: DELLND-NW-R, 20240

ATTN: DELLND-NW-R, P. Williams, 21 300

USA Chemical School

ATTN: ATZN-EM-US

USA Comm-Elec Engrg Instl Agcy

ATTN: CCC-EMED-RED, G. Lane

ATTN: CCC-CEC-CCB, W. Neundorff

USA Communications Cnd

ATTN: CC-OPS-W

ATTN: CC-OPS-WR, H. Weller

USA Communications RSD Cnd

ATTN: DRDCO-COM-RY, W. Reselman

USA Foreign Science & Tech Ctr

ATTN: DRXST-ND

USA Materiel Dev & Readiness Cnd

ATTN: DRCLDC, J. Bender

USA Nuclear & Chem Agcy

ATTN: Library

USA TRADOC Sys Analysis Actv

ATTN: ATAA-PL

ATTN: ATAA-TOC, F. Payan, Jr

ATTN: ATAA-TOC

DEPARTMENT OF THE ARMY (Continued)

USA Satellite Comm Agency
ATTN: Doc Con

USA Missile Cmd
ATTN: DRSMI-YSO, J. Gamble

DEPARTMENT OF THE NAVY

Joint Cruise Missiles Proj Ofc
ATTN: JCMG-707

Naval Air Systems Cmd
ATTN: PMA 271

Naval Electronic Systems Cmd
ATTN: PME 117-211, B. Kruger
ATTN: PME 106-13, T. Griffin
ATTN: Code 501A
ATTN: PME 117-20
ATTN: PME 117-2013, G. Burnhart
ATTN: Code 3101, T. Hughes
ATTN: PME 106-4, S. Kearney

Naval Intelligence Spt Ctr
ATTN: NISC-50

Naval Ocean Systems Ctr
ATTN: Code 5322, M. Paulson
ATTN: Code 532
ATTN: Code 5323, J. Ferguson

Naval Research Lab
ATTN: Code 4720, J. Davis
ATTN: Code 4780
ATTN: Code 7500, B. Wald
ATTN: Code 4780, S. Ossakow
ATTN: Code 6700
ATTN: Code 7950, J. Goodman
ATTN: Code 4187
ATTN: Code 4700

Naval Space Surveillance Sys
ATTN: J. Burton

Naval Surface Weapons Center
ATTN: Code F31

Naval Telecommunications Cmd
ATTN: Code 341

Office of the Deputy Chief of Naval Ops
ATTN: OP 981N
ATTN: OP 941D
ATTN: NDP 654, Strat Eval & Anal Br

Office of Naval Research
ATTN: Code 412, W. Conde11
ATTN: Code 414, G. Joiner

Strategic Systems Proj Ofc
ATTN: NSP-2141
ATTN: NSP-2722, F. Wimberly
ATTN: NSP-43

Theater Nuclear Warfare Proj Ofc
ATTN: PM-23, D. Smith

DEPARTMENT OF THE AIR FORCE

Aerospace Defense Cmd
ATTN: DC, T. Long

Air Force Geophysics Lab
ATTN: OPR, H. Gardiner
ATTN: OPR-1
ATTN: LKB, K. Champion
ATTN: CA, A. Stair
ATTN: PHY, J. Buchau
ATTN: R. Babcock
ATTN: R. O'Neil

Air Force Technical Applications Ctr
ATTN: TN

Air Force Weapons Lab
ATTN: SUL
ATTN: NTYC
ATTN: NTN

Air Force Wright Aeronautical Lab
ATTN: A. Johnson
ATTN: W. Hunt

Air Logistics Cmd
ATTN: OO-ALC/MM

Air University Library
ATTN: AUL-LSE

Assistant Chief of Staff
Studies & Analyses
ATTN: AF/SASC, C. Rightmeyer
ATTN: AF/SASC, W. Kraus

Ballistic Missile Office
ATTN: ENSH, W. Wilson
ATTN: SYC, Col Kwan

Deputy Chief of Staff
Research, Development, & Acq
ATTN: AFRDS, Space Sys & C3 Dir
ATTN: AFRDSS
ATTN: AFRDSP

Deputy Chief of Staff
Ops & Plans
ATTN: AF XO CD
ATTN: AF XO T
ATTN: AF XO S

Electronic Systems Div
ATTN: SCT-2, J. Clark

Electronic Systems Div
ATTN: OCT-4, J. Deas

Electronic Systems Div
ATTN: SCS-1E
ATTN: SCS-2, LTC Vinkels

Foreign Technology Div
ATTN: NIIS, Library
ATTN: TQTD, B. Ballard

Rome Air Development Ctr
ATTN: OCS, V. Coyne
ATTN: TSLD

DEPARTMENT OF THE AIR FORCE (Continued)

Rome Air Development Center
ATTN: EEP, J. Rasmussen

Space Division
ATTN: YGJB, W. Mercer
ATTN: YKM, Maj Alexander
ATTN: YKM, Capt Norton

Strategic Air Command
ATTN: NRT
ATTN: DCX
ATTN: XPFS
ATTN: ADWATE, B. Bauer
ATTN: DCXT, T. Jorgensen
ATTN: XPFS

OTHER GOVERNMENT AGENCIES

Central Intelligence Agency
ATTN: OSWR/SSD for K. Feuerpfell
ATTN: OSWR/NED

Department of Commerce
National Bureau of Standards
ATTN: Sec Ofc for R. Moore

Department of Commerce
National Oceanic & Atmospheric Admin
ATTN: R. Grubb

Institute for Telecommunications Sciences
ATTN: L. Berry
ATTN: A. Jean
ATTN: W. Utlaut

NATO

NATO School (SHAPE)
ATTN: US Docs Officer

DEPARTMENT OF ENERGY CONTRACTORS

EG&G, Inc
ATTN: D. Wright
ATTN: J. Colvin

University of California
Lawrence Livermore National Lab
ATTN: Tech Info Dept Library
ATTN: L-389, R. Ott
ATTN: L-31, R. Hager

Los Alamos National Lab
ATTN: MS 664, J. Zinn
ATTN: P. Keaton
ATTN: D. Simons
ATTN: MS 670, J. Hopkins
ATTN: T. Kunkle, ESS-5
ATTN: R. Jeffries
ATTN: J. Wolcott
ATTN: C. Westervelt

Sandia National Lab
ATTN: D. Dahlgren
ATTN: Tech Library 3141
ATTN: Space Proj Div
ATTN: D. Thornbrough
ATTN: ORG 1250, W. Brown
ATTN: ORG 4231, T. Wright

DEPARTMENT OF ENERGY CONTRACTORS (Continued)

Sandia National Labs, Livermore
ATTN: T. Cook
ATTN: B. Murphey

DEPARTMENT OF DEFENSE CONTRACTORS

Acrospace Corp
ATTN: V. Josephson
ATTN: T. Salmi
ATTN: R. Slaughter
ATTN: I. Garfunkel
ATTN: J. Straus
ATTN: D. Olsen

Analytical Systems Engrg Corp
ATTN: Radio Sciences

Analytical Systems Engrg Corp
ATTN: Security

BDM Corp
ATTN: L. Jacobs
ATTN: T. Neighbors

Berkeley Research Associates, Inc
ATTN: J. Workman
ATTN: S. Brecht
ATTN: C. Prettie

Boeing Aerospace Co
ATTN: MS/87-63, D. Clauson

Boeing Co
ATTN: G. Hall
ATTN: S. Tashird

Booz-Allen & Hamilton, Inc
ATTN: B. Wilkinson

BR Communications
ATTN: J. McLaughlin

University of California at San Diego
ATTN: H. Booker

Charles Stark Draper Lab, Inc
ATTN: A. Tetewski
ATTN: J. Gilmore
ATTN: D. Cox

Computer Sciences Corp
ATTN: F. Eisenbarth

Comsat Labs
ATTN: D. Fang
ATTN: G. Hyde

Cornell University
ATTN: D. Farley, Jr
ATTN: M. Kelly

E-Systems, Inc
ATTN: R. Berezdivin

Electrospace Systems, Inc
ATTN: H. Logston
ATTN: P. Phillips

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

EOS Technologies, Inc
ATTN: B. Gabbard

ESI, Inc
ATTN: R. Ibaraki
ATTN: P. Beckman
ATTN: J. Lemman
ATTN: E. Isai
ATTN: J. Marshall

General Electric Co
ATTN: G. Zierdt
ATTN: A. Steinmayer

General Electric Co
ATTN: G. Millman

General Research Corp
ATTN: B. Bennett

Geo-Conters, Inc
ATTN: E. Mannan

Harris Corp
ATTN: E. Knick

Honeywell, Inc
ATTN: G. Collier, Avionics Dept
ATTN: G. Terry, Avionics Dept

Horizons Technology, Inc
ATTN: R. Kruger

ISI, Inc
ATTN: D. Hansen

IBM Corp
ATTN: R. Glander

Institute for Defense Analyses
ATTN: C. Bauer
ATTN: H. Wolfhard
ATTN: J. Aein
ATTN: H. Gates

International Tel & Tel Corp
ATTN: Tech Library

International Tel & Tel Corp
ATTN: G. Whitmore

JAYCOR
ATTN: J. Sperling

JAYCOR
ATTN: J. DonCarlos

Johns Hopkins University
ATTN: J. Newland
ATTN: T. Evans
ATTN: P. Komiske
ATTN: J. Phillip

Kaman Sciences Corp
ATTN: T. Stephens

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Kamal, Temco
ATTN: B. Gambill
ATTN: DASIA
ATTN: J. Devore
ATTN: W. Knapp
ATTN: K. Schwartz
ATTN: W. M. Namara

Liton Systems, Inc
ATTN: B. Zinner

Lockheed Missiles & Space Co, Inc
ATTN: R. Swan
ATTN: J. Kumer

Lockheed Missiles & Space Co, Inc
ATTN: C. Old
ATTN: B. Churchill
ATTN: Dept 60-12

MIT Lincoln Lab
ATTN: D. Towle

MA/COM Linkabit Inc
ATTN: R. Van Trees
ATTN: A. Viterbi
ATTN: I. Jacob

Magnavox Govt & Indus Electronics Co
ATTN: G. White

Martin Marietta Corp
ATTN: R. Hoffman

McDonnell Douglas Corp
ATTN: W. Olson
ATTN: Tech Library
ATTN: R. Halprin
ATTN: H. Spitzer

Meteor Communications Corp
ATTN: R. Leader

Mission Research Corp
ATTN: R. Hendrick
ATTN: R. Ellis
ATTN: F. Fagan
ATTN: R. Bigoni
ATTN: G. McCantor
ATTN: F. Guigliano
6 cy ATTN: Tech Library (Doc Con)
ATTN: S. Gutliche
ATTN: R. Begach
4 cy ATTN: C. Lauer

Mitre Corp
ATTN: A. Kymmel
ATTN: S. Adams
ATTN: G. Harding
ATTN: C. Callahan
ATTN: MS J104/M. R. resp

Mitre Corp
ATTN: W. Hall
ATTN: M. Horrocks
ATTN: W. Foster
ATTN: J. Wheeler

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Pacific-Sierra Research Corp

ATTN: F. Thomas
ATTN: E. Field, Jr
ATTN: H. Brode, Chairman SAGE

Pennsylvania State University

ATTN: Ionospheric Research Lab

Photometrics, Inc

ATTN: I. Kofsky

Physical Dynamics, Inc

ATTN: E. Fremouw

Physical Research, Inc

ATTN: R. Deliberis

R&D Associates

ATTN: R. Lelevier
ATTN: C. Greifinger
ATTN: R. Turco
ATTN: H. Dry
ATTN: W. Wright
ATTN: M. Gantsweg
ATTN: W. Karzas
ATTN: F. Gilmore

R&D Associates

ATTN: B. Yoon

Rand Corp

ATTN: E. Bedrozian
ATTN: C. Crain

Riverside Research Institute

ATTN: V. Trapani

Rockwell International Corp

ATTN: R. Buckner

Rockwell International Corp

ATTN: S. Quilici

Santa Fe Corp

ATTN: D. Paulucci

Science Applications, Inc

ATTN: L. Linson
ATTN: C. Smith
ATTN: E. Straker
ATTN: D. Hamlin

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Science Applications, Inc

ATTN: J. Cockayne

SRI International

ATTN: G. Price
ATTN: R. Tsunoda
ATTN: J. Vickrey
ATTN: W. Chesnut
ATTN: R. Livingston
ATTN: D. Neilson
ATTN: J. Petrickes
ATTN: D. McDaniels
ATTN: R. Leadabrand
ATTN: M. Baron
ATTN: C. Rino
ATTN: G. Smith
ATTN: V. Gonzales
ATTN: W. Jaye
ATTN: A. Burns

Stewart Radiation Lab

ATTN: J. Bliven

Sylvania Systems Group

ATTN: R. Steinhoff

Sylvania Systems Group

ATTN: J. Concomina
ATTN: I. Hanberg

Technology International Corp

ATTN: W. Bogardt

Tridcom, Inc

ATTN: J. Murray

TRW Electronics & Defense Center

ATTN: J. Ketchum
ATTN: E. Plabach
ATTN: J. Doe

Utah State University

Attention: [illegible]

ATTN: A. [illegible]

ATTN: J. [illegible]

ATTN: [illegible]

ATTN: [illegible]

VSI Systems Corp

ATTN: [illegible]
ATTN: [illegible]
ATTN: [illegible]
ATTN: [illegible]

ATE
LME