

2



Naval Research Laboratory

Washington, DC 20375-5000

NRL Memorandum Report 6388

AD-A206 270

Development of High Power CARM Oscillators

A. W. FLIFLET, R. B. MCCOWAN, C. A. SULLIVAN,*
D. A. KIRKPATRICK,* S. H. GOLD AND W. M. MANHEIMER

*High Power Electromagnetic Radiation Branch
Plasma Physics Division*

**Science Applications International Corporation
McLean, Virginia*

March 14, 1989

DTIC
ELECTE
APR 05 1989
S D
C&H

ADA206270

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				Form Approved OMB No 0704 0188	
1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b RESTRICTION MARKINGS			
2a SECURITY CLASSIFICATION AUTHORITY		3 DISTRIBUTION AVAILABILITY OF REPORT Approved for public release; distribution unlimited.			
2b DECLASSIFICATION/DOWNGRADING SCHEDULE					
4 PERFORMING ORGANIZATION REPORT NUMBER S NRL Memorandum Report 6388		5 MONITORING ORGANIZATION REPORT NUMBER S			
6a NAME OF PERFORMING ORGANIZATION Naval Research Laboratory	6b OFFICE SYMBOL (If applicable) Code 4740	7a NAME OF MONITORING ORGANIZATION			
6c ADDRESS (City, State, and ZIP Code) Washington, DC 20375-5000		7b ADDRESS (City, State, and ZIP Code)			
8a NAME OF FUNDING SPONSORING ORGANIZATION ONR	8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER			
8c ADDRESS (City, State, and ZIP Code) Washington, DC		10 SOURCE OF FUNDING NUMBERS			
		PROGRAM ELEMENT NO	PROJECT NO	TASK NO RR-011-41	WORK UNIT ACCESSION NO
11 TITLE (Include Security Classification) Development of High Power CARM Oscillators					
12 PERSONAL AUTHOR(S) Fliflet, A.W., McCowan, R.B., Sullivan,* C.A., Kirkpatrick,* D.A., Gold, S.H. and Manheimer, W.M.					
13a TYPE OF REPORT	13b TIME COVERED FROM 10/87 TO 10/88	14 DATE OF REPORT (Year, Month, Day) 1989 March 14	15 PAGE COUNT 28		
16 SUPPLEMENTARY NOTATION *Science Application Corporation, McLean, VA					
17 COSMIC CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Electron cyclotron maser Autoresonance CARM Oscillator Doppler-shifted frequency Magnetron-injection-gun		
19 ABSTRACT (Continue on reverse if necessary and identify by block number) The Cyclotron Auto-Resonance Maser (CARM) is under investigation at the U.S. Naval Research Laboratory as an efficient source of high power millimeter-wave and submillimeter-wave radiation for applications such as plasma heating, advanced rf accelerators, and space-based radars. A short-pulse 100 GHz CARM oscillator experiment based on a 600 kV, 200 Amp, 50 nsec electron beam is under way. The mode selective, high-Q waveguide cavity with rippled-wall Bragg reflectors is designed to operate in the TE ₀₁ mode. A novel cold cathode diode is used to produce a high quality ($\Delta v_z/v_z \leq 3\%$) annular beam with a momentum pitch ratio of 0.6. The cathode features nonemitting focussing electrodes and an annular velvet emitter. The main objective of the experiment is to demonstrate high efficiency ~ 20% at a power of ap-					
(Continues)					
20 DISTRIBUTION AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/AVAIL <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS		21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED			
22a NAME OF PERSON RESPONSIBLE Arne W. Fliflet		22b TELEPHONE (Include Area Code) (202) 767-2469		22c DOWNGRADING SCHEDULE Code 4740	

DD Form 1473, JUN 86

Previous editions are obsolete

S/N 0102-LF-01-6603

19. ABSTRACTS (Continued)

approximately 20 MW. In addition, a long pulse 250 GHz CARM oscillator experiment based on a 500 kV, 100 Amp, 1 μ sec MIG-type thermionic cathode electron gun is planned. The design of these experiments and the optimization of CARM oscillator efficiency are discussed.

CONTENTS

1	INTRODUCTION	1
2	CARM EFFICIENCY OPTIMIZATION	3
3	SHORT-PULSE 100 GHZ CARM OSCILLATOR	5
4	LONG-PULSE CARM OSCILLATOR	7
5	ACKNOWLEDGMENT	8
	REFERENCES	9
	DISTRIBUTION LIST	17



Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

DEVELOPMENT OF HIGH POWER CARM OSCILLATORS

1 Introduction

There is now a considerable research effort to develop high power, high frequency (millimeter wave to infrared) sources based on high voltage electron beams. These devices, the best known of which is the Free Electron Laser (FEL), are inherently high power and produce high frequencies by a doppler-shift effect which scales as the square of the relativistic mass ratio γ . The U.S. Naval Research Laboratory (NRL) has recently initiated an experimental program on a related device called the Cyclotron Auto-Resonance Maser (CARM) [1]. The frequency of this device is doppler-upshifted by $\sim \gamma^2$ from the relativistic cyclotron frequency (that is, upshifted by $\sim \gamma$ from the nonrelativistic cyclotron frequency). The efficiency potential of the CARM is similar to the gyrotron — of order 20–40% — but higher beam quality is required. Compared to gyrotrons, CARM's can have larger cavity structures for a given wavelength and have lower beam pitch angle. These properties simplify beam formation and reduce self-field effects as well as reducing cavity ohmic losses.

Because the interaction occurs with a forward propagating wave, electrons lose axial momentum—and axial velocity—during the interaction, and this leads high efficiency potential due to an “auto-resonance” effect. That is, the interaction resonance condition:

$$\omega = k_{\parallel}v_{\parallel} + \Omega_{nr}/\gamma \quad (1)$$

—where ω is the wave frequency, k_{\parallel} and v_{\parallel} are radiation wavenumber and electron beam velocity components in the beam drift direction, and Ω_{nr} is the nonrelativistic cyclotron frequency — is relatively insensitive to changes in beam energy. This is because the change in the relativistic cyclotron frequency $\Omega = \Omega_{nr}/\gamma$ during the interaction is compensated by a change in the doppler shift $k_{\parallel}v_{\parallel}$. This effect reduces the detuning of the resonance condition during beam-wave energy exchange. A combination of high doppler upshift of the frequency and high efficiency occurs when $\beta_{\perp 0} = 1/\gamma_0$ provided that

$$1 - \beta_{ph}^{-2} \leq \gamma_0^{-2} \quad (2)$$

where $\beta_{\perp} = v_{\perp}/c$ and $\beta_{ph} = v_{ph}/c = \omega/(k_{\parallel}c)$. The autoresonance effect leads to high efficiencies without the need for efficiency enhancement schemes based on tapering the

interaction parameters.

A 0.5 MV CARM has the potential for efficient, multi-MW operation at wavelengths of 1.1 mm (280 GHz) with a 63 kG superconducting magnet or 560 GHz with a 125 kG magnet. With a 1 MV beam or operation at harmonics there is a potential for THz frequencies. This potential makes the CARM an attractive candidate for development as a source for the Compact Ignition Tokamak (CIT).

The NRL development effort has chosen to conduct its first experiments on CARM oscillator configurations for several reasons. The CARM circuit generally involves a highly overmoded waveguide structure with the attendant probability of mode competition. Compared to the amplifier, the oscillator configuration appears to offer more alternatives for mode control. Waveguide cavities with rippled-wall Bragg reflectors can be highly selective with respect to frequency and axial mode index. On the other hand quasi-optical cavities have excellent transverse mode selectivity. Because the radiation traverses an oscillator cavity many times instead of once as in an amplifier, the interaction length can be relatively short and this helps prevent the build-up of spurious oscillations which are a major issue for amplifiers, particularly at high frequencies. The short interaction length also helps reduce the sensitivity to beam velocity spread. Additionally, a free-running oscillator does not require a source of input power, an expensive and scarce commodity at submillimeter wavelengths. The amplifier also requires an overmoded but highly mode selective and nonbeam-intercepting input coupler, a difficult engineering problem. The efficiency potential of CARM oscillators and amplifiers appears to be similar, of order 20-40%. The circulating power in a high Q oscillator is generally much greater than the output power. This leads to somewhat greater ohmic losses for a given output power for the oscillator compared to the amplifier; however, oscillators can be designed for megawatt CW powers.

NRL currently has an ongoing short pulse ~ 50 nsec, 100 GHz CARM oscillator experiment based on a 600 kV, 200 Amp electron beam produced by a pulseline accelerator. The objectives of the experiment are to investigate CARM physics and to demonstrate the high efficiency potential of the CARM oscillator at multimewatt power levels. A 200-300 GHz

CARM oscillator based on a 0.5 MV thermionic cathode electron gun is currently in the design and planning stage. The device would have a pulse length of 1 microsecond and be rep-rated. The goal of the "long pulse" experiment would be to achieve output powers of about 10 MW and efficiencies in the 20-40% range.

2 CARM Efficiency Optimization

Consider the interaction of the electron beam with the TE mode of a vacuum waveguide. The transverse electric field is the form:

$$\vec{E}_\perp(\vec{r}, t) = \Re \left\{ E_0 \vec{z} \times \vec{\nabla}_\perp \psi(\vec{r}) e^{-i\omega t} \right\} \quad (3)$$

where E_0 is the field amplitude, ω is the wave angular frequency, and ψ is the mode scalar function. For a TE_{mn} circular waveguide mode, the scalar function is given by:

$$\psi(\vec{r}) = C_{mn} J_m(k_{mn} r) e^{im\theta} \quad (4)$$

where J_m is a Bessel function of the first kind, m is the azimuthal index, n is the radial index, and x_{mn} is the n^{th} zero of J_m . The mode normalization coefficient C_{mn} is given by:

$$C_{mn} = \left\{ \sqrt{\pi (x_{mn}^2 - m^2)} J_m(x_{mn}) \right\}^{-1} \quad (5)$$

As shown by Fliflet [2], application of single particle theory to the CARM interaction for the s^{th} harmonic leads to the following normalized equations of motion:

$$\frac{du}{d\zeta} = (1-u)^{s/2} \Re \left\{ F_s e^{-i\Theta} \right\} / (1-bu) \quad (6)$$

$$\frac{d\Theta}{d\zeta} = \left[\Delta - u + \frac{s}{2} (1-u)^{s/2-1} \Re \left\{ i F_s e^{-i\Theta} \right\} \right] / (1-bu) \quad (7)$$

where u is the normalized electron energy:

$$u = \frac{2}{\beta_{10}^2} \left(1 - \beta_{||0} / \beta_{ph} \right) (1 - \gamma / \gamma_0), \quad (8)$$

Θ is a slowly varying phase, F_s is the normalized wave amplitude function, which for the fundamental harmonic interaction is given by:

$$F_1 = \frac{2e}{\gamma_0 m_0 c^2} \frac{(1 - \beta_{||0} / \beta_{ph})^2}{\beta_{10}^3 \sqrt{1 - \beta_{ph}^{-2}}} C_{mn} J_{m-1}(k_{mn} r_b) E_0, \quad (9)$$

ζ is the normalized axial coordinate:

$$\zeta = \frac{\beta_{\perp 0}^2}{2\beta_{\parallel 0}} \frac{1 - \beta_{ph}^{-2}}{1 - \beta_{\parallel 0}/\beta_{ph}} (\omega z/c), \quad (10)$$

Δ is the resonance detuning parameter:

$$\Delta = \frac{2(1 - \beta_{\parallel 0}/\beta_{ph})}{\beta_{\perp 0}^2(1 - \beta_{ph}^{-2})} (1 - \beta_{\parallel 0}/\beta_{ph} - s\Omega/\omega) \quad (11)$$

and b is the electron recoil parameter:

$$b = \frac{\beta_{\perp 0}^2}{2\beta_{\parallel 0}\beta_{ph}(1 - \beta_{\parallel 0}/\beta_{ph})} \quad (12)$$

In Equation (9), e is the magnitude of the electron charge, and m_0 is the electron mass.

The electron axial and transverse momenta are given by:

$$p_{\parallel} = \gamma_0 m_e c \beta_{\parallel 0} (1 - bu) \quad (13)$$

$$p_{\perp} = \gamma_0 m_e c \beta_{\perp 0} \sqrt{1 - u} \quad (14)$$

The electron recoil parameter b characterizes how the axial momentum varies with beam energy; as shown in Eq.(14), the larger b is, the more rapidly the axial momentum decreases with decrease in γ . The CARM interaction is characterized by $b \sim 0.3-0.6$, the gyrotron regime is obtained by setting $b = 0$.

The electronic efficiency can be written in the form: $\eta = \eta_{sp} \hat{\eta}$ where η_{sp} is the single particle efficiency given by:

$$\eta_{sp} = \frac{\beta_{\perp 0}^2}{2(1 - \beta_{\parallel 0}/\beta_{ph})(1 - \gamma_0^{-1})} \quad (15)$$

and $\hat{\eta}$ is the normalized efficiency given by:

$$\hat{\eta} = \int_0^{2\pi} u(\mu, \Theta_0) d\Theta_0 \quad (16)$$

where μ denotes the normalized interaction length and Θ_0 is the initial value of the slowly varying phase parameter. For a given harmonic, recoil parameter, and axial profile for the wave field, the normalized efficiency for optimized Δ can be presented on an $F - \mu$ plot

similar to the plot used to characterize the gyrotron [3]. The parameter F' defined in this paper divided by two is equal to the amplitude parameter F defined by Danly *et al* [3] in the limit: $b \rightarrow 0, \beta_{ph} \rightarrow \infty$. A plot of optimized constant normalized efficiency contours as a function of F and μ is shown for the case of $b = 0.4$ and constant wave field amplitude in Figure 1. The corresponding iso- Δ values are shown in Figure 2. Figures 1 and 2 show that for a constant field profile, the maximum normalized efficiency is $\approx 36\%$ and the optimum parameters are $F = 0.2$, $\mu = 8$, and $\Delta = 0.6$. It is of interest to note that in the gyrotron limit ($b = 0$), the optimum normalized efficiency is 42%. In the case of the gyrotron the normalized efficiency can be increased to over 70% by suitably profiling the axial profile of the wave field and it is expected that a similar enhancement for the CARM can be achieved using this technique.

3 Short-Pulse 100 GHz CARM Oscillator

A Proof-of-Principle experiment based on a waveguide cavity with a Bragg reflectors has been set up to investigate the CARM configuration. The device is designed to operate at 100 GHz with a 600 KV, 200 Amp electron beam produced by a pulseline accelerator with a pulselength of ~ 50 nsec. The choice of beam and cavity parameters is based on the theory outlined in Section 2. This theory, which assumes a cold beam, predicts an efficiency of 20% at a power of 24 MW. A schematic of the device configuration is shown in Figure 3. The annular electron beam propagates near the wall of the Bragg reflector waveguide cavity which has been optimized for the TE_{61} circular waveguide mode.

The ability to produce a high quality beam is considered critical to the success of this experiment, a major objective of which is to demonstrate high efficiency for the CARM interaction. The beam quality requirement can be estimated by a simple coherence argument. The constraint on axial velocity spread is:

$$\Delta v_{\parallel}/v_{\parallel} < \lambda/(2L) \quad (17)$$

for no spread in beam energy. Equation (17) can readily be expressed as a constraint on pitch angle spread. The constraint on energy spread for a beam with no pitch angle spread

is

$$\frac{\Delta\gamma}{\gamma} < \frac{(1 - \gamma_0^{-2})(\lambda/2L)}{(1 + \alpha^2)(\Omega/\omega - \gamma_0^{-2})} \quad (18)$$

where α is the average momentum pitch ratio of the beam. These relationships lead to the curves for axial momentum, pitch angle, and energy spread shown in Figure 4 for a 600 kV CARM with $\beta_{\perp} = 1/\gamma_0$. These curves show that there is greater sensitivity to pitch angle spread than to energy spread, a feature related to the auto-resonant character of the interaction. Note that the denominator of Eq.(18) can be small when $\gamma \gg 1$ since in this case for the CARM $\omega/\Omega \approx \gamma^2$. The required tolerances are considered achievable except for group velocities very close to the speed of light. To minimize sensitivity to beam velocity spread, a group velocity of 0.86c was chosen for the 100 GHz short pulse experiment.

The cold cathode diode is expected to produce a highly laminar space-charge-limited-flow beam via the use of nonemitting focussing electrodes. The cathode is anodized aluminum with a velvet or graphite emitting surface. The diode is expected to produce a high quality beam with only a few percent spread in axial momentum. This diode is based on a theory of relativistic laminar flow diodes recently developed at NRL by Finn, Fliflet and Manheimer [4]. The transverse momentum required for the CARM interaction is provided by a nonadiabatic dip in the applied magnetic field followed by adiabatic compression of the magnetic field [5]. Simulations of the beam formation system carried out using the Hermansfeldt Electron Trajectory Code [6] indicate that an axial velocity spread of about 3% in the interaction region should be obtainable with this system.

An important feature of the Bragg reflector cavity is that it has a high Q factor for only a limited range of axial wavenumbers. Our design studies for the 100 GHz CARM experiment indicate that this type of cavity can be highly selective with respect to both transverse and longitudinal mode indices [7,8]. Other advantages of this type of resonator include compactness which facilitates beam transport and magnet design, and the possibility of profiling the cavity fields for efficiency enhancement similarly to what is done for gyrotrons. A Bragg cavity and associated radiation profile are shown in Figure 5. The depth of the Bragg ripples is considerably exaggerated. The TE_{61} whispering gallery mode with $Q \approx 1500$ was chosen as the operating mode. This type of mode couples well to both the

electron beam and to the Bragg reflectors. Other whispering gallery modes with radial index $n = 1$ represent the principal CARM-type competing modes. The frequency separation of 3 GHz should prevent competition between these modes while allowing step-tunability. Another important feature of this cavity is that reflector bandwidth was chosen sufficiently narrow that there is only a single axial mode per transverse mode. The CARM mode Q factor must be chosen high enough to prevent competition from low frequency (gyrotron) modes.

4 Long-Pulse CARM Oscillator

The present 600 kV, 100 GHz CARM oscillator project is expected to provide important data on the potential of the CARM as an efficient high power source. However, a thermionic cathode experiment is essential for complete investigation of CARM issues. A preliminary design has been obtained at for a 500 kV, 250 GHz thermionic cathode device. A 55 kG magnetic field—produced by a superconducting magnet—is required for operation with $\beta_{\perp} = 1/\gamma$. A TE_{14} mode has been chosen based on output power, e-beam size, and wall heating considerations. High power operation in a waveguide cavity at wavelengths ≤ 1 mm requires group velocities close to the speed of light with attendant sensitivity to beam quality. This results from the need for cavity dimensions large compared to the wavelength and the need to control ohmic heating. A group velocity of $0.97c$ was chosen for the preliminary design. An output power of 10 MW is obtained for 92% output reflectivity and the wall loading is about 3 kW/cm^2 for the optimum efficiency wave amplitude. The peak electric fields at the wall are less than 50 kV/cm for the TE_{14} mode. Operation at 10% duty factor would result in an average power of 1 MW and an average wall loading of 0.3 kW/cm^2 . The computed cold beam efficiency is $\sim 20\%$ and the required beam current is 100 Amps. The cavity radius is 9.3 mm and the electron beam radius for a beam placed on the third E-field peak—this avoids coupling to whispering gallery modes which have high ohmic losses—is 5.6 mm. An annular electron beam is generated by a temperature-limited MIG type 500 kV electron gun. The cathode emission current density is $\sim 10 \text{ A/cm}^2$ at a current of 100 Amps, a cathode loading compatible with high duty factor operation.

The gun perveance is $0.28 \mu\text{perv}$. For comparison, the gun for the SLAC klystron has a perveance of $2 \mu\text{perv}$; thus space-charge defocussing effects should be controllable. Very low pitch angle spread (a critical CARM requirement) should be obtainable with this type of gun. The design goal is an axial momentum spread of a few percent. This experiment should provide highly a relevant technology base for a burst mode 280 GHz source for CIT or Alcator C-Mod.

A preliminary electrode design has been obtained for a 500 kV, 100 Amp, 1 μsec pulse length MIG-type electron gun. Based on calculations using the Herrmannsfeldt Electron Trajectory Code, the electrodes produce a highly laminar, temperature-limited, annular electron beam with a final momentum pitch ratio $\alpha \sim 0.5$ and very low axial velocity spread, $\Delta v_{\parallel}/v_{\parallel} \sim 1\%$. A schematic of the gun is shown in Figure 6.

Volume TE modes such as TE_{0n} or TE_{1n} type modes have much lower wall losses due to ohmic heating and lower peak rf fields at the wall than whispering gallery ($\text{TE}_{m1}, m \gg 1$) modes and are therefore of interest for high duty factor applications. However, special cavity designs are required to select these modes. Possible approaches include the use of axial slots to select TE_{1n} modes or suppression of axial currents (wire-walled waveguide) for TE_{0n} modes. Quasi-optical cavity configurations will also be investigated. The attractiveness of such cavities increases with increase in the radiation frequency since for high power it becomes necessary to increase cavity size relative to the wavelength. Open mirror quasi-optical cavities also allow the wave phase velocity to be controlled independently of the transverse mode or transverse dimensions of the cavity. As discussed by Sprangle *et al* [9], this control is obtained by varying the angle between the radiation and beam propagation directions. The phase velocity can also be chosen to minimize the effect of beam energy spread. Quasi-optical cavities have excellent transverse mode selectivity and should not support low frequency (gyrotron) modes.

5 Acknowledgment

This work was supported by the U.S. Office of Naval Research.

References

- [1] V. L. Bratman, N.S. Ginzburg, G.S. Nusinovich, M.I. Petelin, and P.S. Stelkov, *Int. J. Electron.* **51** (1981) 541
- [2] A.W. Fliflet, *Int. J. Electron.* **61** (1986) 1049
- [3] B.G. Danly and R.J. Temkin, *Phys. Fluids* **29** (1986) 561
- [4] J.M. Finn, A.W. Fliflet and W.M. Manheimer, *Int. J. Electron.* **61** (1986) 985
- [5] S.H. Gold, A.W. Fliflet, W.M. Manheimer, R.B. McCowan, W.M. Black, R.C. Lee, V.L. Granatstein, A.K. Kinkcad, D.L. Hardesty and M. Sucey, *Phys. Fluids* **30** (1987) 2226
- [6] W.B. Herrmannsfeldt, SLAC-Report-226, Stanford Linear Accelerator Center, Stanford, California, U.S.A. (1979)
- [7] R.B. McCowan, A.W. Fliflet, S.H. Gold, V.L. Granatstein and M.C. Wang, *Int. J. Electron.* **65** (1988) 463
- [8] R.B. McCowan, A.W. Fliflet, S.H. Gold, W.M. Black, A.K. Kinkead, V.L. Granatstein and M. Sucey, *IEEE Trans. Electron Devices*, Part II, to be published
- [9] P. Sprangle, C.-M. Tang and P. Serafin, *Nucl. Instrum. Methods Phys. Res.* **250** (1986) 361

ISO-EFFICIENCY CONTOURS

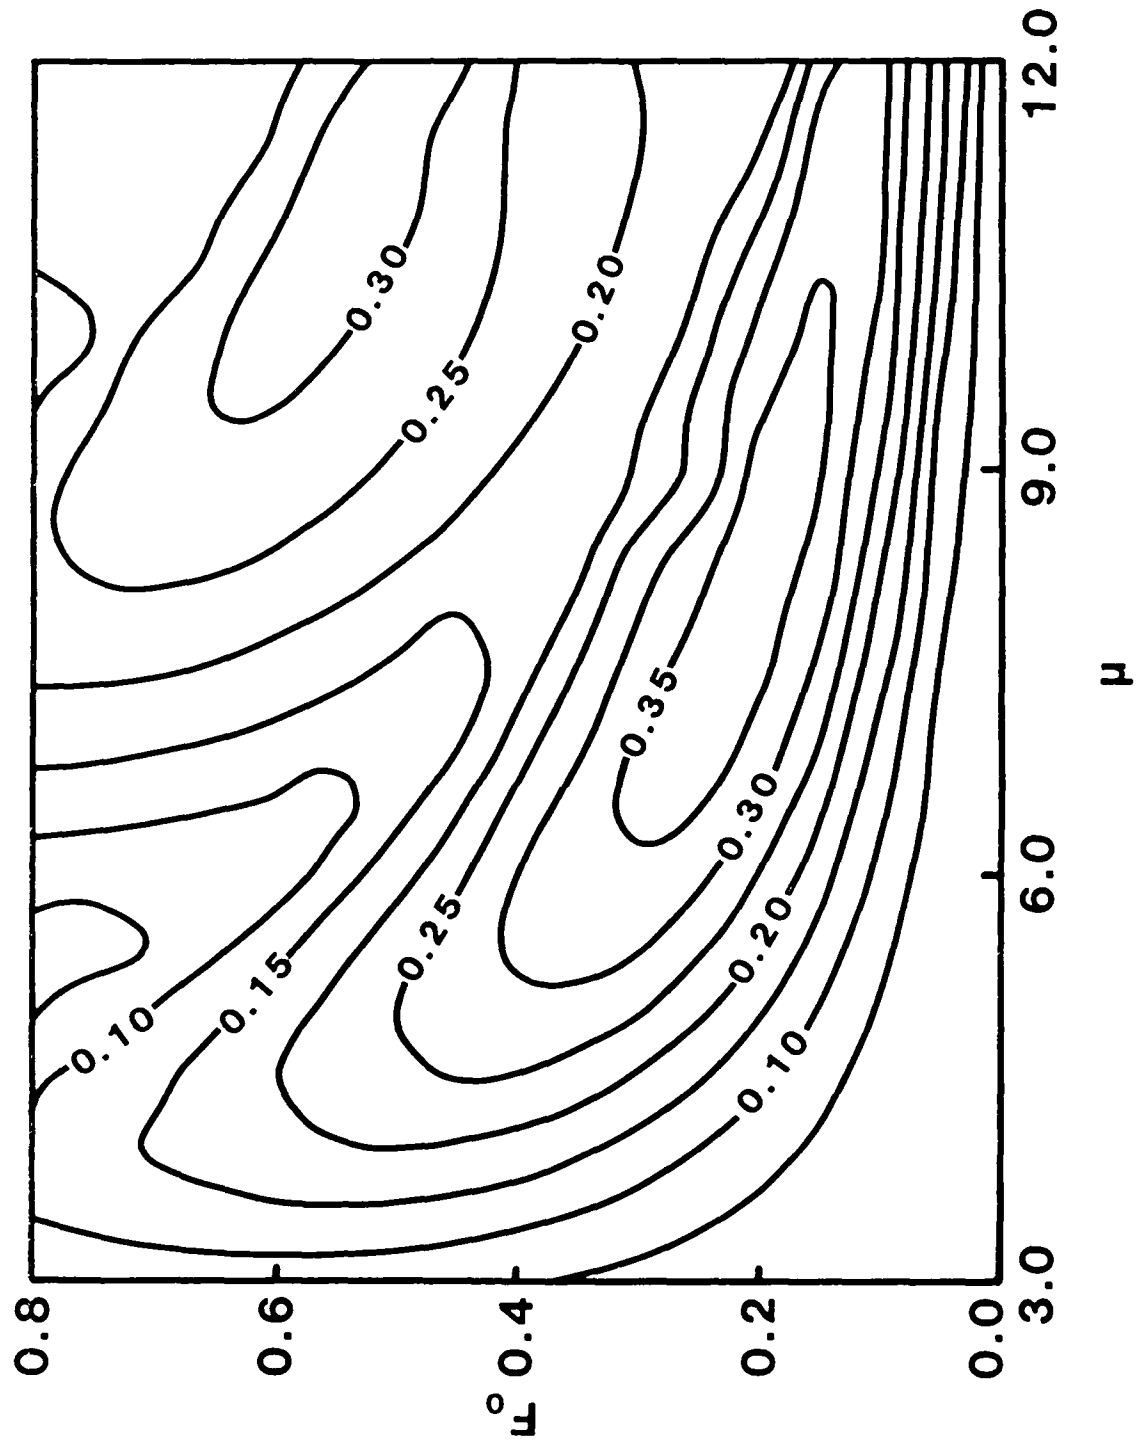


Figure 1. $F - \mu$ plot of optimum normalized efficiency for a constant amplitude wave and $b = 0.4$.

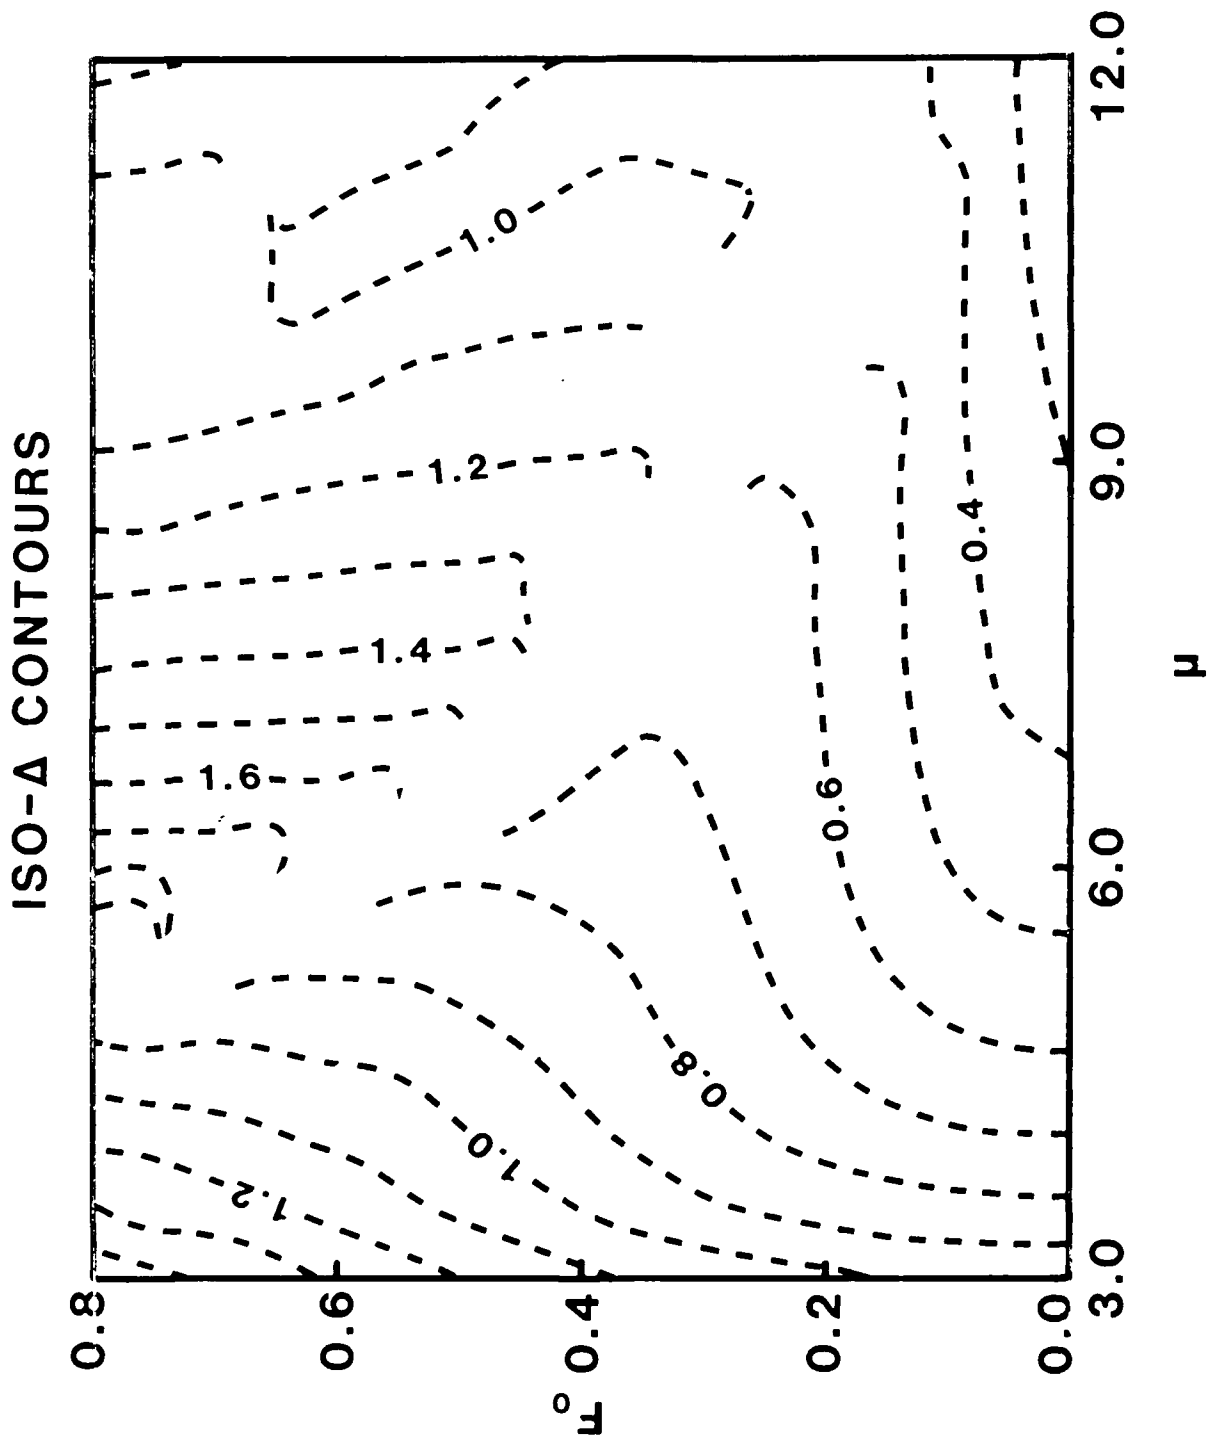


Figure 2. $F - \mu$ plot of Δ corresponding to optimum efficiency for a constant amplitude wave and $b = 0.4$.

NRL 100 GHZ CARM OSCILLATOR EXPERIMENT

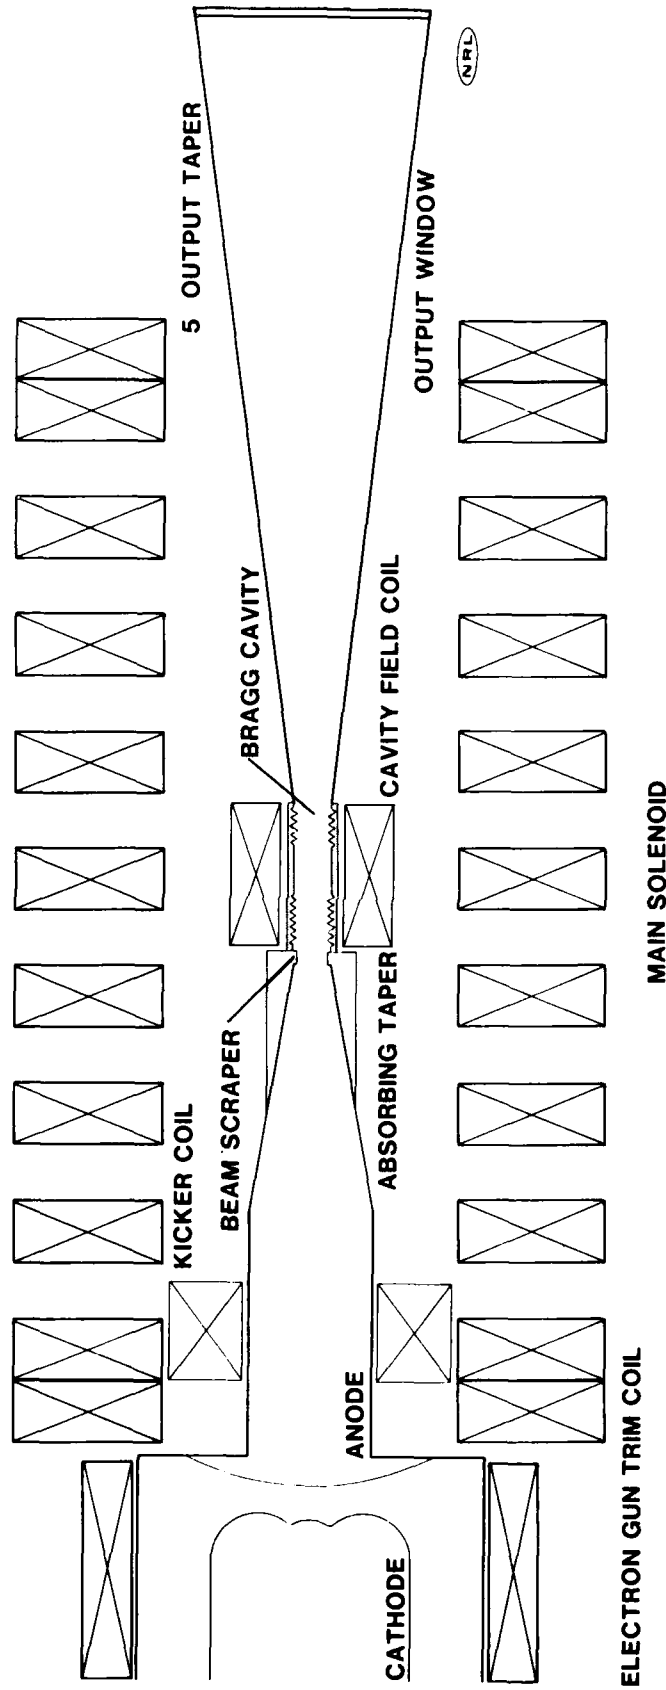


Figure 3. Schematic of 100 GHz short-pulse CARM Oscillator experiment.

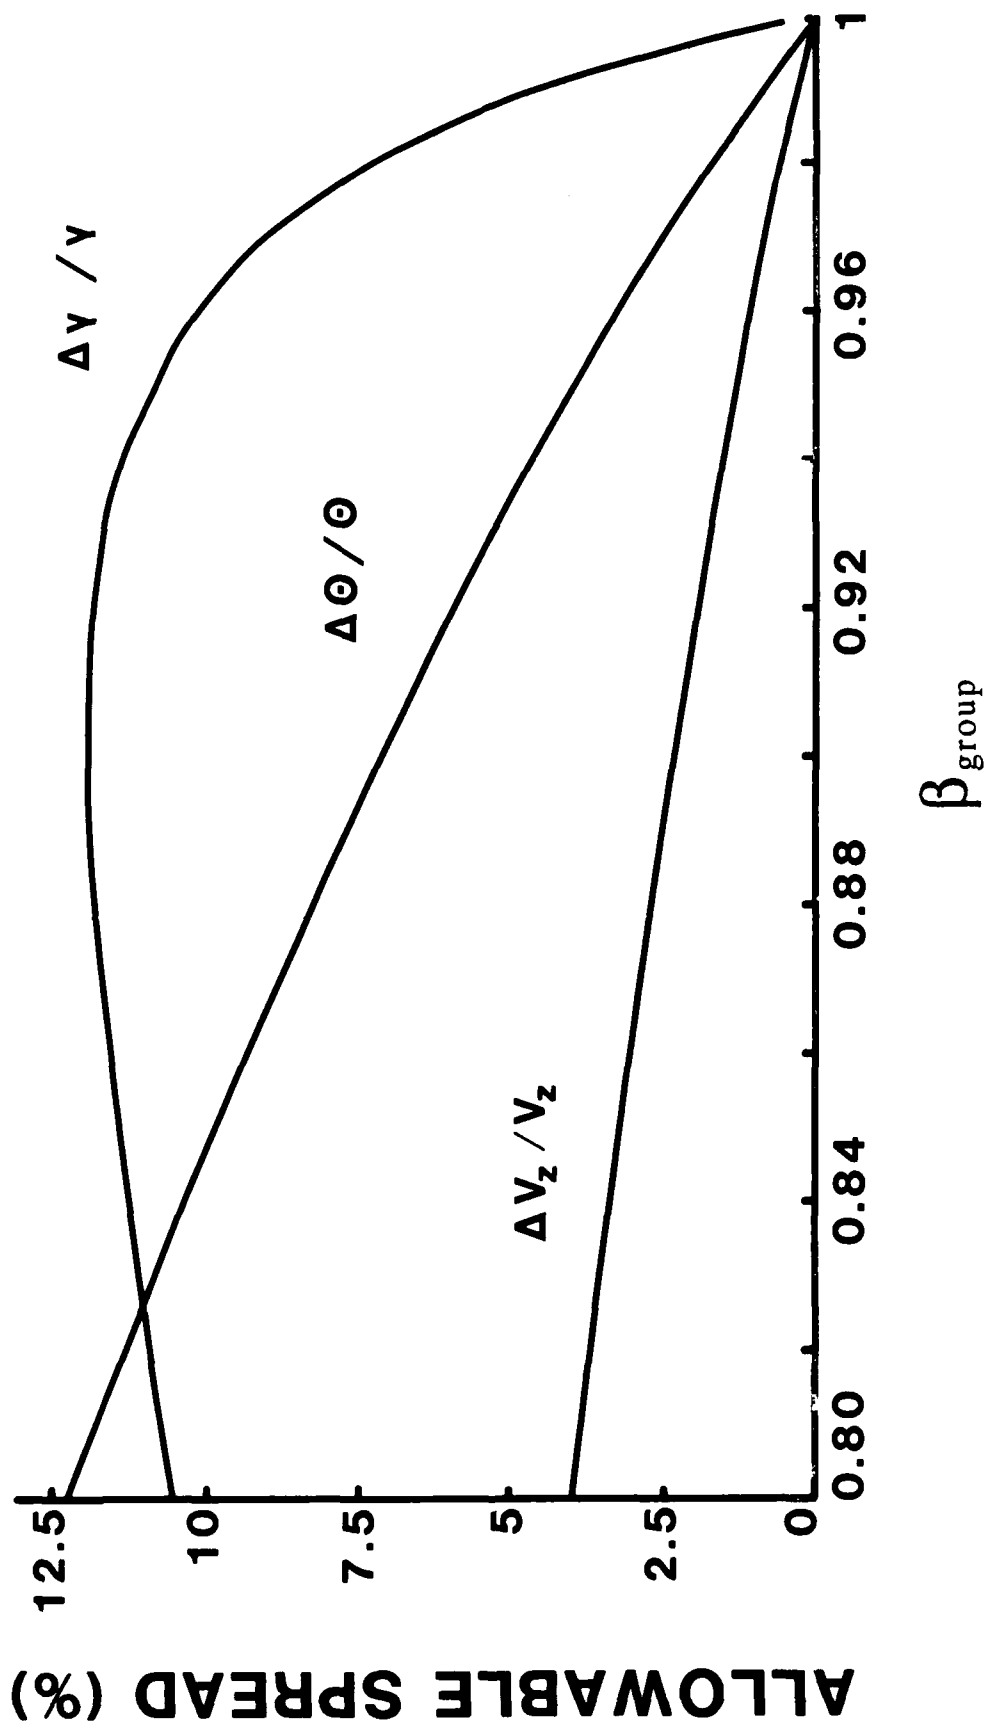


Figure 4. Electron beam quality requirements for a 600 kV CARM oscillator with $\beta_L = 1/\gamma_0$.



DOWNSTREAM REFLECTOR

UPSTREAM REFLECTOR

a_1

a_2

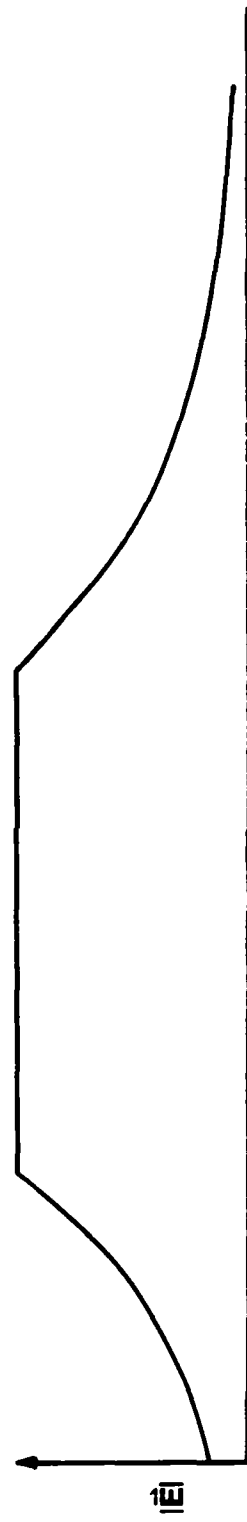
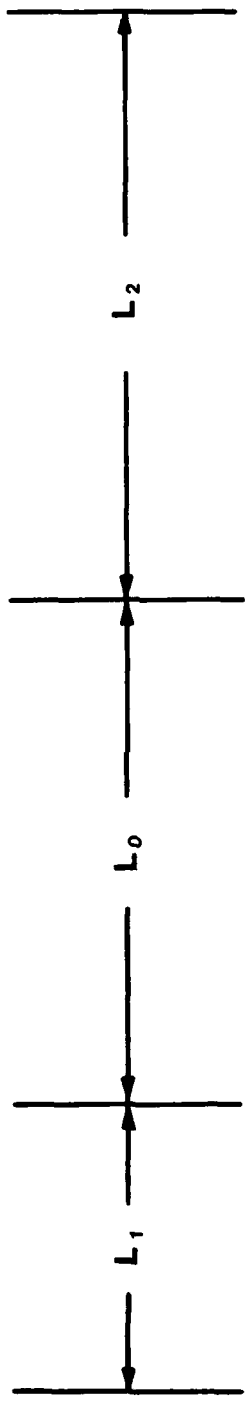


Figure 5. CARM waveguide cavity with Bragg reflectors and associated radiation profile.

500 kV MAGNETRON INJECTION GUN FOR CARM OSCILLATOR

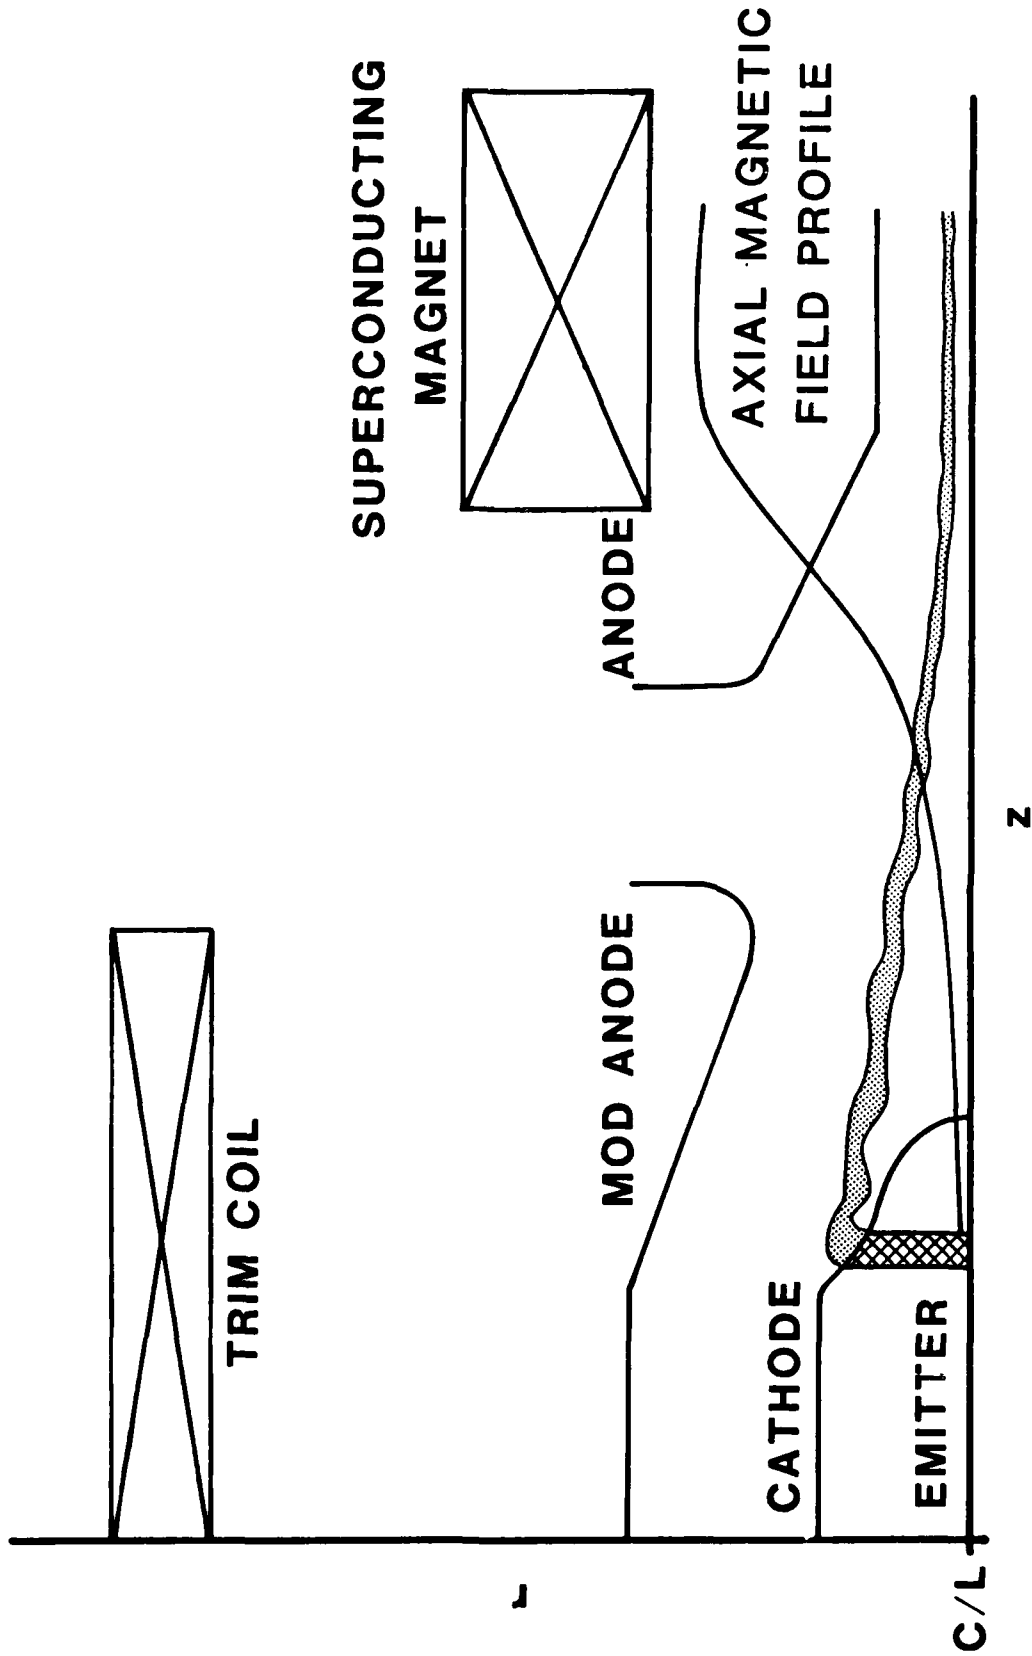


Figure 6. Schematic of a 500 kV, temperature-limited cathode, MIG-type electron gun for a 250 GHz CARM oscillator.

4740 DISTRIBUTION LIST

Air Force Avionics Laboratory AFWAL/AADM-1 Wright/Patterson AFB, Ohio 45433 Attn: Walter Friez	1 copy
Air Force Office of Scientific Research Bolling AFB Washington, D.C. 20332 Attn: H. Schlossberg	1 copy
Air Force Weapons Lab Kirkland AFB Albuquerque, New Mexico 87117 Attn: Dr. William Baker Dr. A.H. Guenter	2 copies 1 copy
Columbia University 520 West 120th Street Department of Electrical Engineering New York, N.Y. 10027 Attn: Dr. S.P. Schlesinger A. Sen	1 copy 1 copy
Columbia University 520 West 120th Street Department of Applied Physics and Nuclear Engineering New York, New York 10027 Attn: T.C. Marshall R. Gross	1 copy 1 copy
Cornell University School of Applied and Engineering Physics Ithica, New York 14853 Attn: Prof. Hans H. Fleischmann John Nation R. N. Sudan	1 copy 1 copy 1 copy
Creol-FEL Research Pavillion 12424 Research Parkway, Suite 400 Orlando, FL 32826 Attn: Dr. Luis R. Elias Dr. I. Kimel	1 copy 1 copy
Dartmouth College 18 Wilder, Box 6127 Hanover, New Hampshire 03755 Attn: Dr. John E. Walsh	1 copy

Department of Energy Div. of Advanced Energy Projects Washington, DC 20545 Attn: Dr. R. Gajewski	1 copy
Department of Energy The Pentagon Washington, D.C. 20545 Attn: C. Finfgeld/ER-542, GTN T.V. George/ER-531, GTN D. Crandall/ER-55, GTN Dr. David F. Sutter/ER-224, GTN	1 copy 1 copy 1 copy 1 copy
Defense Advanced Research Project Agency/DEO 1400 Wilson Blvd. Arlington, Virginia 22209 Attn: Dr. S. Shey Dr. L. Buchanan	1 copy 1 copy
Defense Communications Agency Washington, D.C. 20305 Attn: Dr. Pravin C. Jain Assistant for Communications Technology	1 copy
Defense Nuclear Agency Washington, D.C. 20305 Attn: Mr. J. Farber Dr. Leon Wittwer (RAAE)	1 copy 5 copies
Defense Technical Information Center Cameron Station 5010 Duke Street Alexandria, Virginia 22314	2 copies
General Atomics 13-260 Box 85608 San Diego, CA 92138 ATTN: Dr. J. Doane Dr. C. Moeller	1 copy 1 copy
Georgia Tech. EES-EOD Baker Building Atlanta, Georgia 30332 Attn: Dr. James J. Gallagher	1 copy
Hanscomb Air Force Base Stop 21, Massachusetts 01731 Attn: Lt. Rich Nielson/ESD/INK	1 copy

Hughes Aircraft Co.
Electron Dynamics Division
3100 West Lomita Boulevard
Torrance, California 90509
Attn: J. Christiansen 1 copy
J.J. Tancredi 1 copy

Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265
Attn: Dr. R. Harvey 1 copy
Dr. R.W. Schumacher 1 copy

KMS Fusion, Inc.
3941 Research Park Dr.
P.O. Box 1567
Ann Arbor, Michigan 48106
Attn: S.B. Segall 1 copy

Lawrence Berkeley Laboratory
University of California
1 Cyclotron road
Berkeley, CA 94720
Attn: Dr. A.M. Sessler 1 copy

Lawrence Livermore National Laboratory
P.O. Box 808
Livermore, California 94550
Attn: Dr. D. Prosnitz 1 copy
Dr. T.J. Orzechowski 1 copy
Dr. J. Chase 1 copy
Dr. W.A. Barletta 1 copy
Dr. D.L. Birx 1 copy
Dr. R. Briggs 1 copy
Dr. E.T. Scharlemann 1 copy

Los Alamos National Scientific Laboratroy
P.O. Box 1663, MSJ 564
Los Alamos, NM 87545
Attn: Dr. Brian Newnam 1 copy

Los Alamos Scientific Laboratory
P.O. Box 1663, AT5-827
Los Alamos, New Mexico 87545
Attn: Dr. T.J.T. Kwan 1 copy
Dr. L. Thode 1 copy
Dr. C. Brau 1 copy
Dr. R. R. Bartsch 1 copy

Massachusetts Institute of Technology
 Department of Physics
 Cambridge, Massachusetts 02139
 Attn: Dr. G. Bekefi/36-213 1 copy
 Dr. M. Porkolab/NW 36-213 1 copy
 Dr. R. Davidson/NW 16-206 1 copy
 Dr. A. Bers/NW 38-260 1 copy
 Dr. K. Kreisler 1 copy
 Dr. B. Danby 1 copy
 Dr. G.L. Johnston 1 copy

Massachusetts Institute of Technology
 167 Albany St., N.W. 16-200
 Cambridge, Massachusetts 02139
 Attn: Dr. R. Temkin/NW 14-4107 1 copy

Spectra Technologies
 2755 Northup Way
 Bellevue, Washington 98004
 Attn: Dr. J.M. Slater 1 copy

Mission Research Corporation
 Suite 201
 5503 Cherokee Avenue
 Alexandria, Virginia 22312
 Attn: Dr. M. Bollen 1 copy
 Dr. Tom Hargreaves 1 copy
 Dr. J. Pasour 1 copy

Mission Research Corporation
 1720 Randolph Road, S.E.
 Albuquerque, New Mexico 87106
 Attn: Mr. Brendan B. Godfrey 1 copy

SPAWAR
 Washington, D.C. 20363
 Attn: E. Warden
 Code PDE 106-3113 1 copy
 Capt. Fontana
 PMW 145 1 copy

Naval Research Laboratory
 Addressee: Attn: Name/Code
 Code 1000 - Commanding Officer 1 copy
 Code 1001 - T. Coffey 1 copy
 Code 1200 - Capt M.A. Howard 1 copy
 Code 1220 - Security 1 copy
 Code 2628 - TID Distribution 22 copies
 Code 4000 - W. Ellis 1 copy
 Code 4000 - D. Nagel 1 copy
 Code 4700 - S. Ossakow 26 copies

Code 4700.1 - A.W. Ali	1 copy
Code 4710 - C. Kapetanakos	1 copy
Code 4740 - Branch Office	25 copies
Code 4740 - W. Black	1 copy
Code 4740 - A. Fliflet	1 copy
Code 4740 - S. Gold	1 copy
Code 4740 - A. Kinhead	1 copy
Code 4740 - W.M. Manheimer	1 copy
Code 4740 - M. Rhinewine	1 copy
Code 4770 - G. Cooperstein	1 copy
Code 4790 - B. Hui	1 copy
Code 4790 - C.M. Hui	1 copy
Code 4790 - Y.Y. Lau	1 copy
Code 4790 - P. Sprangle	1 copy
Code 5700 - L.A. Cosby	1 copy
Code 6840 - S.Y. Ahn	1 copy
Code 6840 - A. Ganguly	1 copy
Code 6840 - R.K. Parker	1 copy
Code 6840 - N.R. Vanderplaats	1 copy
Code 6850 - L.R. Whicker	1 copy
Code 6875 - R. Wagner	1 copy

Naval Sea Systems Command
 Department of the Navy
 Washington, D.C. 20362
 Attn: Commander
 PMS 405-300

1 copy

Northrop Corporation
 Defense Systems Division
 600 Hicks Rd.
 Rolling Meadows, Illinois 60008
 Attn: Dr. Gunter Dohler

1 copy

Oak Ridge National Laboratory
 P.O. Box Y
 Mail Stop 3
 Building 9201-2
 Oak Ridge, Tennessee 37830
 Attn: Dr. A. England

1 copy

Office of Naval Research
 800 N. Quincy Street
 Arlington, Va. 22217
 Attn: Dr. C. Roberson
 Dr. W. Condell
 Dr. T. Berlincourt

1 copy
 1 copy
 1 copy

Optical Sciences Center University of Arizona Tucson, Arizona 85721 Attn: Dr. Willis E. Lamb, Jr.	1 copy
Physics International 2700 Merced Street San Leandro, California 94577 Attn: Dr. J. Benford	1 copy
Physical Science Inc. 603 King Street Alexandria, VA 22314 ATTN: M. Read	1 copy
Princeton Plasma Plasma Physics Laboratory James Forrestal Campus P.O. Box 451 Princeton, New Jersey 08544 Attn: Dr. H. Hsuan	2 copies
Dr. D. Ignat	1 copy
Dr. H. Furth	1 copy
Dr. P. Efthimion	1 copy
Dr. F. Perkins	1 copy
Raytheon Company Microwave Power Tube Division Foundry Avenue Waltham, Massachusetts 02154 Attn: N. Dionne	1 copy
Sandia National Laboratories ORG. 1231, P.O. Box 5800 Albuquerque, New Mexico 87185 Attn: Dr. Thomas P. Wright	1 copy
Mr. J.E. Powell	1 copy
Dr. J. Hoffman	1 copy
Dr. W.P. Ballard	1 copy
Dr. C. Clark	1 copy
Science Applications, Inc. 1710 Goodridge Dr. McLean, Virginia 22102 Attn: Adam Drobot	1 copy
P. Vitello	1 copy
D. Bacon	1 copy
C. Menyuk	1 copy
Science Research Laboratory 15 Ward Street Somerville, MA 02143 Attn: Dr. R. Shefer	1 copy

Stanford University Dept. of Electrical Engineering Stanford, CA 94305 Attn: Dr. J. Feinstein	1 copy
Stanford University High Energy Physics Laboratory Stanford, California 94305 Attn: Dr. T.I. Smith	1 copy
Stanford University SLAC Stanford, CA 94305 Attn: Dr. Jean Labacqz	1 copy
TRW, Inc. One Space Park Redondo Beach, California 90278 Attn: Dr. H. Boehmer Dr. T. Romisser Dr. Z. Guiragossian	1 copy 1 copy 1 copy
University of California Physics Department Irvine, California 92717 Attn: Dr. G. Benford Dr. N. Rostoker	1 copy 1 copy
University of California Department of Physics Los Angeles, CA 90024 Attn: Dr. A.T. Lin Dr. N. Luhmann Dr. D. McDermott	1 copy 1 copy 1 copy
University of Maryland Department of Electrical Engineering College Park, Maryland 20742 Attn: Dr. V. L. Granatstein Dr. W. W. Destler	1 copy 1 copy
University of Maryland Laboratory for Plasma and Fusion Energy Studies College Park, Maryland 20742 Attn: Dr. Tom Antonsen Dr. John Finn Dr. Jhan Varyan Hellman Dr. W. Lawson Dr. Baruch Levush Dr. Edward Ott Dr. M. Reiser	1 copy 1 copy 1 copy 1 copy 1 copy 1 copy 1 copy

University of Tennessee Dept. of Electrical Engr. Knoxville, Tennessee 37916 Attn: Dr. I. Alexeff	Timothy Calderwood Code 2630	1copy 1 copy
University of New Mexico Department of Physics and Astronomy 800 Yale Blvd, N.E. Albuquerque, New Mexico 87131 Attn: Dr. Gerald T. Moore		1 copy
University of Utah Department of Electrical Engineering 3053 Merrill Engineering Bldg. Salt Lake City, Utah 84112 Attn: Dr. Larry Barnett Dr. J. Mark Baird		1 copy 1 copy
Director of Research U. S. Naval Academy Annapolis, Maryland 21402-5021		1 copy
U. S. Army Harry Diamond Labs 2800 Powder Mill Road Adelphi, Maryland 20783-1145 Attn: Dr. Howard Brandt Dr. Edward Brown Dr. Stuart Graybill Dr. A. Kehs Dr. J. Silverstein		1 copy 1 copy 1 copy 1 copy 1 copy
Varian Associates 611 Hansen Way Palo Alto, California 94303 Attn: Dr. H. Huey Dr. H. Jory Dr. Kevin Felch Dr. R. Pendleton Dr. A. Salop		1 copy 1 copy 1 copy 1 copy 1 copy
Varian Eimac San Carlos Division 301 Industrial Way San Carlos, California 94070 Attn: C. Marshall Loring		1 copy
Yale University Applied Physics Madison Lab P.O. Box 2159 Yale Station New Haven, Connecticut 06520 Attn: Dr. I. Bernstein		1 copy
DIRECTOR OF RESEARCH U. S. NAVAL ACADEMY ANNAPOLIS, MD 21402	Records Cindy Sims Code 2634	1copy 1copy

2 COPIES