

FILE COPY

AD

AD-E403 070

Technical Report ARFSD-TR-90006

AD-A223 671


DESIGN OF REDUCED ORDER LQG/LTR CONTROLLERS FOR TURRET-GUN SYSTEM

S. Vittal Rao
Department of Electrical Engineering
University of Missouri
Rolla, MO 65401

M. Mattice
N. Colmen, Jr.
Project Engineers
ARDEC

DTIC
ELECTE
JUL 10 1990
S B D

July 1990



US ARMY
ARMAMENT RESEARCH
& DEVELOPMENT CENTER
ARMAMENT RDE CENTER

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

Fire Support Armaments Center

Picatinny Arsenal, New Jersey

Approved for public release; distribution unlimited.

90 07 10 026

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			Approved for public release; distribution unlimited.	
4. PERFORMING ORGANIZATION REPORT NUMBER Technical Report ARFSD-TR-90006			5. MONITORING ORGANIZATION REPORT NUMBER	
6a. NAME OF PERFORMING ORGANIZATION ARDEC, FSAC (cont)		6b. OFFICE SYMBOL SMCAR-FSF-RC	7a. NAME OF MONITORING ORGANIZATION	
6c. ADDRESS (CITY, STATE, AND ZIP CODE) Fire Control Division Picatinny Arsenal, NJ 07806-5000 (cont)			7b. ADDRESS (CITY, STATE, AND ZIP CODE)	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION ARDEC, IMD STINFO Br		8b. OFFICE SYMBOL SMCAR-IMI-I	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (CITY, STATE, AND ZIP CODE) Picatinny Arsenal, NJ 07806-5000			10. SOURCE OF FUNDING NUMBERS	
			PROGRAM ELEMENT NO.	PROJECT NO. TASK NO. WORK UNIT ACCESSION NO.
11. TITLE (INCLUDE SECURITY CLASSIFICATION) DESIGN OF REDUCED ORDER LQG/LTR CONTROLLERS FOR TURRET-GUN SYSTEM				
12. PERSONAL AUTHOR(S) S. Vittal Rao, University of Missouri; M. Mattice and N. Coleman, Jr., Proj Engrs, ARDEC				
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM Sep 87 TO Sep 88	14. DATE OF REPORT (YEAR, MONTH, DAY) July 1990	15. PAGE COUNT 19
16. SUPPLEMENTARY NOTATION				
17. COSATI CODES			18. SUBJECT TERMS (CONTINUE ON REVERSE IF NECESSARY AND IDENTIFY BY BLOCK NUMBER)	
FIELD	GROUP	SUB-GROUP	Unmodelled dynamics, Reduced order model, Robust controllers, Linear quadratic gaussian with loop transfer recovery, LQG/LTR-GUNS, ordnance, Light Attack Helicopters	
19. ABSTRACT (CONTINUE ON REVERSE IF NECESSARY AND IDENTIFY BY BLOCK NUMBER)				
A linear quadratic gaussian with loop transfer recovery (LQG/LTR) methodology has been applied to design robust controllers for turret-gun systems. A reduced order design procedure is presented using balanced realization reduced order models. A critical comparison is made between original and reduced order controllers. The performance of the reduced controller is satisfactory.				
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☐ UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT. ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL I. HAZENDARI			22b. TELEPHONE (INCLUDE AREA CODE) DSN(AV)880-3316	22c. OFFICE SYMBOL SMCAR-IMI-I

DD FORM 1473, 84 MAR

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

CONTENTS

	Page
Introduction	1
Plant Description	1
Modeling of Turret-Gun System	2
Design of LQG/LTR Controller	2
Full Order Design Results	3
Design Using Reduced Order Models	4
Simulation Results	5
Conclusions	5
References	13
Distribution List	15

FIGURES

1	Azimuth axis system	7
2	Closed loop system	8
3	Singular value plots of TFL and $G(s)k(s)$	8
4	Implementation of reduced order controller	9
5	Singular value plots of TFL and $G_b(s)k_b(s)$	9
6	Step response	10
7	Ramp response	10
8	Step response with disturbance	11



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

INTRODUCTION

Improvements in robust performance of a turret-gun system mounted on helicopters can significantly enhance the mission capabilities of light attack helicopters. Designing a controller for such a system whose mathematical model is subject to uncertainties is an interesting and challenging problem. The uncertainties in the model may arise from unmodeled dynamics, parameter variation, linearization of nonlinear elements, etc. A significant research effort has been directed toward the design and implementation of robust controllers which can guarantee the stability and performance.

Among the various methods available for design, the linear quadratic Gaussian with loop transfer recovery (LQG/LTR) design procedure has many advantages (refs 1 and 2). This methodology will result in systems with excellent robustness, command following, disturbance rejection and noise suppression properties. The direct application of this methodology for designing controllers for turret-gun system yielded a 12/13th order controller. The convergence/numerical integration problems in the simulation of this controller along with the nonlinear plant was encountered. Hence we have employed reduced order models in designing robust controllers using LQG/LTR methodology.

A large number of procedures are available in the literature for obtaining reduced order models (ref 3). A suitable reduced order model is identified for designing reduced order robust controllers. A critical comparison of robustness properties between original and reduced order controllers is made. The residual modes neglected in the reduced order procedure may be excited by the controller to cause a destabilizing effect on the closed loop system response. This phenomenon is called spillover problem which is not present in this design procedure.

PLANT DESCRIPTION

The turret-gun system consists of an automatic cannon driven by an electrical motor and mounted within a cradle using a slide mechanism which allows for recoil movement. Recoil adapters are mounted between the recoiling mass of the gun and the cradle to absorb some of the recoil force. The cradle and gun assemblies are attached to a fork using two trunnion pins. One trunnion pin has a resolver built into it. This resolver provides the elevation pointing error to the turret control box. The elevation axis positioning is accomplished through the use of a servovalve controlled, double acting hydraulic cylinder. The piston has unequal cross-sectional areas to account for gravitational effects. A delta hydraulic pressure transducer provides rate feedback information to the turret control box.

The fork assembly is held in place by the azimuth housing that holds a rotary hydraulic motor and a gearbox. The housing also holds a train rate sensor that measures the angular velocity of the gun/cradle/fork unit and a resolver for measuring the angular position.

The azimuth housing, fork, cradle, and gun are attached to the hull of the vehicle.

MODELING OF TURRET-GUN SYSTEM

The mathematical model of the turret-gun system contains nonlinear elements, such as gear train backlash, servovalve idiosyncrasies, hydraulic motor flows, etc. The firing disturbances excite the structural modes of the system.

Preliminary testing has shown that very little coupling exists between the elevation and azimuth axis. Therefore, the nonlinear azimuth and elevation models were developed independently. Production turret-gun systems are known to have problems mainly in the azimuth axis; therefore, this report has concentrated more on the azimuth axis.

The azimuth axis system (fig. 1) consists of three physically identifiable sections: servovalve, hydraulic motor/gearbox, and gun plant. A physical model of this system is developed by Integrated Systems Inc. (ISI). ISI has developed a detailed nonlinear model and identified various parameters of the model (ref 4). This model has been used to design full order and reduced order robust controllers.

DESIGN OF LQG/LTR CONTROLLER

The performance requirements of the controller for azimuth axis are:

- Closed loop stability under parameter variations
- Good command following performance
- Disturbance rejection
- Insensitive to modeling errors
- No spillover problems
- Sensor noise rejection

The types of uncertainties which affect the response of the system are:

- Barrel temperature
- Firing disturbance excites the structural modes of the gun
- Compliance of the system
- Helicopter motion
- Linearization of nonlinear elements

Full Order Design Results

A linearized 12th-order model of the azimuth system with motor current as input and train position as output has been derived. A typical feedback system (fig. 2) is desired to evaluate $k(s)$ using LQG/LTR methodology. After examining the physical nonlinear model of the azimuth system, it is concluded that most of uncertainties are at the output of the plant.

By using the standard results (refs 1 and 2) a full order order LQG/LTR controller has been carried out.

The singular value plots of the target feedback loop and the open loop transfer function $G(s)k(s)$ are shown in figure 3. The eigenvalues of the loop and closed loop system are given in table 1.

Table 1. Comparison of open loop and closed loop eigenvalues

<u>Open loop system</u>	<u>Closed loop system</u>
-1.7133×10^{-3}	$-3.396 \pm j 82.84, -90.519$
$-5.375 \pm j 52.04$	$-16.245 \pm j 172.8, -16.917 \pm 89.65$
$-19.819 \pm j 294.84$	$-5852.5 \pm j 1395.4, -63.58 \pm j 135.74$
$-20.265 \pm j 137.94$	$-4852.2 \pm j 4543.3, -37.05 \pm j 302.04$
-945.26	$-3113 \pm j 6280.8, -945.33$
-122.23 ± 6397.9	$-1405.3 \pm j 8136.5, -122.23 \pm j 6397.9$
-1573.2 ± 4550.7	$-1573.2 \pm j 4550.7$

Design Using Reduced Order Models

In order to minimize the computational and implementation requirements of LQG/LTR controllers, it is desirable to use reduced order models. The examination of open-loop eigenvalues of the system reveals that the system has seven dominant modes; therefore, the 7th order reduced models have been derived by using balanced realization method (ref 5). These reduced order models are employed to design LQG/LTR controllers.

The reduced controllers are implemented on the original system as shown in figure 4.

The singular value plots of the target feedback loop and the open loop transfer function $G(s)k_b(s)$ are shown in figure 5 where $K_b(s)$ is the LQG/LTR controller design using balanced realization reduced order models.

The eigenvalues of the original open loop system, reduced order model and closed loop systems with reduced order controllers are given in table 2.

Table 2. Eigenvalue comparisons

<u>Original open loop system</u>	<u>Reduced order model</u>	<u>Closed loop system with reduced controller</u>
-1.713×10^{-3}	-1.7133×10^{-3}	$-3.389 \pm j 82.89$
$-5.375 \pm j 52.04$	$-5.383 \pm j 52.04$	-7.62
$-19.819 \pm j 294.84$	$-19.996 \pm j 294.56$	$-16.55 \pm j 140.68$
$-20.265 \pm j 137.94$	$-20.733 \pm j 137.70$	$-16.90 \pm j 173.47$
-945.26		$-63.02 \pm j 310.19$
$-122.23 \pm j 6397.9$		$-76.-7 \pm j 57.62$
$-1573.2 \pm j 4550.7$		$-121.92 \pm j 6397.5$
		-624.02
		$-661.84 \pm j 1121.7$
		$-1571.4 \pm j 4552.9$
		-15894

The phase and gain margins of the target feedback loop and closed loop system with original and reduced order controllers are given in table 3.

Table 3. Phase and gain margins

	Margins	
	Gain (dB)	PM phase (deg)
Target feedback loop	00	69
Closed loop system with original controller	22	64
Closed loop system with reduced order controller	13	61

Simulation Results

The parameters of the system matrix are perturbed by 5% and the step responses for full order design and reduced order design are plotted in figure 6. For the same perturbation, the ramp responses were plotted in figure 7, and the step response with random disturbances at the output are given in figure 8.

CONCLUSIONS

Balance reduced order models are employed to design robust controllers using linear quadratic Gaussian with loop transfer recovery methodology for a practical turret-gun system. The eigenvalues and stability margins of the reduced order design are compared with the original controller. These comparisons and simulation results indicate that the reduced order design gave satisfactory results. The spillover problems are not present in this reduced order controller. The main advantage of the reduced order design is the simplification in implementation.

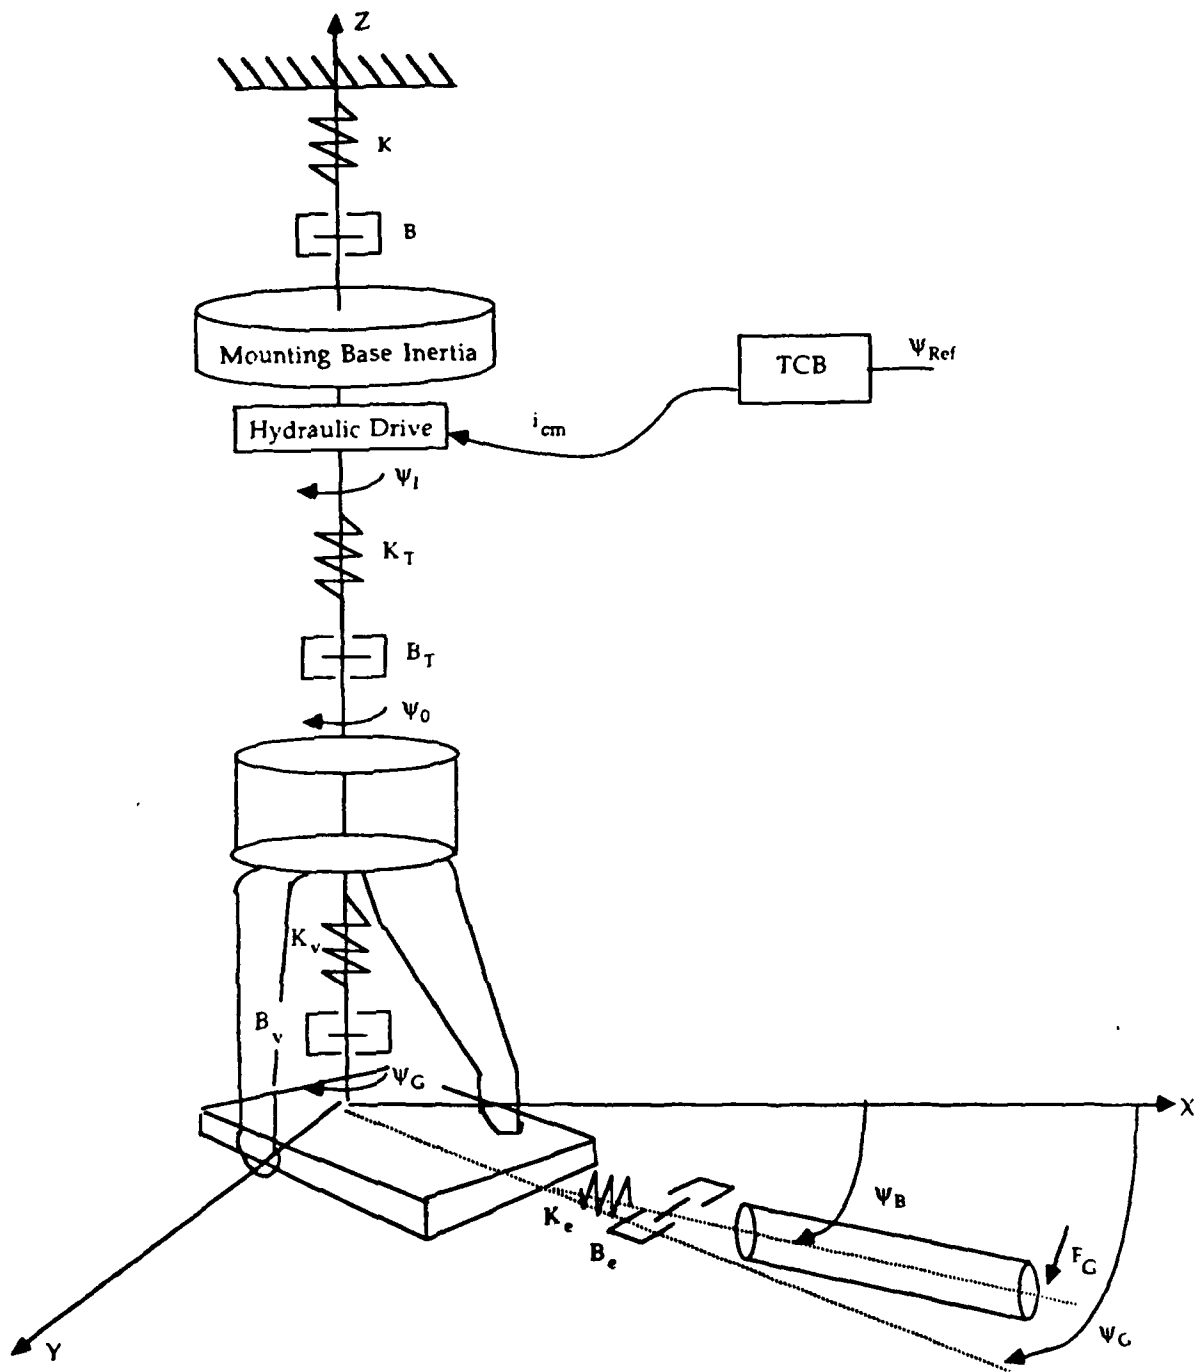


Figure 1. Azimuth axis system

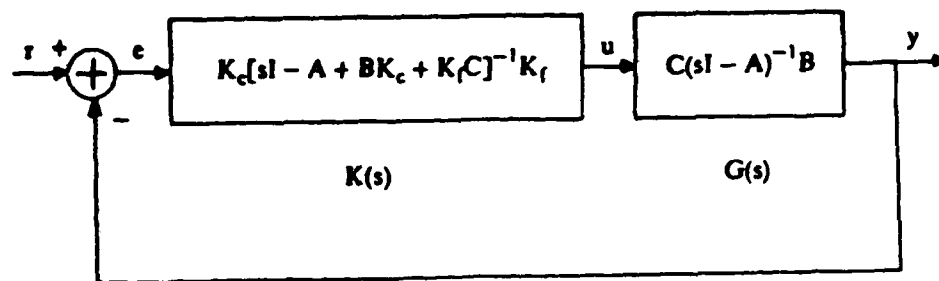


Figure 2. Closed loop system

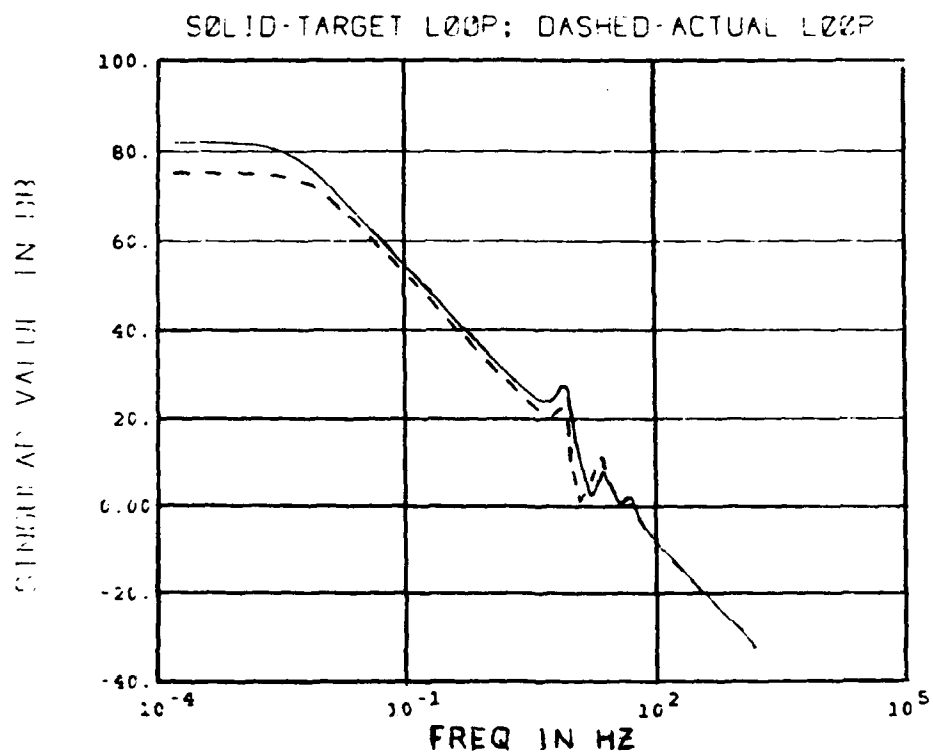


Figure 3. Singular value plots of TFL and $G(s)k(s)$

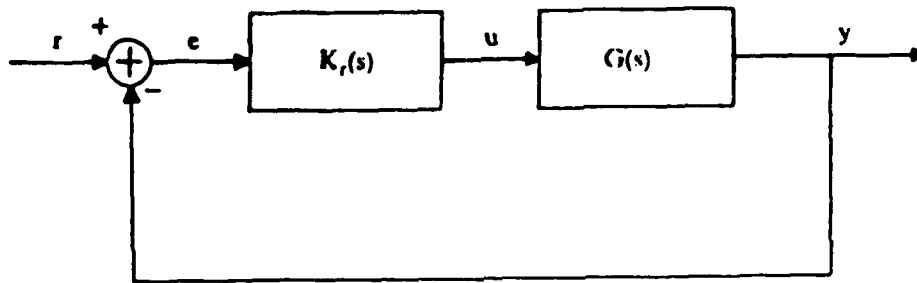


Figure 4. Implementation of reduced order controller

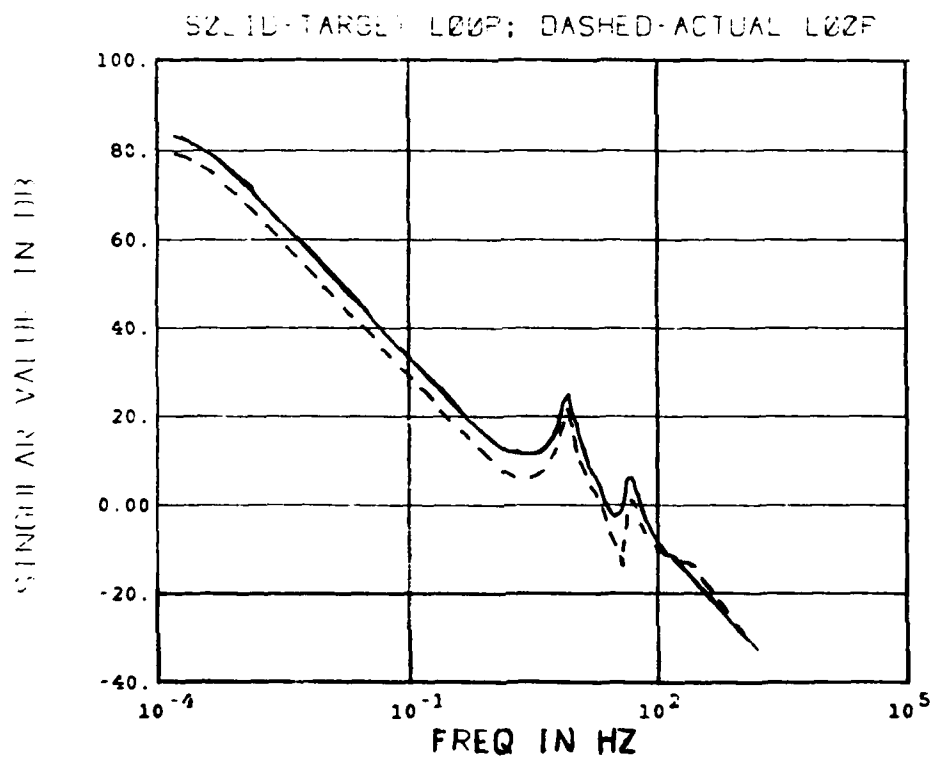


Figure 5. Singular value plots of TFL and $G_b(s)k_b(s)$

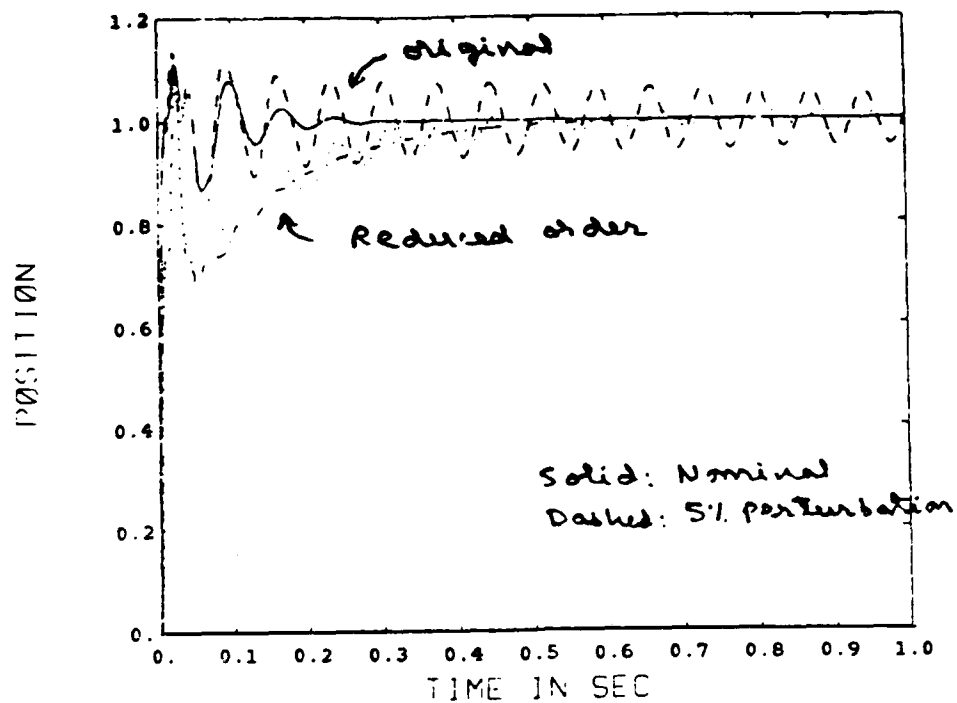


Figure 6. Step response

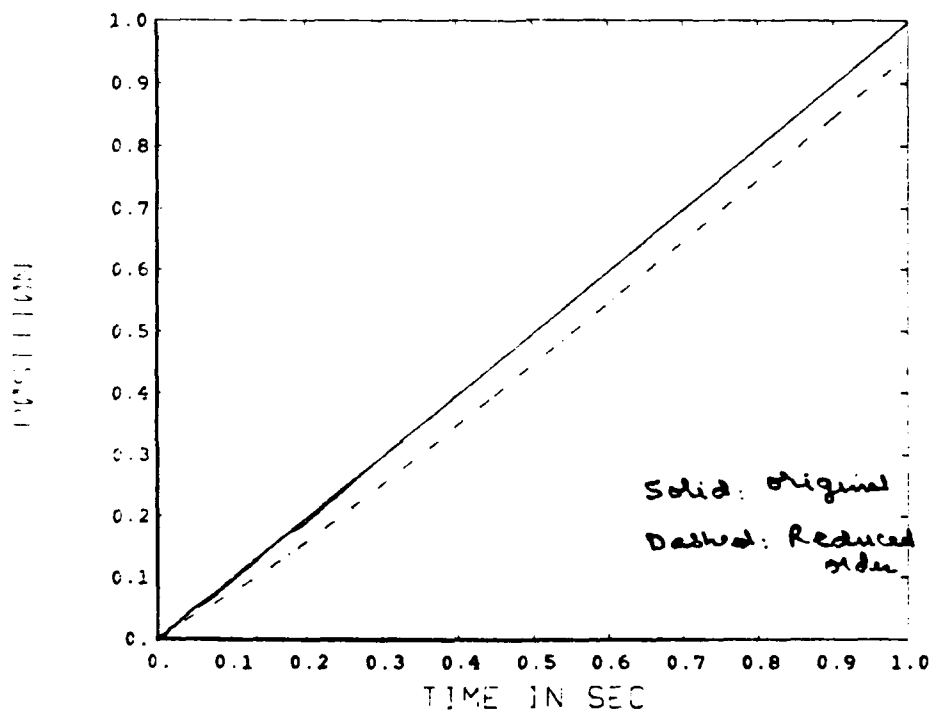


Figure 7. Ramp response

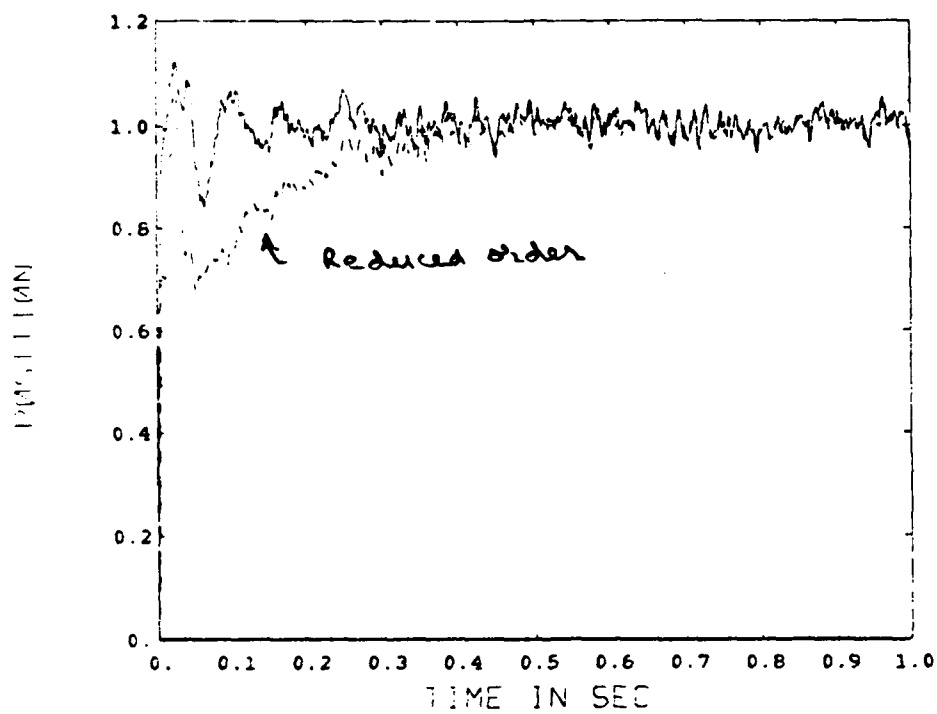


Figure 8. Step response with disturbance

REFERENCES

1. Athans, M., "A Tutorial on the LQG/LTR Method," Proceedings of American Control Conference, Seattle, pp 1289-1296, June 1986.
2. Athans, M. and Stein, G., "The LQG/LTR Procedure for Multivariable Feedback Control Design," IEEE Trans. on Automatic Control, vol AC-32, no. 2, pp 105-114, February 1987.
3. Bonvin, D. and Mellichamp, D. A., "A Unified Derivation and Critical Review of Model Approaches to Model Reduction," International Journal of Control, 1982, vol 35, no. 5, pp 829-848.
4. Shah, S., "Gun/Turret Adaptive Controller for Integrated Air-to-Air Weapon Systems," Report No. 127, Integrated Systems Inc., California, July 1988.
5. Moore, B. C., "Principal Component Analysis in Linear Systems: Controllability, Observability, and Model Reduction," IEEE Trans. Automatic Control, vol AC-26, no. 1, pp 17-31, February 1981.

DISTRIBUTION LIST

Commander
Armament Research, Development and Engineering Center
U.S. Army Armament, Munitions, and Chemical Command
ATTN: SMCAR-IMI-I (5)
SMCAR-FSF-RC (6)
Picatinny Arsenal, NJ 07806-5000

Commander
U.S. Army Armament, Munitions and Chemical Command
ATTN: AMSMC-GCL(D)
Picatinny Arsenal, NJ 07806-5000

Administrator
Defense Technical Information Center
ATTN: Accessions Division (12)
Cameron Station
Alexandria, VA 22304-6145

Director
U.S. Army Materiel Systems Analysis Activity
ATTN: AMXSY-MP
Aberdeen Proving Ground, MD 21005-5066

Commander
Chemical Research, Development and Engineering Center
U.S. Army Armament, Munitions and Chemical Command
ATTN: SMCCR-MSI
Aberdeen Proving Ground, MD 21010-5423

Commander
Chemical Research, Development and Engineering Center
U.S. Army Armament, Munitions and Chemical Command
ATTN: SMCCR-RSP-A
Aberdeen Proving Ground, MD 21010-5423

Director
Ballistic Research Laboratory
ATTN: AMXBR-OD-ST
Aberdeen Proving Ground, MD 21005-5066

Chief
Benet Weapons Laboratory, CCAC
Armament Research, Development and Engineering Center
U.S. Army Armament, Munitions and Chemical Command
ATTN: SMCAR-CCB-TL
Watervliet, NY 12189-5000

Commander
U.S. Army Armament, Munitions and Chemical Command
ATTN: SMCAR-ESP-L
Rock Island, IL 61299-6000

Director
U.S. Army TRADOC Systems Analysis Activity
ATTN: ATAA-SL
White Sands Missile Range, NM 88002