

ADA 952000

2

TECHNICAL REPORT-RD-WS-93-3

AD-A263 249



SPATIAL LIGHT MODULATORS (SLMs)
SURFACE QUALITY




gy
mm

Tracy D. Hudson
Weapons Sciences Directorate
Research, Development, and Engineering Center

REDSTONE SCIENTIFIC INFORMATION CENTER
5 0510 00063862 4

MARCH 1993

DTIC
ELECT
APR 23 1993
S B D



U.S. ARMY MISSILE COMMAND
Redstone Arsenal, Alabama 35898-5000

Approved for public release; distribution is unlimited.

93 4 22 007

93-08647



DESTRUCTION NOTICE

FOR CLASSIFIED DOCUMENTS, FOLLOW THE PROCEDURES IN DoD 5200.22-M, INDUSTRIAL SECURITY MANUAL, SECTION II-19 OR DoD 5200.1-R, INFORMATION SECURITY PROGRAM REGULATION, CHAPTER IX. FOR UNCLASSIFIED, LIMITED DOCUMENTS, DESTROY BY ANY METHOD THAT WILL PREVENT DISCLOSURE OF CONTENTS OR RECONSTRUCTION OF THE DOCUMENT.

DISCLAIMER

THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY OTHER AUTHORIZED DOCUMENTS.

TRADE NAMES

USE OF TRADE NAMES OR MANUFACTURERS IN THIS REPORT DOES NOT CONSTITUTE AN OFFICIAL ENDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERCIAL HARDWARE OR SOFTWARE.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT <i>Approved for public release; distribution is unlimited.</i>		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) Technical Report RD-WS-93-3			5. MONITORING ORGANIZATION REPORT NUMBER (S)		
6a. NAME OF PERFORMING ORGANIZATION Weapons Sciences Directorate RD&E Center		6b. OFFICE SYMBOL (if applicable) AMSMI-RD-WS-PO	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code) Commander, U. S. Army Missile Command ATTN: AMSMI-RD-WS-PO Redstone Arsenal, AL 35898-5248			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
					WORK UNIT ACCESSION NO.
11. TITLE (Include Security Classification) SPATIAL LIGHT MODULATORS SURFACE QUALITY (U)					
12. PERSONAL AUTHOR(S) Tracy D. Hudson					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM 1 Jun 92 TO 1 Sep 92		14. DATE OF REPORT (Year, Month, Day) March 1993	
				15. PAGE COUNT 17	
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Spatial light modulator; optical pattern recognition; optical correlators; optical systems		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The phase modulating properties of spatial light modulators (SLMs) have been investigated for optical pattern recognition purposes for many years. An interferometric microscope was recently utilized to investigate the surface uniformity, and thus phase distortion, of several SLMs that are commercially available. These interferometric results are presented here and verify that the optical uniformity of SLMs should be considered when phase modulating properties of the devices are to be applied in optical systems.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☐ UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT. ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Tracy D. Hudson			22b. TELEPHONE (Include Area Code) (205) 876-6242		22c. OFFICE SYMBOL AMSMI-RD-WS-PO

TABLE OF CONTENTS

I. INTRODUCTION	1
II. EXPERIMENTAL DATA.....	1
III. CONCLUSION.....	3
REFERENCES.....	9

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Interferogram of Read Side of mid-1970s Edition Hughes Corporation Liquid Crystal Light Valve.....	3
2	Interferograms from the (a) Read, and (b) Write side of Hughes Corporation LCLV Manufactured in mid-1980s.....	4
3	Interferograms of FLC SLM Manufactured by the University of Colorado-Boulder: (a) The Haidinger Fringe Structure Due to Parallelism Between the Read and Write Surfaces of the Device, and (b) The Read Side Input Window Superimposed on the Haidinger Fringe Structure.....	5
4	The Interferograms from the (a) Read, and (b) Write Input Windows of the FLC SLM Fabricated by Displaytech.....	6
5	Interferograms of the (a) Read, and (b) Write Windows of a Lockheed Liquid Crystal SLM.....	7
6	Interferograms of the (a) Write, and (b) Read Side of a Loral Corporation Liquid Crystal SLM.....	8

DTIC QUALITY INSPECTED

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

I. INTRODUCTION

The phase modulating properties of spatial light modulators (SLMs) have been investigated for optical pattern recognition purposes for many years. SLMs investigated include Hughes Liquid Crystal Light Valve (LCLV), Ferroelectric Liquid Crystal (FLC) devices, liquid crystal spatial light modulators from Loral and Lockheed Corporations, and Liquid Crystal Televisions (LCTVs) to name a few. Researchers have attempted to exploit the phase modulating properties of these devices for phase-only matched filtering, computer-generated binary phase-only filters, and optical associative memories [1]. Early investigations of LCTVs for these applications found that a liquid gate was required because of the nonuniform glass sandwich structure of the devices. More recent investigations verify the continued existence of phase distortions from less than one fringe across the device to more than two for recent liquid crystal displays [2].

II. EXPERIMENTAL DATA

An interferometric microscope (Graham Optics Fringe Printer II) was recently utilized to investigate the surface uniformity of several SLMs that are commercially available. This microscope utilizes the Fizeau interferometric architecture discussed elsewhere [3]. The reference surface is four inches in diameter and specified as flat to $\lambda/20$ at $\lambda=0.6328 \mu\text{m}$. The modulators tested include two Hughes LCLVs, two FLC SLMs, and liquid crystal spatial light modulators from Loral and Lockheed Corporations.

A Hughes LCLV (CdS photoconductor, $50 \times 50 \text{ mm}$ clear aperture) was initially placed under the interferometric microscope. The Hughes LCLV was positioned so the front reflection of the read surface was interfered with the reference wave. The resultant interferogram is shown in Figure 1. This interferogram consists of uniformly parallel fringes, thereby denoting a uniformly flat optical surface. The Hughes LCLV evaluated above was originally manufactured in the mid-1970s. A more recently manufactured light valve from Hughes Corporation was then tested. This light valve was the input SLM to the portable correlator unit utilized in MICOM's missile optical guidance program [4]. The resulting interferograms from the read and write surfaces of the device are shown in Figure 2. The read surface is flat to $\approx 2\lambda$ across the 50 mm diameter aperture and concave in shape. The write surface is flat to $1-1/2\lambda$ over the 50 mm diameter aperture and convex in shape.

The optical surface quality of two FLC SLMs was then measured using the above techniques. The interferograms from an optically addressed FLC SLM manufactured by the University of Colorado-Boulder in 1988 are shown in Figure 3. This FLC SLM has a consistent interference pattern, known as Haidinger fringes, due to the parallelism between the front (read) and back (write) surfaces of the device. This consistent pattern is shown in Figure 3(a). There is no dielectric mirror present in this modulator. Furthermore, optical flats were not used to sandwich the SLM structure. The front surface (read input window) of the device is not flat when compared to the reference waveform. This result is shown superimposed with the results of Figure 3(a) in Figure 3(b). Each of these interference patterns results in a series of concentric or Newtonian rings. The

read surface of this SLM is concave in shape with a surface error of $\approx 2\lambda$ over the 12.5 mm diameter aperture. The interferograms from a more recently fabricated FLC SLM from Displaytech are shown in Figure 4. Unlike the previous FLC SLM, this device does employ optical flats and a dielectric mirror. The read surface is convex with a surface error of 1λ across the 23 mm diameter aperture. The write surface was measured to be flat to $\lambda/20$ over the effective aperture, the resolution limit of the optical reference flat of the interferometric microscope.

Two additional liquid crystal SLMs were then tested. These devices are a Loral Corporation SLM which employed a nematic liquid crystal with an As_2Se_3 photosensor and a Lockheed SLM with a twisted nematic structure and GaAs photosensor. The interferograms from the Lockheed and Loral Corporation SLMs are shown in figures 5 and 6, respectively. The read and write input windows of the Lockheed SLM are flat to $\approx 3-1/2$ and 5λ with the surfaces convex and concave, respectively. The Loral SLM's write side input window is flat to $\lambda/2$ with some coarse Haidinger fringes present. These fringes are most likely due to reflections between the dielectric mirror and input glass window. The read side of the Loral SLM is very nonuniform in structure as shown by the interferogram of Figure 6(b). This nonuniformity appears to be a separation between two or more layers within the device's multilayered structure.

III. CONCLUSION

These results verify that the optical uniformity of SLMs should be considered when phase modulating properties of the devices are to be applied in optical systems. From the above devices, the most likely candidate for such applications without modification to the optical system appears to be the mid-1970s edition of the Hughes LCLV. The other SLMs may be used if immersed in a liquid gate. However, liquid gates introduce complexities in optical systems to the SLM such as proper index matching of sometimes carcinogenic fluids.



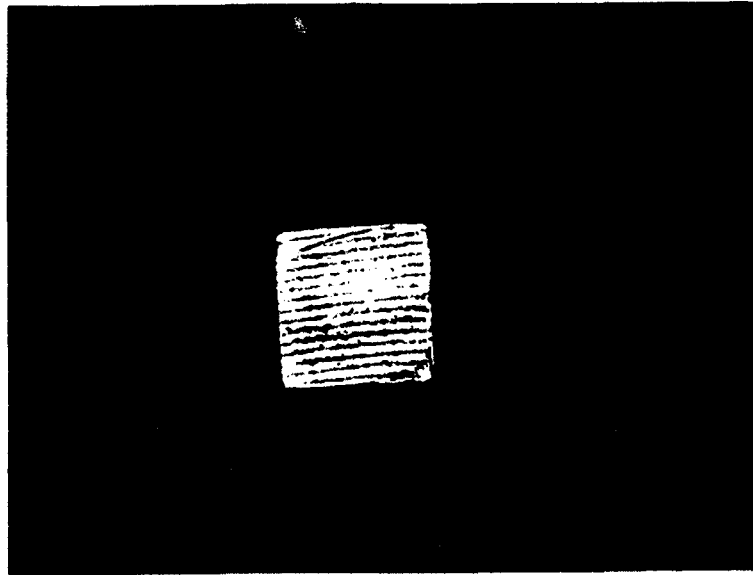


Figure 1. Interferogram of Read Side of mid-1970s Edition Hughes Corporation Liquid Crystal Light Valve

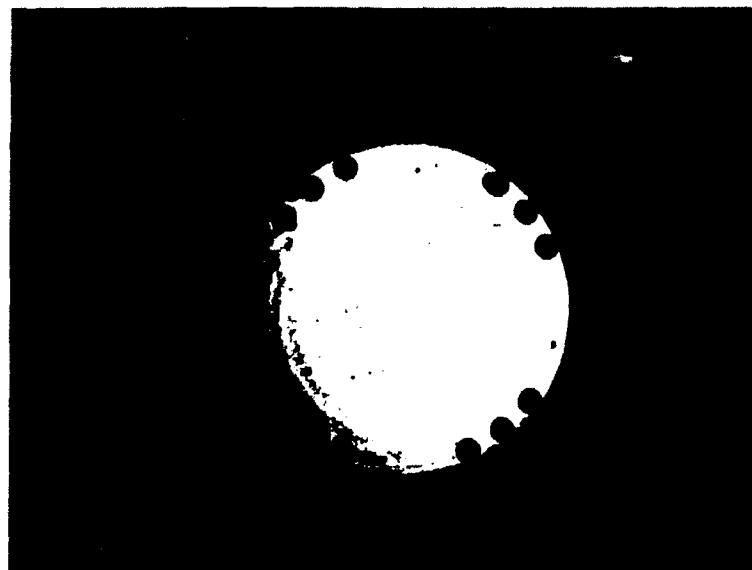


(a)

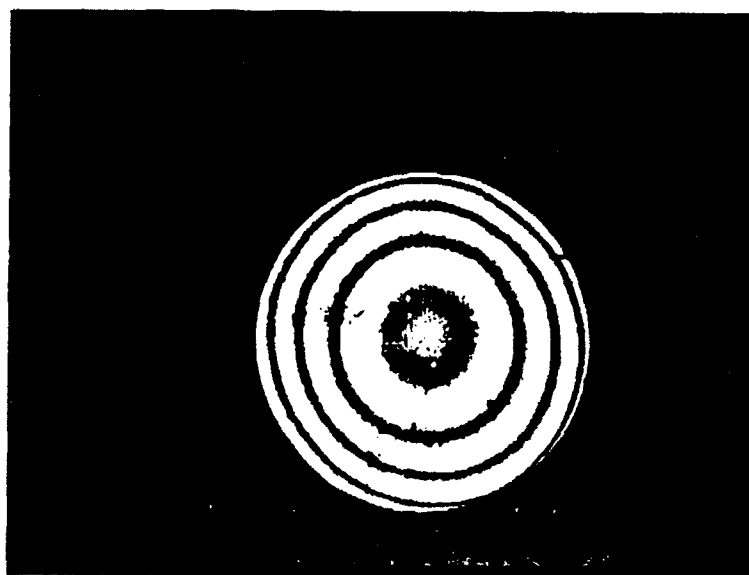


(b)

Figure 2. Interferograms from the (a) Read and (b) Write side of Hughes Corporation LCLV Manufactured in mid-1980s

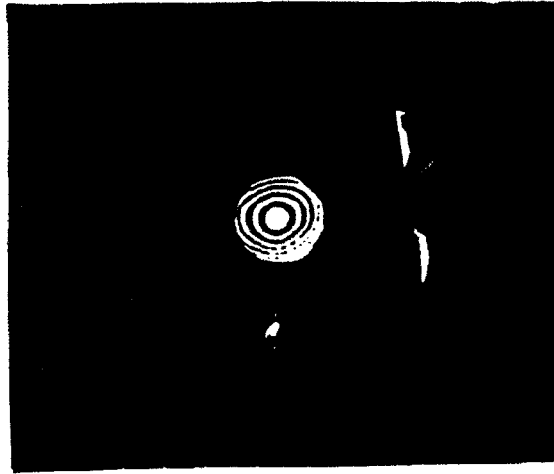


(a)

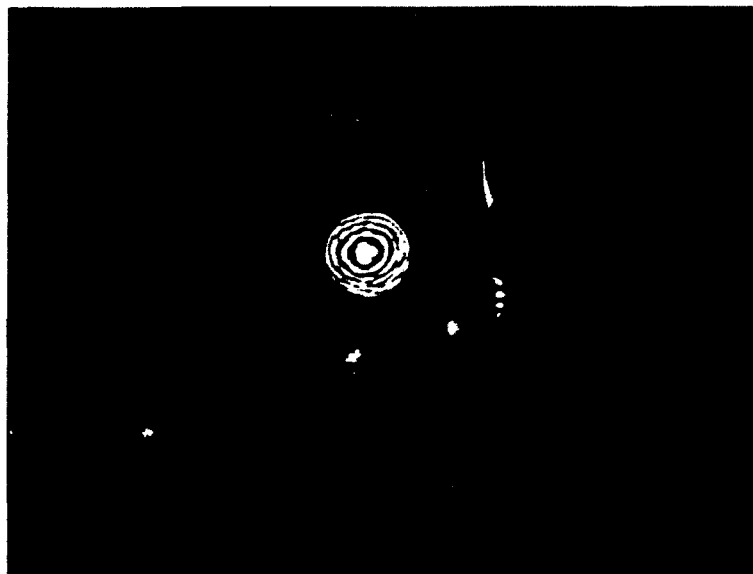

(b)

Figure 3. Interferograms of FLC SLM Manufactured by University of Colorado-Boulder: (a) The Haidinger Fringe Structure Due to Parallelism Between the Read and Write Surfaces of the Device. (b) The Read Side Input Window Superimposed on the Haidinger Fringe Structure

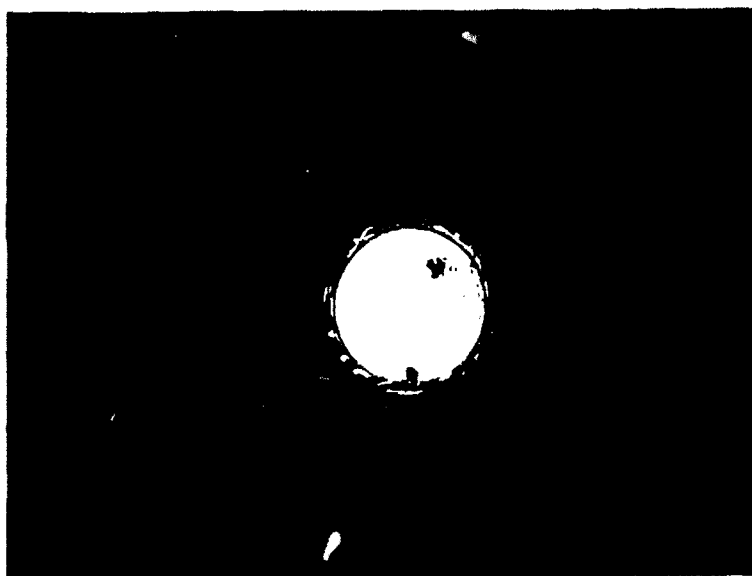


(a)




(b)

Figure 4. The Interferograms from the (a) Read and (b) Write Input Windows of the FLC SLM Fabricated by Displaytech

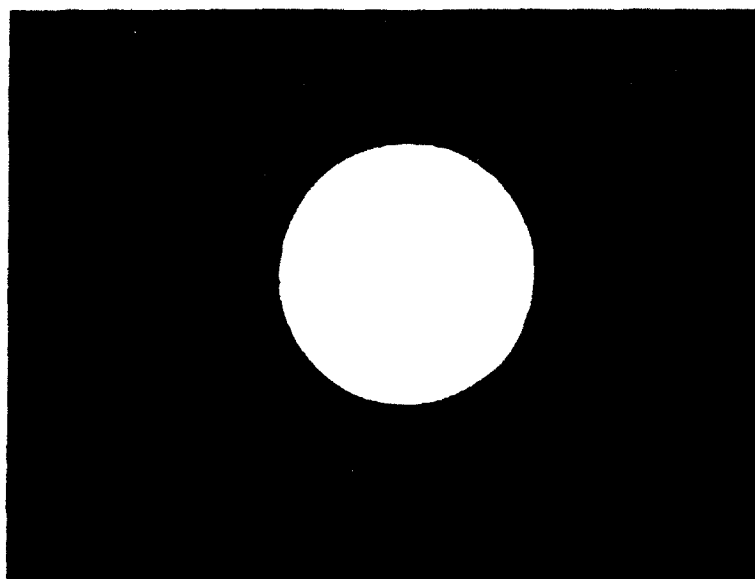


(a)

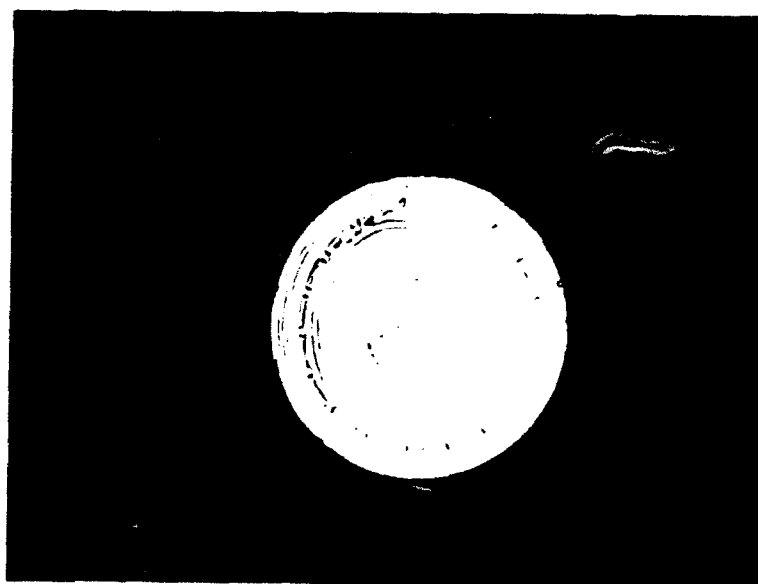


(b)

Figure 5. Interferograms of the (a) Read and (b) Write Windows of a Lockheed Liquid Crystal SLM

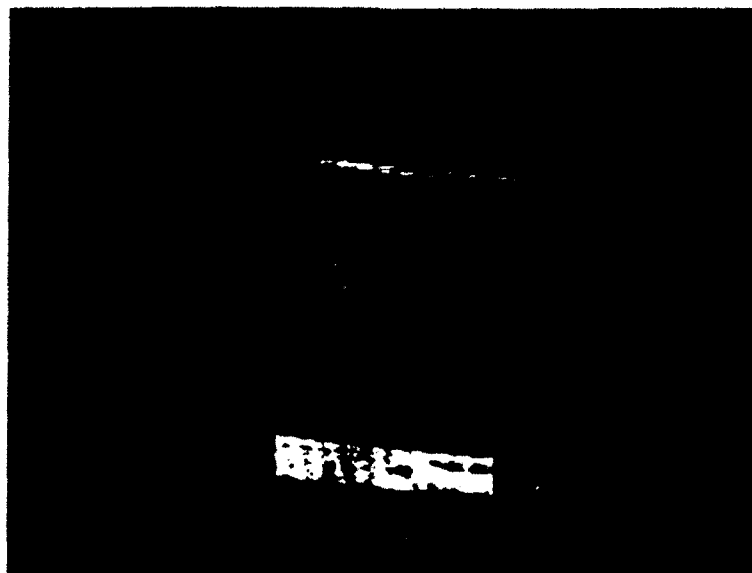

(a)

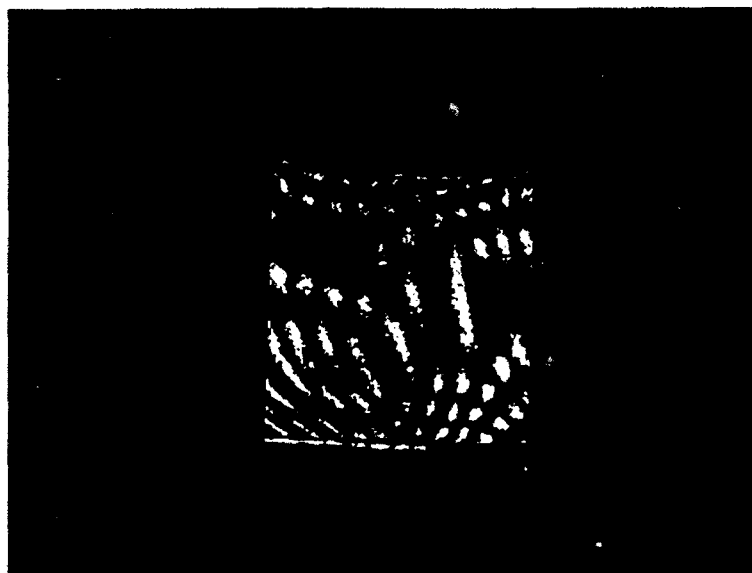

(b)

Figure 6. Interferograms of the (a) Write and (b) Read side of a Loral Corporation Liquid Crystal SLM

REFERENCES

1. B. V. K. Kumar, Appl. Opt. **31**, 4773-4801 (1992).
2. D. A. Gregory, J. C. Kirsch, and E. C. Tam, Appl. Opt. **31**, 163-165 (1992).
3. Zygo Corporation, "Interpretation of Interferograms," *The 1991 Photonics Design and Applications Handbook*, 37th ed. (Laurin Publishing Co., Pittsfield, MA, 1991), pp. H-45H-53.
4. T. D. Hudson, D. A. Gregory, J. C. Kirsch, J. A. Loudin, and W. M. Crowe, Proc. Soc. Photo-Opt. Instrum. Eng. **1564**, 54-64 (1991).

DISTRIBUTION

Copies

Director
U.S. Army Research Office
ATTN: SLCRO-PH
P. O. Box 12211
Research Triangle Park, NC 27709-2211

1

Headquarters
Department of the Army
ATTN: DAMA-ARR
Washington, DC 20310-0623

1

Headquarters
OUSDR&E
ATTN: Ted Berlin court
The Pentagon
Washington, DC 20310-0623

1

IIT Research Institute
ATTN: GACIAC
10 W. 35th Street
Chicago, IL 60616

1

Department of Electrical Engineering
Pennsylvania State University
ATTN: Dr. F. T. S. Yu
University Park, PA 16802

1

Department of Physics
The University of North Carolina at Charlotte
ATTN: Dr. Eddy C. Tam
Charlotte, NC 28223

1

Department of the Air Force
Rome Labs
ATTN: ESOP/Dr. Joe Horner
Hanscom AFB, MA 01731-5000

1

The University of Oklahoma
School of Electrical Engineering and Computer Science
ATTN: Dr. Ted E. Batchman
202 West Boyd, Room 219
Norman, OK 73019

1

Dist-1

DISTRIBUTION (cont'd)

	<u>Copies</u>
Naval Surface Warfare Center ATTN: Code G-43/Nick Cavaris 10901 New Hampshire Avenue Silver Springs, MD 20903-5000	1
Jet Propulsion Laboratory ATTN: Dr. Li-Jen Cheng 4800 Oak Grove Drive Pasadena, CA 91109-8099	1
University of Connecticut ATTN: Dr. Bahrom Javidi Assistant Professor of Electrical Engineering Department of Electrical Engineering Storrs, CT 06268	1
U. S. Armament Munitions & Chemical Command ATTN: SM CAR-AET/Dr. Wiliam T. Ebihara Picatinny Arsenal, NJ 07806-5000	1
U. S. Army Materiel System Analysis Activity ATTN: AMXSY-MP (Herbert Cohen) Aberdeen Proving Ground, MD 21005	1
AMSMI-RD	1
AMSMI-GC-IP, Fred Bush	1
AMSMI-RD-CS-T	1
AMSMI-RD-CS-R	5
AMSMI-RD-WS, W. Wharton	1
J. Bennett	1
S. Troglen	1
AMSMI-RD-WS-PO, T. Hudson	50