


UNCLASSIFIED

2

SRL-0080-TM

AR-006-782

AD-A264 074



DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
SURVEILLANCE RESEARCH LABORATORY
SALISBURY, SOUTH AUSTRALIA

TECHNICAL MEMORANDUM
SRL-0080-TM

DTIC
ELECTE
MAY 13 1993
S C D

A ROTOR FOR TESTING THE DYNAMIC
PERFORMANCE OF GPS RECEIVERS

G. FIELKE and J. SILBY

APPROVED FOR PUBLIC RELEASE

© COMMONWEALTH OF AUSTRALIA

SEPTEMBER 1991

93 5 1 1

UNCLASSIFIED
02

93-10336



SRL-0080-TM

A ROTOR FOR TESTING THE DYNAMIC PERFORMANCE OF GPS RECEIVERS

G. FIELKE AND J. SILBY

1. Accounting
 2. Business
 3. Mathematics
 4. Science
 5. History
 6. Geography
 7. Art
 8. Music
 9. Physical Education
 10. Health
 11. Language
 12. Foreign Languages
 13. Computer Science
 14. Environmental Studies
 15. Law
 16. Medicine
 17. Engineering
 18. Architecture
 19. Design
 20. Journalism
 21. Public Administration
 22. Political Science
 23. Sociology
 24. Anthropology
 25. Psychology
 26. Philosophy
 27. Religion
 28. Interdisciplinary Studies
 29. Liberal Arts
 30. Professional Studies
 31. Business Administration
 32. Business Management
 33. Business Economics
 34. Business Law
 35. Business Communication
 36. Business Writing
 37. Business Calculus
 38. Business Statistics
 39. Business English
 40. Business Information Systems
 41. Business Analytics
 42. Business Ethics
 43. Business Strategy
 44. Business Operations
 45. Business Finance
 46. Business Marketing
 47. Business Sales
 48. Business Training
 49. Business Development
 50. Business Innovation
 51. Business Research
 52. Business Consulting
 53. Business Project Management
 54. Business Quality Management
 55. Business Process Improvement
 56. Business System Design
 57. Business Data Analysis
 58. Business Forecasting
 59. Business Risk Management
 60. Business Compliance
 61. Business Governance
 62. Business Leadership
 63. Business Team Building
 64. Business Conflict Resolution
 65. Business Negotiation
 66. Business Decision Making
 67. Business Problem Solving
 68. Business Creativity
 69. Business Innovation Management
 70. Business Entrepreneurship
 71. Business Social Responsibility
 72. Business Sustainability
 73. Business Environmental Management
 74. Business Energy Management
 75. Business Water Management
 76. Business Waste Management
 77. Business Air Quality Management
 78. Business Noise Management
 79. Business Climate Change Management
 80. Business Biodiversity Management
 81. Business Land Use Management
 82. Business Resource Management
 83. Business Human Resources Management
 84. Business Labor Relations Management
 85. Business Compensation Management
 86. Business Performance Management
 87. Business Quality Management
 88. Business Process Management
 89. Business System Management
 90. Business Data Management
 91. Business Forecasting Management
 92. Business Risk Management
 93. Business Compliance Management
 94. Business Governance Management
 95. Business Leadership Management
 96. Business Team Building Management
 97. Business Conflict Resolution Management
 98. Business Negotiation Management
 99. Business Decision Making Management
 100. Business Problem Solving Management
 101. Business Creativity Management
 102. Business Innovation Management
 103. Business Entrepreneurship Management
 104. Business Social Responsibility Management
 105. Business Sustainability Management
 106. Business Environmental Management
 107. Business Energy Management
 108. Business Water Management
 109. Business Waste Management
 110. Business Air Quality Management
 111. Business Noise Management
 112. Business Climate Change Management
 113. Business Biodiversity Management
 114. Business Land Use Management
 115. Business Resource Management
 116. Business Human Resources Management
 117. Business Labor Relations Management
 118. Business Compensation Management
 119. Business Performance Management
 120. Business Quality Management
 121. Business Process Management
 122. Business System Management
 123. Business Data Management
 124. Business Forecasting Management
 125. Business Risk Management
 126. Business Compliance Management
 127. Business Governance Management
 128. Business Leadership Management
 129. Business Team Building Management
 130. Business Conflict Resolution Management
 131. Business Negotiation Management
 132. Business Decision Making Management
 133. Business Problem Solving Management
 134. Business Creativity Management
 135. Business Innovation Management
 136. Business Entrepreneurship Management
 137. Business Social Responsibility Management
 138. Business Sustainability Management
 139. Business Environmental Management
 140. Business Energy Management
 141. Business Water Management
 142. Business Waste Management
 143. Business Air Quality Management
 144. Business Noise Management
 145. Business Climate Change Management
 146. Business Biodiversity Management
 147. Business Land Use Management
 148. Business Resource Management
 149. Business Human Resources Management
 150. Business Labor Relations Management
 151. Business Compensation Management
 152. Business Performance Management
 153. Business Quality Management
 154. Business Process Management
 155. Business System Management
 156. Business Data Management
 157. Business Forecasting Management
 158. Business Risk Management
 159. Business Compliance Management
 160. Business Governance Management
 161. Business Leadership Management
 162. Business Team Building Management
 163. Business Conflict Resolution Management
 164. Business Negotiation Management
 165. Business Decision Making Management
 166. Business Problem Solving Management
 167. Business Creativity Management
 168. Business Innovation Management
 169. Business Entrepreneurship Management
 170. Business Social Responsibility Management
 171. Business Sustainability Management
 172. Business Environmental Management
 173. Business Energy Management
 174. Business Water Management
 175. Business Waste Management
 176. Business Air Quality Management
 177. Business Noise Management
 178. Business Climate Change Management
 179. Business Biodiversity Management
 180. Business Land Use Management
 181. Business Resource Management
 182. Business Human Resources Management
 183. Business Labor Relations Management
 184. Business Compensation Management
 185. Business Performance Management
 186. Business Quality Management
 187. Business Process Management
 188. Business System Management
 189. Business Data Management
 190. Business Forecasting Management
 191. Business Risk Management
 192. Business Compliance Management
 193. Business Governance Management
 194. Business Leadership Management
 195. Business Team Building Management
 196. Business Conflict Resolution Management
 197. Business Negotiation Management
 198. Business Decision Making Management
 199. Business Problem Solving Management
 200. Business Creativity Management
 201. Business Innovation Management
 202. Business Entrepreneurship Management
 203. Business Social Responsibility Management
 204. Business Sustainability Management
 205. Business Environmental Management
 206. Business Energy Management
 207. Business Water Management
 208. Business Waste Management
 209. Business Air Quality Management
 210. Business Noise Management
 211. Business Climate Change Management
 212. Business Biodiversity Management
 213. Business Land Use Management
 214. Business Resource Management
 215. Business Human Resources Management
 216. Business Labor Relations Management
 217. Business Compensation Management
 218. Business Performance Management
 219. Business Quality Management
 220. Business Process Management
 221. Business System Management
 222. Business Data Management
 223. Business Forecasting Management
 224. Business Risk Management
 225. Business Compliance Management
 226. Business Governance Management
 227. Business Leadership Management
 228. Business Team Building Management
 229. Business Conflict Resolution Management
 230. Business Negotiation Management
 231. Business Decision Making Management
 232. Business Problem Solving Management
 233.

Evaluation of GPS User Equipment (UE) requires that a measurement be made of the error in reported position in order to gauge the performance, both static and dynamic, of the UE against the manufacturer's claims and US DoD specifications. Static error can be measured by placing the antenna of a GPS receiver over a survey point. However, it is also necessary to determine errors which may be dependent upon velocity, acceleration and higher derivatives.

A rotor has been constructed to aid in the evaluation of GPS receivers. The rotor has a ten metre arm with a mounting for a GPS antenna at the end of the arm. Angular velocity can be controlled from 0.5 to 30 rpm continuously.

The GPS antenna is mounted on the end of the rotor arm and signals are taken to the base of the radar mount via a rotary RF joint and a length of low loss Prodelin cable.



POSTAL ADDRESS: Director, Surveillance Research Laboratory,
PO Box 1500, Salisbury, South Australia 5108

This work is Copyright. Apart from any fair dealing for the purpose of study, research, criticism or review, as permitted under the Copyright Act 1968, no part may be reproduced by any process without written permission. Copyright is the responsibility of the Director Publishing and Marketing, AGPS. Inquiries should be directed to the Manager, AGPS Press, Australian Government Publishing Service, GPO Box 84, Canberra ACT 2601.

CONTENTS

	Page No
1. Introduction	1
2. Design of the Rotor	1
3. Control of the Induction Motor	2
4. The Control Loop	2
5. Method of Testing the Control Loop	2
6. Test Results	3
6.1 Constant Velocity	3
6.2 Acceleration	3
7. GPS Measurements	3
7.1 Preliminary Results	4
8. Other Developments	4
9. Conclusions	4
APPENDIX I	5
REFERENCES	6

FIGURES

1. Prototype Rotor	7
2. Finished Rotor	8
3. System Block Diagram	9
4. Acceleration Characteristic - 1rpm	10
5. Acceleration Characteristic - 10rpm	10
6. Acceleration Characteristic - 20rpm	11
7. Acceleration Characteristic - 30rpm	11
8. Track Plot - Magnavox MX4400 - 5rpm - filter 2.2	12
9. Track Plot - Magnavox MX4400 - 5rpm - filter 2.8	13
10. Track Plot - UH60 - 5rpm	14

1.

1. Introduction

The Australian Defence Force (ADF) has selected the NAVSTAR/Global Positioning System (GPS) as the prime external navigation system. Joint Project Brief (JPB) 915 defines the schedule for ADF acquisition of GPS equipment.

Evaluation of GPS User Equipment (UE) requires that a measurement is made of the error in reported position in order to gauge the performance, both static and dynamic, of the UE against the manufacturer's claims and US DoD specifications.

Static error can be measured by placing the antenna of the GPS receiver over a survey marker. The reported position can then be compared with the known position. It is also necessary to determine errors which may be dependent upon velocity, acceleration and higher derivatives.

In the past, dynamic performance has been assessed by installing GPS equipment in an aircraft. The GPS equipment has been used to record the flight path of the aircraft. Contemporaneously, the aircraft has been tracked by kinetheodolites to establish ground truth. Flight trials using kinetheodolites for ground truth are expensive, dependent on weather conditions and limit velocity and acceleration values to below those claimed and specified. Processing of the results is tedious and time consuming. It was suggested in reference 1 that a rotor could be used to evaluate GPS equipment under dynamic conditions in a timely and cost efficient manner.

2. Design of the Rotor

The feasibility of the rotor technique is described in reference 1. A prototype rotor was constructed from an old L band radar mount to show the viability of the technique.

It was decided to constrain the length of the rotor arm to 10m. An arm was manufactured from hollow, square section mild steel and mounted on the radar mount. The rotor was driven by the 110 volt motor which came with the mount at speeds to 10 rpm in an open loop configuration. Data were recorded and analysis showed that the concept was feasible as reported in reference 1. The prototype rotor is shown in figure 1.

The results obtained with the prototype were sufficiently encouraging to warrant the construction of a rotor which consisted of a 10m counter balanced arm mounted on a turntable which is rotated at specific, accurately controlled radial velocities in the range 0.5 rpm to 30 rpm.

The arm of the rotor was constructed from aluminium mast extrusion and braced with stainless steel wire rope. It was mounted on the L band radar mount. A standard 2 pole, 7.5kW, 415 volt, 50Hz squirrel cage motor was used to drive the rotor arm via the 180:1 reduction gear of the radar mount.

The GPS antenna is mounted on the end of the rotor arm and signals are taken to the base of the radar mount via a rotary RF joint and a length of low loss (Prodlin) cable.

The final version of the rotor is shown in figure 2.

The radar mount was originally fitted with coarse and fine synchro resolvers for measuring the shaft position. It was decided to use these synchros to record shaft position while the rotor is operating. A ten bit synchro to digital converter was connected to the coarse synchro.

2.

The synchro to digital converter has an uncertainty of ± 0.5 LSB. Uncertainty in the measured shaft angle is, therefore, $360/1024$ degrees. This allows the position of the end of the rotor arm to be estimated within 0.06m which is two orders better than the expected accuracy of the GPS receivers which will be tested.

If greater accuracy is required, either a 12 bit shaft encoder or a further synchro to digital converter on the fine synchro will be required.

3. Control of the Induction Motor

Speed control of an induction motor is best achieved by varying the frequency of the supply voltage. The voltage is varied in proportion to the frequency to keep the voltage/frequency ratio constant. This was achieved by using a commercially available, three phase supply which is pulse width modulated.

4. The Control Loop

Control was achieved by mounting a 60 tooth gear wheel on the motor. A magnetic pick up generates a pulse as each tooth passes it. These pulses are used to calculate the speed of the motor shaft and hence the speed of the rotor arm. A microprocessor is used to count the pulses from the motor gear and reference pulses are used to drive the motor via the commercial supply. Any difference in pulse count between the reference pulses and those from the gear on the motor will result in an error signal which will be corrected by the microprocessor.

A block diagram of the system is shown in fig.3.

With reference to fig.3:

A 100Hz signal from a crystal oscillator or some other stable source is used as a reference signal for the controller.

The controller compares the frequency of the reference source with the frequency of the pulses derived from the magnetic pick up. The output frequency and voltage of the inverter is then adjusted to reduce the difference between the two frequencies to zero.

5. Method of Testing the Control Loop

The rate of rotation of the rotor is set by a digital word which is input from the front panel of the controller. The true angular velocity could be determined by measuring the time taken for the arm to complete a number of revolutions. An accurate measurement of time would have been difficult to achieve by direct methods.

A source of accurate 1Hz pulses was available from the Surveillance Research Laboratory Time and Frequency Standard and it was decided to use these pulses to interrogate the synchro to digital converter and measure the accumulation of angular movement over a period of time. The ratio of true angular velocity to nominal angular velocity was then calculated. The rationale for this method of measurement is to be found in Appendix I.

The arm was rotated at nominal rates of 1,5,10,15, and 20 revolutions per minute(rpm). These were chosen so that each revolution would take an integer number of seconds to complete. Thus, if the shaft angle is recorded once per second, the recorded angles should repeat each $60/r$ seconds where 'r' is the angular velocity in rpm. Any variation in angular velocity will result in a change in these recorded angles.

The shaft angle was recorded each $60/r$ seconds while the shaft was rotated for about 400 revolutions. Regression coefficients for angle against revolutions were calculated and hence, $\delta\theta/\theta$.

3.

The true angular velocity can be calculated by the relationship:

$$\text{True angular velocity} = \text{Nominal angular velocity}(1 + \delta\theta/\theta)$$

The value of $\delta\theta/\theta$ was found to be approximately $-1E-4$ for each rate of rotation tested. This value had an average value of $-1.11E-4$ with minimum and maximum values of $1.04E-4$ and $1.3E-4$.

It can be concluded that the arm rotates one part in 10^4 more slowly than the nominal rate of rotation.

The loop constants of the controller were set to give the loop a critical damping factor. The response to a step input is to give one overshoot and one undershoot at the output. The response was determined by observing the error voltage with a storage oscilloscope.

6. Test Results

6.1 Constant Velocity

The rotor was maintained at a constant angular velocity for approximately 15 minutes. A measurement of the shaft angle was taken once per second. The angular velocities were chosen such that one revolution would be completed in an integer number of seconds. Any deviation from the nominal velocity would be revealed by the measurement of angle swept per unit time.

The results showed that the rate of rotation was less than the nominal by parts in 10^4 . This data is shown in the following table.

rpm	time of rotation	measured lag	$\delta\theta/\theta$
1	15 min	0.7 degrees	$1.30E-4$
5	15 min	2.8 degrees	$1.04E-4$
10	13 min	4.9 degrees	$1.05E-4$
15	14 min	8.1 degrees	$1.07E-4$
20	14 min	11.3 degrees	$1.12E-4$
Average $\delta\theta/\theta \Rightarrow$			$1.11E-4$

The above measurements were taken with the wind gusting to 15 knots.

6.2 Acceleration

The rotor was accelerated from rest to predetermined angular velocities of 1, 10, 20, and 30 rpm. It was discovered that the maximum attainable angular velocity was 28 rpm. The controller parameters were set to force the rotor to accelerate to the desired velocity in 40 seconds. The parameters were optimised to give the required acceleration characteristic at a terminal angular velocity of 10 rpm. The speed/time characteristics of the rotor are shown in figs 4 - 7.

7. GPS Measurements

The antenna of a GPS receiver is mounted on the end of the rotor arm and connected to the receiver at the base of the rotor via a length of low loss Prodlin coaxial cable.

All of the recording and control equipment is housed in a caravan some 20 metres from the rotor. Data is collected from the data port

of a GPS receiver and recorded on a computer. The data port of the receiver is connected to the computer by a length of screened cable, the data is normally transmitted at RS422 levels. As well as the data from the GPS receiver, Universal Time Coordinated (UTC) and shaft angle of the rotor are also recorded. The coordinates of the centre of the rotor have been supplied by the Australian Land Information Group (AUSLIG). The position reported by the GPS receiver is compared

4.

with the truth data calculated from the dimensions of the rotor arm and the shaft angle.

7.1 Preliminary Results

Data have been collected from a Magnavox MX4400 receiver and a Collins UH60 receiver with the rotor shaft rotating at angular velocities from 1 to 5 rpm. Both of these receivers are specified to an acceleration of 2g. The position recorded from these receivers was plotted with respect to the centre of the rotor. These plots are shown in figs 8 - 10.

These figures show the effect of different filters. Figures 8 and 9 show the effect of changing the filter in the Magnavox receiver and figure 10 shows that the UH60 receiver has been optimised for medium dynamics.

The above named receivers are two channel sequencing receivers which sample each satellite in turn. They must predict ahead the range measurements to the solution time. A test of this nature will test the ability of the receiver to predict ahead using its calculations of range rate.

Work on analysis software is proceeding.

8. Other Developments

A contract was let to the Queensland University of Technology to study methods of using the rotor data for analysis of GPS receiver performance and for filter identification. The University has produced software to assess receiver performance and to determine the filter characteristics. This has been tested on data from the rotor and shows promise of being a useful tool.

This work is described in references 2,3, and 4.

9. Conclusions

A rotor with a 10 metre arm has been constructed which can be rotated at speeds from 0.5 to 30 rpm. The speed of rotation is tightly controlled allowing the rotor to be used for testing the accuracy of position and velocity reporting of GPS receivers. Software is being developed to analyse data collected from the rotor.

The Queensland University of Technology has developed techniques for using the data to determine filter characteristics of GPS receivers.

5.

APPENDIX I

Measurement of Angular Velocity

If we designate w = angular velocity
and T = time taken for one revolution

We can say that $w = 2\pi/T = 2\pi f$ where f = frequency in Hertz

$$\begin{aligned} \text{Differentiating} \quad dw &= -2\pi T^{-2} dT \\ &= -w dT/T \\ \text{ie:} \quad dw/w &= -dT/T \end{aligned}$$

Time can be measured from the angle traversed, ie:

$$dT/T = d\theta/\theta$$

Approximating the differential to the difference:

$$\delta w/w = -\delta T/T = \delta\theta/\theta$$

Where $\delta\theta$ = difference between the measured angle traversed and the expected angle.

If we designate the rate of turn of the arm as r rpm and measure the shaft angle each $60/r$ seconds, a graph of shaft angle against number of revolutions can be plotted. The slope of the line is then equal to $\delta\theta$ in units of degrees per revolution. $\delta\theta$ can now be divided by 360 to obtain $\delta\theta/\theta$ which is dimensionless. The true angular velocity can now be found from the relationship:

$$w_{\text{true}} = w_{\text{nom}}(1 + \delta\theta/\theta)$$

REFERENCES

- | | | |
|----|--|---|
| 1. | Gubbay, J.S. | GPS User Equipment Evaluation
Technique Using a Rotor Mounted
Antenna SRL |
| 2. | Queensland University of
Technology | GPS Filter Identification for UE
Identification (FEB 89) |
| 3. | Queensland University of
Technology | GPS Filter Identification User
Equipment Evaluation (MAR 90) |
| 4. | Queensland University of
Technology | Simulation of RATS on NAVSIM
Simulation Software (MAY 90) |
| 5. | Queensland University of
Technology | GPS Filter Identification and User
Equipment Evaluation (JUN 90) |



Figure 1. Prototype rotor



Figure 2. Finished rotor

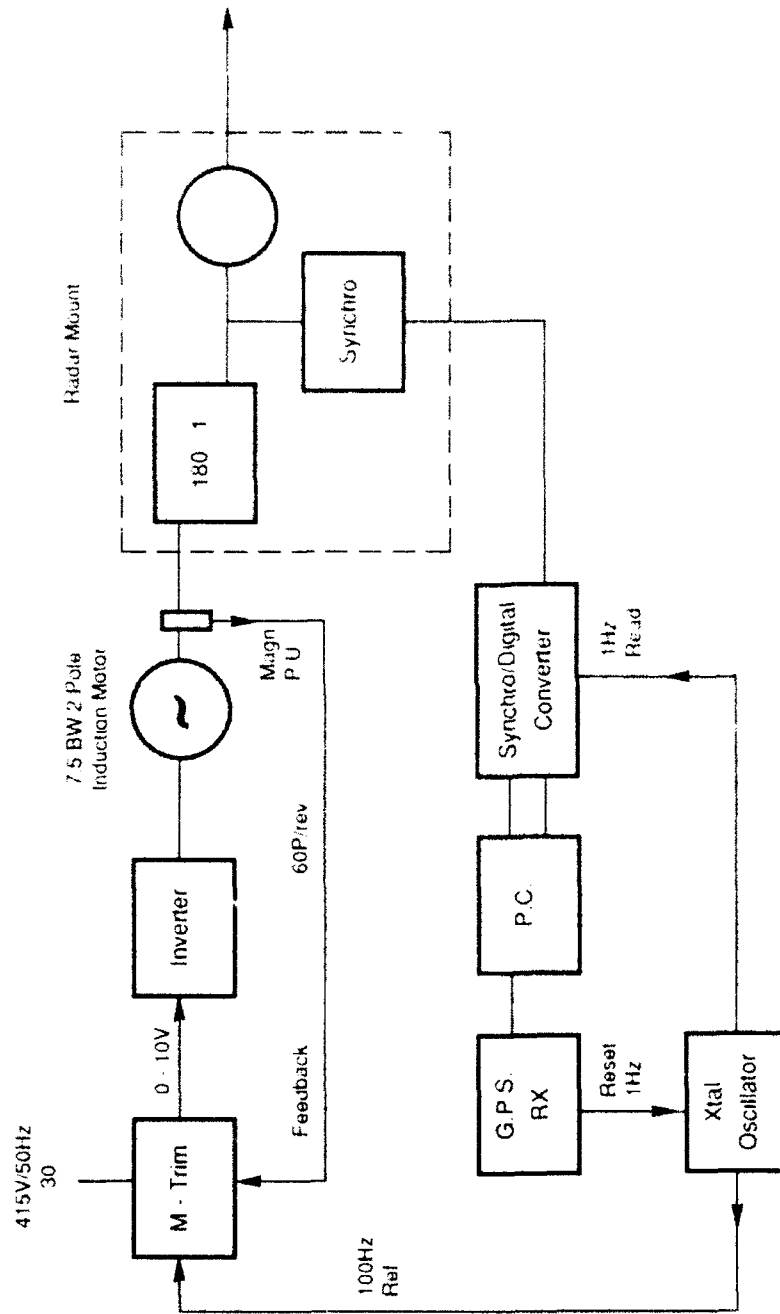


Figure 3 System block diagram

no all channels are off

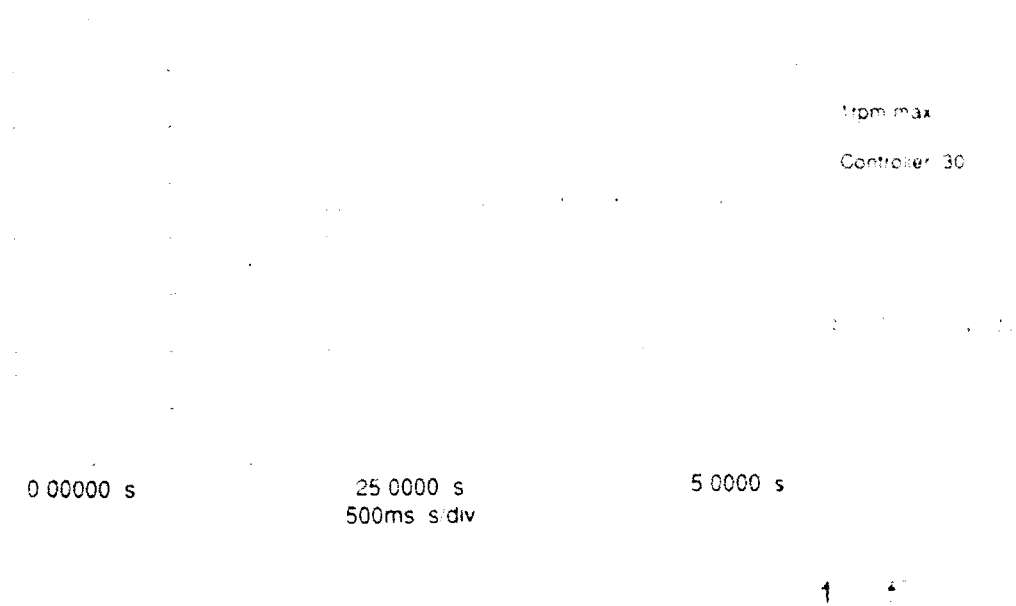


Figure 4. Acceleration characteristic - 1rpm

no all channels are off

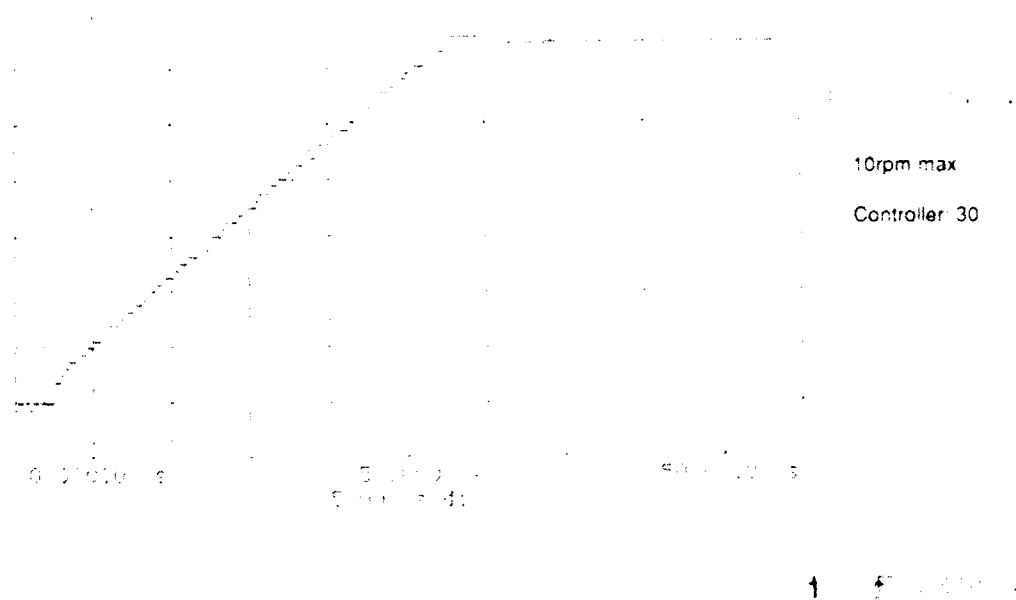


Figure 5. Acceleration characteristic - 10rpm

no all channels are off

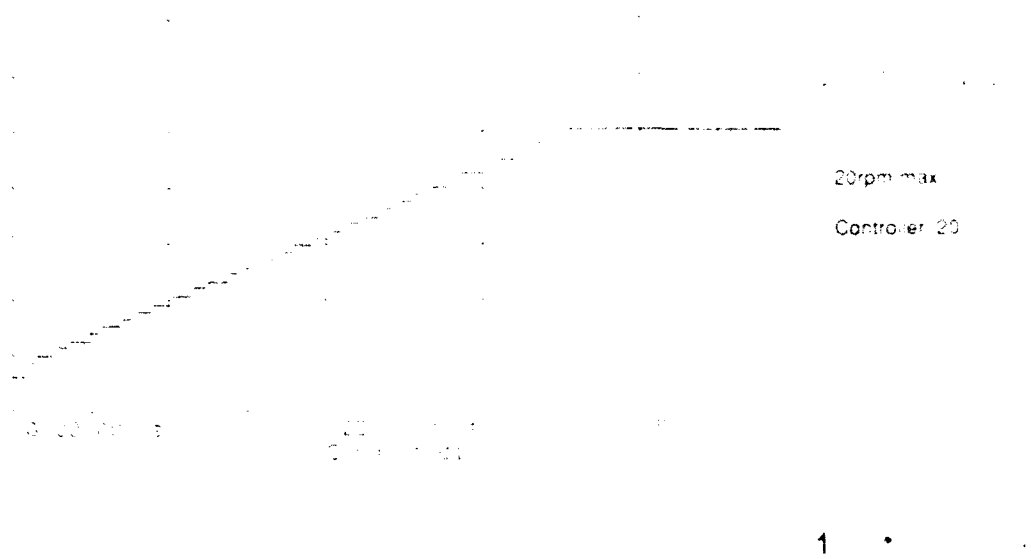


Figure 6. Acceleration characteristic - 20 rpm

no all channels are off

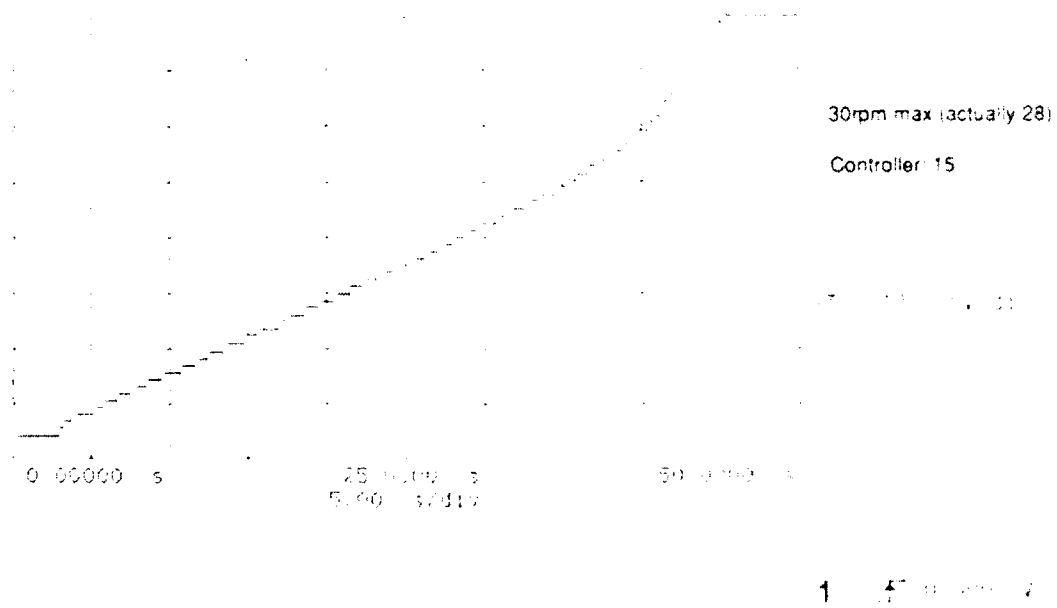


Figure 7. Acceleration characteristic - 30rpm

5 rpm FILTER 2.2

Receiver Type: MX4400

EAST

Mean: 3.1

Standard deviation: 8.4


NORTH

Mean: -1.3

Standard deviation: 7.9

Number of data points: 763

HDOP = 2.1

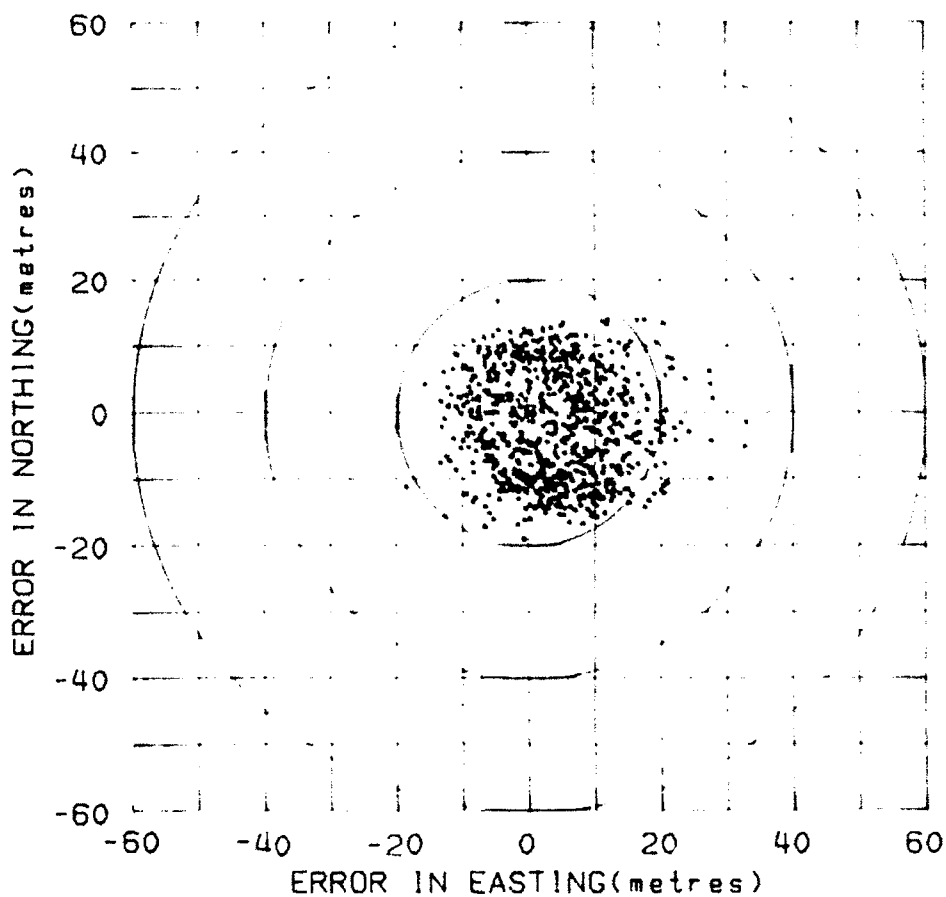

Reference position (WGS84 coordinates)

EAST: 283134.917

NORTH: 6154021.780

ZONE: 54

Figure 8. Track plot - Magnavox MX440 - 5rpm - filter 2.2

5 rpm FILTER 2.8

Receiver Type: MX4400

EAST

Mean: -1.0

Standard deviation: 7.0


NORTH

Mean: -1.8

Standard deviation: 7.9

Number of data points: 771

HDOP: 1.3

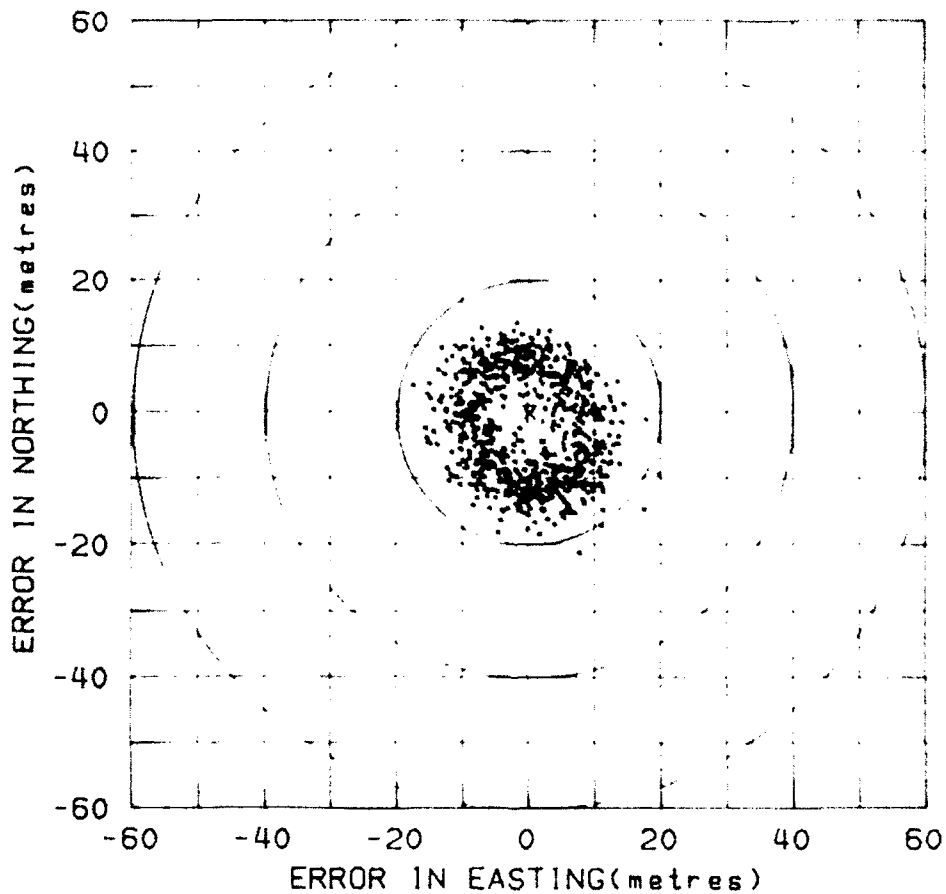

Reference position (WGS84 coordinates)

EAST: 283134.917

NORTH: 6154021.780

ZONE: 54

Figure 9. Track plot - Magnavox MX4400 - 5rpm - filter 2.8

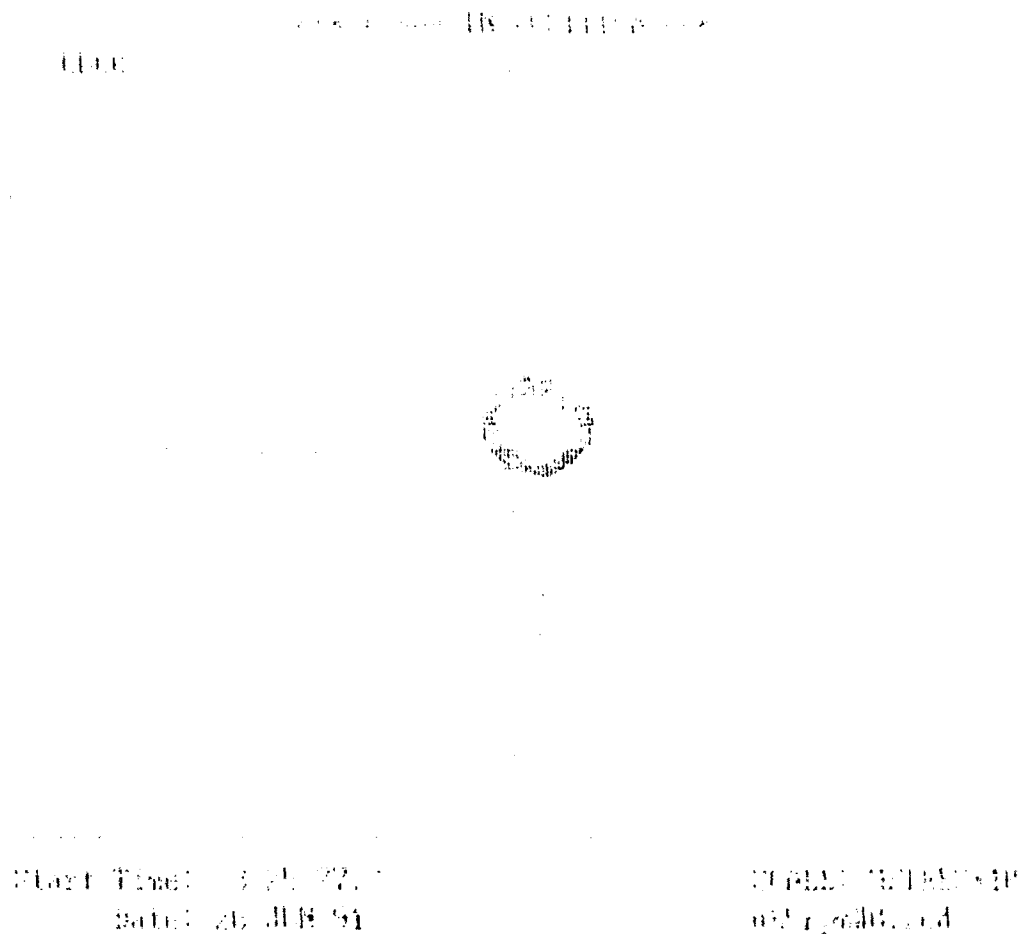


Figure 10. Track plot - UH60 - 5rpm

DISTRIBUTION

	Copy No.
Defence Science and Technology Organisation	
Chief Defence Scientist	1
Central Office Executive	1
Counsellor, Defence Science, London	1 shared copy
Counsellor, Defence Science, Washington	Cont Data Shd
Scientific Adviser, Defence Central	Cont Data Shd
Scientific Adviser, Defence Intelligence Organisation	1
Navy Scientific Adviser	1
Air Force Scientific Adviser	1
Army Scientific Adviser	1
Australian Defence Force	
Program Manager, GPS Joint Project Office	1
Surveillance Research Laboratory	
Director	1
Chief, Microwave Radar Division	1
Head, Microwave Radar Engineering	1
Mr D.K. Ireland, Microwave Radar Engineering	1
Mr A.R. Padgham, Microwave Radar Engineering	1
Mr G. Fielke (Co-Author)	1
Mr J. Silby (Co-Author)	1
Libraries and Information Services	
Australian Government Publishing Service	1
Defence Central Library, Technical Reports Centre	1
Manager, Document Exchange Centre, (for retention)	1
National Technical Information Service, United States	2
Defence Research Information Centre, United Kingdom	2
Director Scientific Information Services, Canada	1
Ministry of Defence, New Zealand	1
National Library of Australia	1
Defence Science and Technology Organisation Salisbury, Research Library	2
Library, Aeronautical Research Laboratory	1
Library, Materials Research Laboratory	1
Library Defence Signals Directorate, Melbourne	1
British Library Document Supply Centre	1
Spares	
Defence Science and Technology Organisation Salisbury, Research Library	6

DOCUMENT CONTROL DATA SHEET

Page 1 of 1
UNCLASSIFIEDPrivacy Marking Level
of Document
N/A

1a. AR Number AR-006-782	1b. Establishment Number SRL-0080-1M	2. Document Date September 1991	3. Task Number
4. Title A ROTOR FOR TESTING THE DYNAMIC PERFORMANCE OF GPS RECEIVERS		5. Security Classification ☐ U ☐ C ☐ R ☐ S Document Title Abstract S (Secret) C (Conf) R (Rest) U (Unclass) * For UNCLASSIFIED docs with a secondary distribution LIMITATION, use (L) in document box	6. No. of Pages 1
		7. No. of Refs 5	
8. Author(s) G. Fielke and J. Silby		9. Downgrading/Delimiting Instructions N/A	
10a. Corporate Author and Address Surveillance Research Laboratory PO Box 1500 SALISBURY SA 5108		11. Officer/Position responsible for Security Downgrading Approval for Release SERL	
10b. Task Sponsor			
12. Secondary Distribution of this Document APPROVED FOR PUBLIC RELEASE Any enquiries outside stated limitations should be referred through DSTIC, Defence Information Services, Department of Defence, Anzac Park West, Canberra, ACT 2600.			
13a. Deliberate Announcement No Limitation			
13b. Casual Announcement (for citation in other documents) ☒ No Limitation ☐ Ref. by Author, Doc No. and date only.			
14. DEFTTEST Descriptors NAVSTAR global positioning system, Performance evaluation, Error analysis, Rotors.		15. DISCAT Subject Codes 170705	
16. Abstract Evaluation of GPS User Equipment (UE) requires that a measurement be made of the error in reported position in order to gauge the performance, both static and dynamic, of the UE against the manufacturer's claims and US DoD specifications. Static error can be measured by placing the antenna of a GPS receiver over a survey point. However, it is also necessary to determine errors which may be dependent upon velocity, acceleration and higher derivatives. A rotor has been constructed to aid in the evaluation of GPS receivers. The rotor has a ten metre arm with a mounting for a GPS antenna at the end of the arm. Angular velocity can be controlled from 0.5 to 30 rpm continuously. The GPS antenna is mounted on the end of the rotor arm and signals are taken to the base of the radar mount via a rotary RF joint and a length of low loss Prodelin cable.			

16. Abstract (CONT.)

17. Imprint

Surveillance Research Laboratory
PO Box 1500
SALISBURY SA 5108

18. Document Series and Number

SRL-0080-TM

19. Cost Code

20. Type of Report and Period Covered

TECHNICAL MEMORANDUM

21. Computer Programs Used

N/A

22. Establishment File Reference(s)

N/A

23. Additional information (if required)