



Prognostics and Diagnostics Program, Tilt Demonstration

**by David Vance, Francois Koenig
and Russell Harris**

ARL-TN-0259

June 2006

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-TN-0259

June 2006

Prognostics and Diagnostics Program, Tilt Demonstration

**David Vance, Francois Koenig
and Russell Harris
Sensors and Electron Devices Directorate, ARL**

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE		3. DATES COVERED (From - To)	
June 2006		Final		January to March 2006	
4. TITLE AND SUBTITLE Prognostics and Diagnostics Program, Tilt Demonstration				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) David Vance, Francois Koenig, and Russell Harris				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-SE-RM 2800 Powder Mill Road Adelphi, MD 20783-1197				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TN-0259	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1197				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Prognostics and Diagnostics provides a capability to diagnose and potentially predict end of life of components and systems. This provides the logisitican and commander valuable information on asset availability. A demonstration board was designed and built as part of the development of this capability. As an initial objective, the board was programmed to monitor tilt in two axes using an accelerometer.					
15. SUBJECT TERMS Tilt, prognostics, diagnostics					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 16	19a. NAME OF RESPONSIBLE PERSON David Vance
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) (301) 394-2613

Contents

Contents	iii
List of Figures	iv
List of Tables	iv
1. Overview	1
1.1 Prognostics and Diagnostics Program Overview	1
1.2 P&D Demonstration Board Overview	1
2. Purpose	1
2.1 Development Objective	1
2.2 Capability Demonstration	2
3. Implementation	2
3.1 Hardware Overview	2
3.2 Major Parts Used	4
3.3 Software	4
3.4 Source Code	7
Distribution List	9

List of Figures

Figure 1. ARL P&D demonstration board.	2
Figure 2. Prognostics and diagnostics demonstration board schematic	3
Figure 3. Flow chart of main and interrupt service request.	5
Figure 4. Flowchart of accelerometer and analog-digital converter initializations.....	6

List of Tables

Table 1. Major functional parts.	4
---------------------------------------	---

1. Overview

1.1 Prognostics and Diagnostics Program Overview

The Prognostics and Diagnostics (P&D) program is defined as the application of appropriate sensors (data), analysis (knowledge), and reasoning (interpretation) to provide system-level health assessment, detect and isolate component degradation and impending failure, and provide appropriate alerts to the logisticians and commanders.

The goal of the program is to develop advanced health management technologies to reliably and accurately detect and quantify the status of critical components and to forecast future damage, faults, or operational degradation, to integrate into logistics decision support systems with the use of condition-based maintenance, and to give the mission commander asset availability.

This technology includes a compact sensor platform that has the capability to provide prognostics and diagnostics of systems where g-shock, temperature, humidity, vibration, and system-specific sensing are needed for system health monitoring.

1.2 P&D Demonstration Board Overview

As part of the P&D program, a series of iterative designs will be developed to provide assessment tools. As part of this series, the demonstration board, which is the first conceptual design, was built. It includes all the necessary sensors of the core unit except for the G-shock sensor. However, a non-working version of the Army Research Laboratory Micro-Electro-Mechanical Systems (MEMS) G-shock sensor is included for fit.

2. Purpose

This board provides the ability to program the microcontroller to perform functions similar to those necessary for P&D in terms of sensor data collection and simple threshold functions. It also provides the capability to measure electrical parameters such as current to allow the evaluation of various data collection processes. This will provide the initial energy usage numbers which will be used to evaluate battery life.

2.1 Development Objective

A number of capabilities are to be programmed into this demonstration board on the road map to developing a complete system. This report highlights the use of the accelerometer and microcontroller to perform tilt monitoring.

2.2 Capability Demonstration

A program to detect tilt in the positive X and/or Y direction was developed and implemented with the use of the demonstration board. The objective of the program was to detect tilt beyond a specific angle in the positive X and/or Y axis direction.

3. Implementation

3.1 Hardware Overview

A board was designed and built to represent a core P&D unit. Its purpose was to provide a bench-level circuit that functionally could be used to test and evaluate the key parts of the design, namely, the microcontroller, temperature/humidity sensor, real-time clock, accelerometer, and external flash memory. Figure 1 shows the board and figure 2 shows the schematic.

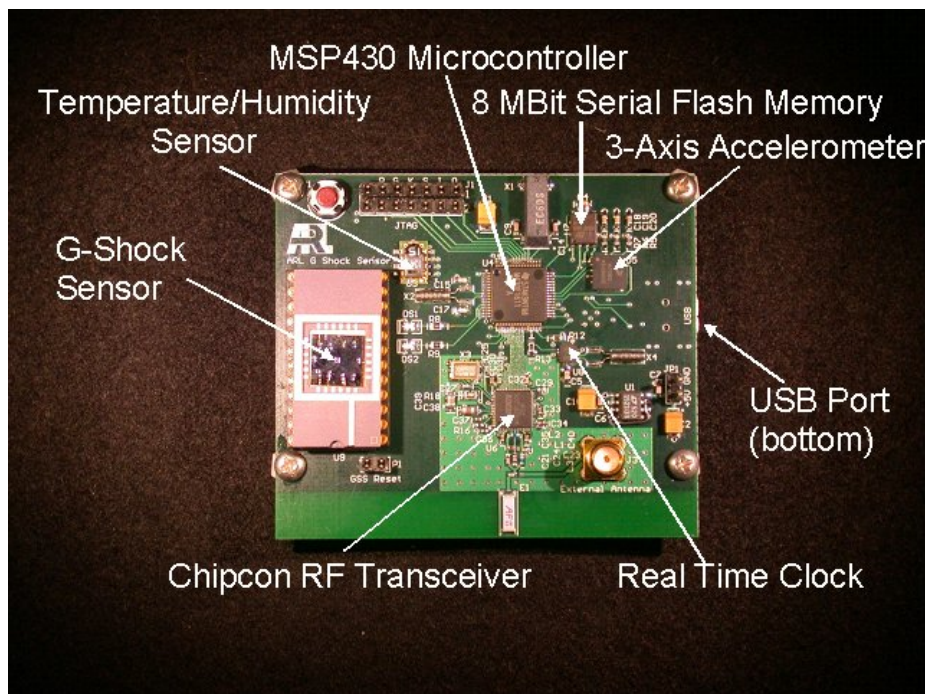


Figure 1. ARL P&D demonstration board.

The design is based on the use of as many microcontroller modules as possible. This simplifies the design and allows for testing of the microcontroller's capabilities to determine if the internal modules provide the necessary functionality. As these determinations are made, modifications of the design to allow for additional external components such as analog-to-digital converters will be made.

The circuit also contains miscellaneous components for programming, debugging, and monitoring. These include a Joint Test Action Group (JTAG) interface for programming and debugging, two light-emitting diodes (LEDs) for monitoring, and a push button to be used as an external interrupt.

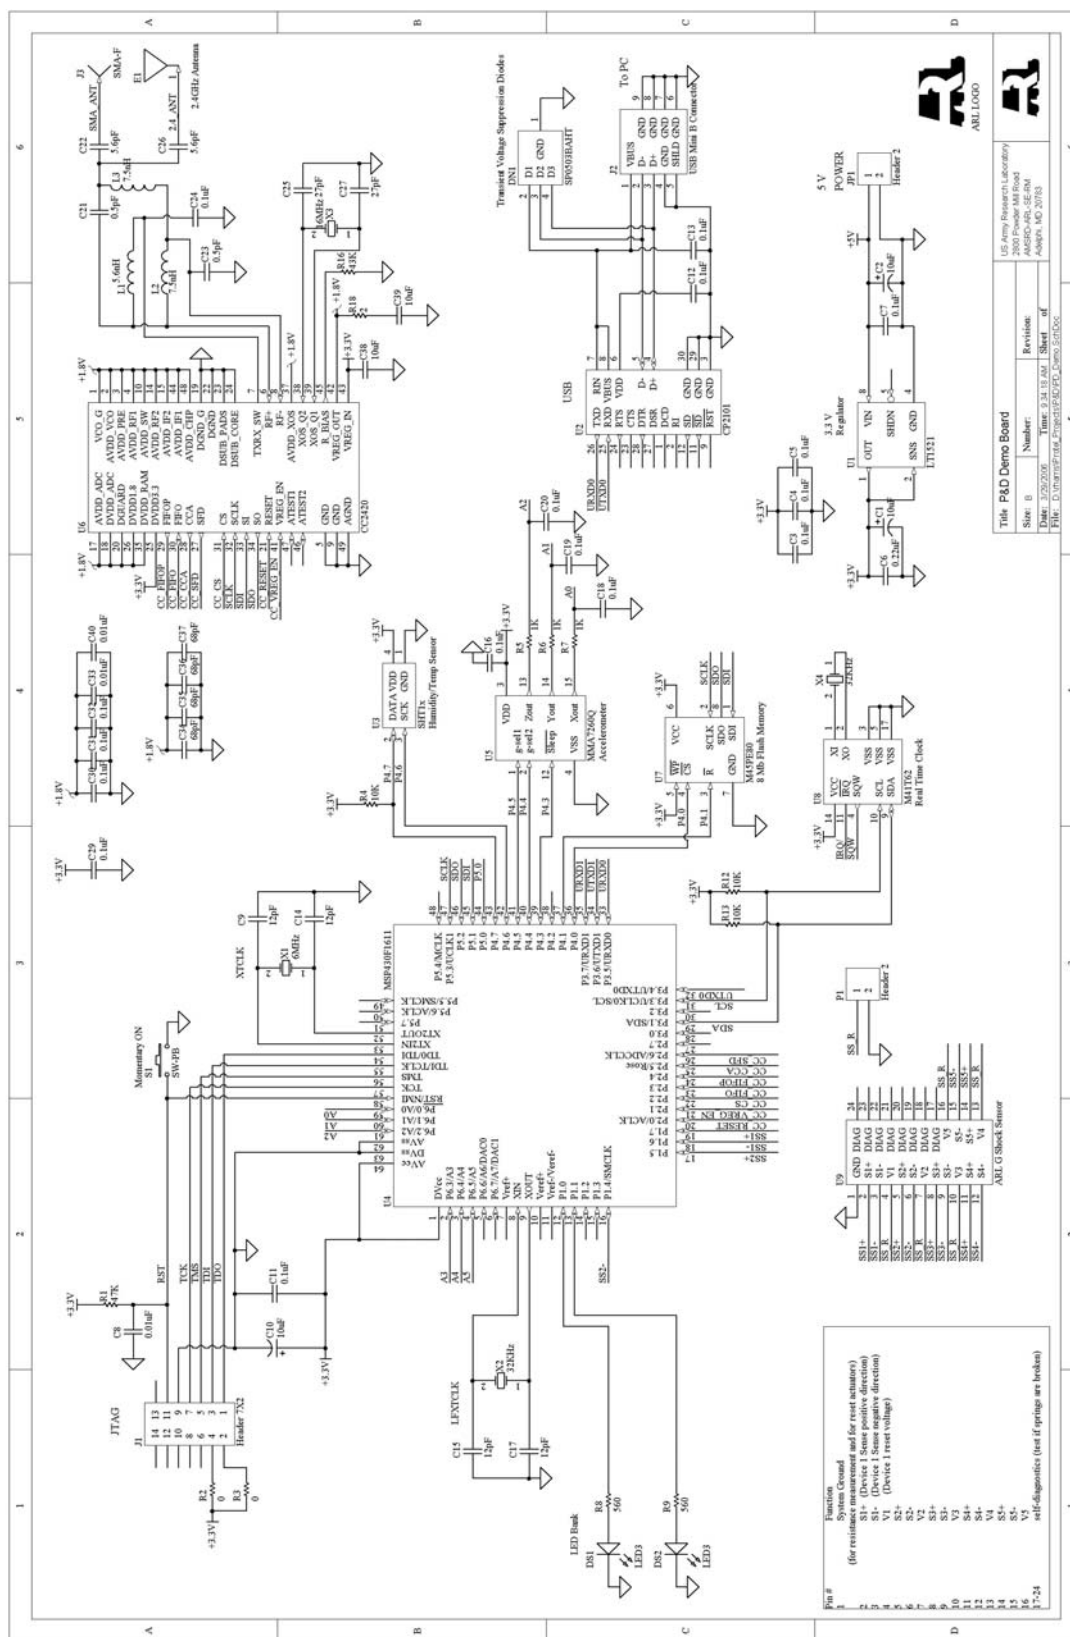


Figure 2. Prognostics and diagnostics demonstration board schematic.

Although not used for this demonstration, the circuit also contains a radio frequency (RF) transceiver and the choice of an on-board chip antenna or Sub Miniature version A (SMA) connector for external antenna.

3.2 Major Parts Used

Table 1 lists the major functional parts used in this design. In addition to the major parts, a Universal Serial Bus (USB)-to-Universal Asynchronous Receiver Transmitter (UART) bridge allows USB connectivity, a 32-KHz crystal sources the low frequency auxiliary clock input, and a 6 MHz crystal sources the high frequency clock input.

Table 1. Major functional parts.

Part	Manufacturer	Manufacturer Part Number	Part Description
Microcontroller	Texas Instruments	MSP430F1611	Ultralow-power Mixed Signal Microcontroller
Accelerometer	Freescale	MMA7260	Low power three-Axis Accelerometer
Flash Memory	STMicroelectronics	M45PE80	8-bit, serial flash memory w/Serial Peripheral Interface (SPI) interface
Real Time Clock	STMicroelectronics	M41T62	Serial access real time clock w/Alarms
Temperature/Humidity Sensor	Sensirion	SHT15	Temperature/Humidity Sensor, Fully calibrated, digital output
RF Transceiver	Chipcon	CC2420	True single-chip 2.4 GHz Institute of Electrical & Electronics Engineers (IEEE) 802.15.4/ZigBee(tm) RF transceiver with media access control (MAC) support

3.3 Software

The basic objective of this program was to use the accelerometers to determine if the board has been tilted beyond approximately 45 degrees in the positive X or Y axis (as defined by the accelerometer). With the ADC12 module of the MSP430F1611 microcontroller, a program was written to continuously loop and collect data from the X and Y axis output of the accelerometer, compare them to a fixed value that represents the approximate 45-degree tilt value, and if it is exceeded, to light the LED representing that axis. All three axes were not used since only two LEDs were available on the board. During the conversion time period, the microcontroller was placed in low power Mode 3 to save energy.

The IAR Embedded Workbench for MSP430 was used as the programming and debugging Integrated Development Environment (IDE) and C was used as the language.

Figure 3 is a flowchart of the main program and the interrupt service request (ISR) for this demonstration. Figure 4 details the accelerometer and analog to digital converter initialization.

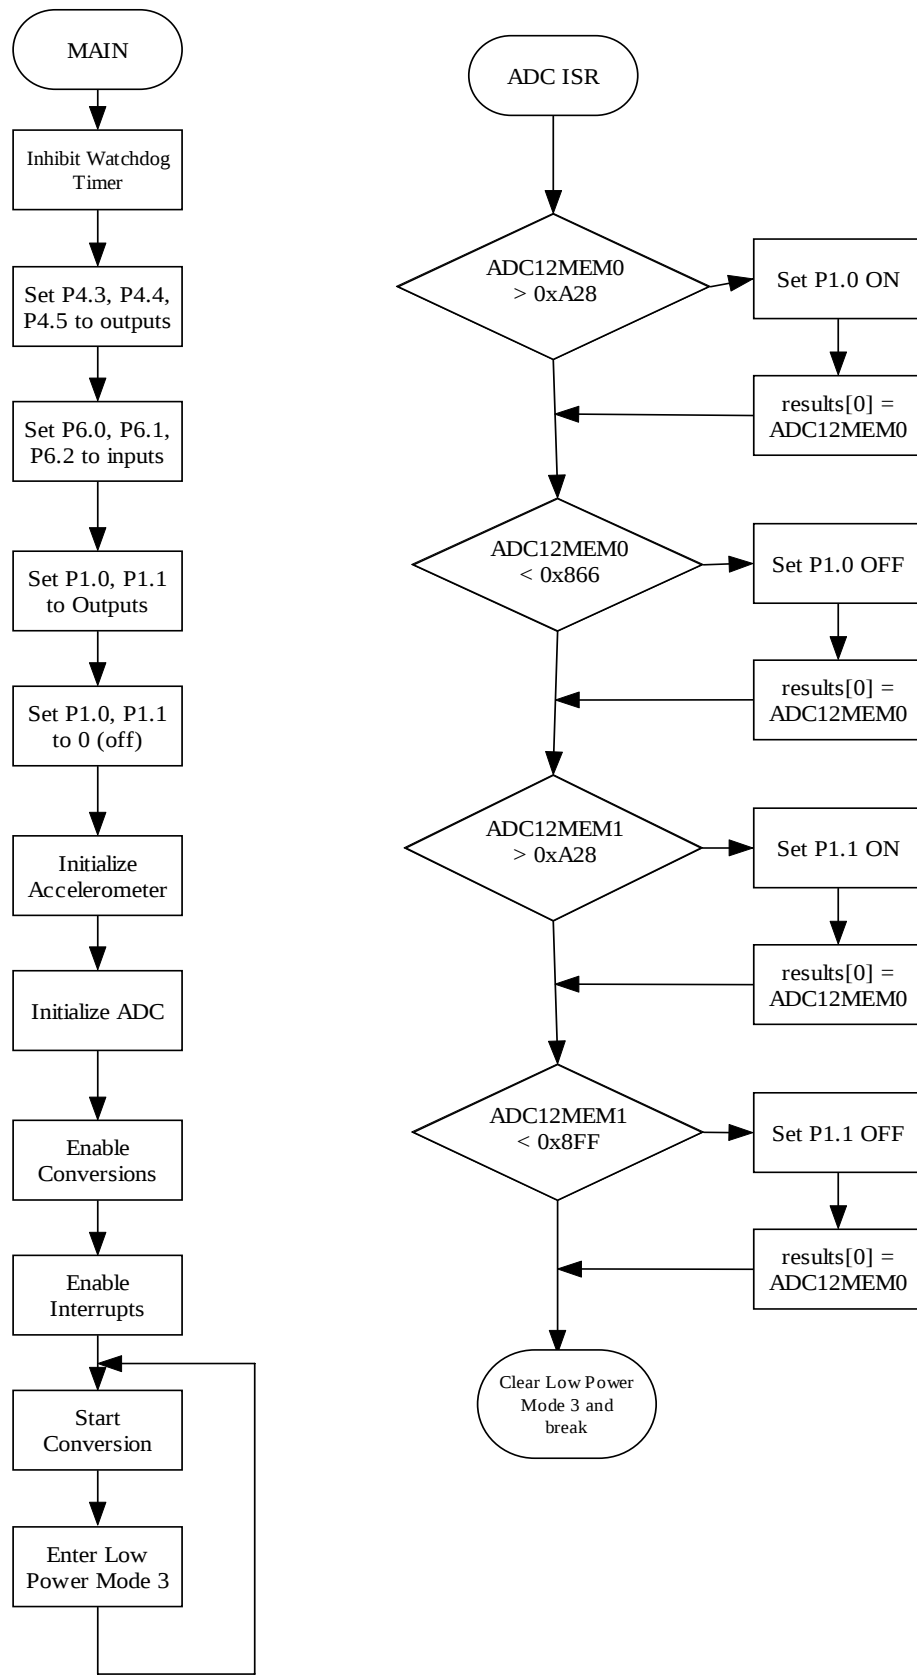


Figure 3. Flow chart of main and interrupt service request.

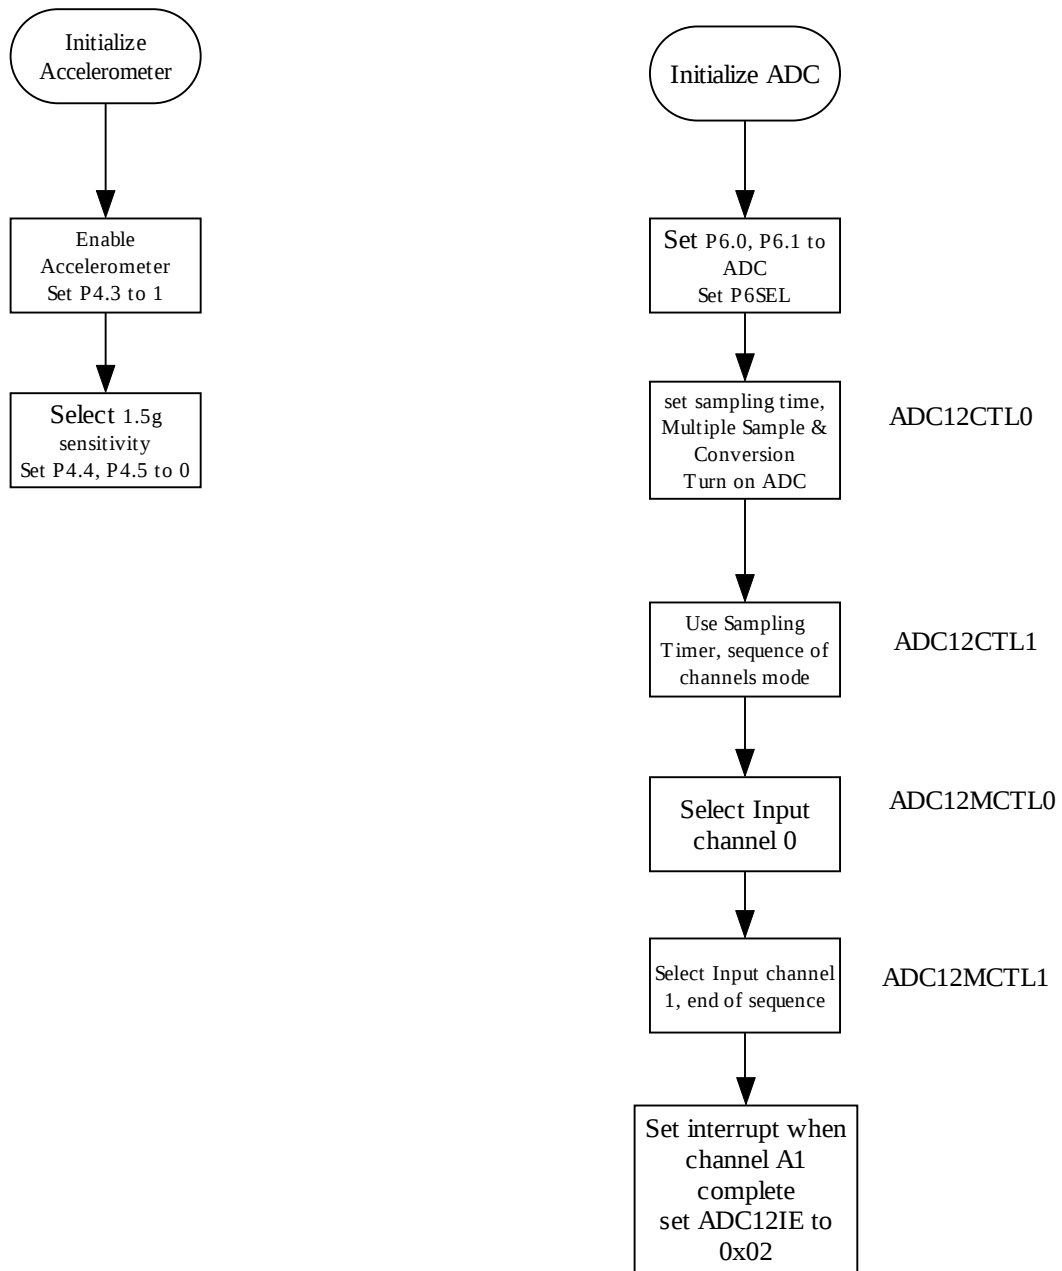


Figure 4. Flowchart of accelerometer and analog-digital converter initializations.

3.4 Source Code

```
// Analog output of accelerometer is sent to 2 a/d inputs.
// A single sequence of conversions is performed - one conversion each on
// channels A0 and A1. Each conversion uses AVcc and AVss for the
// references. The conversion results are stored in ADC12MEM0 and ADC12MEM1 and // are
// moved to 'results[]' upon completion of the sequence. The results are // tested against a specific
// value representing an angle of tilt in the X or Y // axis. If the test is true, an LED is lit.
//
//      Name      Location
//      accel sleep/  P4.3
//      accel g-sel2  P4.4
//      accel g-sel1  P4.5
//
//      A0, xout      P6.0
//      A1, yout      P6.1
//
//
//      LED1, xth      P1.0
//      LED2, yth      P1.1
//
//
//

#include <msp430x16x.h>
static unsigned int results[3];    // Needs to be global in this example
                                   // Otherwise, the compiler removes it
                                   // because it is not used for anything.

void main(void)
{
    WDTCTL = WDTPW + WDTHOLD;      // Stop WDT
    P4DIR |= 0x38;                  // force output DIR on P4.3, P4.4, P4.5
    P6DIR &= ~0x03;                  // force input DIR on P6.0, P6.1 using
    P1DIR |= 0x03;                  // force output DIR on P1.0, 1.1 (LEDs)
    P1OUT &= ~0x03;                  // Force P1.0-P1.1 off
    P4OUT |= 0x08;                  // force P4.3 high for accel enable
    P4OUT &= ~0x30;                  // force P4.4, P4.5 low for 1.5g sens.
    P6SEL |= 0x03;                  // P6.0, P6.1 ADC option select

    ADC12CTL0 = SHT0_10 + MSC + ADC12ON; // Set sampling time, auto 2nd, turn on  ADC12
    ADC12CTL1 = SHP + CONSEQ_1;         // Use sampling timer, single sequence
    ADC12MCTL0 = INCH_0;                 // ref+=AVcc, channel = A0
    ADC12MCTL1 = INCH_1 + EOS;           // ref+=AVcc, channel = A1, end seq.
    ADC12IE = 0x02;                     // Enable ADC12IFG.1 (interrupt when A1 done)
    ADC12CTL0 |= ENC;                    // Enable conversions
```

```

_EINT();                // Enable interrupts

while(1)
{
    ADC12CTL0 |= ADC12SC;        // Start conversion
    _BIS_SR(LPM3_bits);        // Enter LPM3
}

// ADC12 interrupt service routine
#pragma vector=ADC_VECTOR
__interrupt void ADC12_ISR (void)
{
    if (ADC12MEM0 > 0xa28)
    {
        P1OUT |= 0x01;          // Set P1.0 LED on (x-axis accel)
        results[0] = ADC12MEM0;  // Move results, IFG is cleared
    }
    if (ADC12MEM0 < 0x866)
    {
        P1OUT &= 0x02;          // Set P1.0 LED off
        results[0] = ADC12MEM0;
    }
    if (ADC12MEM1 > 0xa28)
    {
        P1OUT |= 0x02;          // Set P1.1 LED on (y-axis accel)
        results[1] = ADC12MEM1;  // Move results, IFG is cleared
    }
    if (ADC12MEM1 < 0x8FF)
    {
        P1OUT &= 0x01;          // Set P1.1 LED off
        results[1] = ADC12MEM1;
    }
    _BIC_SR_IRQ(LPM3_bits);      // Clear LPM3, SET BREAKPOINT HERE
}

```

Distribution List

ADMNSTR
DEFNS TECHL INFO CTR
ATTN DTIC-OCF (ELECTRONIC COPY)
8725 JOHN J KINGMAN RD STE 0944
FT BELVOIR VA 22060-6218

DARPA
ATTN IXO S WELBY
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

OFC OF THE SECY OF DEFNS
ATTN ODDRE (R&AT)
THE PENTAGON
WASHINGTON DC 20301-3080

US ARMY TRADOC
BATTLE LAB INTEGRATION & TECHL
DIRCTRT
ATTN ATCD-B
10 WHISTLER LANE
FT MONROE VA 23651-5850

SMC/GPA
2420 VELA WAY STE 1866
EL SEGUNDO CA 90245-4659

COMMANDING GENERAL
US ARMY AVN & MIS CMND
ATTN AMSAM-RD W C MCCORKLE
REDSTONE ARSENAL AL 35898-5000

US ARMY INFO SYS ENGRG CMND
ATTN AMSEL-IE-TD F JENIA
FT HUACHUCA AZ 85613-5300

US ARMY SIMULATION TRAIN &
INSTRMNTN CMND
ATTN AMSTI-CG M MACEDONIA
12350 RESEARCH PARKWAY
ORLANDO FL 32826-3726

US GOVERNMENT PRINT OFF
DEPOSITORY RECEIVING SECTION
ATTN MAIL STOP IDAD J TATE
732 NORTH CAPITOL ST., NW
WASHINGTON DC 20402

US ARMY RSRCH LAB
ATTN AMSRD-ARL-CI-OK-TP TECHL
LIB T LANDFRIED (2 COPIES)
ABERDEEN PROVING GROUND MD
21005-5066

DIRECTOR
US ARMY RSRCH LAB
ATTN AMSRD-ARL-RO-EV
W D BACH
PO BOX 12211
RESEARCH TRIANGLE PARK NC 27709

US ARMY RSRCH LAB
ATTN AMSRD-ARL-CI-OK-T
TECHL PUB (2 COPIES)
ATTN AMSRD-ARL-CI-OK-TL
TECHL LIB (2 COPIES)
ATTN AMSRD-ARL-D J M MILLER
ATTN AMSRD-ARL-SE-RE
M PATTERSON
ATTN AMSRD-ARL-SE-RE
R DEL ROSARIO
ATTN AMSRD-ARL-SE-RM
D W VANCE (2 COPIES AND 1 CD)
ATTN AMSRD-ARL-SE-RM E ADLER
ATTN AMSRD-ARL-SE-RM T KWOK
ADELPHI MD 20783-1197

INTENTIONALLY LEFT BLANK.