



Performance Assessment: University of Michigan Meta-Material-Backed Patch Antenna

by Robert Dahlstrom and Steven Weiss

ARL-TN-0269

January 2007

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-TN-0269**January 2007**

Performance Assessment: University of Michigan Meta- Material-Back Patch Antenna

**Robert Dahlstrom and Steven Weiss
Sensors and Electron Devices Directorate, ARL**

Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) January 2007		2. REPORT TYPE Final		3. DATES COVERED (From - To) January 2006 to May 2006	
4. TITLE AND SUBTITLE Performance Assessment: University of Michigan Meta-Material-Backed Patch Antenna				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Robert Dahlstrom and Steven Weiss				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-SE-RM 2800 Powder Mill Road Adelphi, MD 20783-1197				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TN-0269	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1197				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT This report describes measurements performed on a meta-material-backed patch antenna designed and fabricated at the University of Michigan for use by CERDEC. The purpose of the measurements was to resolve inconsistencies between the performance measured at these two organizations. The antenna consists of a microstrip patch, with a broad-banding slot, backed by a reactive impedance surface. The gain and impedance characteristics of the meta-material-backed patch antenna were found to be in agreement with the values reported by the University of Michigan within the accuracy of our measurement. The antenna proves to be broadband, both in impedance and antenna pattern characteristics, and promises to be useful for many applications.					
15. SUBJECT TERMS Meta-material, patch antenna, microstrip					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON Robert Dahlstrom
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 301-394-3173

Contents

List of Figures	iv
Introduction	1
Return Loss	1
Gain Measurements	2
Radiation Pattern Measurements	3
Summary	4
Distribution List	5

List of Figures

Figure 1. Measured return loss of the meta-material antenna.....	1
Figure 2. Measured gain of the meta-material-backed patch antenna.	2
Figure 3. E-plane radiation pattern.	3
Figure 4. H-plane radiation pattern.	4

Introduction

A meta-material-backed patch antenna for use at UHF was designed and fabricated under the direction of Kamal Sarabandi at the University of Michigan for use by the U.S. Army Communications-Electronics Research Development and Engineering Center. The antenna consists of a microstrip patch, with a broad-banding slot, backed by a reactive impedance surface (RIS). Because of inconsistencies between the performance measured at these two organizations, particularly the gain of the antenna, the Army Research Laboratory (ARL) Millimeter Wave Branch was asked to duplicate the antenna measurements to assist in identifying the cause of the inconsistencies.

Return Loss

The return loss, shown in figure 1, was measured using a network analyzer. Our data showed a slightly higher return than the data reported by the University of Michigan. In subsequent conversations, we found that they used a ground plane to simulate vehicle mounting while we measured it by itself, which would account for the difference.

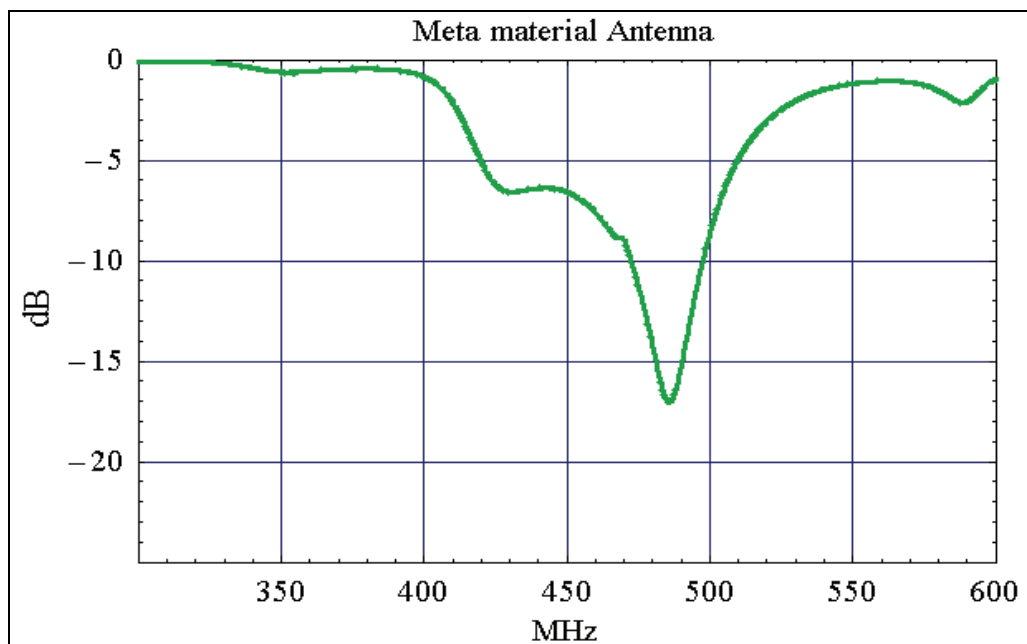


Figure 1. Measured return loss of the meta-material antenna.

Gain Measurements

The gain of the meta-material-backed patch antenna was measured in the microwave anechoic chamber at the ARL, Adelphi, MD. It was placed on a foam block oriented so that its broad face with the radiating patch was directed toward the illuminating antenna. Two reference antennas were then substituted for the antenna being tested and the received signals were measured and compared, as shown in figure 2. The realized gain curves show the gain derived by comparing the signal received by the test antenna relative to each reference and adding the estimated gain of the reference. The corrected gain curves include a correction for the impedance mismatch, as measured (above) at the connector of the meta-material-backed patch antenna, to show its gain when matched.

The primary reference antenna is the ETS-Lindgren Model 3106 horn using published typical and measured gain data. As an additional check, a Polarad UH-1 horn was used as a reference with its gain estimated based on aperture size. The different reference antennas vary in gain by about two dB but show a similar variation characteristic with frequency with gains of about 2 to 6 dB in the 420 to 485 MHz range of interest. The University of Michigan reported higher gain, particularly at the lower frequencies, but if they had used a ground plane, it could increase the gain by this amount.

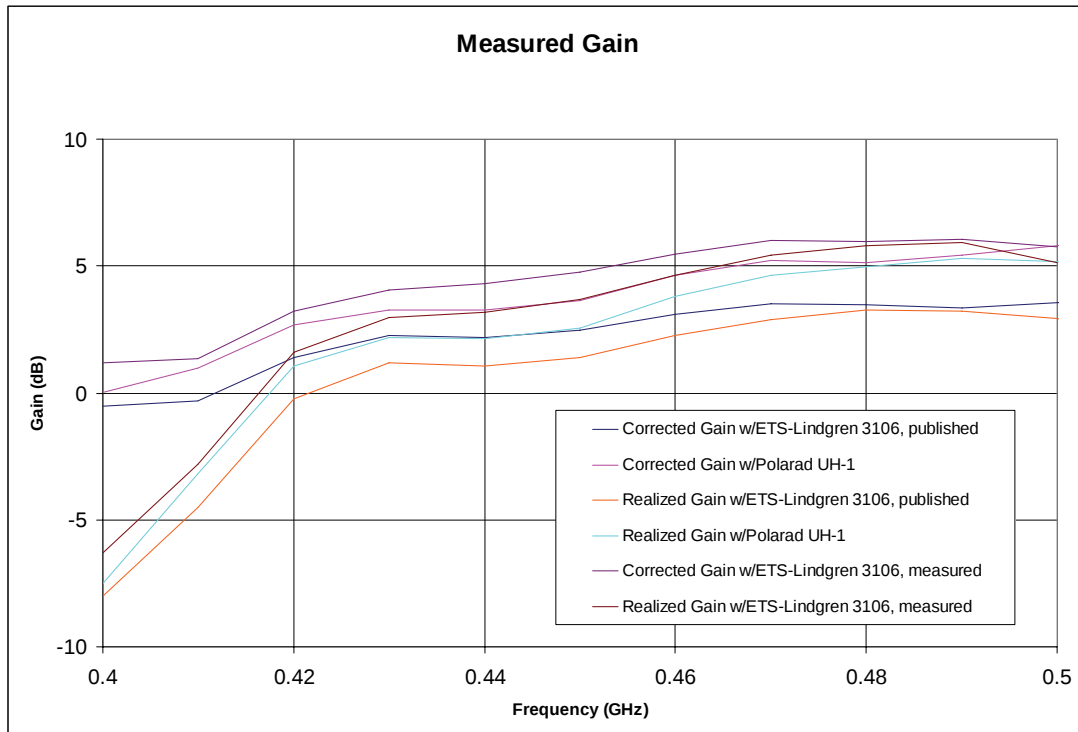


Figure 2. Measured gain of the meta-material-backed patch antenna.

Radiation Pattern Measurements

The radiation patterns of the meta-material-backed patch antenna were measured in the microwave anechoic chamber at the ARL, Adelphi, MD. The antenna was placed on a foam block on the azimuth positioner with the broad surface containing the patch facing the illuminator. Illumination was from an antenna located in the apex of the tapered chamber. The polarization was expected to be vertical with respect to the U-shaped slot based on symmetry, and a quick check verified this orientation.

The E-plane patterns are given in figure 3 and the H-plane patterns are given in figure 4. They show a broad, stable beam in each plane, slightly broader in the E-plane.

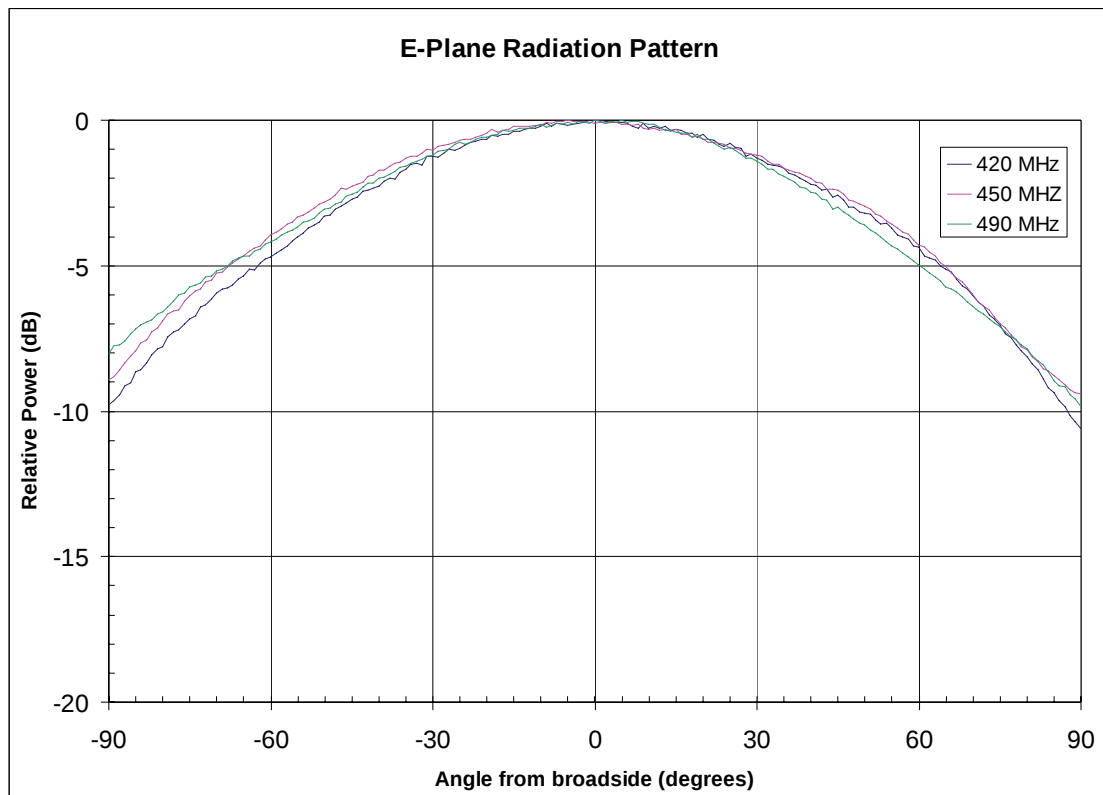


Figure 3. E-plane radiation pattern.

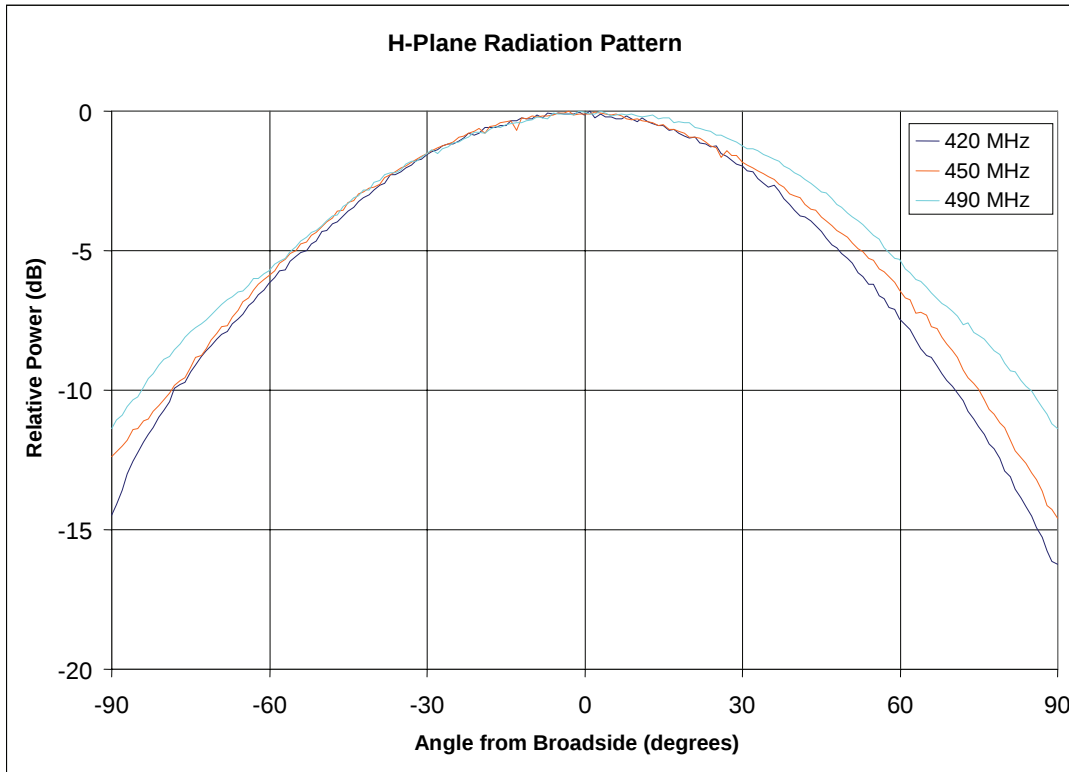


Figure 4. H-plane radiation pattern.

Summary

The gain and impedance characteristics of the meta-material-backed patch antenna were measured and were found to be in agreement with the values reported by the University of Michigan within the accuracy of our measurement given the gain standards available at ARL and our knowledge of the details of their measurement procedures. The antenna proves to be broadband, both in impedance and antenna pattern characteristics, which promises to be useful for many applications.

Distribution List

ADMNSTR
DEFNS TECHL INFO CTR
ATTN DTIC-OCP (ELECTRONIC COPY)
8725 JOHN J KINGMAN RD STE 0944
FT BELVOIR VA 22060-6218

DARPA
ATTN IXO S WELBY
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

OFC OF THE SECY OF DEFNS
ATTN ODDRE (R&AT)
THE PENTAGON
WASHINGTON DC 20301-3080

US ARMY RSRCH DEV AND ENGRG CMND
ARMAMENT RSRCH DEV AND ENGRG
CTR
ARMAMENT ENGRG AND TECHNLGY CTR
ATTN AMSRD-AAR-AEF-T J MATTS
BLDG 305
ABERDEEN PROVING GROUND MD
21005-5001

US ARMY COMMUNICATIONS-
ELECTRONICS RSRCH, DEV & ENGRG CTR
ATTN G PALAFOX
BLDG 2700 MYER CENTER
FT MONMOUTH NJ 07703

US ARMY TRADOC
BATTLE LAB INTEGRATION & TECHL
DIRCTRT
ATTN ATCD-B
10 WHISTLER LANE
FT MONROE VA 23651-5850

PM TIMS, PROFILER (MMS-P) AN/TMQ-52
ATTN B GRIFFIES
BUILDING 563
FT MONMOUTH NJ 07703

SMC/GPA
2420 VELA WAY STE 1866
EL SEGUNDO CA 90245-4659

COMMANDING GENERAL
US ARMY AVN & MIS CMND
ATTN AMSAM-RD W C MCCORKLE
REDSTONE ARSENAL AL 35898-5000

US ARMY INFO SYS ENGRG CMND
ATTN AMSEL-IE-TD F JENIA
FT HUACHUCA AZ 85613-5300

US GOVERNMENT PRINT OFF
DEPOSITORY RECEIVING SECTION
ATTN MAIL STOP IDAD J TATE
732 NORTH CAPITOL ST., NW
WASHINGTON DC 20402

DEPT OF ELECT ENGRG & COMPUTER SCI
UNIV OF MICHIGAN
ATTN K SARABANDI
3228 EECS BLDG
1301 BEAL AVE
ANN ARBOR, MI 48109-2122

US ARMY RSRCH LAB
ATTN AMSRD-ARL-CI-OK-TP TECHL LIB
T LANDFRIED (2 COPIES)
BLDG 4600
ABERDEEN PROVING GROUND MD
21005-5066

DIRECTOR
US ARMY RSRCH LAB
ATTN AMSRD-ARL-RO-EV W D BACH
PO BOX 12211
RESEARCH TRIANGLE PARK NC 27709

US ARMY RSRCH LAB
ATTN AMSRD-ARL-D J M MILLER
ATTN AMSRD-ARL-CI-OK-T
TECHL PUB (2 COPIES)
ATTN AMSRD-ARL-CI-OK-TL
TECHL LIB (2 COPIES)
ATTN AMSRD-ARL-SE-RM
R DAHLSTROM
ATTN AMSRD-ARL-SE-RM
S WEISS (5 COPIES)
ATTN IMNE-ALC-IMS
MAIL & RECORDS MGMT
ADELPHI MD 20783-1197