



Technical Note on Scale Conversion for the Synchronous Impulse Reconstruction (SIRE) Radar

by Kenneth Ranney, Lam Nguyen, and Anders Sullivan

ARL-TN-0286

July 2007

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-TN-0286**July 2007**

Technical Note on Scale Conversion for the Synchronous Impulse Reconstruction (SIRE) Radar

Kenneth Ranney, Lam Nguyen, and Anders Sullivan
Sensors and Electron Devices Directorate, ARL

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) July 2007		2. REPORT TYPE		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Technical Note on Scale Conversion for the Synchronous Impulse Reconstruction (SIRE) Radar				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Kenneth Ranney, Lam Nguyen, and Anders Sullivan				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-SE-RU 2800 Powder Mill Road Adelphi, MD 20783-1197				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TN-0286	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1197				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT This technical note describes a calibration method used to convert measurements obtained with the U.S. Army Research Laboratory synchronous impulse reconstruction (SIRE) radar from an integer scale to an absolute, radar cross section (RCS) scale. The required RCS reference point is obtained from highly accurate solutions of Maxwell's equations for a modeled reference target and scene. Electrical characteristics of this modeled target and scene are carefully selected to match those encountered in the actual data collection.					
15. SUBJECT TERMS Ultrawideband impulse radar, radar calibration, SIRE					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 18	19a. NAME OF RESPONSIBLE PERSON Kenneth Ranney
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 301-394-0832

Contents

List of Figures	iv
Introduction	1
Technical Approach	1
Summary	3
Appendix. Examples of Calibration Factors Calculated for Various SIRE Images	5
Distribution List	9

List of Figures

Figure A-1. Image bandwidth 500–2000 MHz.....	5
Figure A-2. Image bandwidth 500–800 MHz.....	5
Figure A-3. Image bandwidth 500–1000 MHz.....	6
Figure A-4. Image bandwidth 1000–2000 MHz.....	6
Figure A-5. Image bandwidth 1500–2000 MHz.....	7

Introduction

A well-understood, absolute measurement scale plays a critical role in understanding the physical phenomena observed in radar data. Such a scale provides a common reference frame and enables comparison of synthetic aperture radar (SAR) data collected from multiple radar sensors. For this reason, the Synchronous Impulse Reconstruction (SIRE) radar team wishes to determine a scale factor that allows measurements expressed in a scale based on analog-to-digital (A/D) counts to be converted to radar cross section (RCS) values.

In many applications, a particular reference target of known RCS, typically a point-like target, is placed in-scene to provide a calibration reference signal. The RCS of this reference target has been determined theoretically and, therefore, provides a reference number for scaling the corresponding target response observed in SAR imagery. If, however, a theoretical number is not available for a particular reference target, then a different approach is required. The extremely low depression angles inherent in the SIRE radar operation make the classical theory-based approach impractical. Thus, we have implemented a unique mixture of high fidelity electromagnetic (EM) modeling results and data measurements to obtain the desired calibration scale factor. This technical note briefly describes the approach that we have adopted.

Technical Approach

As mentioned above, we have used results from high fidelity electromagnetic models and EM-solvers in conjunction with measured radar data to obtain a calibration factor for the SIRE radar. This factor maps image pixels within the focused SAR image from their original values into commonly used RCS values.

In order to obtain the necessary RCS reference point, we select a canonical target deployment and model both the target and the SIRE radar system (i.e., frequency band and operational geometry). Using high fidelity EM-solvers developed at ARL, we then solve for the RCS of the canonical target at many individual frequencies within the frequency band of interest. Since the solvers yield both a magnitude and phase at each frequency, we are able to filter the outputs as desired. That is, we can invoke Parseval's theorem to relate the energy reflected by the canonical target in both the modeled and measured cases.

As part of this approach we make the following approximations that allow us to relate radar measurements to results obtained using the EM-solvers:

- The time domain response of the sphere approximates a point target. Hence, the peak value from the sphere captures almost all of the energy along that particular down-range cut.
- The focusing procedure is linear and provides adequate cross-range resolution to isolate the canonical target from any neighboring background clutter.
- Due to symmetry, the measured sphere RCS will not be affected by integration in the direction that the vehicle travels (i.e., along-track integration).

Parseval's theorem states that:

$$\sum_{n=0}^{N-1} |f(n)|^2 = \frac{1}{N} \sum_{m=1}^{N-1} |F(m)|^2, \quad (1)$$

where $f(n)$ is the time-domain sequence and $F(m)$ is its discrete Fourier Transform. Since we approximate the sphere by a point target, we select a particular down-range cut in the focused SIRE image data and use it in the left-hand side of (1), replacing $\sum_{n=0}^{N-1} |f(n)|^2$ in (1) with

$\max_n \{ |f(n)|^2 \}$. We then substitute the appropriate frequency domain data from the EM-solvers in the right-hand side of (1). After these substitutions, the two sides of (1) will differ by some scale factor, and this scale factor becomes our calibration correction. That is,

$$\alpha = \frac{\frac{1}{N} \sum_{m=1}^{N-1} |F_{\text{modeled}}(m)|^2}{\max\{|f_{\text{measured}}(n)|^2\}}, \quad (2)$$

where N represents the number of frequency samples used (as determined by the bandwidth used to form the focused image).

After application of the scale factor, we are left with the approximation

$$\alpha \sum_{n=0}^{N-1} |f_{\text{measured}}(n)|^2 \approx \frac{1}{N} \sum_{m=1}^{N-1} |F_{\text{modeled}}(m)|^2, \quad (3)$$

which represents the result in the converted scale obtained by forcing the Parseval relationship to hold.

We note here that the scale factor, α , obtained in this way may change as the bandwidth used to obtain the focused imagery changes. Thus, we will calculate a new scale conversion factor for each bandwidth of interest based on modeled and measured data.

The appendix includes examples of focused SIRE imagery together with the calibration factor calculated for each case.

Summary

This technical note described a method for converting radar measurements from a scale based on A/D output values to a universal scale based on RCS. The desired conversion factor is obtained by invoking Parseval's Theorem together with a few simplifying assumptions. For this reason, it is valid only for the bandwidth used to obtain a particular focused image. It can easily be applied to any image of interest, however, provided that both modeled and measured data exist. It is the incorporation of outputs from high fidelity EM-solvers that differentiate the proposed method from many methods commonly used in practice.

INTENTIONALLY LEFT BLANK.

Appendix. Examples of Calibration Factors Calculated for Various SIRE Images

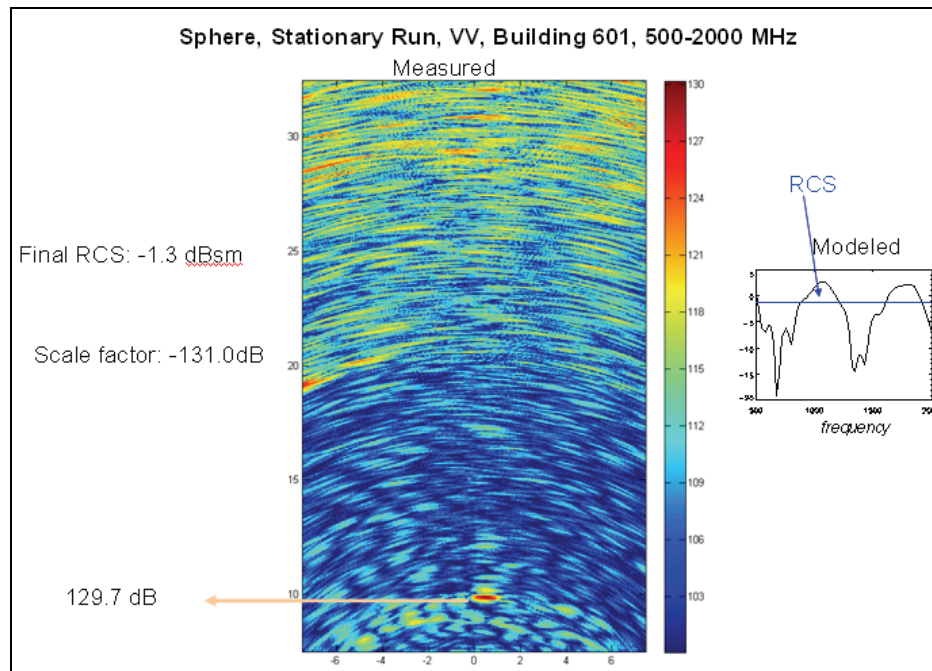


Figure A-1. Image bandwidth 500–2000 MHz.

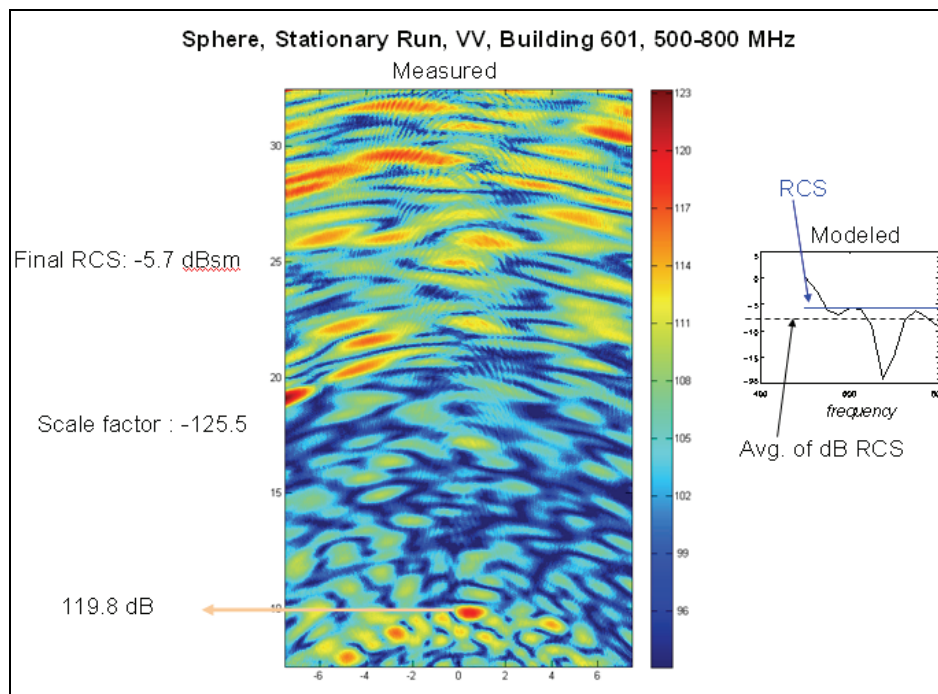


Figure A-2. Image bandwidth 500–800 MHz.

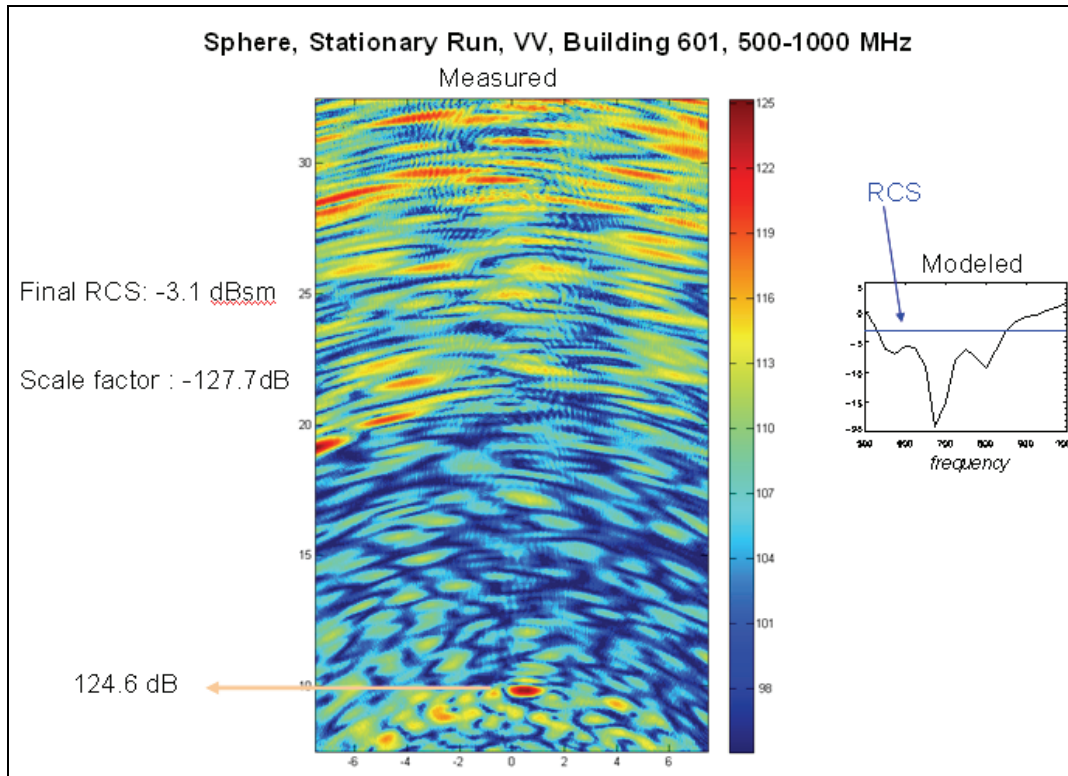


Figure A-3. Image bandwidth 500–1000 MHz.

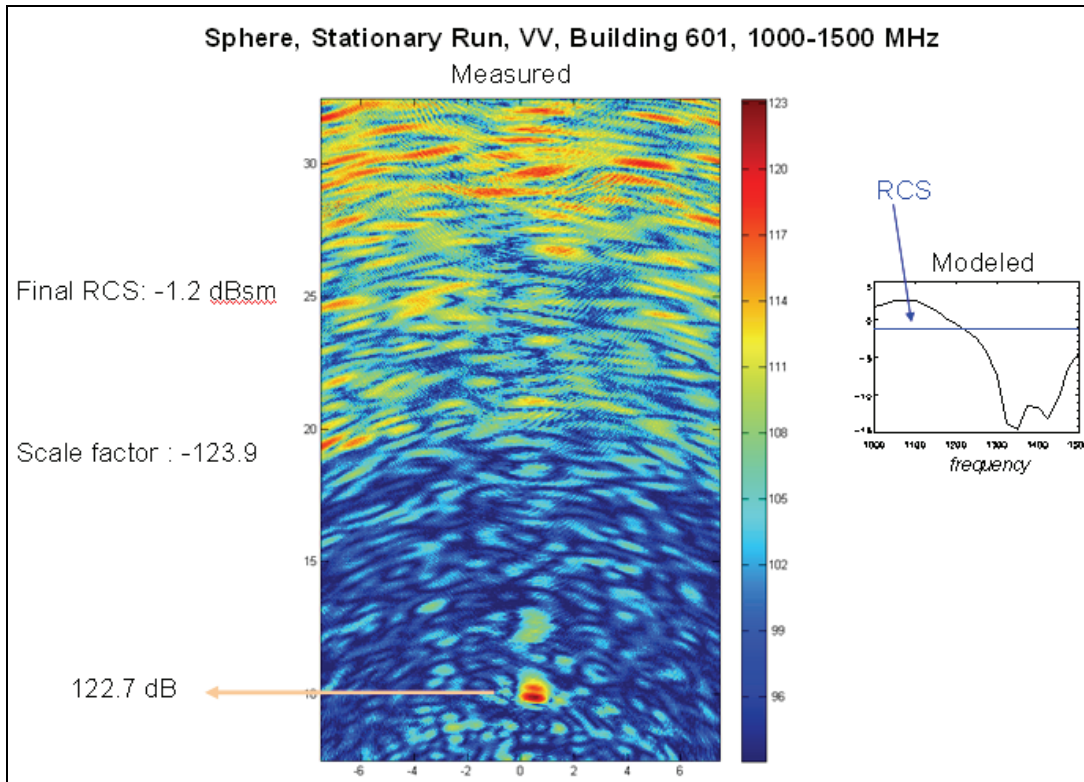


Figure A-4. Image bandwidth 1000–2000 MHz.

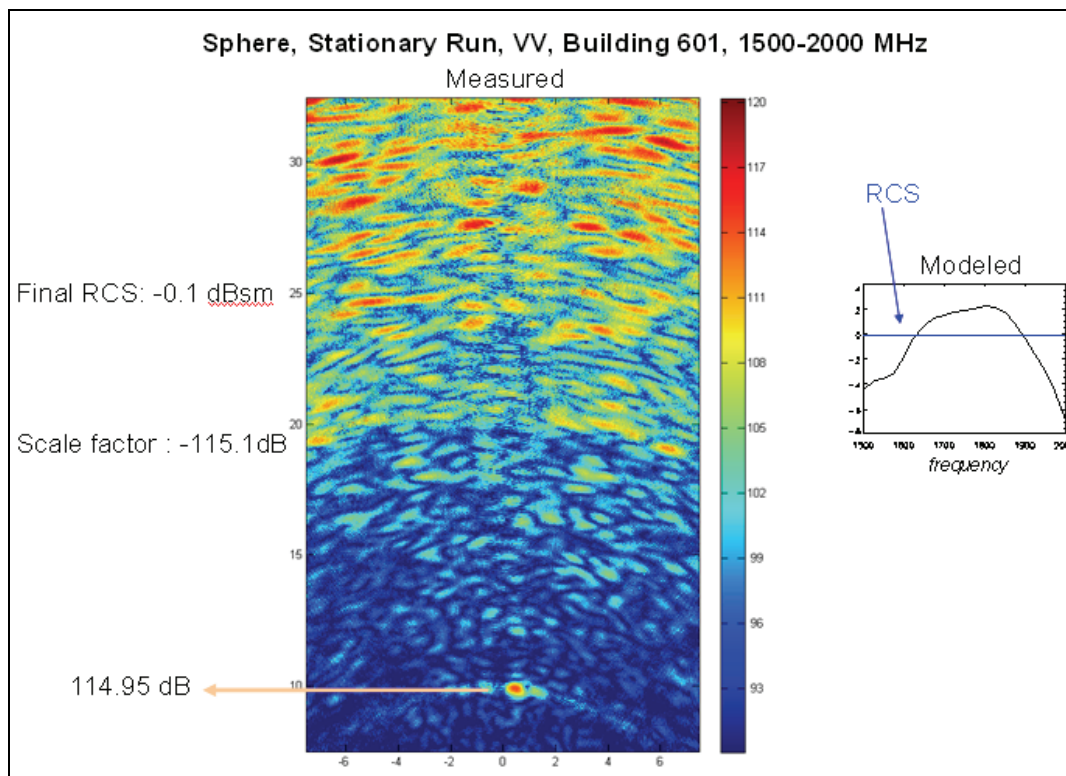


Figure A-5. Image bandwidth 1500–2000 MHz.

INTENTIONALLY LEFT BLANK.

Distribution List

ADMNSTR
DEFNS TECHL INFO CTR
ATTN DTIC-OCP (ELECTRONIC COPY)
8725 JOHN J KINGMAN RD STE 0944
FT BELVOIR VA 22060-6218

US ARMY RSRCH LAB
ATTN AMSRD-ARL-CI-OK-TP TECHL LIB
T LANDFRIED (2 COPIES)
BLDG 4600
ABERDEEN PROVING GROUND MD 21005-
5066

US ARMY RSRCH LAB
ATTN AMSRD-ARL-D J M MILLER
ATTN AMSRD-ARL-CI-OK-T
TECHL PUB (2 COPIES)
ATTN AMSRD-ARL-CI-OK-TL
TECHL LIB (2 COPIES)
ATTN IMNE-ALC-IMS
MAIL & RECORDS MGMT
ATTN AMSRD-ARL-SE-RU
K RANNEY (4 COPIES)
ATTN AMSRD-ARL-SE-RU K. KAPPRA
ATTN AMSRD-ARL-SE-RU J. SICHINA
ATTN AMSRD-ARL-SE-RU A. SULLIVAN
ATTN AMSRD-ARL-SE-RU B. STANTON
ATTN AMSRD-ARL-SE-RU F. KOENIG
ATTN AMSRD-ARL-SE-RU R. INNOCENTI
ATTN AMSRD-ARL-SE-RU M. RESSLER
ATTN AMSRD-ARL-SE-RU L. NGUYEN
ATTN AMSRD-ARL-SE-RU G. SMITH
ATTN AMSRD-ARL-SE-RU D. WONG
ATTN AMSRD-ARL-SE-RU C. TRAN
ATTN AMSRD-ARL-SE-RU G. KIROSE
ADELPHI MD 20783-1197

INTENTIONALLY LEFT BLANK.

