

UNCLASSIFIED

AD NUMBER
AD287258
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; AUG 1962. Other requests shall be referred to US Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD 21010.
AUTHORITY
BRL, per DTIC Form 55

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD 287 258

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY ASTIA 287258
AS AD NO.


BRL

MEMORANDUM REPORT NO. 1423
AUGUST 1962

63-1-3
287 258

CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR
PENTOLITE AND TNT

Ralph E. Shear
Edwin Q. Wright

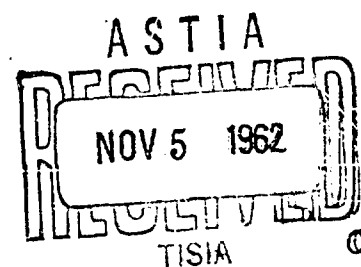

Department of the Army Project No. 503-04-002
BALLISTIC RESEARCH LABORATORIES

ABERDEEN PROVING GROUND, MARYLAND

ASTIA AVAILABILITY NOTICE

Qualified requestors may obtain copies of this report from ASTIA.

The findings in this report are not to be construed
as an official Department of the Army position.

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 1423

AUGUST 1962

CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE AND TNT

Ralph E. Shear
Edwin Q. Wright

Terminal Ballistics Laboratory

Department of the Army Project No. 503-04-002

ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 1423

REShear/EQWright/ic
Aberdeen Proving Ground, Md.
August 1962

CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE AND TNT

ABSTRACT

The Kirkwood-Brinkley shock propagation theory is used to obtain peak pressure-distance curves for Pentolite and TNT. The curve for Pentolite obtained by using the calculated initial pressure and flow energy at the charge surface as initial values is in excellent agreement with experiment for distances greater than 1.75 charge radii.

The curve for TNT obtained by using some approximate values of the peak pressure and energy at the charge surface is in excellent agreement with some recent free-air blast measurements. The curve is also compared with Brode's calculated pressure-distance curve.

TABLE OF CONTENTS

	PAGE
ABSTRACT	3
SYMBOLS	6
INTRODUCTION	7
THE KIRKWOOD-BRINKLEY THEORY	9
INTEGRATION OF THE KIRKWOOD-BRINKLEY EQUATIONS.	13
RESULTS	14
ACKNOWLEDGEMENT.. . . .	16
REFERENCES	17
FIGURE 1	19
FIGURE 2	20
DISTRIBUTION LIST	21

LIST OF SYMBOLS

c	local sound velocity
c_0	sound velocity at 300°K and 1 atm.
E	energy
h	enthalpy
p	excess pressure
p_0	ambient pressure, 1 atm.
r	distance
t	time
u	mass velocity
U	shock velocity
ρ	density
ρ_0	density of air at 1 atm and 300°K

INTRODUCTION

The prediction of damage to structures caused by blast waves in air requires knowledge of the peak pressure-distance, pressure-time, reflected pressure-time relations as well as the impulse-distance relation. Extensive experimental data exist for the propagation of the blast wave from bare spherical charges detonated in air and many of these data (for Pentolite) have been compiled by Goodman¹. The theoretical determination of the blast wave parameters requires the numerical integration of the basic hydrodynamical equations describing the flow and until recently few satisfactory results were available. Brode² has calculated the blast wave from a spherical charge of TNT and reports the shock line parameters as well as the flow properties behind the shock. In a less extensive calculation, Makino and Shear³ have calculated the flow properties behind an experimentally "known" shock line for Pentolite by the method of characteristics. The calculation of Makino and Shear gives the flow properties in the region bounded by the shock line, the explosion gas-air boundary and a terminal characteristic; hence does not include calculations of impulse. Neither of these calculations include shock reflection from a rigid boundary. Therefore, one must rely upon experimental data for the flow properties during reflection¹ or estimates of the shock reflection parameters which are based upon knowledge of the peak reflected pressure or assumed time histories of pressure, (e.g., ref. 4).

The peak pressure-distance curve for Pentolite has been determined by extensive experimental data. This curve, given appropriate initial data, could be calculated by the method used by Brode in his calculations for TNT and comparisons made with the experimental data. The pressure-distance curve can be calculated by the shock propagation theory of Kirkwood-Brinkley⁵ if appropriate initial conditions are given. The early results of Kirkwood and Brinkley showed good agreement with experiment. Since that time the equations of state for air have been revised, experimental techniques have been improved and great mass of

experimental data has been accumulated. Thus, since the Kirkwood-Brinkley theory does provide a simple method of obtaining the peak pressure-distance curve, a comparison should be made with existing data. Also, comparisons should be made with the more refined calculations of the type performed by Brode, when such calculations become available.

In the following pages, the Kirkwood-Brinkley theory will be described briefly and used to obtain pressure-distance curves for Pentolite and TNT under various initial conditions. The initial conditions which are required in the integration are to be specified at (1) the charge surface or (2) at a given fixed distance from the center of the charge.

THE KIRKWOOD-BRINKLEY THEORY

The shock propagation theory of Kirkwood and Brinkley⁵ is based upon a similarity constraint imposed upon the energy-time curve of the shock wave. The use of this similarity constraint and the Hugoniot relations enables one to reduce the partial differential equations describing the flow process to a system of ordinary differential equations for peak pressure and shock wave energy as functions of distance from the explosive charge. Detailed derivations and analysis of this propagation theory may be found in references 5, 6, and 7; hence it will be sufficient to outline the basic relations involved in the approximation.

Kirkwood and Brinkley use the equations of continuity and motion, which describe the flow, in the form:

$$\frac{\rho}{\rho_0} \frac{r^2}{R^2} \left(\frac{\partial u}{\partial R} \right)_t + \frac{2u}{r} = - \frac{1}{\rho c^2} \left(\frac{\partial p}{\partial t} \right)_R$$

$$\frac{R^2}{r^2} \left(\frac{\partial u}{\partial t} \right)_R + \frac{1}{\rho_0} \left(\frac{\partial p}{\partial R} \right)_t = 0$$

where the variable R is the position in the undisturbed air of a volume element which has at time t the position r , thus at the shock front $r = R$. Thus, at the shock front the equations of continuity and motion become

$$\frac{\rho}{\rho_0} \left(\frac{\partial u}{\partial R} \right)_t + \frac{2u}{R} = - \frac{1}{\rho c^2} \left(\frac{\partial p}{\partial t} \right)_R \quad (1)$$

$$\left(\frac{\partial u}{\partial t} \right)_R + \frac{1}{\rho_0} \left(\frac{\partial p}{\partial R} \right)_t = 0$$

These equations provide two equations for $\frac{\partial p}{\partial t}$, $\frac{\partial p}{\partial R}$, $\frac{\partial u}{\partial t}$ and $\frac{\partial u}{\partial R}$ and the Hugoniot relation

$$p = \rho_0 Uu \quad (2)$$

when differentiated in the direction of the shock path gives a third relation, viz.,

$$\left(\frac{\partial u}{\partial t}\right)_R + U \left(\frac{\partial u}{\partial R}\right)_t - U \frac{du}{dp} \left(\frac{\partial p}{\partial R}\right)_t - \frac{du}{dp} \left(\frac{\partial p}{\partial t}\right)_R = 0 \quad (3)$$

The shock front parameters, U , p and u are given as functions of p by the Hugoniot relations. To solve equations (1) and (3) algebraically for the four partial derivations, a fourth relation among the partial derivatives is needed. Kirkwood and Brinkely obtain the desired fourth condition by considering the total work done by the explosive source and through their analysis express the energy-time integral

$$E = \int_{t_R}^{\infty} r^2 p u dt$$

in terms of the peak pressure-distance curve of the shock wave at distances beyond R , that is,

$$E = \int_{t_R}^{\infty} r^2 p u dt = \int_R^{\infty} \rho_0 R^2 \Delta h dR \quad (4)$$

where Δh is the specific enthalpy increment of a fluid element traversed by the shock wave; the shock leaves the element in a state of higher entropy and energy, from which state it returns adiabatically to ambient pressure. Hence Δh depends only on the peak pressure at R , i.e., $\Delta h = \Delta h(p_R)$. Normalizing the time integral in (4) by the shock front values $R^2 p_R u_R$ and choosing a reduced time τ given by

$$\tau = \frac{t - t_R}{\mu} \quad (5)$$

$$\text{where } \frac{1}{\mu} = - \left(\frac{\partial}{\partial t} \ln (r^2 p u) \right)_{t=0} \quad (6)$$

The energy-time integral, E, becomes

$$E(R) = R^2 p_R u_R v(R) \quad (7)$$

where

$$v(R) = \int_0^{\infty} f(R, \tau) d\tau \quad (8)$$

$$\text{and } f(R, \tau) = \frac{r^2 p u}{R^2 p_R u_R} \quad (9)$$

The basis of the Kirkwood-Brinkley shock propagation theory is the approximation of the integral $v(R)$ (eq. 8). Kirkwood and Brinkley (ref. 6) find as a satisfactory approximation that

$$v(R) = 1 - 1/3 \exp \left\{ - p/p_0 \right\} \quad (10)$$

With this approximation and equations (6) and (7) the desired fourth condition among the partial derivatives is obtained. Thus, the equation

$$\frac{1}{u} \frac{\partial u}{\partial t} + \frac{1}{p} \frac{\partial p}{\partial t} + \frac{2u}{R} = - \frac{R^2 p u v(R)}{E(R)} \quad (11)$$

and equations (1) and (3) supplemented by the Hugoniot relations give $\frac{\partial p}{\partial R}$, $\frac{\partial p}{\partial t}$, $\frac{\partial u}{\partial R}$ and $\frac{\partial u}{\partial t}$. Kirkwood and Brinkley give the propagation equation in the form

$$\begin{aligned} \frac{dy}{dx} &= -1 + \Omega \frac{M (R/R_1)^2}{Q} \\ \frac{dz}{dx} &= -\Omega + \frac{N (R/R_1)^2}{Q} \end{aligned} \quad (12)$$

$$\text{where } \Omega = \Omega(p/p_0) = 1 - \frac{4(\rho_0/\rho) + 2(1 - \rho_0/\rho)G}{2(1+g) - G}$$

$$M(p/p_0) = \frac{p}{p_0} v \left\{ \frac{12 G \gamma}{\gamma + 1} \left(\frac{c_0}{U} \right)^2 \frac{1}{2(1+g) - G} \right\}$$

$$N(p/p_0) = M - \frac{12 \gamma^3}{\gamma + 1} \frac{\Delta h p_0}{c_0^2 p}$$

$$x = \ln(R/R_1) \quad 1 + g = 2 - \frac{p}{U} \frac{dU}{dp}$$

$$y = \ln p/p_0$$

$$z = \ln Q \quad G = 1 - \left(\frac{\rho_0 U}{\rho c} \right)^2$$

$$Q = \frac{4\gamma^2}{\gamma+1} \frac{E \rho_e R_1}{R_p}$$

R_1 = charge radius

ρ_e = loading density of explosive.

and where $\gamma = 1.4$ is the specific heat ratio for air at 300°C and 1 atmosphere pressure.

INTEGRATION OF THE KIRKWOOD-BRINKLEY EQUATIONS

The coefficients Ω , M and N which occur in equations (12) are functions of the shock pressure only. These have been computed from the tables of Shear and Day⁸. Equations (12) can then be solved by specifying either p and E at the charge surface or by specifying p and the slope of the pressure-distance curve at some fixed value of R .

Shear⁹ has calculated the initial pressure and flow energy for Pentolite detonating in free air; he reports the initial pressure to be 669 atm and the specific flow energy to be $47568 \text{ cm}^3 \text{ atm/g}$. These values were used as initial conditions at $R/R_1 = 1$, (the charge surface) in the integration of equations (12) and the resulting pressure distance curve is presented in Figure 1.

Sultanoff and McVey¹⁰ have performed some very precise measurements of shock distance vs. time for Pentolite. At a distance corresponding to 20 charge radii the pressure is reported to be 10.408 atm. and the slope, $\frac{dy}{dx}$, calculated by a 5-point Lagrangian interpolated formula is -2.483. These values were used as initial values in equations (12) and the calculated pressure-distance curve is shown in Figure 1.

The initial conditions, at the charge surface, for TNT appear to be suspect. Brode² used an initial flow energy of 252.28 K cal/mole TNT in his calculations but because of inconsistencies in his Figure 1 and Figure 16 it is difficult to estimate the initial pressure. When the pressure-distance curve of Brode's Figure 1 is extrapolated back to the charge surface the initial pressure appears to be between 480 and 490 atmospheres, whereas Figure 16 of the same report shows a peak pressure slightly less than 400 atm.

Shear⁹ indicates that he obtained an approximate value of 515 atmospheres for the initial peak pressure from Jones and Miller's data¹¹ and Brode reports on initial flow energy of 221.7 K cal/mole TNT that he calculated from the work of G.I. Taylor¹². Since Taylor's and Jones and Miller's data are not in agreement, consistency is again lacking. However, using $P = 515 \text{ atm}$ and $E = 221.7 \text{ cal/mole TNT}$ at the charge surface, equations (12) were integrated and the resulting pressure-distance curve is presented in Figure 2.

RESULTS

The pressure-distance curve obtained from the Kirkwood-Brinkley equations (12) using Shear's initial data⁹ shows excellent agreement with experimental data except in the region of the charge surface (see Figure 1) i.e., except for R/R_1 between 1 and 1.75. The pressure-distance curve obtained using the pressure and the slope of the experimental pressure-distance curve¹⁰ at 20 charge radii shows very good agreement with experiment for $R/R_1 \geq 8$. At $R/R_1 = 1$ the pressure is about 570 atm (see Figure 1).

Figure 2 shows some experimental pressure-distance data^{13, 14} along with Brode's curve for TNT and the pressure-distance curve obtained from solving equations (12) with initial values of pressure and energy of 515 atm and 221.7 K cal/mole TNT, respectively. The data of reference 13 were obtained from the explosion of 7.9-pound spherical charges of TNT detonated in free air and the data of reference 14 were obtained from the detonation of a 20-ton hemispherical charge of TNT exploded on the ground. In plotting the data of reference 14, no corrections were made for shock interaction with the ground or the "so-called" reflectivity factors. Brode's curve seems to describe the measurements of reference 14 whereas the calculated Kirkwood-Brinkley curve reproduces the free-air measurements of reference 13. For $R/R_1 > 10$ Brode's curve and the data of reference 14 can be shifted to show agreement with the Kirkwood-Brinkley curve and the data of reference 13 but this requires an increase of approximately 30 percent in the energy used by Brode in his calculations. The difference in the shape of the initial portions of the two curves prohibits any possibility of overall agreement for the two curves.

Pressure-distance curves obtained by the Kirkwood-Brinkley theory with an initial energy of 252.2 K cal/mole TNT and initial pressures in the range 430-515 atm. did not differ greatly from the plotted curve in Figure 2 for values of $R/R_1 > 10$. For $R/R_1 > 720$ these calculations give pressures higher than the corresponding pressures of the plotted curve.

Kirkwood and Brinkley calculated a theoretical pressure-distance curve for cast TNT. (NRC. A-341). They used $p=525$ atm; and $E = 240.6$ cal/mole TNT in their calculations; the resulting curve does not differ significantly from the curve plotted in Figure 2.

The excellent agreement of the pressure-distance curve for Pentolite, calculated from the data of Shear, with the experimental pressure-distance data indicates the need for re-investigation of the Kirkwood-Brinkley theory and further calculations of the detonation characteristics of explosives. For, if initial conditions for the Kirkwood-Brinkley theory can be prescribed by theory and the resulting shock line adequately describes the pressure-distance relation, this provides a quick and inexpensive method for prediction of the shock properties of explosives without need of any experimental data. Thus, the number of costly and time consuming experiments required to determine the blast properties of newly developed explosives could be reduced. The above described calculations could be performed in a few hours and the results could be used as initial conditions for a blast calculation of the type performed by Brode. The Kirkwood-Brinkley calculation required less than ten minutes of computation time.

Ralph E. Shear
RALPH E. SHEAR

EDWIN Q. WRIGHT

ACKNOWLEDGEMENT

The assistance of the members of C. Hauff's programming section, who were responsible for coding and programming this problem for the BRLESC Computer, is gratefully acknowledged.

REFERENCES

1. Goodman, H. Compiled Free-Air Blast Data on Bare Spherical Pentolite, BRL Report No. 1092, 1960.
2. Brode, H. A Calculation of the Blast Wave from a Spherical Charge of TNT, Rand Report RM 1965, The Rand Corp., Santa Monica, California 1957.
3. Makino, R. and Shear, R. Unsteady Spherical Flow Behind a Known Shock Line BRL Report No. 1154, 1961.
4. a. Shear, R. E. and McCane, P. Normally Reflected Shock Parameters BRLM 1273, 1960.
b. Chandrasekhar, S. Normal Reflection of a Blast Wave, BRL Report No. 439, 1943
c. Finkelstein, R. Normal Reflection of Shock Waves, Explosive Research Report No. 6, Navy Department, Bureau of Ordnance, Washington, D.C. 1944.
d. Makino, R. and Shear, R. Estimation of Normal Reflected Impulse of Blast Waves, BRL Technical Note No. 1010, 1955.
5. a. Kirkwood, J. and Brinkley, S. R., Jr. Theory of the Propagation of Shock Waves from Explosive Sources in Air and Water OSRD Report No. 4814, Office of Scientific Research and Development 1945.
b. See also The Physical Review Vol. 71, 1947, P. 606.
6. Cole, R. M. Underwater Explosions Princeton University Press, 1948.
7. Makino, R. The Kirkwood-Brinkley Theory of the Propagation of Spherical Shock Waves, and its Comparison with Experiment BRL Report No. 750, 1951.
8. Shear, R. E. and Day, B. D. Tables of Thermodynamic and Shock Front Parameters for Air, BRL Memo Report No. 1206, 1959.
9. Shear, R. E. Detonation Properties of Pentolite, BRL Report No. 1159, 1961.
10. a. Sultanoff, M. and McVey, G. Shock Pressure at and Close to the Surface of Spherical Pentolite Charges Inferred from Optical Measurements, BRL Report No. 917, 1954.
b. Sultanoff, M. and McVey, G. Observations of the Shock From Spherical Pentolite Charges, BRL Report No. 984, 1956.

11. Jones, H. and Miller, A. R. The Detonation of Solid Explosives Proc. Roy. Soc. (London) A-194, 1948, P. 480.
12. Taylor, G. I. The Dynamics of the Combustion Products Behind Plane and Spherical Detonation Fronts in Explosives, Proc. Roy. Soc, (London) A-200, 1950, P. 235.
13. Fisher, E.M. And Pittman, J. F. Air Blast from the Detonation of Small TNT Charges NAVORD Report 2890, U.S. Naval Ordnance Laboratory, White Oak, Maryland 1953.
14. Canadian Observations on 20 Ton TNT Explosion, Suffield Experimental Station, Ralston, Alberta, Canada, Draft Copy, Jan. 1961.

FIG. 1
PEAK EXCESS PRESSURE RATIO vs. DISTANCE IN CHARGE RADII
FOR PENTOLITE AT A LOADING DENSITY OF 1.65 g/cm³


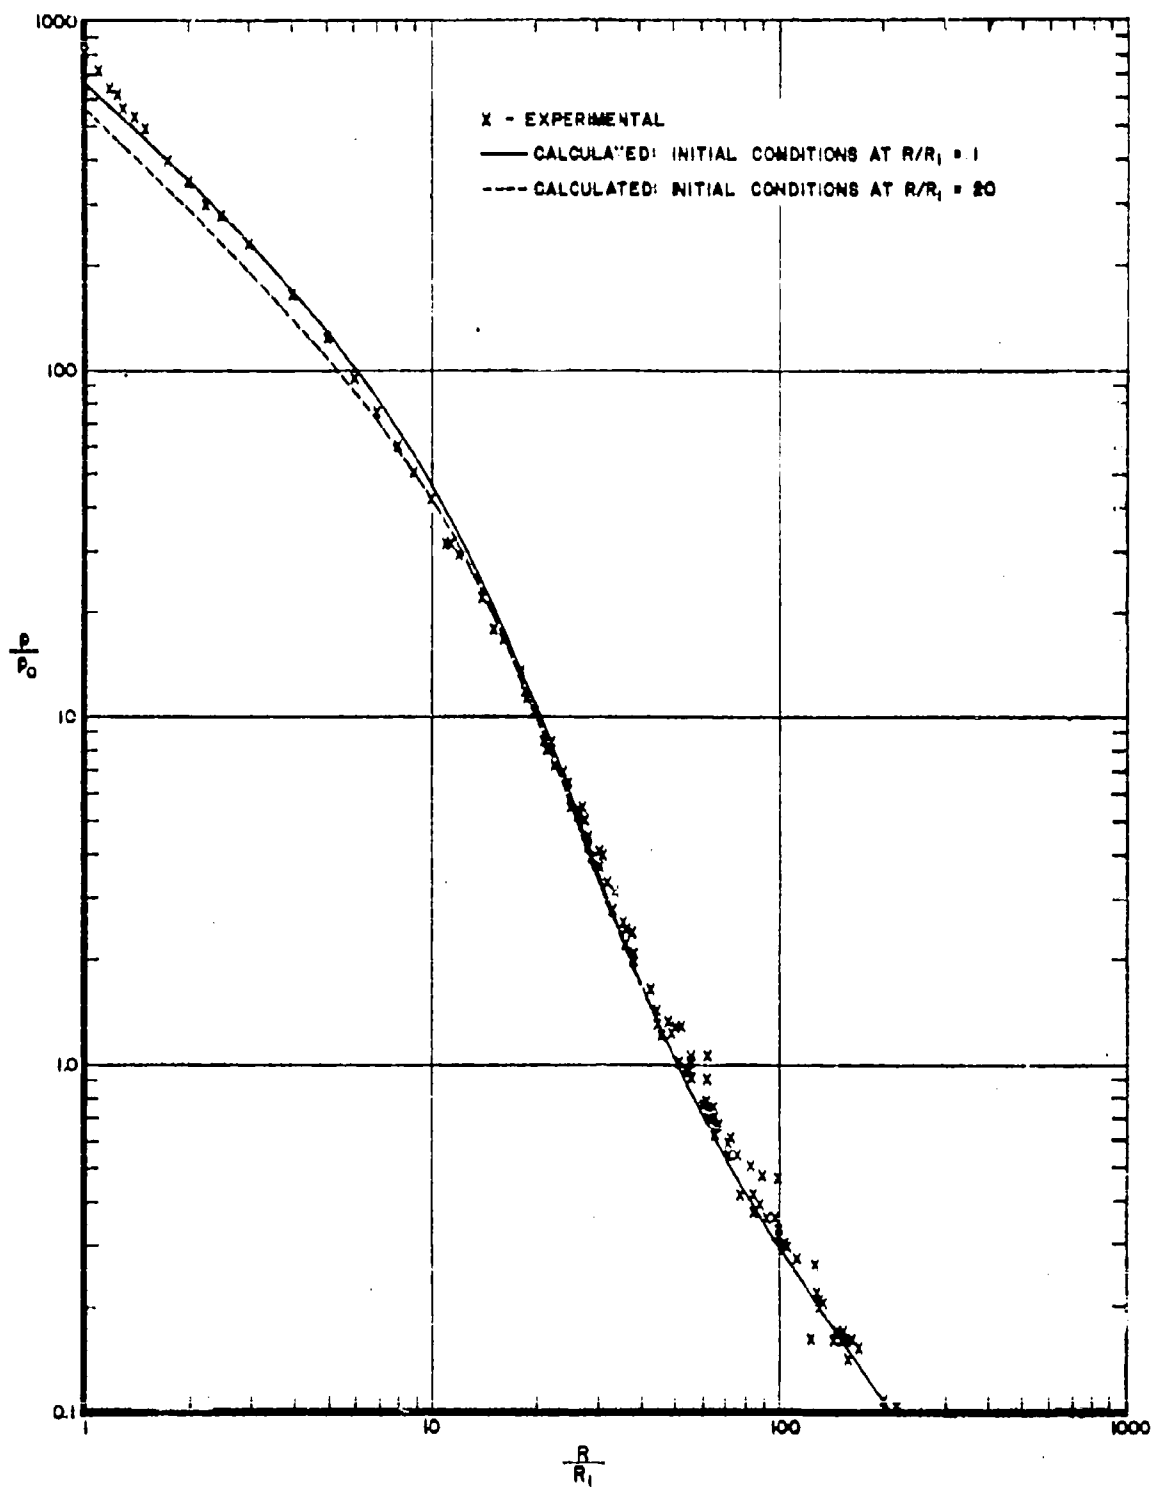


FIG. 2
PEAK EXCESS PRESSURE RATIO vs. DISTANCE IN CHARGE RADII
FOR TNT AT A LOADING DENSITY OF 1.5 g/cm³

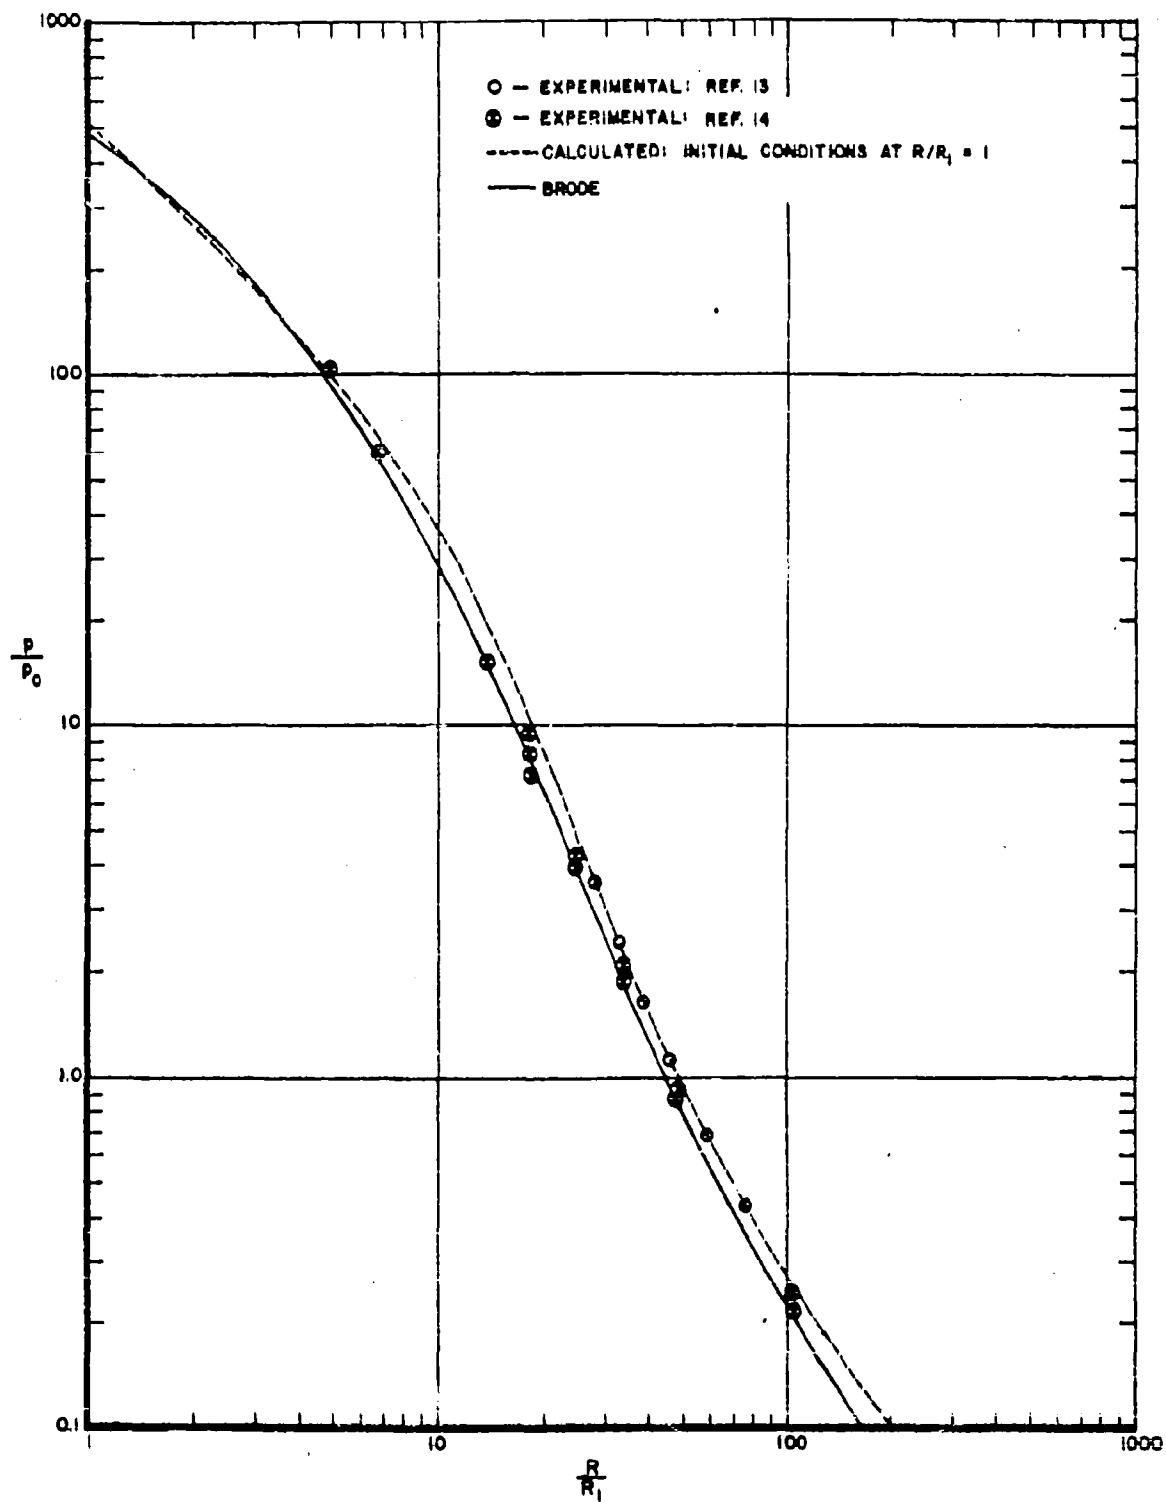

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
10	Commander Armed Services Technical Information Agency ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia	1	Chief of Engineers Department of the Army ATTN: ENGMC-EB Washington 25, D. C.
1	Director of Defense Research and Engineering (OSD) ATTN: Director/Ordnance Washington 25, D. C.	1	Commanding General White Sands Missile Range, New Mexico ATTN: ORDBS-OM, Technical Library, RR-10
1	Director IDA/Weapon Systems Evaluation Group Room IE880, The Pentagon Washington 25, D. C.	1	Commanding General U. S. Army Combat Developments Command Fort Belvoir, Virginia
1	Director Research & Development Division Army Materiel Command ATTN: AMCOR-TB Washington 25, D. C.	1	Army Research Office Arlington Hall Station Arlington, Virginia
1	Commanding General Frankford Arsenal ATTN: Library Branch, 0270, Bldg. 40 Philadelphia 37, Pennsylvania	1	Commander U. S. Naval Ordnance Test Station ATTN: Code 4541 China Lake, California
3	Commanding Officer Picatinny Arsenal ATTN: Feltman Research and Engineering Laboratories Dover, New Jersey	3	Chief, Bureau of Naval Weapons ATTN: DIS-33 Department of the Navy Washington 25, D. C.
1	Commanding Officer Diamond Ordnance Fuze Laboratories ATTN: Technical Information Office Branch 012 Washington 25, D. C.	1	Chief of Naval Operations ATTN: Op 374 - Dr. J. Steinhardt Department of the Navy Washington 25, D. C.
1	Research Analysis Corporation ATTN: Document Control Office 6935 Arlington Road Bethesda, Maryland Washington 14, D. C.	3	Commander Naval Ordnance Laboratory ATTN: Mr. Wm. Filler Mr. Peter Hanlon - Exp. Research Department Air Ground Exp. Division White Oak, Silver Spring 19, Maryland
		2	Commanding Officer Naval Ordnance Laboratory ATTN: Dr. H. A. Thomas Library Corona, California

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commanding Officer U. S. Naval Air Development Center Johnsville, Pennsylvania	2	Director Air University Library ATTN: AUL (3T-AUL-60-118) Maxwell Air Force Base, Alabama
2	Commander U. S. Naval Ordnance Test Station ATTN: Technical Library China Lake, California	1	Commander Air Force Missile Test Center ATTN: J. R. Atkins - MRSS Patrick Air Force Base, Florida
2	Commander U. S. Naval Weapons Laboratory Dahlgren, Virginia	3	Commander Aeronautical Systems Division ATTN: WWAD WWY WWDS Wright-Patterson Air Force Base, Ohio
2	Commander Air Force Systems Command ATTN: SCRR2 Andrews Air Force Base Washington 25, D. C.	1	Commander Foreign Technology Division ATTN: Associated Equipment Section, ATLAS Wright-Patterson Air Force Base, Ohio
1	Commander Arnold Engineering Development Center ATTN: AEOI Arnold Air Force Station Tullahoma, Tennessee	1	Director, Project RAND Department of the Air Force 1700 Main Street Santa Monica, California
1	Commander Air Force Ballistic Missile Division Norton Air Force Base, California	5	Chief of Staff U. S. Air Force ATTN: AFDRT AFCOA AFORQ The Pentagon Washington 25, D. C.
1	Commander Air Proving Ground Center ATTN: PGAPI Eglin Air Force Base, Florida	1	Director of Research and Development U. S. Air Force ATTN: AFDRT Washington 25, D. C.
	Of Interest to: PGTWR PGTW		
2	Commander Air Force Cambridge Research Laboratory ATTN: CRRDM - Lt. G. Meltz L. G. Hanscom Field Bedford, Massachusetts		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
4	University of California Lawrence Radiation Laboratory Technical Information Division ATTN: Clovis G. Craig P. O. Box 808 Livermore, California	2	Aircraft Armaments, Inc. ATTN: Dr. Wilfred Baker Mr. R. R. Mills, Jr. P. O. Box 126 Cockeysville, Maryland
	Of Interest to: Mr. Bruce Crowley Dr. Gus Dorough - Chemical Division Dr. Sidney Fernbach Dr. John Foster	2	Armour Research Foundation Illinois Institute of Technology Center ATTN: F. Forzel - Volpe Chicago 16, Illinois
1	Director National Aeronautics and Space Administration 1520 H Street Washington 25, D. C.	1	Broadview Research Corporation ATTN: Mr. Kenneth Kaplan 1811 Trousdale Drive Burlingame, California
1	Director National Aeronautics and Space Administration ATTN: Mr. Peirce Langley Research Center Langley Field, Virginia	1	CONVAIR, A Division of General Dynamics Corporation P. O. Box 1950 San Diego 12, California
1	U. S. Atomic Energy Commission Sandia Corporation Sandia Base Albuquerque, New Mexico	1	CONVAIR, A Division of General Dynamics Corporation Fort Worth 1, Texas
4	U. S. Atomic Energy Commission Los Alamos Scientific Laboratory P. O. Box 1663 Los Alamos, New Mexico	1	Cornell Aeronautical Laboratory, Inc. ATTN: Mr. Joseph Desmond, Librarian Buffalo 5, New York
1	Aerojet-General Corporation 6352 North Irwindale Road Azusa, California	3	General Electric Research Laboratory P. O. Box 1088 Schenectady, New York
1	Aerojet-General Corporation Technical Information Office ATTN: R. G. Weitz Sacramento Plants P. O. Box 1947 Sacramento 9, California	1	Grumman Aircraft Engineering Corporation ATTN: Armament Group Bethpage, Long Island, New York
		1	Lockheed Aircraft Corporation Military Operations Research Division ATTN: Mr. R. A. Bailey - Division Engineer Burbank, California

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	McDonnell Aircraft Corporation ATTN: Armament Group P.O. Box 516 St. Louis 3, Missouri	1	Chance-Vought Aircraft Company ATTN: Dr. C.C. Wan P.O. Box 5907 Dallas, Texas
1	Northrop Aircraft, Inc. 1001 E. Broadway Hawthorne, California	1	Douglas Aircraft Company Long Beach, California
2	Republic Aviation Corporation Farmingdale, Long Island, New York	1	Hughes Aircraft Company ATTN: Mr. Dana Johnson Research and Development Laboratories Florence Avenue at Teale Street Culver City, California
2	The Rand Corporation ATTN: H.L. Brode F.R. Gilmore 1700 Main Street Santa Monica, California	4	The Martin Company ATTN: Mr. S.L. Rosing Mail No. 356 Middle River, Maryland Mr. Dobray - Mail No. X813 Library Mr. Denkle - Mail No. J3149 Baltimore 3, Maryland
1	Space Technology Laboratories, Inc. ATTN: Technical Information Center Document Processing P.O. Box 95001 Los Angeles 45, California	2	North American Aviation, Inc. ATTN: Mr. D.H. Mason Mr. J. Ward Engineering Technical File 12214 Lakewood Boulevard Downey, California
1	Applied Physics Laboratory The Johns Hopkins University ATTN: J. Juracek, Jr. 8621 Georgia Avenue Silver Spring, Maryland	1	Midwest Research Institute ATTN: B.L. Rhodes 425 Volker Boulevard Kansas City 10, Missouri
1	California Institute of Technology Guggenheim Aeronautical Laboratory ATTN: H.W. Leipmann Pasadena 4, California	1	The Johns Hopkins University Institute for Cooperative Research 3506 Greenway Baltimore 18, Maryland
1	Boeing Airplane Company ATTN: Mr. W.A. Pearce Wichita, Kansas	2	Massachusetts Institute of Technology ATTN: Dr. James Mar, Bldg. 23-111 Dr. Emmett A. Witmer, Rm. 41-219 Cambridge 39, Massachusetts
1	Boeing Airplane Company ATTN: Mr. J. Christian - Armament Unit Mr. Ray Elain - Aerospace Division Seattle 24, Washington		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Purdue University Director of Statistical Laboratory ATTN: Dr. Kossach Lafayette, Indiana	1	Professor M. Holt Brown University Graduate Division of Applied Mathematics Providence 12, Rhode Island
1	Stanford Research Institute Menlo Park, California	1	Professor W. Sears Cornell University Graduate School of Aeronautical Engineering Ithaca, New York
2	Stevens Institute of Technology Davidson Laboratory ATTN: Dr. S.J. Lukasik Mr. L.H. Weeks Hoboken, New Jersey	1	Professor G.B. Whitham New York University Institute of Mathematical Sciences 25 Waverly Place New York 3, New York
1	University of Michigan Department of Engineering ATTN: Dr. O. Laporte Ann Arbor, Michigan	1	Dr. Paul Richards Technical Operations, Inc. Brulington, Massachusetts
1	University of Utah Institute of Rate Processes ATTN: M.A. Cook Salt Lake City, Utah	1	Dr. J.S. Rinehart University of Colorado School of Mines Golden, Colorado
1	Professor W. Bleakney Palmer Physical Laboratory Princeton University Princeton, New Jersey	1	Mr. F.T. Bodurtha E.I. DuPont de Nemours and Company Louviers Building Wilmington 98, Delaware
1	Dr. S.R. Brinkley Combustion and Explosives Research, Inc. Alcoa Building Pittsburgh 19, Pennsylvania	1	Mr. H.G. Leistner - Civil Engineer Pan American World Airways, Inc. Patrick Air Force Base, Florida
1	Professor J.P. Hirschfelder University of Wisconsin Department of Chemistry Madison, Wisconsin	1	Mr. Robert McAlevy Princeton University Forrestal Research Center Department of Aeronautical Engineering Princeton, New Jersey
1	Professor K.O. Friedrichs New York University Applied Mathematics Panel New York, New York		

DISTRIBUTION LIST

No. of
Copies

Organization

10

The Scientific Information Officer
Defence Research Staff
British Embassy
3100 Massachusetts Avenue, N.W.
Washington 8, D.C.

Of Interest to:

Mr. G. Simm
R.A.E.

Mr. James
Fort Halstead, England

4

Defence Research Member
Canadian Joint Staff
2450 Massachusetts Avenue, N.W.
Washington 25, D.C.

AD
Accession No.
 Ballistic Research Laboratories, AFG
 CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE
 AND TNT
 R. E. Shear, E. Q. Wright
 BRU Memorandum Report No. 1423 August 1962
 DA Proj. No. 503-04-002

The Kirkwood-Brinkley shock propagation theory is used to obtain peak pressure-distance curves for Pentolite and TNT. The curve for Pentolite obtained by using the calculated initial pressure and flow energy at the charge surface at initial values is in excellent agreement with experiment for distances greater than 1.75 charge radii.

The curve for TNT obtained by using some approximate values of the peak pressure and energy at the charge surface is in excellent agreement with some recent free-air blast measurements. The curve is also compared with Brode's calculated pressure-distance curve.

UNCLASSIFIED
Accession No.
 Ballistic Research Laboratories, AFG
 CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE
 AND TNT
 R. E. Shear, E. Q. Wright
 BRU Memorandum Report No. 1423 August 1962
 DA Proj. No. 503-04-002

UNCLASSIFIED
 Air Blast -
 Mathematical Analysis
 Explosions - Pressure

The Kirkwood-Brinkley shock propagation theory is used to obtain peak pressure-distance curves for Pentolite and TNT. The curve for Pentolite obtained by using the calculated initial pressure and flow energy at the charge surface at initial values is in excellent agreement with experiment for distances greater than 1.75 charge radii.

The curve for TNT obtained by using some approximate values of the peak pressure and energy at the charge surface is in excellent agreement with some recent free-air blast measurements. The curve is also compared with Brode's calculated pressure-distance curve.

AD
Accession No.
 Ballistic Research Laboratories, AFG
 CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE
 AND TNT
 R. E. Shear, E. Q. Wright
 BRU Memorandum Report No. 1423 August 1962
 DA Project No. 503-04-002

UNCLASSIFIED
 Air Blast -
 Mathematical Analysis
 Explosions - Pressure

The Kirkwood-Brinkley shock propagation theory is used to obtain peak pressure-distance curves for Pentolite and TNT. The curve for Pentolite obtained by using the calculated initial pressure and flow energy at the charge surface at initial values is in excellent agreement with experiment for distances greater than 1.75 charge radii.

The curve for TNT obtained by using some approximate values of the peak pressure and energy at the charge surface is in excellent agreement with some recent free-air blast measurements. The curve is also compared with Brode's calculated pressure-distance curve.

UNCLASSIFIED
Accession No.
 Ballistic Research Laboratories, AFG
 CALCULATED PEAK PRESSURE-DISTANCE CURVES FOR PENTOLITE
 AND TNT
 R. E. Shear, E. Q. Wright
 BRU Memorandum Report No. 1423 August 1962
 DA Project No. 503-04-002

UNCLASSIFIED
 Air Blast -
 Mathematical Analysis
 Explosions - Pressure

The Kirkwood-Brinkley shock propagation theory is used to obtain peak pressure-distance curves for Pentolite and TNT. The curve for Pentolite obtained by using the calculated initial pressure and flow energy at the charge surface at initial values is in excellent agreement with experiment for distances greater than 1.75 charge radii.

The curve for TNT obtained by using some approximate values of the peak pressure and energy at the charge surface is in excellent agreement with some recent free-air blast measurements. The curve is also compared with Brode's calculated pressure-distance curve.