

Technical Report ARWSB-TR-12021

SPECTRAL ANALYSIS USING A METHOD OF SEQUENTIAL TRANSFORMS

Moayyed A. Hussain¹, Mark A. Johnson², Sara Lorene Makowiec²

¹Battelle, Chapel Hill, NC 27517

²Benét Laboratories

SEPTEMBER 2012



ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
Armaments Engineering & Technology Center
Weapon Systems & Technology



Approved for public release; distribution is unlimited.

Report Documentation Page				Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.						
1. REPORT DATE 21 SEP 2012		2. REPORT TYPE FINAL		3. DATES COVERED 00-00-2011 to 00-00-2012		
4. TITLE AND SUBTITLE SPECTRAL ANALYSIS USING A METHOD OF SEQUENTIAL TRANSFORMS				5a. CONTRACT NUMBER		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Mark Johnson; Sara Makowiec				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. ARMY ARDEC, Benet Laboratories, RDAR-WSB, Watervliet, NY, 12198				8. PERFORMING ORGANIZATION REPORT NUMBER ARWSB-TR-12021		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. ARMY ARDEC, Benet Laboratories, RDAR-WSB, Watervliet, NY, 12198				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT We are exploring the use of acoustic resonant techniques to identify defective components by monitoring the fundamental modes of vibration that arise following an impulse load. We employ the spectrum of the filtered data as a feature for use in automated statistical pattern recognition. The feature provides a measure of the severity of the defect using the acoustic signature of a defect free component as a baseline. Defects change the signature by shifting or splitting the frequencies and introducing beats. Identifying these changes in the spectrum relative to baseline data is difficult because of the large number of natural frequencies associated with complex geometries and the presence of noise in the data. In the case of real-time health monitoring, obtaining a representative spectrum is challenging since averaging cannot be employed without the use of multiple transducers. We have developed a new approach to obtain a smoother spectrum by analyzing sequential data using an approach similar to Rayleigh's quotient method for eigenvalue problems and super-resolution techniques. The resulting spectrum enhances the natural modes of vibration and provides a better feature for automated classification techniques. The numerical implementation of the algorithm requires modest computational resources. The algorithm for generating the Rayleigh quotient has been successfully tested on numerically generated waveforms and experimentally acquired data. In all cases, there was a significant reduction in the inherent noise and the numerically generated noise from digital filtering.						
15. SUBJECT TERMS						
16. SECURITY CLASSIFICATION OF:				17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 13	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified				

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement by or approval of the U.S. Government.

Destroy this report when no longer needed by any method that will prevent disclosure of its contents or reconstruction of the document. Do not return to the originator.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Service, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington, DC 20503.					
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 21-09 2012		2. REPORT TYPE FINAL		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE SPECTRAL ANALYSIS USING A METHOD OF SEQUENTIAL TRANSFORMS				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Mark A. Johnson, Sara Lorene Makowiec AUTHOR FROM ELSEWHERE*				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army ARDEC Benet Laboratories, RDAR-WSB Watervliet, NY 12189-4000				8. PERFORMING ORGANIZATION REPORT NUMBER ARWSB-TR-12021	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army ARDEC Benet Laboratories, RDAR-WSB Watervliet, NY 12189-4000				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER	
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited or other distribution statement.					
13. SUPPLEMENTARY NOTES *Company or DoD joint other author(s)					
14. ABSTRACT We are exploring the use of acoustic resonant techniques to identify defective components by monitoring the fundamental modes of vibration that arise following an impulse load. We employ the spectrum of the filtered data as a feature for use in automated statistical pattern recognition. The feature provides a measure of the severity of the defect using the acoustic signature of a defect free component as a baseline. Defects change the signature by shifting or splitting the frequencies and introducing beats. Identifying these changes in the spectrum relative to baseline data is difficult because of the large number of natural frequencies associated with complex geometries and the presence of noise in the data. In the case of real-time health monitoring, obtaining a representative spectrum is challenging since averaging cannot be employed without the use of multiple transducers.					
15. SUBJECT TERMS Rayleigh quotient, acoustin resonant techniques					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT U	18. NUMBER OF PAGES 13	19a. NAME OF RESPONSIBLE PERSON Mark Johnson
a. REPORT U/U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) (518) 266-4986

INSTRUCTIONS FOR COMPLETING SF 298

1. REPORT DATE. Full publication date, including day, month, if available. Must cite at least the year and be Year 2000 compliant, e.g., 30-06-1998; xx-08-1998; xx-xx-1998.

2. REPORT TYPE. State the type of report, such as final, technical, interim, memorandum, master's thesis, progress, quarterly, research, special, group study, etc.

3. DATES COVERED. Indicate the time during which the work was performed and the report was written, e.g., Jun 1997 - Jun 1998; 1-10 Jun 1996; May - Nov 1998; Nov 1998.

4. TITLE. Enter title and subtitle with volume number and part number, if applicable. On classified documents, enter the title classification in parentheses.

5a. CONTRACT NUMBER. Enter all contract numbers as they appear in the report, e.g. F33615-86-C-5169.

5b. GRANT NUMBER. Enter all grant numbers as they appear in the report, e.g. 1F665702D1257.

5c. PROGRAM ELEMENT NUMBER. Enter all program element numbers as they appear in the report, e.g. AFOSR-82-1234.

5d. PROJECT NUMBER. Enter all project numbers as they appear in the report, e.g. 1F665702D1257; ILIR.

5e. TASK NUMBER. Enter all task numbers as they appear in the report, e.g. 05; RF0330201; T4112.

5f. WORK UNIT NUMBER. Enter all work unit numbers as they appear in the report, e.g. 001; AFAPL30480105.

6. AUTHOR(S). Enter name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. The form of entry is the last name, first name, middle initial, and additional qualifiers separated by commas, e.g. Smith, Richard, Jr.

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES). Self-explanatory.

8. PERFORMING ORGANIZATION REPORT NUMBER. Enter all unique alphanumeric report numbers assigned by the performing organization, e.g. BRL-1234; AFWL-TR-85-4017-Vol-21-PT-2.

9. SPONSORING/MONITORS AGENCY NAME(S) AND ADDRESS(ES). Enter the name and address of the organization(s) financially responsible for and monitoring the work.

10. SPONSOR/MONITOR'S ACRONYM(S). Enter, if available, e.g. BRL, ARDEC, NADC.

11. SPONSOR/MONITOR'S REPORT NUMBER(S). Enter report number as assigned by the sponsoring/ monitoring agency, if available, e.g. BRL-TR-829; -215.

12. DISTRIBUTION/AVAILABILITY STATEMENT. Use agency-mandated availability statements to indicate the public availability or distribution limitations of the report. If additional limitations/restrictions or special markings are indicated, follow agency authorization procedures, e.g. RD/FRD, PROPIN, ITAR, etc. Include copyright information.

13. SUPPLEMENTARY NOTES. Enter information not included elsewhere such as: prepared in cooperation with; translation of; report supersedes; old edition number, etc.

14. ABSTRACT. A brief (approximately 200 words) factual summary of the most significant information.

15. SUBJECT TERMS. Key words or phrases identifying major concepts in the report.

16. SECURITY CLASSIFICATION. Enter security classification in accordance with security classification regulations, e.g. U, C, S, etc. If this form contains classified information, stamp classification level on the top and bottom of this page.

17. LIMITATION OF ABSTRACT. This block must be completed to assign a distribution limitation to the abstract. Enter UU (Unclassified Unlimited) or SAR (Same as Report). An entry in this block is necessary if the abstract is to be limited.

ABSTRACT

We are exploring the use of acoustic resonant techniques to identify defective components by monitoring the fundamental modes of vibration that arise following an impulse load. We employ the spectrum of the filtered data as a feature for use in automated statistical pattern recognition. The feature provides a measure of the severity of the defect using the acoustic signature of a defect free component as a baseline. Defects change the signature by shifting or splitting the frequencies and introducing beats. Identifying these changes in the spectrum relative to baseline data is difficult because of the large number of natural frequencies associated with complex geometries and the presence of noise in the data. In the case of real-time health monitoring, obtaining a representative spectrum is challenging since averaging cannot be employed without the use of multiple transducers. We have developed a new approach to obtain a smoother spectrum by analyzing sequential data using an approach similar to Rayleigh's quotient method for eigenvalue problems and super-resolution techniques. The resulting spectrum enhances the natural modes of vibration and provides a better feature for automated classification techniques. The numerical implementation of the algorithm requires modest computational resources. The algorithm for generating the Rayleigh quotient has been successfully tested on numerically generated waveforms and experimentally acquired data. In all cases, there was a significant reduction in the inherent noise and the numerically generated noise from digital filtering.

Table of Contents

ABSTRACT.....	i
BACKGROUND	1
RESULTS	5
SUMMARY AND CONCLUSION.....	7

BACKGROUND

The derivation of Rayleigh's quotient is outlined below to provide insight into how it can be obtained as sequential transforms. These transforms can then be used to simplify the numerical techniques so the approach can be implemented using modest computational resources.

Consider a signal G_i ,

$$G_i = A_i \exp(-2\pi j f_0 t_i) = A_i \exp(-2\pi j f_0 \Delta t i), \quad i = 0, N-1 \quad (1)$$

where A_i is the amplitude, f_0 is a single frequency, and t is a time vector. The Discrete Fourier Transform (DFT) of G_i is:

$$H_l = \frac{1}{N} \sum_{i=0}^{N-1} G_i \exp(2\pi j i \frac{l}{N}) = \frac{1}{N} \sum_{i=0}^{N-1} A_i \exp(2\pi j i (\frac{l}{N} - f_0 \Delta t)), \quad l = 0, \dots, N-1 \quad (2)$$

Let $\alpha = -2\pi f_0 \Delta t$, $\beta = -\frac{2\pi l}{N}$, $a = \exp(j\alpha)$, $b = \exp(j\beta)$ $b = b(l)$, $\theta = \frac{\alpha - \beta}{2}$

Let $A_i = 1$, and sum the series to give H_l as:

$$|H_l(N)|^2 = \left\{ \frac{\sin(N\theta)}{N \sin(\theta)} \right\}^2 \quad (3)$$

Equations (2,3) are the usual Fourier transform of G_i . Equation (3) can also be obtained by constructing a covariance matrix using super-resolution methods [4]. A set of vectors is defined, using a step-wise approach, as:

$$\begin{aligned} x_1 &= (a^{N-1} \ a^{N-2} \dots 1) \\ x_2 &= (a^{N-2} \ a^{N-3} \dots 0), \quad etc \\ &\vdots \\ x_N &= (1 \ 0 \ 0 \dots \dots 0) \\ B &= (b^{N-1} \ b^{N-2} \dots 1)^T \end{aligned} \quad (4)$$

The Rayleigh's quotient, λ_N , is [5]:

$$\begin{aligned} \hat{x}_N &= (x_N \ x_{N-1} \ x_{N-2} \ \dots \ x_1)^T \\ \hat{x}_N B &= (x_N B \ x_{N-1} B \ x_{N-2} B \ \dots x_1 B)^T \end{aligned} \quad (5)$$

$$\begin{aligned} \lambda_N &= \frac{(\hat{x}_N B)^T (\hat{x}_N B)}{B^T B} \\ Cov(\hat{x}_N) &= (\hat{x}_N)^T (\hat{x}_N) \end{aligned} \quad (6)$$

Equation (6) is the covariance matrix of source vector and B is the test vector. Rayleigh's quotient provides an alternate to the Fast Fourier Transform (FFT), but requires a large matrix and is numerically intensive. Figure 1 shows MATLAB [5] code used to generate the quotient. The complexity can be reduced by analyzing the structure of the quotient.

```
function RALY1=Rayleigh_old(sig,t,freq_F)
vector1=sig;
NN=length(sig);
xx1=zeros(NN,NN);
for lag=0:NN-1
xx1(:,lag+1)=[zeros(1,lag), conj(vector1(1:NN-lag))];
end
R1 = xx1'*xx1; % Correlation matrix
f0=freq_F;
for k=1:NN
S=exp(-2*pi*i*f0(k)*t);
RALY1(k)=(S*R1*S')/(S*S');
end
return
```

Figure 1 MATLAB code for generating the Rayleigh Quotient

It should be noted that in above definition λ_N has the structure of an eigenvalue but it is actually a transform of the original signal. It has an implicit transform variable $l = 0, \dots, N-1$. The following shows how λ_N can be given as the sum of the squares of sequential Fourier transform.

Consider only one term in (5):

$$\begin{aligned}\lambda_1 &= \frac{(x_1 B)^T (x_1 B)}{B^T B} \\ \lambda_1 &= \frac{1}{B^T B} \left\{ \left(\frac{a}{b} \right)^{N-1} + \left(\frac{a}{b} \right)^{N-2} + \dots + 1 \right\}^T \left\{ \left(\frac{a}{b} \right)^{N-1} + \left(\frac{a}{b} \right)^{N-2} + \dots + 1 \right\} \\ &= \frac{1}{N} \frac{1}{a^{N-1}} \left\{ \frac{a^N - b^N}{a - b} \right\} \frac{1}{b^{N-1}} \left\{ \frac{a^N - b^N}{a - b} \right\} \\ &= \frac{1}{N} \frac{1}{(ab)^{N-1}} \left\{ \frac{a^N - b^N}{a - b} \right\}^2 = \frac{1}{N} \frac{\sin^2 N\theta}{\sin^2 \theta} = N |H_l|^2\end{aligned}\tag{7}$$

Similarly,

$$\lambda_2 = \frac{(x_2 B)^T (x_2 B)}{B^T B}\tag{8}$$

Considering the sum of all the terms and the identity $(a - b)^T (a - b) = 4 \sin^2 \theta$:

$$\begin{aligned} \lambda_N &= \frac{b^{N-1}}{N(a-b)^T} ((a-b)^T \dots (a^N - b^N)^T) \frac{1}{b^{N-1}} \frac{1}{(a-b)} \begin{pmatrix} a-b \\ a^2 - b^2 \\ \vdots \\ a^N - b^N \end{pmatrix} \\ &= \frac{1}{N} \frac{1}{4 \sin^2 \theta} \{4 \sin^2 \theta + 4 \sin^2 2\theta + 4 \sin^2 3\theta + \dots + 4 \sin^2 N\theta\} \end{aligned} \quad (9)$$

Using the summation formula we have:

$$\lambda_N = \sum_{k=1}^N \left\{ \frac{\sin(k\theta)}{\sin \theta} \right\}^2 = \frac{2N+1}{4N \sin^2 \theta} \left\{ 1 - \frac{\sin(2N+1)\theta}{(2N+1)\sin \theta} \right\} \quad (10)$$

Equation 10 is the Rayleigh Quotient transform of a signal with a single frequency f_0 as compared to equation 2 and equation 3 which are Fourier transforms. For comparison equation 2 has been simplified for $A_i=1$ as:

$$|H_i| = \frac{\sin N\theta}{N \sin \theta} \quad (11)$$

Equations (10) and (11) incorporate sinc functions and for the ranges involved, can be less than 1. Therefore, the Fourier transforms can be zero resulting in negative spikes. The Rayleigh quotients will never be zero.

For numerical implementation, the Rayleigh quotient can be represented as the sum:

$$\begin{aligned} \lambda_N &= \frac{1}{N} \frac{1}{4 \sin^2 \theta} \{4 \sin^2 \theta + 4 \sin^2 2\theta + 4 \sin^2 3\theta + \dots + 4 \sin^2 N\theta\} \\ &= \frac{1}{N} \{H_{IN}^2 + H_{IN-1}^2 \dots H_{I0}^2\} \\ &= N \left\{ \frac{fft^2(x_1)}{N^2} + \frac{fft^2(x_2)}{N^2} \dots \frac{fft^2(x_N)}{N^2} \right\} \end{aligned} \quad (12)$$

where $|H_i(N-i)| = \frac{\sin(N-i)\theta}{N \sin \theta} \quad i=1,2,3\dots$

Figure 2 is the corresponding MATLAB code for generating the sequential transform which uses the FFT routine. The input is the time series signal and the output is Rayleigh quotient.

```
function Ys=Rayleigh(x)
tot=0;
x=flipr(x);
for i=0:length(x)-1,tot=tot+abs(fft([x(i+1:end),zeros(1,i)]))^2;end
Ys=tot/length(x);
return
```

Figure 2 code for efficient generation of the Rayleigh Quotient.

RESULTS

The algorithm for generating the Rayleigh quotient was tested on numerically generated waveforms and experimentally acquired data. In all cases, the inherent noise and the noise generated numerically (i.e. sidelobes from numerical filters) was reduced significantly. Figure 3 shows the normalized FFT of a signal and figure 4 shows the transform obtained with Raleigh quotient. The signal, $0.5\sin(2\pi 1000t) + 1.0\sin(2\pi 1500t)$, was generated numerically and corrupted with random numbers with a signal to noise ratio of -14 dB.

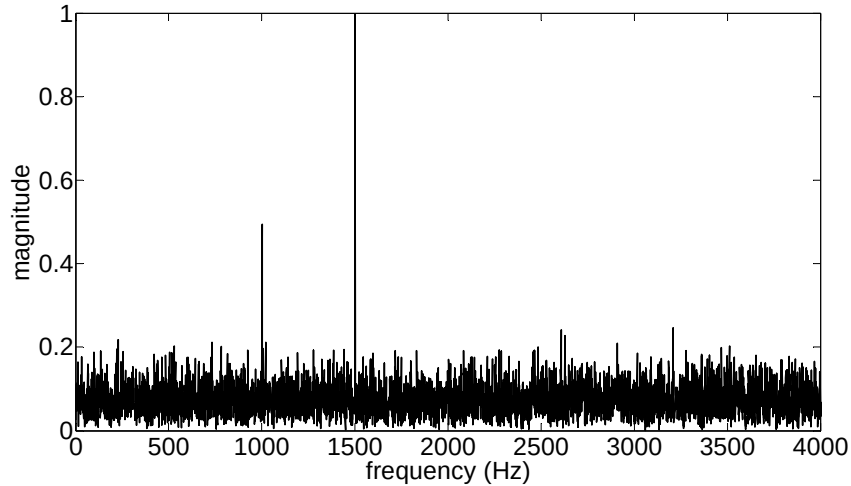


Figure 3. FFT of $0.5\sin(2\pi 1000t) + 1.0\sin(2\pi 1500t)$

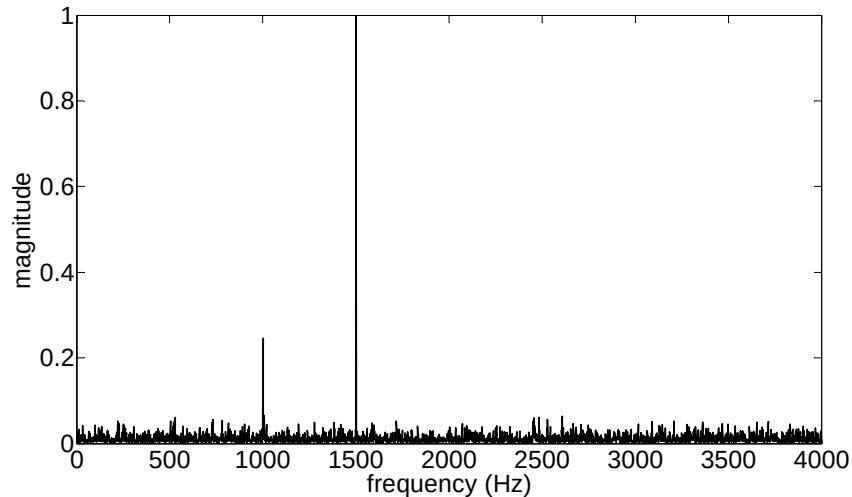


Figure 4. Rayleigh Quotient of $0.5\sin(2\pi 1000t) + 1.0\sin(2\pi 1500t)$

We are currently employing a compact tensile specimen in a systematic study to quantify the propagation of a crack in terms of changes in the fundamental modes of vibration. A crack was induced in a tensile specimen and grown in regular increments. Raw vibration data was collected at each

increment using two accelerometers mounted to the specimen, an instrumented hammer to generate the impulse load, and a spectrum analyzer to collect the data. Approximately 100 data sets from each accelerometer were collected for each specimen. Figure 5 shows the average of the FFT for second fundamental (9407 Hz, defect free) at each test increment. Results are similar for the first and third modes. Figure 6 shows the second fundamental computed for a single data set using the FFT and method of sequential transforms. The data was filtered using a lowpass filter with a cutoff frequency of 12 kHz. The figure shows how the method of sequential transforms removes sidelobes and sharpens the center frequency.

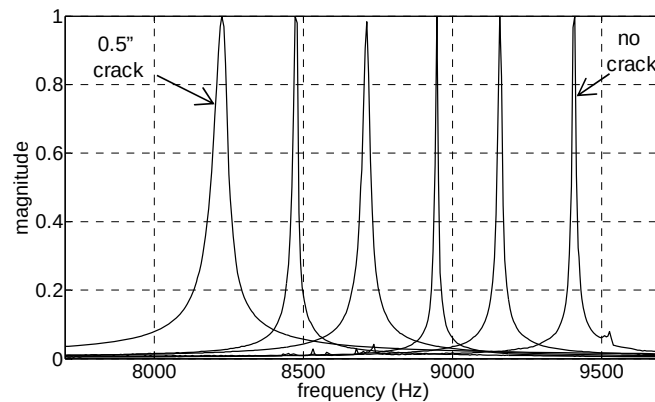


Figure 5. Second fundamental frequency for a compact tensile specimen with different crack lengths.

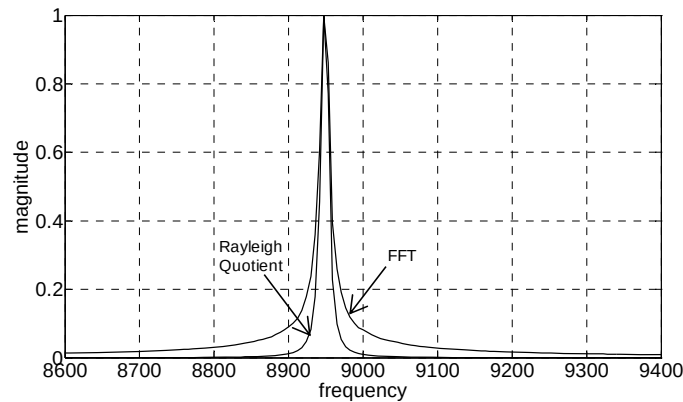


Figure 6. FFT and Rayleigh Quotient for measurements from two accelerometers mounted on the compact tensile specimen.

SUMMARY AND CONCLUSION

We have introduced a new transform method for obtaining a smoother spectrum by analyzing sequential data using an approach similar to Rayleigh's Quotient method for eigenvalue problems and super-resolution techniques. This provides a means for improving the quality of features for automated classification techniques without the need for acquiring multiple samples or using additional transducers. We have derived the approach analytically and provided a numerically efficient means to obtain the transform. The algorithm has been successfully tested on numerical data with artificially induced noise and on experimental accelerometer measurements.

REFERENCES

1. M.A. Johnson and M. A. Hussain, Automatic Crack Detection Using Frequency Response of Large Caliber Gun. (Report for patent Application 2011)
2. Hussain, M.A., Johnson M.A., Crack Detection Using Natural Frequency Reduction Due to Change in Compliance. (Report 2010)
3. Hussain, M.A. Crack Detection Using Frequency Response of Large Caliber Gun Tubes. (Final report TCN 07040, 2009)
4. Simon Haykin. Adaptive Filter Theory. Prentice Hall 1991. Pages 445-457.
5. M.A. Hussain" Application of Rayleigh Quotient for Rapid Classification of Rotary Wing and Fixed Wing Targets Using High Resolution Radar Signatures" Presented SPIE Conference AeroSense, published in proceeding 3718-30 S5 1999.
6. The MathWorks Inc., 3 Apple Hill Drive, Natick, MA 01760-2098