

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188		
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 20-03-2015		2. REPORT TYPE Final Report		3. DATES COVERED (From - To) 8-Aug-2014 - 7-Feb-2015	
4. TITLE AND SUBTITLE Final Report: Two-Dimensional MoS2 Transistors for Low-Power RF Applications			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER W911NF-14-P-0013		
			5c. PROGRAM ELEMENT NUMBER 665502		
6. AUTHORS Abhishek Motayed, Baomei Wen, Ratan Debnath			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES N5 Sensors, Inc. 18008 Cottage Garden Dr. Suite 200 Germantown, MD 20874 -0000			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS (ES) U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211			10. SPONSOR/MONITOR'S ACRONYM(S) ARO		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) 65872-MS-ST1.1		
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for Public Release; Distribution Unlimited					
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.					
14. ABSTRACT The proposed STTR Phase I project objectives were to demonstrate the feasibility of high-frequency (HF) field-effect transistors (FETs) using novel 2-dimensional (2D) MoS2 semiconductor. Key components of the projects were: 1. Demonstrate large-area growth of mono and multi-layer MoS2 layers using chemical vapor deposition methods with great uniformity and reproducibility. 2. Fabricate large peripheral radio frequency field effect transistors which will employ conventional fabrication					
15. SUBJECT TERMS MoS2 device processing, RF Transistors					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	15. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Baomei Wen
a. REPORT UU	b. ABSTRACT UU	c. THIS PAGE UU			19b. TELEPHONE NUMBER 301-257-6756

Report Title

Final Report: Two-Dimensional MoS2 Transistors for Low-Power RF Applications

ABSTRACT

The proposed STTR Phase I project objectives were to demonstrate the feasibility of high-frequency (HF) field-effect transistors (FETs) using novel 2-dimensional (2D) MoS2 semiconductor. Key components of the projects were:

1. Demonstrate large-area growth of mono and multi-layer MoS2 layers using chemical vapor deposition methods with great uniformity and reproducibility.
 2. Fabricate large-periphery radio-frequency field effect transistors which will employ conventional fabrication methods using contact or projection lithography for high throughput device manufacturing.
 3. Engineer source/drain contacts, gate dielectrics and develop novel concepts of “layer engineering” for high frequency operation.
-

Enter List of papers submitted or published that acknowledge ARO support from the start of the project to the date of this printing. List the papers, including journal references, in the following categories:

(a) Papers published in peer-reviewed journals (N/A for none)

Received

Paper

TOTAL:

Number of Papers published in peer-reviewed journals:

(b) Papers published in non-peer-reviewed journals (N/A for none)

Received

Paper

TOTAL:

Number of Papers published in non peer-reviewed journals:

(c) Presentations

Number of Presentations: 0.00

Non Peer-Reviewed Conference Proceeding publications (other than abstracts):

Received Paper

TOTAL:

Number of Non Peer-Reviewed Conference Proceeding publications (other than abstracts):

Peer-Reviewed Conference Proceeding publications (other than abstracts):

Received Paper

TOTAL:

Number of Peer-Reviewed Conference Proceeding publications (other than abstracts):

(d) Manuscripts

Received Paper

TOTAL:

Number of Manuscripts:

Books

Received Book

TOTAL:

Received Book Chapter

TOTAL:

Patents Submitted

Patents Awarded

Awards

Graduate Students

<u>NAME</u>	<u>PERCENT SUPPORTED</u>	Discipline
Hao.	1.00	
FTE Equivalent:	1.00	
Total Number:	1	

Names of Post Doctorates

<u>NAME</u>	<u>PERCENT SUPPORTED</u>
FTE Equivalent:	
Total Number:	

Names of Faculty Supported

<u>NAME</u>	<u>PERCENT SUPPORTED</u>	National Academy Member
Prof. Qiliang Lee	0.30	
FTE Equivalent:	0.30	
Total Number:	1	

Names of Under Graduate students supported

<u>NAME</u>	<u>PERCENT SUPPORTED</u>
FTE Equivalent:	
Total Number:	

Student Metrics

This section only applies to graduating undergraduates supported by this agreement in this reporting period

The number of undergraduates funded by this agreement who graduated during this period: 0.00

The number of undergraduates funded by this agreement who graduated during this period with a degree in science, mathematics, engineering, or technology fields:..... 0.00

The number of undergraduates funded by your agreement who graduated during this period and will continue to pursue a graduate or Ph.D. degree in science, mathematics, engineering, or technology fields:..... 0.00

Number of graduating undergraduates who achieved a 3.5 GPA to 4.0 (4.0 max scale):..... 0.00

Number of graduating undergraduates funded by a DoD funded Center of Excellence grant for Education, Research and Engineering:..... 0.00

The number of undergraduates funded by your agreement who graduated during this period and intend to work for the Department of Defense 0.00

The number of undergraduates funded by your agreement who graduated during this period and will receive scholarships or fellowships for further studies in science, mathematics, engineering or technology fields:..... 0.00

Names of Personnel receiving masters degrees

<u>NAME</u>
Total Number:

Names of personnel receiving PHDs

<u>NAME</u>
Total Number:

Names of other research staff

<u>NAME</u>	<u>PERCENT SUPPORTED</u>
FTE Equivalent:	
Total Number:	

Sub Contractors (DD882)

1 a. George Mason University

1 b. 4400 University Drive, MS 4C6

Fairfax

VA

220304422

Sub Contractor Numbers (c):

Patent Clause Number (d-1):

Patent Date (d-2):

Work Description (e):

Sub Contract Award Date (f-1):

Sub Contract Est Completion Date(f-2):

1 a. George Mason University

1 b. 4400 University Drive, MSN 4C6

Fairfax

VA

220304422

Sub Contractor Numbers (c):

Patent Clause Number (d-1):

Patent Date (d-2):

Work Description (e):

Sub Contract Award Date (f-1):

Sub Contract Est Completion Date(f-2):

Inventions (DD882)

Scientific Progress

Technology Transfer

Final Technical Report

Contract Number: W911NF-14-P-0013

Project Title: "Two-Dimensional MoS₂ Transistors for Low-Power RF Applications"

Period of Performance: 1/08/2015 to 2/07/2015

Agency: US ARMY Research Office

W262 PROP BK ACCT DURHAM

PO BOX 12211

RES TRIANGLE PARK NC 27709-2211

Invoice Number: ARO-2014-06

Invoice Amount: \$24,884.88

Invoice Date: 3/10/2015

Contracting Officer's Technical Representative:

Dr. Pani Varanasi

US Army Research Office

P.O. Box 12211

Research Triangle Park, NC 27709-2211 Voice: (919) 549-4325

FAX: (919) 549-4310

FIRM NAME: N5 Sensors, Inc.

DUNS: 07-838-6164, EIN: 45-4433498

ADDRESS: 18008 Cottage Garden Dr., 302

CITY: Germantown, STATE: Maryland ZIP: 20874

ENDORSEMENTS

Corporate/Business Official:


Dr. Abhishek Motayed

Title: President and Chief Technical Officer

Telephone: 301-257-6756

Email: amotayed@n5sensors.com

Signature: _____

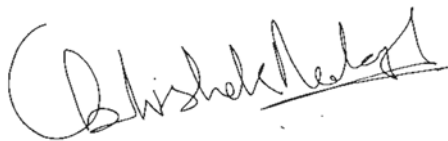

Dated: 03/16/2015

1. Project Objectives

The proposed STTR Phase I project objectives were to demonstrate the feasibility of high-frequency (HF) field-effect transistors (FETs) using novel 2-dimensional (2D) MoS₂ semiconductor. Key components of the projects were:

- **Demonstrate large-area growth of mono and multi-layer MoS₂ layers using chemical vapor deposition methods with great uniformity and reproducibility.**
- **Fabricate large-periphery radio-frequency field effect transistors which will employ conventional fabrication methods using contact or projection lithography for high throughput device manufacturing.**
- **Engineer source/drain contacts, gate dielectrics and develop novel concepts of “layer engineering” for high frequency operation.**

2. Description of the Research

Semiconducting 2D TMDs have shown unique properties due to their low dimension. Hence, they can be utilized for next generation low-power electronics, particularly for high frequency RF transistors. These materials have greater flexibility than other 2D materials (e.g., graphene) and they can be easily grown or transferred on various substrates including the flexible ones to fabricate electronic and optoelectronic devices. Also, 2D materials have finite bandgap, hence they are suitable for low-power electronics, switching circuits with high on-off current ratio and metal-oxide-semiconductor FETs based electronics. Considering the potential of 2D materials, it is very important to develop a uniform growth strategy on various substrates over a large-area so that they can be viable for commercial device application. Simultaneously, exploring and understanding their electronic and optical properties are also very critical.

N5 Sensors, Inc. has demonstrated the feasibility of higher layer counts (3 – 4 layers) MoS₂ devices with clear advantages in terms of on-current, off-state leakage, noise figure, and transconductance. A new-concept of layer-engineering has been developed to understand the material properties and engineer the MoS₂ FETs to establish the high-frequency operations. In order to scale the growth process over a large area of 100 mm², N5 Sensors in collaboration with George Mason University (GMU), has built a chemical vapor deposition (CVD) reactor and established the feasibility of multilayer growth to fabricate RF transistors. In order to achieve low-contact resistance in those devices, high-performance highly-stable contacts have been engineered to achieve low specific resistance.

During the period of performance, we completed several growth runs with iterative optimization, conducted material characterization (Raman scans, photoluminescence, hall mobility measurements). We established fabrication processes, optimized metal contact stacks and annealing conditions, developed and optimized etching recipes, demonstrated large-area devices using standard microfabrication process and reported dc characterization of the transistors.

3. Works performed and Results

In order to achieve the project objectives, the following tasks were performed in this project and the results are also summarized.

Task 1: Demonstration of High-Quality Large-Area MoS₂ Layers

Subtask 1.1 Growth of 10 x 10 mm² monolayer and multilayer MoS₂ on device-quality substrates

N5 has collaborated with Prof. Qiliang Li from GMU to develop a novel technique for high-quality large-area (10 x 10 mm²) growth of MoS₂. Chemical vapor deposition (CVD) method has been employed to grow MoS₂ layers with monolayer-control on various substrates for device integration. Typical setup for the CVD reactor is shown in Fig. 1 (left) in which MoS₂ semiconductor with mono- and multilayers is grown by sulfurization of thin layers of ebeam-deposited Mo film. Figure 2 (right) shows the growth obtained on quartz substrates with various initial layer thicknesses.

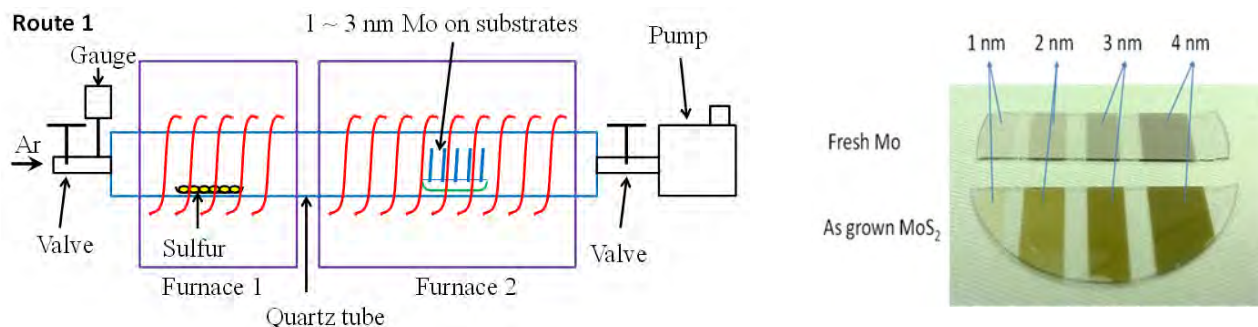


Figure 1. (Left) The schematic of CVD reactor in which MoS₂ monolayer or few-layers are grown. **(Right)** Fresh Mo and sulfurized MoS₂ films on quartz substrate showing various thicknesses.

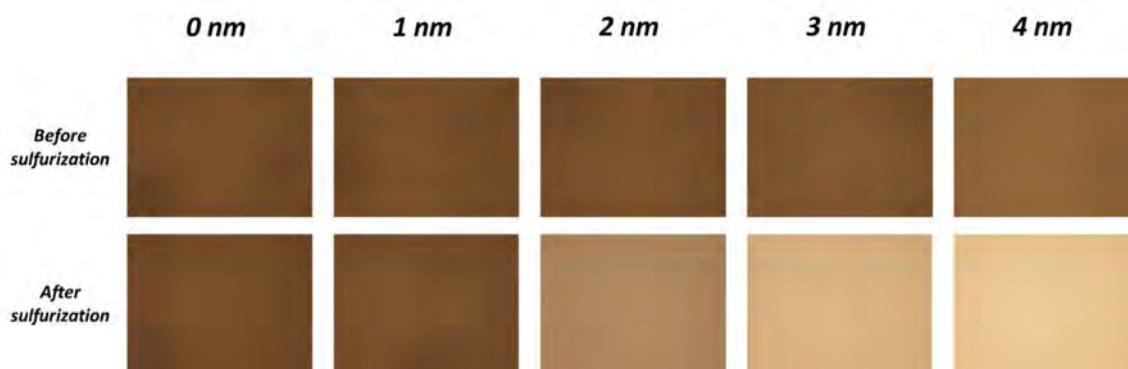


Figure 2. Optical micrographs showing the samples before and after sulfurization at 750 °C for 10 min.

The CVD process has been further optimized to achieve 10 x 10 mm² uniform growth. Firstly, metal Mo was deposited by e-beam evaporation, subsequently loaded to the CVD chamber. The deposition rate is ~0.1 Å/s for Mo. The sulfurization was carried out in a horizontal tube furnace, with the S source at the upstream load, Mo samples at the center zone and Ar as carrier gas with flow rate of 150 - 200 sccm. The furnace was heated up to 500 °C in 30 min, then heated up to 750 °C in 60 min, and kept at 750 °C for 10 min before the substrates were cooled down naturally. The temperature at S source was kept at ~140 °C during deposition. The optical microscope image of the samples with different Mo and after sulphurization is shown in Fig. 2.

Subtask 1.2 Spectroscopic characterization

In order to evaluate the uniformity of MoS₂ over the large area, Raman spectroscopy has been used. Typical Raman spectra of MoS₂ samples with different Mo thicknesses are shown in Fig. 3.

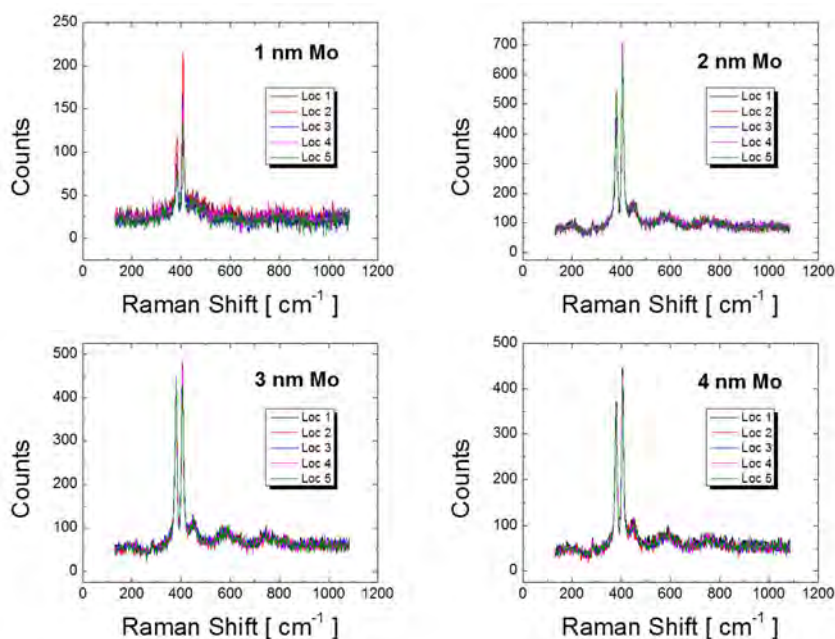


Figure 3. Typical Raman spectra of MoS₂ films at different locations.

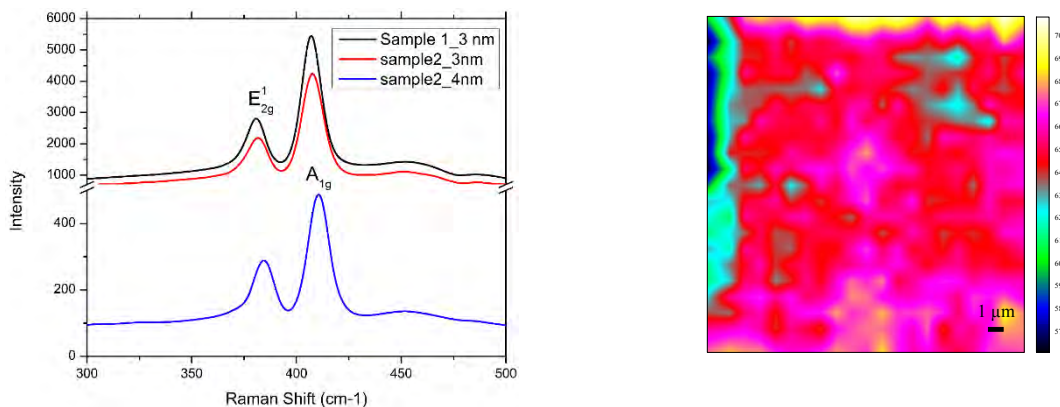


Figure 4. Typical Raman spectra of 3 nm and 4 nm MoS₂ films (left) and the representative Raman map of 3 nm film (right) showing some non-uniformity across the sample.

The peak separations are almost the same for the samples and there is some variation of peak intensity due to the different quality of MoS₂. N5 has developed a protocol to map the Raman spectra over a large area and the data are shown in Fig. 4. The growth process has been further optimized to improve the uniformity and Raman maps of those samples are shown in Fig. 5 not reported earlier.

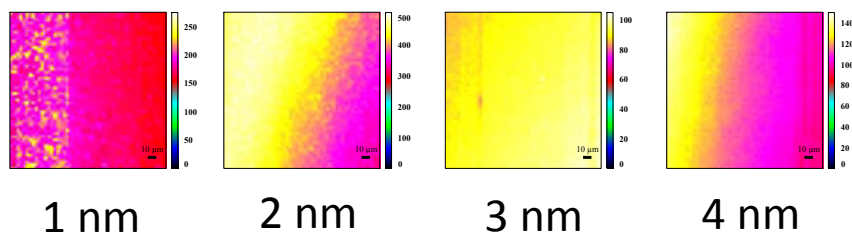


Figure 5. Raman maps (E₂ peak) of MoS₂ films grown on sapphire substrates showing no significant intensity variation across the sample that represents, good quality and uniformity over the mapped area of 400 μm².

In order to increase the drive currents, layer counts have been increased to 10 (over 6 nm thickness) which may increase the non-uniformity across the sample. Raman mapping has been implemented to measure the non-uniformity in these layers as. The graph in Fig. 6 compares the Raman spectra of 10 layer sample with a 3 layer sample and the higher intensity indicates (most likely) more uniform material.

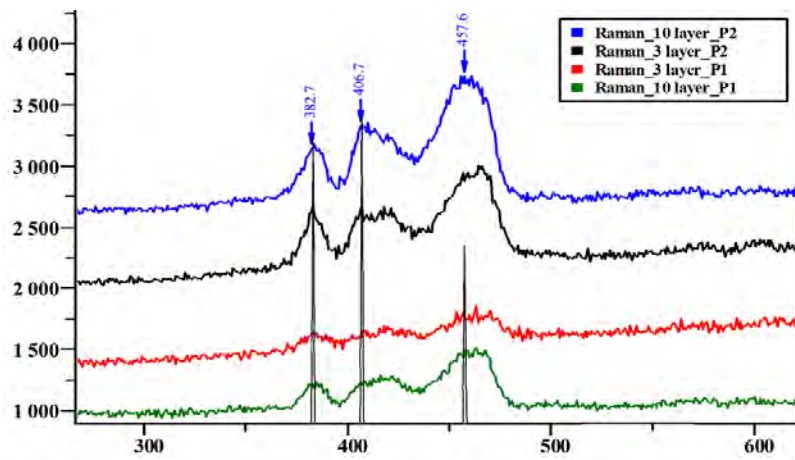


Figure 6. Comparison of Raman spectra between 10 and 3 layers of MoS₂.

Task 2: Development of Low-Resistance Source-Drain Contact Metallization Schemes and High-Performance Gate Dielectric

Subtask 2.1. Design and optimization of new source/drain metallization

N5 has developed the process flow for transistor fabrication along with the key processing tools (Fig. 7). N5's team has many years of experience in microfabrication. During the phase I of the project, N5 has optimized every single aspect of the fabrication process with emphasis on large-

scale manufacturing with high yield. N5 has further characterized the source and drain contacts, optimized etching of MoS₂ for mesa fabrication (active channel formation), and gate oxide deposition using atomic layer deposition.

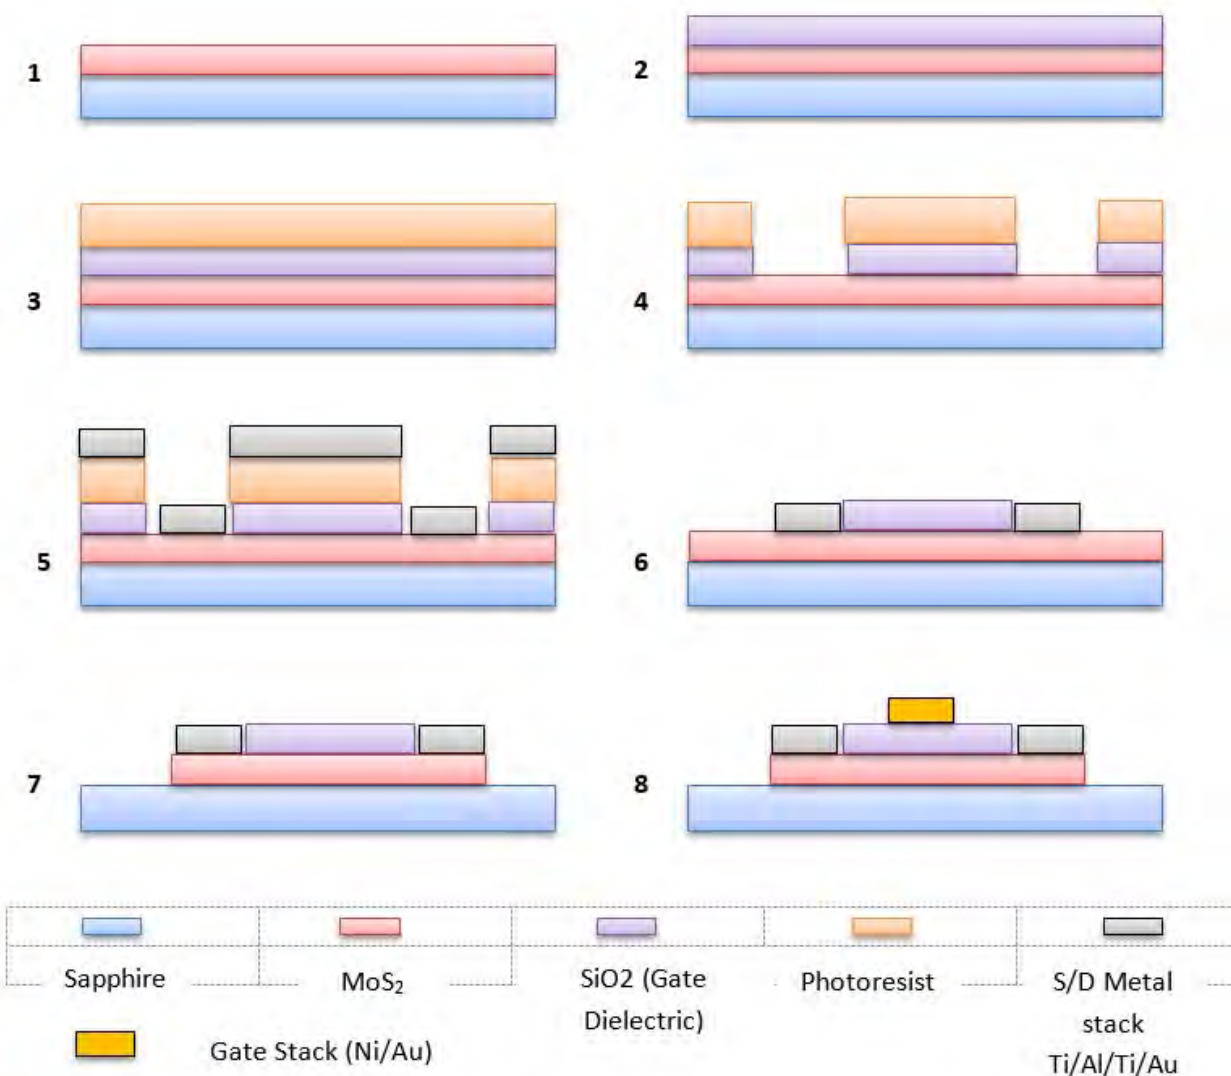


Figure 7. Process flow showing etched multilayer MoS₂ to make source/drain contacts.

The most effective way of characterizing an ohmic metallization scheme is to extract its specific contact resistance (ρ_c , a contact area independent parameter) and transfer length using Transmission Line Measurements (TLM). Typical TLM pattern along with current-voltage characteristics is shown in Fig. 8. N5 has developed a multi-layer ohmic metal stacks of Ti/Al/Ti/Au (30/100/30/30 nm) which have been annealed at 200 C for 1 hour. Using this metal scheme and TLM method (Fig. 8), very small specific contact resistance has been achieved ($10^{-4} - 10^{-5}$ ohm.cm²). Sheet carrier concentration and hall-mobility on large-area MoS₂ (3 and 4 nm thickness) using conventional van-der pauw measurements have been extracted. The table below summarizes the data for a 3 nm MoS₂ film grown on Sapphire substrate:

Sheet Resistance	5270 Ω /square
Sheet Carrier Cocentration (n-type from hall voltage sign)	$2.1 \times 10^{12} \text{ cm}^{-2}$
Hall mobility	$10 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$

Subtask 2.2. Design and optimization of gate dielectrics

Design and optimization of gate dielectric is very important for any FET. Utilizing high dielectric constant oxides (high k) one can increase the gate capacitance without decreasing the gate oxide thickness. N5 has used atomic layer deposition (ALD) method to deposit two gate dielectrics: one Al_2O_3 ($k = 11$) and SiO_2 ($k = 3.9$) as gate dielectrics. The deposition parameters of all these dielectrics has been varied to obtain a high quality interface to the 2D layer with low interface state density.

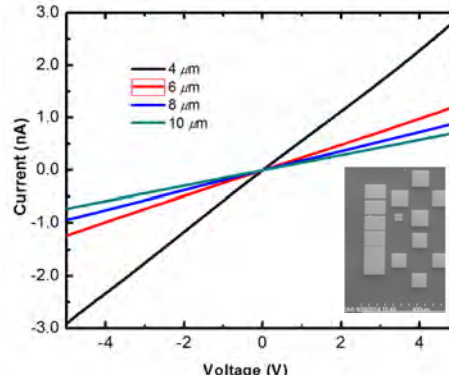


Figure 8. Linear current-voltage data between pads of different gaps of TLM pattern (inset).

Task 3. Design and Fabrication of 2D RF Transistor

In order to increase the drive currents, devices need to be designed and fabricated with more layers of MoS_2 . However, W/L ratios are also an important consideration for drive current optimization. N5 has optimized the lithography process and Fig. 9 shows the scanning electron microscope image for devices with different W/L ratios with 50 nm Al_2O_3 as gate oxide.

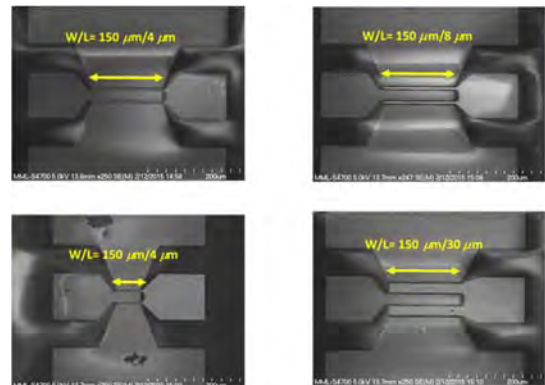


Figure 9 Fabricated 2D RF transistor with various W/L ratio.

Task 4. Measurement of RF Performance

In order to evaluate the performance, figures of merit of the fabricated RF transistors have been extracted. Transconductance of a transistor which measures the effectiveness of the gate signal to modulate the channel current has been extracted for various W/L ratios shown in Fig. 9. Typical transconductance plots of 4 nm MoS₂ devices (normalized drain current with gate dimensions) are shown in Fig. 10. Promising observations are that the normalized current and the transconductance are similar for various W/L ratios, which indicates uniformity. However, the transconductance values are still low and together with the fact that the devices in this particular batch showed a p-type behaviour (the reason for this not clear at this time). It was not clear the reason behind this unusual un-intentional p-type behavior. If this could be understood and reproduced, there is a possibility of producing CMOS type circuits on the same film.

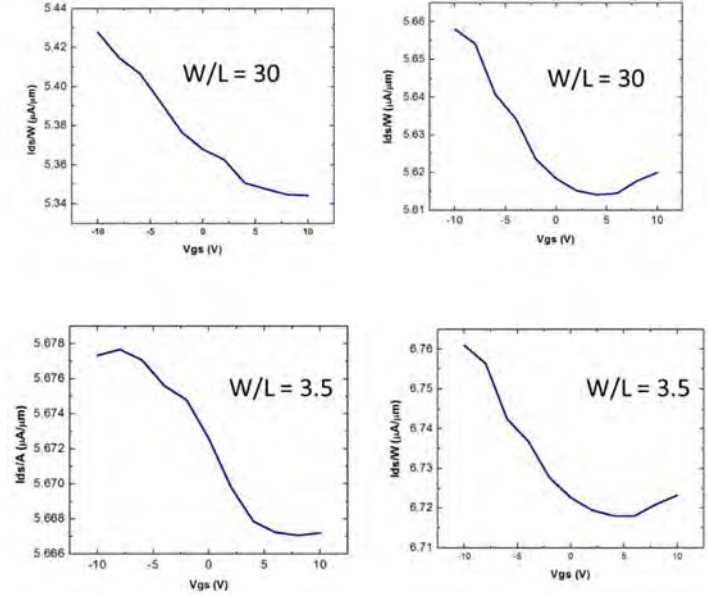


Figure 10 Transconductance of fabricated 2D RF transistor with various W/L ratio.

On the contrary, the transconductance plot of another MoS₂ (top-gated, Ni/Au) transistor (4 nm thickness) with ALD deposited SiO₂ gate dielectric shows the usual n-type behavior (Fig. 11). However, the top gate leakage is still 2 orders of magnitude smaller. The gate dielectric needs further optimization to improve the performance.

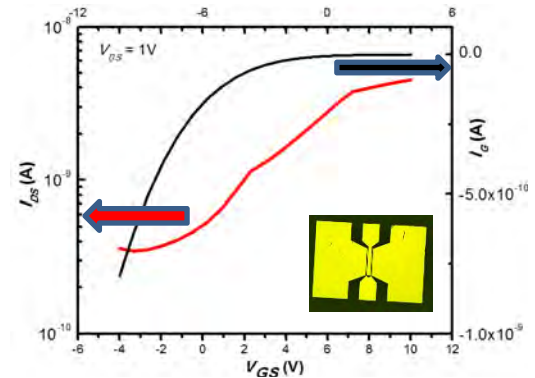


Figure 11. Transconductance of fabricated 2D RF transistor with various W/L ratio. Inset shows the actual device

DC characteristics of further optimized fabricated transistor is shown in Fig. 12. The data show that the channel current decreases with reverse biasing the gate, signature of n-type channel material (typical of MoS₂ films). From

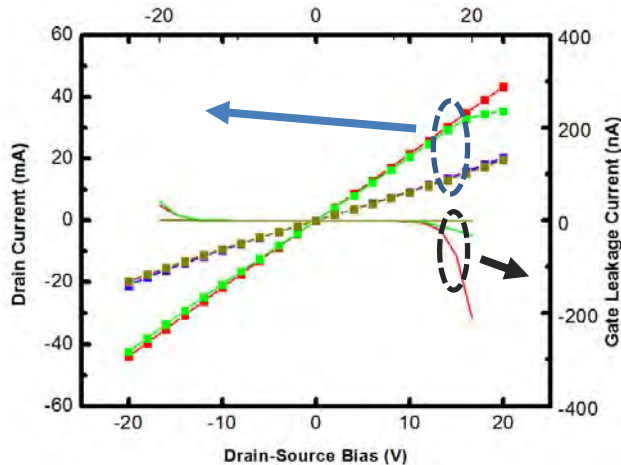


Figure 12. DC characteristics of RF transistor made with 4 nm MoS₂.

the graph above it is clear that gate leakage is 3 order of magnitude smaller than that channel current indicating decent gate performance. Although the normalized channel current is 0.13 mA/ μm (high), the gate drive is poor and this is possibly related to the low-mobility measured in the samples.

N5 has developed a setup to measure the scattering parameter measurement on the RF transistors. The setup is shown in Fig. 13 in which HP 8510C 20 GHz VNA is connected to a probe station using semi-rigid RF cables to cascade RF probe manipulators. The Agilent B15000A is connected to the VNA through internal bias-Ts of the VNA, which provides the DC bias.

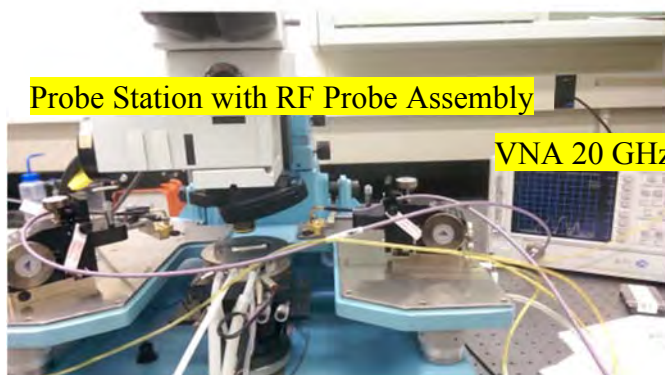


Figure 13. S parameters setup developed by N5.

Using this setup the S-parameters of the biased devices have been extracted. However the S_{12} and S_{21} parameters were in the range of -17 dB (at 0.5 GHz) which is physically un-realistic for a transistor as that would imply an insertion loss. However, we suspect that high contact resistances are still there along with poor gate drive. De-embedding method would be appropriate to extract the intrinsic parameters of the channel itself, excluding the parasitic drain and source resistances.

4. Technical Feasibility

During the STTR phase I, N5 focused on the large-area growth of mono and multi-layer MoS₂ layers using chemical vapor deposition methods with large-area uniformity and reproducibility for RF transistors. Feasibility of large-periphery RF device fabrication has been demonstrated using conventional methods that utilize either contact or projection lithography for high throughput device manufacturing. This further paves the way to transfer the growth process over 1 inch or 2 inch wafer for scalable device development. N5 has utilized multilayer strategies (i.e., higher layer count) rather than single layer which are more commercially viable for scaling up the growth process. Various processes such as metallization scheme, high k gate dielectric deposition has been standardized- an important step for device fabrication. Although unusual p-type behavior has been observed for few samples instead of usual n-type, it would be interesting to explore and investigate the mechanism for such characteristics in future.

Phase II Plans

1. Utilization of atomic layer deposition for large area deposition of 2D materials

GMU team has already started growing TD materials using atomic layer deposition technique. In phase II, N5 plans to utilize ALD deposited 2D materials for transistor development

2. Develop a robust manufacturing process to develop large area devices with high yield and reliability

N5 team has established feasibility of the manufacturing process for realizing realistic RF transistor geometries. For commercial applications, it is imperative to use batch manufacturing processes such as projection lithography and not electron-beam lithography.

3. Demonstrate transistors with significant gain and figures of merit improvement in GHz range operation

N5 team has done significant comparison of devices made from different layer thicknesses, the tradeoff are current drive capability, ability to form ohmic contacts with low-contact resistances, transconductance per gate length, and noise performance. Based on our phase I findings, we are confident that we can deliver a prototype device in phase II, that can be used for system level integration such as low-noise amplifier for low-power applications.