

CYGNUS PFL SWITCH JITTER *

C. Mitton, G. Corrow, M. Hansen, D. Henderson

*National Security Technologies, 2621 Losee Rd.
North Las Vegas, NV 89030 USA*

D. Nelson, E. Ormond, S. Cordova, I. Molina

*Sandia National Laboratories, P.O. Box 238, Mail Stop 944
Mercury, NV 89023 USA*

J. Smith

*Los Alamos National Laboratory, P.O. Box 1663, Mail Stop D-410
Los Alamos, NM 87545 USA*

Abstract

The Cygnus Dual Beam Radiographic Facility consists of two identical radiographic sources: Cygnus 1 and Cygnus 2. Each source has the following X-ray output: 1-mm diameter spot size, 4 rads at 1 m, 50-ns full-width-half-maximum. The diode pulse has the following electrical specifications: 2.25 MV, 60 kA, 60 ns. This Radiographic Facility is located in an underground tunnel test area at the Nevada Test Site (NTS). The sources were developed to produce high-resolution images on subcritical tests performed at NTS. Subcritical tests are single-shot, high-value events. For this application, it is desirable to maintain a high level of reproducibility in source output. The major components of the Cygnus machines are Marx generator, water-filled pulse forming line (PFL), water-filled coaxial transmission line, three-cell inductive voltage adder, and rod-pinch diode. A primary source of fluctuation in Cygnus shot-to-shot performance may be jitter in breakdown of the main PFL switch, which is a “self-break” switch. The PFL switch breakdown time determines the peak PFL charging voltage, which ultimately affects the source X-ray spectrum and dose. Therefore, PFL switch jitter may contribute to shot-to-shot variation in these parameters, which are crucial to radiographic quality. In this paper we will present PFL switch jitter analysis for both Cygnus machines and present the correlation with dose. For this analysis, the PFL switch on each machine was maintained at a single gap setting, which has been used for the majority of shots at NTS. In addition the PFL switch performance for one larger switch gap setting will be examined.

I. CYGNUS SYSTEM

A. General Description

Cygnus is a two-axis radiographic X-ray system designed to drive rod-pinch diode loads [1], [2]. The system consists of two virtually identical accelerators known as Cygnus 1 and Cygnus 2. The space constraint at the underground NTS tunnel facility requires an in-line layout for the two Marx generators as shown in Figure 1. The only two noticeable differences between the two machines are the length of water transmission line that connects the PFL to the inductive voltage adder (IVA), and the angling of the diode axes which are mirror images of each other.

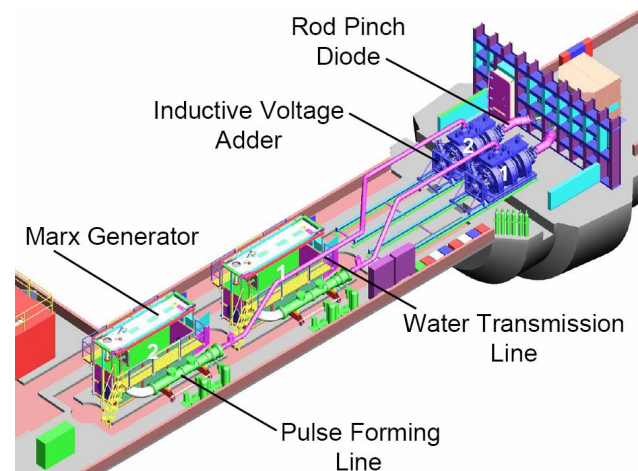


Figure 1. Cygnus underground facility configuration.

B. Pulse Forming Line Description

The PFL System is composed of three water-insulated coaxial lines, each terminated with a self-break switch.

* This work was done by National Security Technologies, LLC, under Contract No. DE-AC52-06NA25946 with the U.S. Department of Energy.

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE JUN 2007	2. REPORT TYPE N/A	3. DATES COVERED -
4. TITLE AND SUBTITLE Cygnus Pfl Switch Jitter		5a. CONTRACT NUMBER
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S)	5d. PROJECT NUMBER	
	5e. TASK NUMBER	
	5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Security Technologies, 2621 Losee Rd. North Las Vegas, NV 89030 USA		8. PERFORMING ORGANIZATION REPORT NUMBER
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited		
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. IEEE International Pulsed Power Conference (19th). Held in San Francisco, CA on 16-21 June 2013.		
14. ABSTRACT The Cygnus Dual Beam Radiographic Facility consists of two identical radiographic sources: Cygnus 1 and Cygnus 2. Each source has the following X-ray output: 1-mm diameter spot size, 4 rads at 1 m, 50-ns full-widthhalf- maximum. The diode pulse has the following electrical specifications: 2.25 MV, 60 kA, 60 ns. This Radiographic Facility is located in an underground tunnel test area at the Nevada Test Site (NTS). The sources were developed to produce high-resolution images on subcritical tests performed at NTS. Subcritical tests are single-shot, high-value events. For this application, it is desirable to maintain a high level of reproducibility in source output. The major components of the Cygnus machines are Marx generator, water-filled pulse forming line (PFL), water-filled coaxial transmission line, threecell inductive voltage adder, and rod-pinch diode. A primary source of fluctuation in Cygnus shot-to-shot performance may be jitter in breakdown of the main PFL switch, which is a self-break switch. The PFL switch breakdown time determines the peak PFL charging voltage, which ultimately affects the source X-ray spectrum and dose. Therefore, PFL switch jitter may contribute to shot-to-shot variation in these parameters, which are crucial to radiographic quality. In this paper we will present PFL switch jitter analysis for both Cygnus machines and present the correlation with dose. For this analysis, the PFL switch on each machine was maintained at a single gap setting, which has been used for the majority of shots at NTS. In addition the PFL switch performance for one larger switch gap setting will be examined.		
15. SUBJECT TERMS		

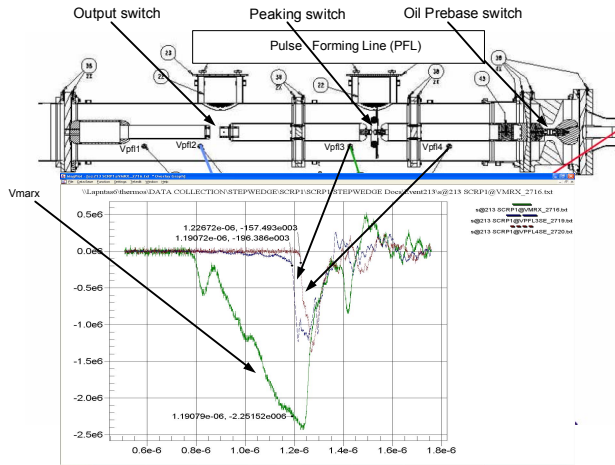
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Table 1. PFL System components.

Line Component			Switch	
PFL	4.8/7.3 Ω	35 ns	PFL	Water
1 st Output	7.8 Ω	35 ns	Peaking	Water
2 nd Output	7.8 Ω	40 ns	Pre-Pulse	Oil

The components and corresponding switches, with specifications, are given in Table 1. Note “PFL” may be used to denote either the singular PFL Line Component, or the entire PFL System. The PFL Line has a stepped impedance that compensates for a drooping load impedance, which is typical of a rod-pinch diode. The Pre-Pulse Switch is oil-filled unlike the other two switches.

The PFL has four capacitive voltage monitors. Two monitors (Vpfl1, Vpfl2) are located in the PFL Line. One monitor (Vpfl3) is in the 1st Output Line, and one monitor (Vpfl4) is located in the 2nd Output Line.

**Figure 2.** Cut away view of the Cygnus PFL.

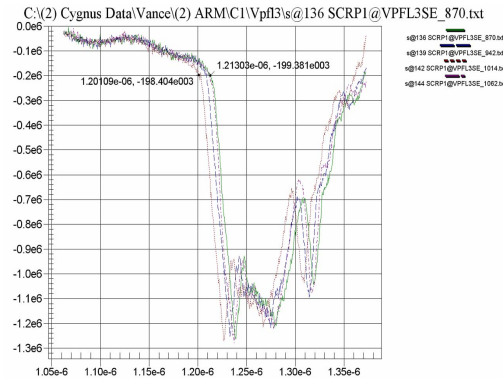
The PFL System components and voltage monitors are shown in a cut away view in Figure 2. A photograph of the PFL is given in Figure 3.

**Figure 3.** Pulse forming line (PFL).

II. PFL SWITCH JITTER

A. Relevance

The purpose of the Cygnus sources is time-resolved radiography for dynamic material science experiments. Information from the radiographs is incorporated into computer models used to depict material properties. Since Cygnus is a vital diagnostic for subcritical tests, performance improvements that lead to higher quality radiographs have become the focus of users. PFL Switch breakdown time determines PFL charging voltage, end-point energy, electron spectrum, and ultimately X-ray spectrum. Also dose is affected since it results from a combination of electron spectrum and current. Therefore, jitter in the PFL Switch contributes to shot-to-shot fluctuation in the X-ray spectrum and dose. A reduction in PFL Switch jitter may improve source reproducibility, which is extremely important in precise interpretation of the subcritical test radiographs. The diagnostic immediately downstream of the PFL switch (Vpfl3) was used to measure PFL switch jitter. It has a highly consistent shape that can be precisely linked to switch breakdown time. Figure 4 is an overlay of four typical Vpfl3 traces which demonstrates jitter.

**Figure 4.** Four Vpfl3 traces showing main PFL switch jitter. From the Cygnus 1 Armando series.

B. Measurement

PFL switch jitter for both Cygnus X-ray sources is presented in Table 2. The results are segregated according to the Cygnus project series. The first three rows correspond to the nominal 3.4–3.5 in. switch gap. Moreover, analysis was done on a small sub-set of Cygnus 2 shots where the switch gap is 3.75 in. This test set is defined as Thermos* and comprises the fourth row.

Table 2. PFL switch jitter.

Project Series	Gap (in)	Cygnus 1 (ns)	Cygnus 2 (ns)
Armando	3.4-3.5	13	10
Step Wedge	3.4-3.5	9	11
Thermos	3.4-3.5	14	14
Thermos*	3.75	--	13

C. Dose correlation

In this work X-ray dose is the parameter chosen for comparison with PFL switch time. Thermoluminescent dosimeters are used to measure the individual machine dose on every shot. In the following graphs, PFL switch time and dose versus shot are plotted. The measurements are segregated according to project series as shown in Table 3.

Table 3. PFL / Dose figures.

Project Series	Cygnus 1	Cygnus 2
Armando	Figure 5	Figure 6
Step Wedge	Figure 7	Figure 8
Thermos	Figure 9	Figure 10
Thermos*	---	Figure 11

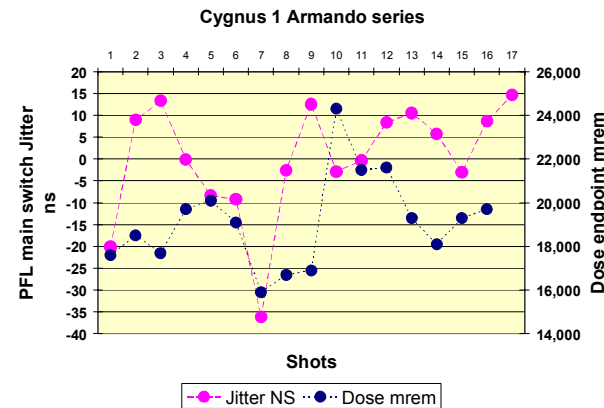


Figure 5. Cygnus 1 – Armando series.

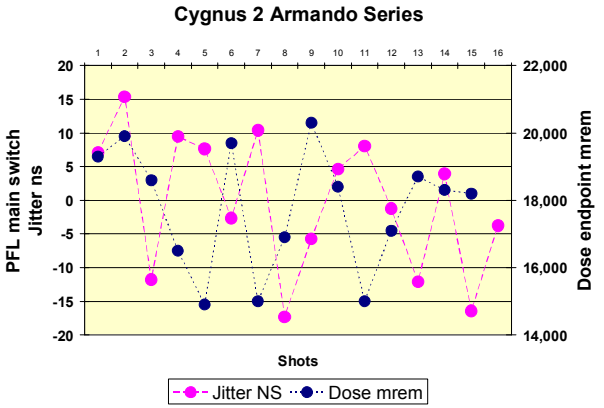


Figure 6. Cygnus 2 – Armando series

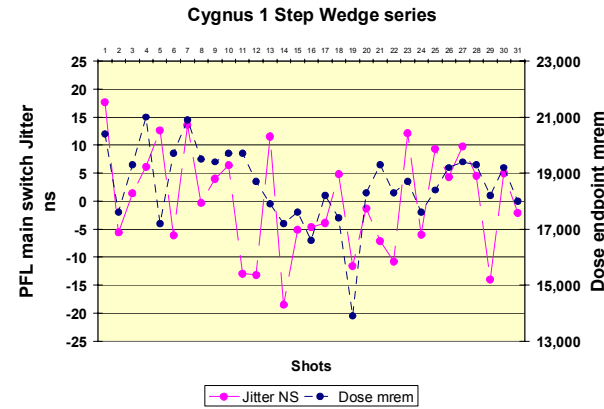


Figure 7. Cygnus 1 – Step Wedge series.

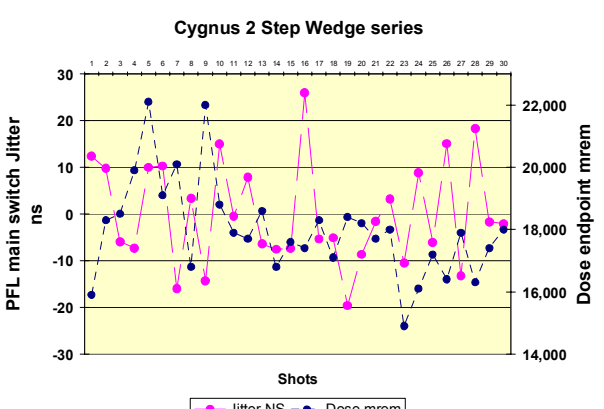


Figure 8. Cygnus 2 – Step Wedge series.

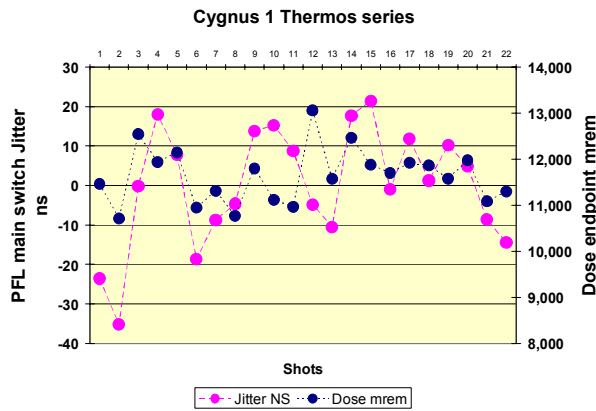


Figure 9. Cygnus 1 – Thermos series.

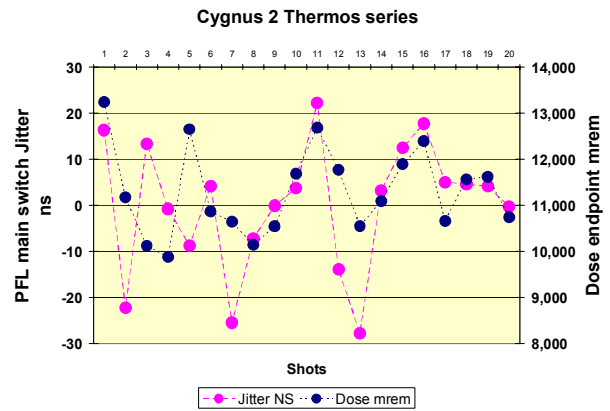


Figure 10. Cygnus 2 – Thermos series.

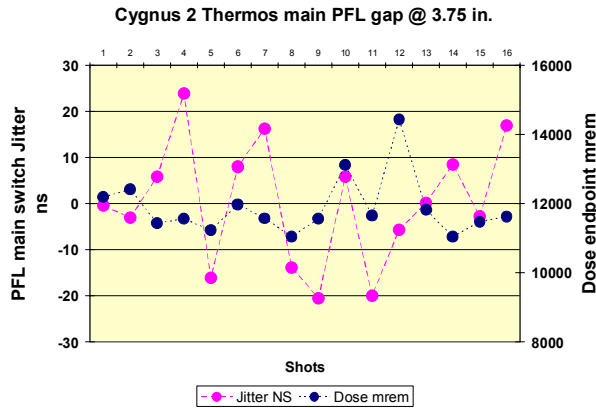


Figure 11. Cygnus 2 – Thermos* series.

III. SUMMARY

Refer to Table 2 for the following discussion. First, consider the comparison of PFL Switch jitter between the different project series (Armando, Step Wedge, and Thermos). Within a few ns, the jitter was comparable on Cygnus 1 as well as on Cygnus 2. Next, compare the jitter results between the two machines (Cygnus 1 and Cygnus 2). Again, within a few ns, the jitter was comparable for all three project series. The data used in this analysis, from different project series and machines, encompasses many variables that are typically encountered over an extended period of operation (e.g., electrode surface quality, insulating water quality, hardware components). The results indicate PFL Switch jitter is not a strong function of any of these variables.

The jitter for the 3.75 in. PFL gap tests is comparable with the jitter for standard shots with 3.4–3.5 in. gap. However, the average dose was ~5% higher for the shots using the 3.75 in. PFL gap as compared with average dose for standard shots. The larger gap setting is attractive from the standpoint of increased endpoint energy and dose. However, the corresponding increased PFL charging time may have contributed to tracking of the PFL oil–water barrier which occurred during the Thermos series. It was decided the increased dose advantage was not worth the increased risk of barrier failure. Therefore, the PFL gap was returned to the 3.4–3.5 in. setting.

Clean PFL switch electrodes were installed at the beginning of Armando and Thermos. Although many shots were executed in both series, there was no clear jitter increase due to switch deterioration. However, since there was a correlation noted on the Radiographic Integrated Test Stand (RITS) at Sandia National Laboratories [3], clean PFL switch electrodes will be installed at the beginning of the next series of shots. Further analysis of switch jitter versus deterioration will be performed.

Review of Figures 5–11 shows no strong correlation between PFL switch time and dose. Note, from the X-ray source standpoint, dose is a function of both electron spectrum and current, and X-ray spectrum is a function of electron spectrum only. Therefore, the X-ray spectrum may be a more sensitive indicator of the influence of jitter on source quality than dose. Future efforts will involve comparison of the X-ray spectrum with PFL Switch time. If a marked correlation is discovered, experiments will be performed which focus on jitter reduction.

IV. REFERENCES

- [1] V. Carboni et al., "Pulse power performance of the Cygnus 1 and 2 radiographic sources," in Proceedings of the 14th IEEE International Pulsed Power Conference, IEEE Cat. No. 03CH37472, 2003, pp. 905-908.
- [2] J. Smith et al., "Cygnus dual beam radiography source," in Proceedings of the 15th IEEE International Pulsed Power Conference, 2005, pp. 334-337.
- [3] E. Puetz et al., "RITS-3 self-break water switch maintenance," Power Modulator Symposium, 2004 and 2004 High Voltage Workshop. Conference Record of the Twenty-Sixth International, pp. 421-423.

* This manuscript has been authorized by National Security Technologies, LLC, under Contract No. DE-AC52-06NA25946 with the U.S. Department of Energy. The United States Government retains and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a non-exclusive, paid up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.