

THYRATRON CHARACTERISTICS UNDER HIGH di/dt AND HIGH REPETITION RATE OPERATION*

D. Ball, J. Hill and T. Kan
Lawrence Livermore National Laboratory
P. O. Box 5508,
Livermore, CA 94550

Summary

Power conditioning systems for high peak and average power, high repetition rate discharge excited lasers involve operation of modulator components in unconventional regimes. Reliable operation of switches and energy storage elements under high voltage and high di/dt conditions is a pacing item for laser development at the present time. To test and evaluate these components a Modulator Component Test Facility (MCTF) was constructed.

The MCTF consists of a command charge system, energy storage capacitors, thyatron switch with inverse thyatron protection, and a resistive load. The modulator has initially been operated at voltages up to 60 kV at 600 Hz. Voltage, current, and calorimetric diagnostics are provided for major modulator components. Measurements of thyatron characteristics under high di/dt operation are presented. Commutation energy loss and di/dt have been measured as functions of the tube hydrogen pressure.

Introduction

Scaling gas discharge lasers to average power levels appropriate for laser isotope separation plant applications requires the development of adequate electrical power conditioning systems. Such systems must have the power capability to drive the high average power lasers plus sufficient reliability for plant operation. The problems associated with developing the power conditioning system arise from scaling the pulse-repetition frequency (PRF) and operating voltage of the laser. The choice and characteristics of switches capable of high average power and high voltage operation are critical to successful laser development.

Hydrogen thyatrons have long been used as high voltage switches for high rep rate applications such as radar modulators. High power laser modulators require high voltage, high rep rate, and high di/dt switch operation not generally needed for line-type modulators. Recent thyatron development has aimed at increasing the voltage and di/dt capabilities of high power tubes.^{1,2} The problems of integrating these new switches into a functioning system together with the effects of scaling modulator parameters introduce major uncertainties into the design and performance of laser power-conditioning systems. The Modulator Component Test Facility (MCTF) was constructed to evaluate modulator component performance at full peak- and average-power stress thus reducing these uncertainties and improving the relative success of laser development.

*This work was performed under the auspices of the U. S. Department of Energy by the Lawrence Livermore National Laboratory under contract number W-7405-ENG-78.

Circuit Design

The MCTF design emphasizes flexibility of testing components such as thyatrons in a manner relevant to high power laser applications. The laser operating parameters require several parallel thyatron switches capable of high-power operation at voltages above 40 kV. The stress on a single thyatron is simulated in the test facility. Typical operating parameters for the MCTF are summarized in Table 1.

Table 1. MCTF Characteristics	
Charge voltage	60 kV
Energy stored per pulse	14 J
Thyatron current pulse	6 kA peak
	100 ns FWHM
Rate of rise of thyatron current	$>10^{11}$ A/S
PRF	2 kHz

The MCTF consists of the 5 major sections shown in Fig. 1. An adjustable high voltage dc power

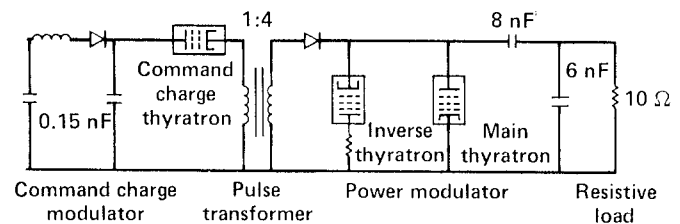


Fig. 1 Simplified circuit diagram of MCTF system.

supply energizes the command charge circuit. A step-up pulse transformer provides higher voltages to the power modulator than would be available from the supply. The thyatron under test is contained in the power modulator section. The main thyatron switch, inverse thyatron, and energy storage capacitors simulate a fraction of the entire modulator system for a high power laser. The laser load is simulated with a resistive load using a flowing salt solution as the electrolyte. All components are immersed in oil to provide both high voltage insulation and adequate component cooling at high power dissipation levels. The oil tank containing the transformer and power modulator is shown in Fig. 2.

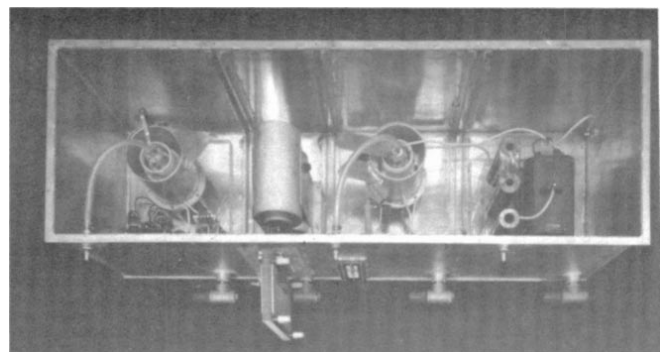


Fig. 2 MCTF modulator tank.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE JUN 1981		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Thyratron Characteristics Under High Di/Dt And High Repetition Rate Operation				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Lawrence Livermore National Laboratory P. O. Box 5508, Livermore, CA 94550				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Design of the power modulator oil tank provides the capability of testing several different sizes of thyratrons and capacitors while maintaining a low inductance configuration. The transformer, main thyatron, inverse thyatron, and energy storage capacitors are each separated by plexiglas barriers. Separating each component provides individual oil circulating systems suitable for calorimetry measurements. The command charge circuit is located in a separate oil tank with its own calorimetry diagnostics.

Thyatron Performance

One of the major objectives of the MCTF is to evaluate thyatron performance under high-voltage, high-power laser modulator conditions. Initial operation of the MCTF involved evaluation of multi-gap thyatron performance at voltages from 38 kV to 60 kV. The first thyatron tested was a HY-5301 which is a two-gap version of the HY-53. Two such thyratrons were operated in the MCTF, one as the main switch and the other as the inverse diode. Initial operation involved testing the system performance and reliability up to 60 kV at 400 Hz.

After testing high voltage modulator operation, characteristics of the HY-5301 as the main switch were measured. A low-inductance single-gap HY-5313 replaced the HY-5301 as the main switch, and the same measurements were repeated to compare thyatron characteristics in identical circuits. Both thyratrons were triggered on the control grid from a 2 kV, 40 ohm driver having a pulse width of 0.5 μ s.

The holdoff voltage and di/dt were measured at various reservoir voltages and the results are shown in Figs. 3 and 4. Compared to the HY-5313, the

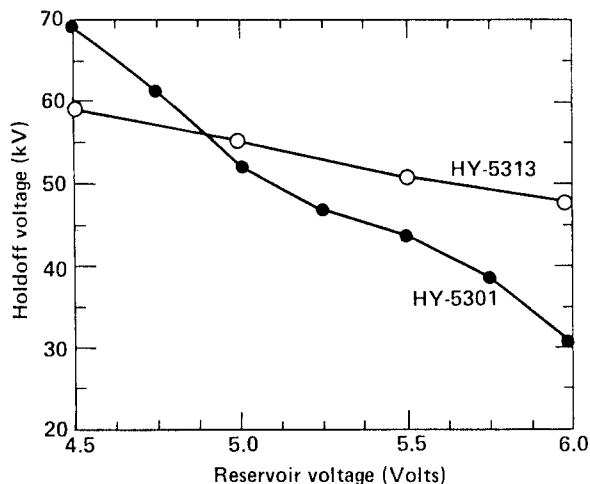


Fig. 3 Variation of holdoff voltage with reservoir voltage

HY-5301 holdoff voltage is more sensitive to changes in reservoir voltage. It should be noted, however, that for a given reservoir voltage, the pressure in one thyatron may differ from that in the other. Both tubes were operated with a voltage charge time of 4 μ s and a holding time of 1 μ s. All di/dt measurements were made at 200 Hz and 38 kV charge voltage. The main thyatron current was measured with a current transformer. The effect of the low inductance structure of the HY-5313 is shown in its

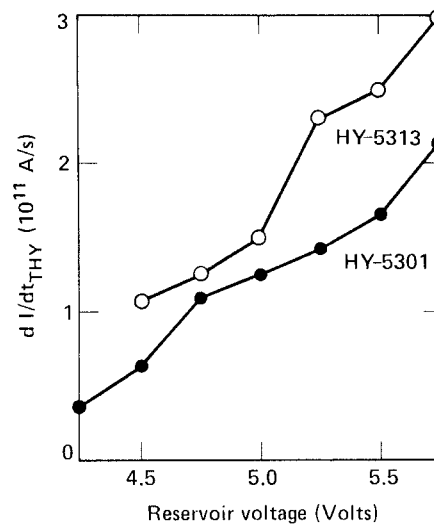


Fig. 4 Reservoir voltage dependence of di/dt at 200 Hz and 38 kV

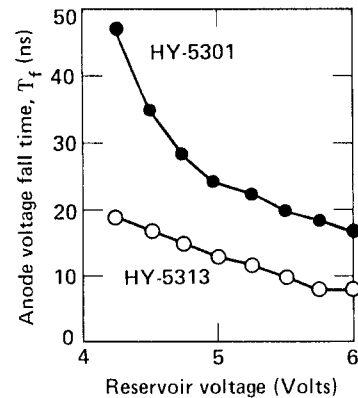


Fig. 5 Anode voltage fall time vs. reservoir voltage measured in a high inductance discharge circuit

higher di/dt at all reservoir voltages. The anode voltage fall time measurements of Fig. 5 were made with a large inductance added to the discharge circuit to prevent voltage drops due to the tube inductance. The fall time was measured from 90% to 10% of the peak voltage. At a given reservoir voltage, the HY-5313 fall time is much less than that of the HY-5301. The percent dissipation curves in Fig. 6 show that operation at a reservoir voltage above the nominal 4.5 V reduces dissipation while increasing di/dt . Fig. 7 indicates that thyatron dissipation decreases slightly with increased PRF. This could be caused by increased gas pressure at a given reservoir voltage due to thyatron heating. For these measurements, the reservoir voltage for the HY-5301 was 5.0 volts and 5.25 volts for the HY-5313. These reservoir voltage values were chosen to provide a holdoff voltage of 52-53 kV.

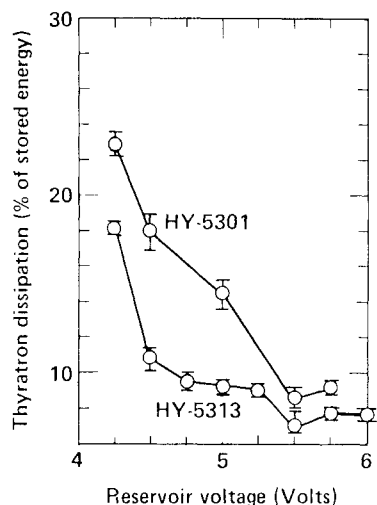


Fig. 6 Percent of thyatron dissipation as a function of reservoir voltage at 200 Hz and 38 kV

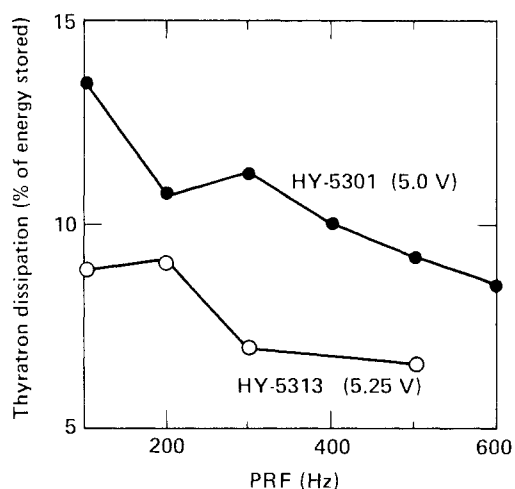


Fig. 7 PRF dependence of percent of thyatron dissipation.
HY-5301 at 5.0 volts on reservoir
HY-5313 at 5.25 volts on reservoir
38 kV charge voltage

Conclusions

A facility for evaluating gas discharge laser modulator components has been constructed, and component tests are currently being made. Initial measurements have characterized important thyatron parameters for two different thyatrons. Since switch lifetime and efficiency may be increased by reducing commutation loss, thyatron dissipation becomes an important factor in laser modulator performance. Dissipation and di/dt measurements emphasize the need to operate thyatrons at higher than normal reservoir voltages to reduce dissipation while increasing di/dt . For our desired laser modulator circuit, the HY-5313 provides sufficient voltage holdoff (>50 kV) and relatively low dissipation (<9%) at high reservoir voltages. Effects of different triggering methods on dissipation should be investigated along with studies of thyatron lifetime. More measurements on other thyatrons should be made particularly to determine dissipation characteristics at higher rep rates and higher voltages.

References

1. R. Caristi, S. Friedman, S. Merz, and D. Turnquist, "New Developments in Super-Fast, High-Power, Hydrogen Thyatron Switching," IEEE Trans. on Electron Devices, Vol. ED-26, No. 10, October 1979.
2. D. Turnquist, "Thyatron Development for High Repetition Rate Gas Lasers," Proc. of the International Conference on Lasers '79, December 1979.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government thereof, and shall not be used for advertising or product endorsement purposes.