

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE JUN 1983	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE A Small And Light Thyatron Grid Driver		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Lawrence Livermore National Laboratory P. O. Box 808 Livermore, CA. 94550		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	
			18. NUMBER OF PAGES 2
			19a. NAME OF RESPONSIBLE PERSON

A SMALL AND LIGHT THYRATRON GRID DRIVER*
 Randall I. Ross
 Lawrence Livermore National Laboratory
 P. O. Box 808
 Livermore, CA. 94550

Introduction

The Laser Isotope Separation Program at Lawrence Livermore National Laboratory is aggressively developing Copper Vapor Laser's (CVL's) for use as dye laser exciters. These CVL's require high voltage (>10 kilovolts), high peak current (>1200 amps), and operate at high repetition rates (up to 12 kilohertz) with fast current risetimes (<50 nanoseconds). Thyratrons are typically used to provide the required pulsed energy to the lasers. Three to five inch ceramic thyratrons, such as EG&G's HY-1802 or ITTs' F-117, are now used depending upon the application. To trigger these thyratrons a low jitter, reliable and compact pulser was developed by the laboratory.

Originally line type and hard tube pulsers were employed. Both in-house and commercial units were used, but these suffered various disadvantages (cost, size, reliability, insufficient output drive, etc.). The newest design, that is reported here, is based on an in-house designed line type pulser, but makes use of a high-voltage switching power supply to provide a reliable, compact, fault-tolerant unit. This pulser is referred to as the thyatron grid driver, and is now in general use in our laboratories. This unit is shown in Figures 1 & 2. A circuit diagram of the new pulser is shown in Figure 3.

The 200 watt switching power supply was specially designed under contract by CETA Corporation. Operating at a switching frequency of 40 kilohertz, this power supply will ramp charge the capacitors in the Pulse Forming Network (PFN) in less than 77 microseconds. This allows the repetition rate of the pulser to be continuously variable from 0-13 kHz with no variation of output waveform, as would be the case with a simple resonantly charged line type pulser. In addition the supply is short circuit proof and incorporates a fast regulator circuit ($<10 \mu s$ response).

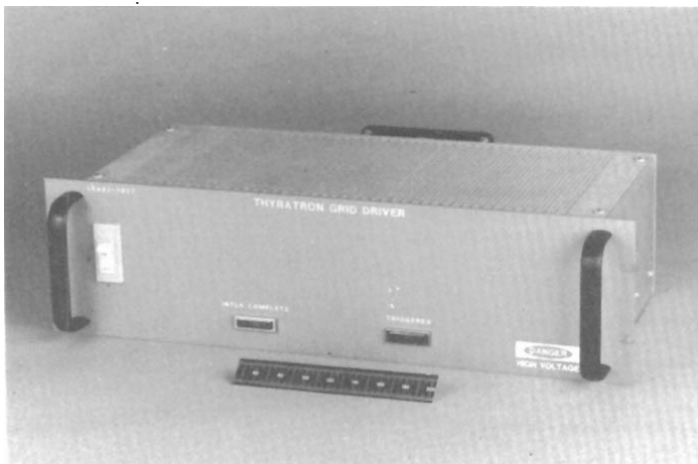


Figure 1

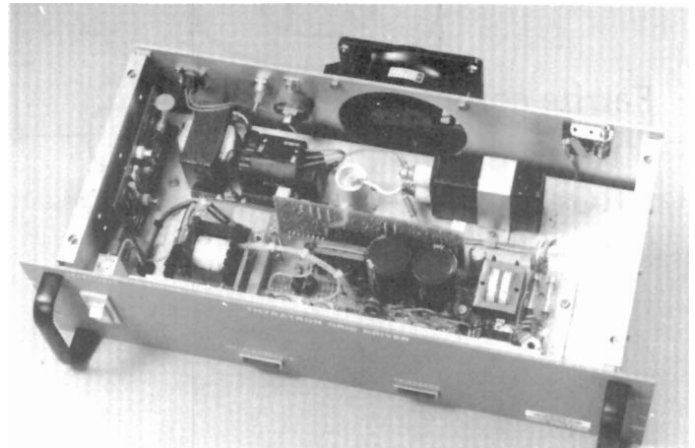


Figure 2

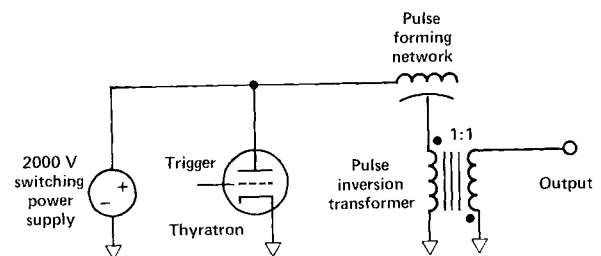


Figure 3

The short circuit current of the supply has a waveform that consists of pulses of current at the power supplies switching frequency which occur at a longer interval than the thyratrons recovery time. This means that during pulser operation, the switching power supply can not keep the pulser thyatron in conduction after the PFN has been discharged. This eliminates latch-up problems by providing in effect a command charge circuit.

A 3 kilovolt (kV), 330 nanoseconds pulse width, 50 ohm PFN was custom made in a small package by Plastic Capacitor, Inc. The pulser thyatron is a EG&G HY-2 which is normally used for radar applications. Figure 4 shows a typical 50 ohm pulse output into a matched thyatron load.

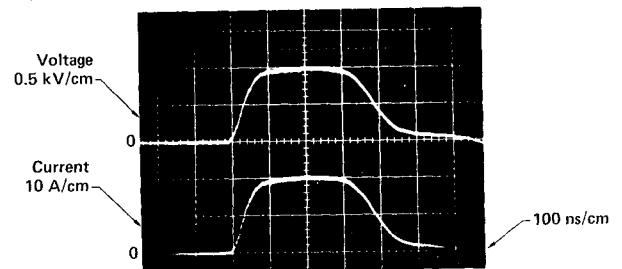


Figure 4

*This work performed under the auspices of the Department of Energy by the Lawrence Livermore National Laboratory under contract No. W-7405-Eng-48.

The physical dimensions of the thyatron grid driver is 5 1/4" (13.3 cm) tall, 8" (20.3 cm) deep, and 19" (48.3 cm) wide. It weighs 15 lbs. (6.8 kg), uses 2 amps of 120 VAC, and runs about \$3K per unit.

This circuit has successfully operated continuously for over two thousand (>2000) hours in actual high power thyatron circuits without failure. The testing is still continuing. The electrical characteristics of this pulser are shown in Table I.

TABLE I

Pulse width	300 ns
Pulse risetime (10-90%)	50 ns
Pulse voltage (open circuit)	2 kilovolts
Pulse voltage (50 Ω)	1 kilovolt
Output impedance	50 ohms
Maximum repetition rate	12 kHz
Pulse jitter	<1 ns
Out put short circuit and overvoltage protection.	

Other pulse formats can be generated within this circuit by changing the PFN design, as long as the maximum average power, peak charging current and maximum charging voltage are not exceeded. The average power delivered to the load is simply given by:

$$P=1/2 CV^2f \leq 200 \text{ watts}$$

where P is the average power of the power supply, C is the capacitance of the PFN, V is the matched output pulse voltage, and f is the repetition rate.

Futher development on this unit is continuing. Stacked Field Effect Transistors (FET) are being investigated to replace the small thyatron. Also the packaging of this pulser and an equally small heater/resevoir and grid bias power supply is being considered to produce a single chassis complete thyatron service unit. Clearly a careful job of packaging has improved the usefulness of these thyatron triggers.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government thereof, and shall not be used for advertising or product endorsement purposes.