

Adamian Y.A., Titkov V.V., Shneerson G.A.

 State Technical University
 St.-Petersburg
 Russia

Electrode surface phenomena are known to play a decisive role in forming short-pulse water breakdown [1-3]. Therefore the substantial decrease of field intensity at the electrode surface may lead to the appreciable rise in operational voltage and stored energy of the water forming line, if the average value of the field intensity is maintained. The electrostatic problems are examined in this paper related to the design of a device in which this objective is reached by insertion into water insulation of solid dielectric bodies having relatively small dielectric permittivity (fig.1). The displacement flux rounds the inserts and passes mainly in the gaps between them. The field intensity in the gaps (Region 1) is larger than near the electrodes (Region 2) and is close to that inside the inserts (Region 3). This system may be termed as electrostatic concentrator [4,5] similarly to magnetic flux concentrator [6]. Evaluation of electrostatic concentrator effectiveness may be based on the assumption that the field intensity at the sections mn and $m'n'$ is constant and the displacement flux through the insert is neglected. Then for the middle section of the system having spatial pitch $2d = 2(\delta_1 + \delta_2)$ the approximate equality holds true

$$q' = E_0 \varepsilon_1 d \approx E_k (\varepsilon_1 \delta_1 + \varepsilon_2 \delta_2), \quad (1)$$

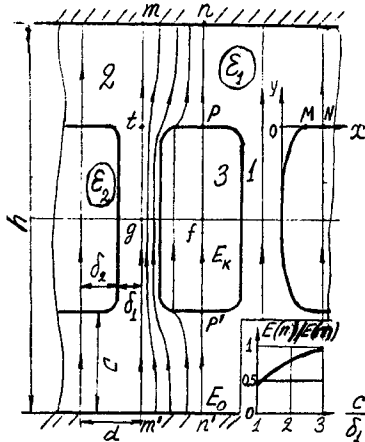


Fig.1. Schematic of the electrostatic concentrator.

where q' is the line charge density, E_k is the field intensity in the gaps and inserts far from electrodes (at the sections pp' and tt' , fig.1). The voltage between the electrodes may be expressed

$$U \approx 2CE_0 + (h - 2C) E_k. \quad (2)$$

Further, expressing E_0 and E_k by q' from (1) we find the capacitance per unit length of the concentrator section having width $2d$,

$$C' = \frac{q'}{U} = \frac{2\varepsilon_1 d (\varepsilon_1 \delta_1 + \varepsilon_2 \delta_2)}{2C(\varepsilon_1 \delta_1 + \varepsilon_2 \delta_2) + (h - 2C)\varepsilon_1 d}. \quad (3)$$

Assuming additional condition $h \gg 2C$ we get

$$C' \approx (2/h)(\varepsilon_1 \delta_1 + \varepsilon_2 \delta_2), \quad U \approx hE_k. \quad (4)$$

$$W' = C'U^2/2 = E_k^2 h (\varepsilon_1 \delta_1 + \varepsilon_2 \delta_2) = E_k W'_0 / E_0, \quad (5)$$

where $W'_0 = E_0^2 \varepsilon_1 d h$ is the energy stored in the capacitor without any inserts and field intensity E_0 . If $E_k > E_0$ such a storage has E_k/E_0 times larger operational voltage and energy. The capacitance is decreased by the same ratio. If the breakdown conditions near the electrodes in the examined system are defined by the same phenomena as in the system with no inserts then as E_0 the breakdown intensity should be used E_0^+ defined by Martin's formulae [7] or their analogues [8,9] for the anode. The parameter E_k describes the breakdown in the water gaps far from electrodes or the breakdown in the solid inserts where the field

In a properly designed line parameter E_n equal to normal to the interface field component in the water has order of $(\varepsilon_1/\varepsilon_2)E_k$ which is many times less than E_0 . This rises

expectation that the breakdown formation in the water will be constrained. It may be also guessed that the field intensity in the gaps and the inserts will be limited by the electrical strength of the solid dielectric. The corresponding value E_k may be adopted equal to

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE JUN 1993		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Water Line With The Electrostatic Concentrator				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) State Technical University St.-Petersburg Russia				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

that for the usual breakdown of solid insulation in a quasi-uniform field. This value in the microsecond range is 2+2.5 times higher than E_0 for dielectrics used as insulators of water lines. For the system shown in fig.1 this estimate is pessimistic because the solid insulation is separated from the electrodes by the water layers.

The experimental data are not available in present for the water breakdown in the case when the field intensity at the electrodes is largely reduced compared to its average value. The estimates of E_0 and E_k should be checked experimentally with the very careful choice of the characteristic parameters δ_1/d and δ_2/d and for different form of inserts.

For a given ratio δ_1/d the value C/d should be assumed in such a way that the field intensities at the characteristic points m and n were close. The example of the dependence $E(n)/E(m)$ for the ratio $\delta/d = 1/3$ is plotted in fig.1. The calculation for the rectangular inserts and $\epsilon_0/\epsilon_1 = 0$ shows that even for $C/d = 3$ $E(n)/E(m)$ is close to unity.

Real form of the inserts should prevent the field rise at the edges and keep low the normal field component at the interface. An initial choice of the insert form was based on the model for which the ratio ϵ_2/ϵ_1 equals zero. In this case the profile is chosen in such a way that the field intensity at the

boundary is constant up to the point M and then decreases monotonously [10]. In the coordinate system shown in fig.1 this profile is defined by the equations

$$x = \frac{\delta_1}{\pi} \left[2\sqrt{1-\lambda} - \ln \frac{1 + \sqrt{1-\lambda}}{1 - \sqrt{1-\lambda}} \right]; \quad (6)$$

$$y = \frac{2\delta_1}{\pi} \sqrt{\lambda} \quad (7)$$

where $0 < \lambda < 1$. This profile minimizes the tangent field intensity component at the boundary.

The computer calculations have shown, however, that this profile with the flat section MN is not optimal, if the ratio ϵ_2/ϵ_1 is non-zero. In this case the value of normal field component at the interface becomes significant. The lower value of E_n can be obtained if a profile is formed by a circular arc and an inclined section MN' (fig.2). In this system the tangent field component decreases monotonously and the normal one does not exceed $0.028E_k$ in the water and $1.12E_k$ in the dielectric. The further profile optimization is possible but it gives no confidence that this will result in an additional appreciable decrease of E_n in the concentrator with flat electrodes having inserts separated from the electrodes.

Another performance of an electrostatic concentrator is shown in fig.3. This system is convenient for studies of singlechannel devices with two-dimensional or axisymmetric field. The solid dielectric here contacts the electrodes. The field in the solid dielectric far away from the channel is close to uniform. The boundary field intensity varies from the value E_k close to average (far from the electrodes) to the value approximately equal to $E_0 \propto (\epsilon_1/\epsilon_2)E_k$ (at the electrodes). Here $\epsilon_{1,2}$ are the channel sections far away from the electrode and near it, respectively.

The insulator breakdown experiments have shown that in the strictly uniform field having $E_n = 0$ equal to zero the electric strength is practically unaffected by the insulator if it is not hygroscopic [8,9]. Curving the boundary results in a decrease of the breakdown voltage. It is suggested in [9] that this is caused by a normal field component at

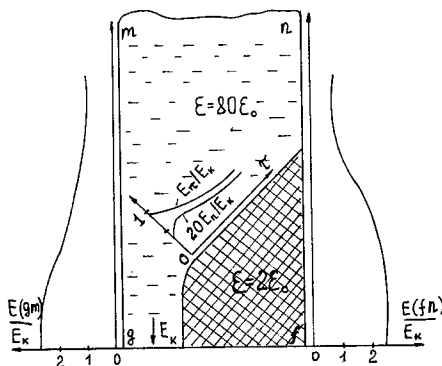


Fig.2. Fragment of the concentrator with inclined boundary section MN'

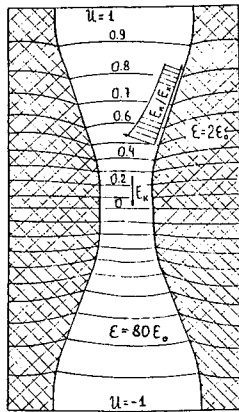


Fig.3. Concentrator with solid dielectric contacting the electrodes.

the boundary. Therefore this type of the concentrator also requires minimization of E_n along with providing of a smooth fall of E_n . In this work we performed a small set of experiments which were intended to demonstrate the role of the normal field component. This was achieved by oscilloscopic studies of the breakdown in a cylindric channel with the uniform field and in the channel having the field reduced at the electrode surface (fig.4a,b). Water with the time constant $\tau = \rho\epsilon_1 \approx 10^{-7}$ s was used in the experiments. In the first set of experiments larger voltage rise times were used and in the second one these values were smaller than τ . During the first set (fig.4) the field distribution was defined by water conductivity and the normal intensity component at the boundary was close to zero as the current lines rounded the insert. The breakdown in this set came later than in the channel with smooth walls. In the second set (fig.4), the field was close to an electrostatic one, and according to computer calculation its value reached $E_n = 0.02E_k$. In this set the

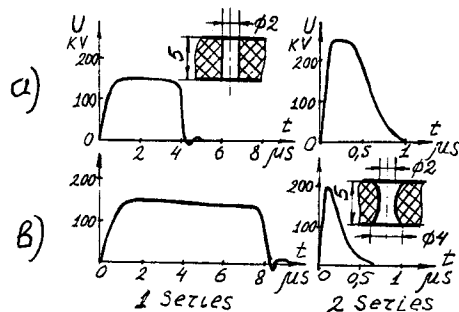


Fig.4. Voltage waveforms
a - Channel with even walls
b - Channel with profiled walls

system with smooth walls proved to have greater electric strength and its breakdown occurred later. Thus the minimization of the normal field component by variation of the boundary form requires very careful consideration. The example of smooth transition from the narrow channel to the wide section is shown in fig.3. Here the maximum value $E_n = 0.012E_k$ is obtained. Further decrease of the normal field is possible only if the transition section is lengthened.

The drastic way of bringing normal field to zero is the use of non-plane electrodes. In the experiments [8] the increase of electric strength of water line insulators was established if the electrode was convex at the point of contact with the insulator. The example where the condition $E_n=0$ is strictly fulfilled, is shown in fig.5. The boundary is formed here by a field line in the region $abcd$, and one of the equipotential lines is taken as the electrode surface. In this system the maximum field intensity at the electrode section contacting water is $E = 0.5E_k$, the field intensity at the interface reaches maximum value $1.5E_k$ at point b. As in the previously examined cases the field is decreased here near the electrodes and is somewhat increased in the solid dielectric. The breakdown in the water and the solid dielectric is governed by its own breakdown voltage and by the corresponding value of the average field intensity $E_k = U_k/h$. This type of concentrator may be effective, if E_k is greater than E_0 where E_0 is the field intensity in water in the uniform field.

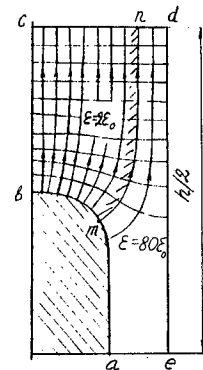


Fig.5. Fragment of the system with $E_n=0$
a) electrode; b) solid dielectric ($\epsilon \approx \epsilon_0$);
c) liquid dielectric ($\epsilon \approx \epsilon_0$)

References

- [1]. Ushakov V.Yu., Kapishnikov N.K., Kukhta V.R. "Electrical strength of liquids" In: "Pulse discharge in dielectrics" ed. by G.A. Mesyats. Novosibirsk, 1985, pp. 114-134.
- [2]. McCrath P.B., Nelson J.K., Optical studies of breakdown events in liquid dielectric. Proc. of the Inst. Electric Engineers, 1977, v. 24, № 2, p. 183-187
- [3]. Ovchinnikov I.T., Yanshin K.V., Yanshin E.V. "Experimental studies of pulsed electric fields in water near a spike electrode with the aid of the Kerr effect". Zhurn. Techn. Phys., 1978, v. 52, № 2, pp. 2592-2689.
- [4]. Shneerson G.A. "Forming line." USSR Patent № (11) 764106. The bulletin of inventions № 34, 15.09.80.
- [5]. Knoepfel H. Pulsed high magnetic fields. N.-H Publ. Amsterdam, London, 1970.
- [6]. Shneerson G.A. "The fields and transients in superhigh pulse current devices" (2-nd ed.) "Energoatomizdat" publishers, M.: 1992, 413 pp.
- [7]. Martin I.C. Nanosecond pulse techniques. Aldermaston 1970.
- [8]. Kuchinsky G.S., Lysakovsky G.G., Monastyrsky A.I. "Electric strength of liquid dielectrics under microsecond voltage pulses". Elektrichestvo, 1981, № 10, pp. 41-44.
- [9]. Ushakov V.Ya., Muratov V.M., Lopatin V.V. et al. "To the choice of optimal insulator forms of high-voltage pulse devices with water insulation". Elektrichestvo, 1980, № 12, pp. 56-58.