

UNCLASSIFIED

AD 292 246

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



19990226122

UNCLASSIFIED

**Reproduced From
Best Available Copy**

REPRODUCTION QUALITY NOTICE

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- **Pages smaller or larger than normal.**
- **Pages with background color or light colored printing.**
- **Pages with small type or poor printing; and or**
- **Pages with continuous tone material or color photographs.**

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐

If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

292 246

AD No. _____
ASTIA FILE COPY

292246

FC

CYANAMID

GENERATION OF HYDROGEN FOR FUEL CELLS IN SUBMARINE PROPULSION

Processes Involving Decomposition of Ammonia


Project Serial No. SF013-06-04, Task 4377

Contract NObs-86745

AMERICAN CYANAMID COMPANY

Engineering & Construction Division

October, 1962



8
5.60
(55 pgs)

TABLE OF CONTENTS

TABLE OF CONTENTS

	<u>Page</u>
Introduction	1
Abstract	3
Processes for Generation of Hydrogen	7
Processes Utilizing Dissociation of Ammonia	10
Alternate I - Dissociation at Low Pressure by Electrical Energy	10
Process Description	10
Equipment Description & Arrangement	14
Utilities	16
Instrumentation & Manpower	17
Cost Estimate	19
Assumptions	20
Alternate II - Dissociation at High Pressure by Electrical Energy	22
General Description	22
Alternate III - Dissociation at High Pressure by Chemical Energy	24
General Description	24
Process Description	25
Equipment Description & Arrangement	27
Utilities	29
Instrumentation & Manpower	30
Cost Estimate	31
Assumptions	32

TABLE OF CONTENTS (CONT.)

	<u>Page</u>
Future Program	33
Bibliography	35
Appendix	36

INTRODUCTION

INTRODUCTION

Fuel cells are under study as sources of electrical power for submarines. At present only the hydrogen-oxygen cell is sufficiently advanced for consideration. The oxygen for this cell could be stored as liquid aboard the submarine, but methods for handling liquid hydrogen under similarly practical conditions are not now available. Therefore, a hydrogen plant must be installed in the submarine.

Several processes are in industrial use for production of hydrogen, using various raw materials and methods. Any of these can be adapted for installation on a submarine. For use on a submerged submarine, however, they require drastic modification.

Waste gases which are normally produced by these processes must not be vented, except when snorkeling. Equipment noise, size and response time must be minimized. All of the equipment must be capable of withstanding severe shock loads and of operating properly under all maneuvering positions of the submarine.

To meet these and other requirements, we have prepared alternate process designs for using the decomposition of ^{NH₃} ammonia as a source of hydrogen. Our research laboratories have conducted experiments to provide certain basic kinetic data and catalyst information; our high speed digital computers have been used to develop mathematical models; and our drafting facilities have constructed space models for our designs.

Our study leads to the conclusion that one of the alternates is immediately available for firm design and installation. A second one may be developed readily as a slight improvement, but a third one which requires development by pilot plant investigation promises to become the

optimum process. This report describes our designs for the three alternatives. It also includes the assumptions on which the designs are based and a suggested program to select and install the most practical process.

ABSTRACT

ABSTRACT

Three raw materials for production of hydrogen are compared on a theoretical basis. The reasons for selection of ammonia for further study are set forth.

Two terms should be defined at the beginning. We refer to "usable hydrogen" as hydrogen fed to the cells less hydrogen purged from them. "Net real hydrogen" is the flow of usable hydrogen less the amount used to produce power for the hydrogen generation process itself. Using ammonia as raw material, three process alternates are treated. They differ primarily in the method used to cause dissociation of the ammonia into nitrogen and hydrogen. The specified design basis for each case is that at maximum rate the plant must produce 70 lbs./hr. of net real hydrogen. While emphasizing maximum utilization of commercially available equipment, we have allowed our design to exceed the specified basis. This overdesign can be eliminated by substituting other equipment to be found by more exhaustive equipment survey or to be ordered as special supplies for the specified rates. However, it is not considered purposeful to do so until a process is chosen subsequent to this study.

In Alternate I, the dissociation is carried out at low pressure, i.e., about 35 psig, in conventional equipment using electrical energy to supply the heat required by the endothermic reaction. In Alternate II, which is treated briefly, the dissociation is carried out at a higher pressure than is commonly used; electrical energy is the heat source as in Alternate I. In Alternate III, the heat of dissociation is supplied by combustion of ammonia in the stream of ammonia being decomposed; and both reactions go on at high pressure. All three alternates are alike in that

4

the by-product nitrogen is liquefied under pressure by heat exchange with boiling oxygen, and the liquid nitrogen is then stored in place of the oxygen. No gas is vented in any alternate, and no extra storage space is required.

Each of the three alternates is taken up separately. The process, equipment, instrumentation, cost and design assumptions of Alternate I are described in detail first. While this is not the most efficient or compact process conceivable, its design does not require any extension of our present knowledge in chemical engineering. As we have designed it, some of the equipment projects about $3\frac{1}{2}$ feet out of the space allocated both fore and aft. The hydrogen holdup is less than 400 cubic feet, compared with the allowable maximum of 900 cubic feet.

Alternate II is a process of unproved efficiency. It rests on a few additional assumptions which have not yet been tested, so far as we know. Its advantage is a lower power requirement than in Alternate I.

Alternate III is the most efficient process we have planned to date. Application of this process, however, would have to be preceded by bench scale and pilot plant experimentation with various catalysts and operating conditions. The equipment volume exceeds slightly the space allowed for it by the Bureau, but does not conflict with any existing equipment shown on the drawing furnished to us.

The most important characteristics of the alternate processes may be compared as follows; other details are tabulated in the Appendix;

5

<u>Alternate</u>	<u>Installed Cost</u>	<u>Submarine Volume Required (cu. ft.)</u>	<u>Net Hydrogen Available for Submarine Power (lbs./hr.)</u>	<u>Operating Requirements per lb. of net real H₂</u>		
				<u>Process KWH</u>	<u>lbs. O₂</u>	<u>lbs. NH₃</u>
I	\$800,000	1480	78.4	7.85	14.5	10.1
II		1252	70.0	6.92	13.6	9.54
III	\$515,000	1295	98.0	0.28	9.9	6.96

In this study, we have considered Alternate I as the reference design from which Alternates II and III are derived by innovations and with which they are compared in regard to relative merits. As reference design, Alternate I is aimed at immediate application by minimizing uncertainties and incorporating conventional equipment. Therefore, it offers the advantage that the design can be firmed and the equipment installed without any delay whenever a decision is reached to adopt this alternate for testing in a submarine. Alternate II reduces the parasitic power requirement by approximately 20% and reduces slightly the raw material and space requirements but introduces a number of process uncertainties which must be resolved.

Alternate III is the most attractive scheme in virtue of its low requirements for parasitic power, space, and raw material and a very low hydrogen inventory. It lends itself to optimization by advanced engineering skills including process simulation and mathematical analysis using high speed electronic computers. During this study, we have already laid the foundation for more detailed investigation of this alternate in the future. Our research laboratories have also initiated programs for establishing reaction kinetics and materials behavior as well as developing catalysts of high efficiency and optimum characteristics.

Development of the above processes may be carried out in the following steps with some overlapping:

- (1) Design Alternate I for immediate installation on a test bed or submarine or both.
- (2) Modify the Alternate I design after testing to determine the feasibility of Alternate II.
- (3) Pilot Alternate III while Alternate I is being designed. If the necessary information is developed before Alternate I can be built, modify the design and install Alternate III on the test bed or submarine or both.

However, we recognize that Alternate III is our goal and it could be achieved without step (2) of the above mentioned development program.

PROCESSES FOR GENERATION OF HYDROGEN

PROCESSES FOR GENERATION OF HYDROGEN

The major industrial processes for producing hydrogen in the United States are steam reforming of natural gas and partial oxidation of liquid hydrocarbons or natural gas. Comparatively small amounts of hydrogen are made by cracking ammonia. In the past, some military requirements have been met by reforming methanol. Coke oven gas and refinery off-gas have been used in large quantities, at locations where they are produced, as impure feeds for hydrogen purification plants.

Before discussing processes which may be applied to operations inside a submarine, we should point out that methods of handling liquid hydrogen are now under intensive development. It is possible that these methods will improve sufficiently to make it useful in submarines as fast as a generation process can be developed to that stage. Therefore, it is suggested that methods of storing liquid hydrogen safely outside the pressure hull be studied while processes for generating it on board are engineered.

Returning to the above processes, the use of natural gas as a raw material is ruled out because it is not generally available, either as a gas or as liquefied methane. Partial oxidation of some liquid hydrocarbons may lead to the production of soot, which presents a disposal problem. Coke oven gas and refinery off-gas are, of course, unavailable to submarine application.

Dissociation of ammonia and reforming of methanol remain. Recently processes have also been developed for reforming light hydrocarbons auto-thermally, i.e., by oxidizing part of the hydrocarbon in the reaction feed to supply the heat required to reform the rest.

These raw materials may be compared first by visualizing ideal thermodynamic processes. The raw materials are liquid oxygen and the liquid hydrogen compounds, such as ammonia, naphtha or methanol. Where reforming is involved, water is recycled from the fuel cell. The end products are taken to be liquid water, carbon dioxide and nitrogen at the conditions of storage or disposal.

On this ideal basis the above raw materials may be compared as follows:

	Partial Oxidation of Naphtha*	LPG*	Reforming of Methanol	Dissociation of Ammonia
Raw Material Usage				
lbs./lb. usable H ₂	2.78	2.71	5.94	6.67
gals./lb. usable H ₂	0.50	0.56	0.90	1.35
Oxygen Usage				
lbs./lb. usable H ₂	9.82	9.70	8.88	9.41
gals./lb. usable H ₂	1.03	1.02	0.93	0.99
Liquid CO ₂ Produced				
lbs./lb. usable H ₂	8.55	8.00	8.14	
gals./lb. usable H ₂	1.01	0.95	0.96	
Liquid N ₂ Produced				
lbs./lb. usable H ₂				5.49
gals./lb. usable H ₂				0.82
Energy Produced				
KWH/lb. usable H ₂	16.90	16.70	17.70	17.90
KWH/lb. raw material	6.08	6.12	2.98	2.68
KWH/lb. oxygen	1.72	1.72	1.99	1.90

* Using n-hexane and n-butane for naphtha and LPG respectively.

Under perfect conditions, the hydrocarbons yield more energy per pound of raw materials, but less per pound of oxygen, than methanol and ammonia. The oxygen supply, which must be stored in a special container inside the pressure hull, is believed to limit the underwater capability of the vessel. Therefore storage problems favor methanol and ammonia.

As operators of reforming and ammonia plants, we consider reliability to be the most important criterion. The major threat to reliability in any catalytic process is damage to the catalyst.

Naphtha may contain poisons for reforming and shift catalyst. Oxides of carbon are formed in reforming naphtha and methanol, and these may poison fuel cell catalysts. In land-based chemical plants temporary poisoning may be corrected, but it may be fatal on board a submarine. Disposal of carbon dioxide presents some additional problems. Ammonia, on the other hand, does not contain poisons for dissociation catalyst. When dissociated alone, it does not form poisons for fuel cell catalysts.

For the above reasons we have concentrated on processes involving decomposition of ammonia.

PROCESSES UTILIZING DISSOCIATION OF AMMONIA

Alternate I - Dissociation at Low Pressure by Electrical Energy

PROCESSES UTILIZING DISSOCIATION OF AMMONIA

Alternate I - Dissociation at Low Pressure by Electrical Energy

Process Description

Most industrial dissociators are heated electrically and operate at pressures which are slightly above atmospheric. To make use of commercially available equipment, this process was designed around it. All of the equipment items have been specified by vendors or designed by us, using published data.

The following description refers to Process and Service Flowsheets FS-1-D and FS-2-D in the Appendix to this report. In overall summary, the process consists of dissociation of ammonia followed by condensation of the nitrogen produced. The resulting hydrogen stream is one feed for the fuel cell. The other feed stream is oxygen, which is vaporized by using it to supply refrigeration for the purification of the hydrogen. First the hydrogen and then the oxygen will be traced through the process.

Liquid ammonia from storage at 85° F. and 167 psia is reduced in pressure to 57 psia and vaporized at 28° F. in the Ammonia Vaporizer. The vapor is preheated against dissociated ammonia vapor in the Ammonia Preheater and is then cracked in the Ammonia Dissociator. Energy for the endothermic dissociation is supplied with electrical resistance elements.

The cracked ammonia contains less than 0.1% residual ammonia. It is used to preheat and vaporize the ammonia feed and is then chilled to reduce the volume for compression. Just before entering the Crude Hydrogen Compressor it is joined by two recycle streams which will be described later.

In the Crude Hydrogen Compressor the hydrogen-rich stream is compressed to 315 psia. It is aftercooled, chilled and scrubbed with cold water to remove residual ammonia. Then it is dried over molecular sieves and fed to the cryogenic equipment.

The Cold Exchanger uses several cold streams to precool the crude hydrogen and to condense out part of its nitrogen. Any traces of ammonia or water vapor that may pass through the scrubber and dryer are frozen out in this exchanger. Additional nitrogen is condensed in the Scrubbing Column, which is actually a partial condenser.

The bottoms product of the column is liquid nitrogen containing some dissolved hydrogen. The hydrogen is flashed off at 29.7 psia with some nitrogen and recycled to the suction of the Crude Hydrogen Compressor. The remaining liquid nitrogen is stored in a compartment of the liquid oxygen storage tank.

The overhead product of the column is 90% hydrogen, 10% nitrogen at 284 psia and -319° F. It is heated to -6° F. in the Cold Exchanger and expanded to 24.7 psia in the Expander. The expansion serves two purposes: it supplies energy to drive the Oxygen Compressor; it cools the expanded 90% hydrogen stream sufficiently to permit its use as a source of intermediate refrigeration in the plant.

The cold expander exhaust chills the purge gases from the cell, the cracked ammonia from the vaporizer, the condensate used for scrubbing ammonia out of the crude hydrogen, and the compressed crude hydrogen before it is scrubbed with water. After it has supplied this refrigeration, a side stream of it is used to carry off water vapor from the drier bed which is being regenerated. The side stream is returned to the main stream and the combined streams are heated to 150° F. and saturated with water

vapor in the Hydrogen Saturator. (This item is shown on our flowsheets but is considered outside our battery limits.) The warm saturated 90% hydrogen stream flows to the fuel cell battery at 14.7 psia.

The liquid oxygen feed is split into two streams. One supplies refrigeration at a low level (-328° F.) for producing reflux in the Scrubbing Column. The other supplies refrigeration at a somewhat higher level to meet the overall requirements of the cryogenic system.

The low level oxygen stream is vaporized at 1.4 psia in indirect heat exchange with the hydrogen-nitrogen feed to the scrubbing column. It is then heated to -6° F. in the Cold Exchanger and compressed to 16.7 psia in the Oxygen Compressor.

In parallel with the low level oxygen stream, the higher level stream is vaporized and heated in the Cold Exchanger at slightly above atmospheric pressure. After it leaves the Exchanger at -6° F., it re-joins the compressed low level stream. The combined streams are heated to 150° F. and saturated in the Oxygen Saturator. (The item, like the Hydrogen Saturator, is shown on our flowsheets but is considered outside our battery limits.) The warm saturated oxygen flows to the fuel cell battery at 14.7 psia.

Due to inert impurities in the feed gases, the fuel cells must be purged on both the hydrogen and oxygen sides. Since our hydrogen feed contains 10% nitrogen, the purge rate must exceed this flow. The oxygen feed contains 0.5% argon, and the oxygen side must be purged to remove this inert impurity.

One further criterion for determining the rate of purge is the allowable concentration of the inert impurities on each side. We have selected purge rates which keep these concentrations within the ranges

1

permitted by the supplier of the fuel cell. In addition we have set the purge rate from the hydrogen side high enough to permit us to mix the hydrogen and oxygen purge streams without entering the explosive range.

As a result we can chill the mixed purge streams and safely compress the mixture to the suction pressure of the Crude Hydrogen Compressor. The argon, oxygen and nitrogen in these streams go to the Scrubbing Column where they tend to collect in the liquid nitrogen which goes to storage. Thus there is no gas to be vented during operation of this plant.

Equipment Description and Arrangement

Most of the equipment used in this process is conventional in design. Therefore, only the aspects which are unusual, or items which require special materials of construction, will be described. The arrangement was arrived at with the aid of the model shown in Items 12 and 13 in the Appendix. (The supports shown in the photographs are intended for assembly of the model only.)

The Ammonia Preheater utilizes inconel in its construction, due to high operating temperature and the possibilities of nitriding and hydrogen embrittlement. This is also true of the Ammonia Dissociator. Both units may be made of newer alloys now under investigation for resistance to these forms of attack. The Dissociator is a set of six fixed-bed catalytic reactors in parallel. In the design we are preparing, the catalyst is made of iron. Our own laboratory data indicates that certain other materials might permit a more compact design. This is a subject for investigation in the future program recommended by us.

The Crude Hydrogen Compressor, like the Oxygen Compressor and the Off-Gas Booster, is a non-lubricated, slow-speed, reciprocating compressor. Prospective vendors have assured us that the noise specification can be met. Lubrication is avoided in order to prevent carryover of oil or decomposition products which foul the low temperature equipment or cause fires in oxygen piping. Glass-filled teflon rings, or rings made of other materials, have been proved satisfactory in similar service.

The Cold Exchanger is a brazed-aluminum, extended-surface heat exchanger of a type which has been used widely in low temperature service. Its high surface per unit volume and high fin efficiency make it especially attractive in this application. Exchangers of this type have passed leak test with freon and helium.

Originally the Scrubbing Column was planned to be a packed column. It became evident during design that the required enrichment could be obtained by differential partial condensation, which has often been utilized in cryogenic applications. The column is simply a vertical shell-and-tube heat exchanger with the nitrogen condensing out of the gas as it rises through the tubes. Oxygen boils at low pressure in the shell. This design is believed to be less sensitive to changes in the trim or diving angle of the submarine than any packed or tray-type column would be. (Incidentally, the oxygen supply should be passed through an adsorbent to remove contaminants before vaporization or the vaporizer should be purged periodically to nitrogen storage to prevent their accumulation in the oxygen-rich bath.)

The equipment has been piped and arranged as shown on Drawing P-1-D in the Appendix. Taking into account the need for access, insulation, support (not shown), etc., it is arranged to project somewhat beyond the limits set by the Bureau of Ships, as indicated by the broken lines. In the piping design made for this study, the short runs with frequent bends would appear to favor flexibility and minimize thrust problems. However, if and when we are asked to prepare a final design, we would then check the piping for stresses due to expansion, contraction, pulsation and shock. The effect of pipe size and configuration on propagation of noise would also be taken into account.

Utilities

Electricity and cooling water are the only utilities used by the process. The electrical loads may be summarized as follows:

<u>Equipment</u>	<u>Maximum Operating Load (KW)</u>
Dissociator	457.0
Crude Hydrogen Compressor	141.8
Crude Hydrogen Dryers	4.0
Off-Gas Booster	9.7
Condensate Pump	0.321
Fresh Water Recycle Pumps	0.926
Instrumentation	1.0
Lighting	<u>1.0</u>
Total	615.7

Assuming that the fuel cells consume 0.1 lb. of hydrogen per KWH, the above process load requires the production of 61.6 lbs./hr. The remaining 78.4 lbs./hr. of the hydrogen output of this process exceeds by 12% the 70 lbs./hr. of net real hydrogen required for an acceptable design.

Cooling water at 95° F. is available from the FW/SW Heat Exchanger and is distributed as shown on Service Flowsheet FS-2-D. The total requirement is 17.8 GPM. In addition, 24.8 GPM of hot (160° F.) water is used for saturating the gases going to the cells, and 0.4 GPM of condensate is used to scrub out the undissociated ammonia in the crude hydrogen. The latter stream is wasted to the sea as dilute aqua ammonia.

Instrumentation and Manpower

The proposed instrumentation is shown on Engineering Flowsheet FS-3-D. Our standard symbols are explained on Item 11 in the Appendix. The aim of this plan is to minimize manual operation without using excessive space for the controllers.

When an increase in power output is required, the operator raises the control point on the ammonia flow controller. This may also be done remotely from the Propulsion Control Cubicle. All of the remaining adjustments follow automatically, where it is necessary.

The temperature of the Dissociator tends to fall, so the power input increases to maintain it. A time delay is built into the relay to avoid drawing increased power before it is produced. During the resulting temperature dip the amount of undissociated ammonia increases, but the constant flow of scrubbing water is sufficient to remove it.

The bypass on the Crude Hydrogen Compressor closes to maintain suction pressure. The timing cycle on the Dryers will handle the maximum load.

As the temperature of the crude hydrogen at the cold end of the Cold Exchanger rises, more liquid oxygen at atmospheric pressure is admitted to the exchanger to supply the additional refrigeration requirement. The purity of the hydrogen produced tends to fall with increasing load, and this closes the bypass on the Oxygen Compressor.

The rate of feed of both gases to the battery increases. When this reduces the purity of the purge streams, the bypass on the Off-Gas Booster closes. The minor instrumentation operates similarly.

The residence time of hydrogen in the equipment and piping at full rate is about 50 seconds. All of the instrumentation will respond

in less time than this. On the oxygen side of the process, the time required to fill the shell of the Scrubbing Column is about 15 minutes. Therefore, the instrumentation is designed to maintain the maximum level, permitting a varying purity of hydrogen. The hydrogen concentration never falls below 90%, however. A manual by-pass is provided around the level control valve for quick startup.

The short response time on the hydrogen side implies a low holdup in the equipment and piping. If the hydrogen inventory were liberated in the submarine, it would amount to about 350 cubic feet, which is well below the value of 900 cubic feet which would create an explosive atmosphere.

The panel for control of this plant is a free-standing panel about six feet high by seven feet long by two feet deep. An additional foot of working space is required behind the panel. All of the instruments are the miniature type; pressure gauges are the miniline type. DC electrical instrumentation, with a standby battery in each case, is used for reliability and comparative insensitivity to shock and vibration.

In view of the instrumentation provided, only about one quarter of one man's full time per watch is required. His duties include logging readings every two hours, blowing down compressors where necessary, checking crankcase levels, checking calibration of analyzers, etc.

Cost Estimate

The installed cost of this plant would be \$800,000, including contingency. This is based on our experience in construction of chemical process plants. The figure includes design, engineering, purchasing, equipment, labor and supervision of construction by the engineering firm. Construction in a Navy shipyard is assumed. We have also assumed that all utilities are brought to the battery limits by others.

Spare parts are not included, since we are not familiar with Navy practice in this area. Demolition and removal of existing equipment is also excluded.

Assumptions

The major assumption made in designing this process is that the equipment can be mounted or re-designed where necessary to meet the noise and shock specifications. For ordinary heat exchangers, pumps, columns and compressors this does not seem to imply much change, if any. The Dissociator presents special problems.

Due to the high operating temperature of the Dissociator, its mechanical design cannot be based on high safety factors. This makes it vulnerable to added loads such as shock. Ordinary types of high-temperature insulation are not chosen for strength. Also high-capacity DC relays must close and open quickly and are likely to be noisy. We have assumed that all of these problems can be solved by improvements in materials and circuitry.

With reference to the power supply, we have assumed that a DC supply of constant voltage will be available. This contrasts with the drooping characteristic of the present chemical batteries. We believe that mechanical switching equipment can be designed to alter the series-parallel arrangement as the load changes, and keep the output voltage constant.

In general, we have assumed the following efficiencies: fuel cell 60%; compressors 70%; pumps 70%; motors 70% to 90% (depending on size). The design pressure of the oxygen storage tank is assumed to be equivalent to the static pressure due to 700 feet of sea water. The operating pressure of oxygen storage will be 16.7 psia. Liquid ammonia will be stored at 167 psia and 85° F.

Most of our detailed assumptions were design bases which have been verified in the course of design. The major exception to this is the efficiency

of the Scrubbing Column. We have assumed that this unit will approach true differential condensation in operation. If it does not, the reflux ratio, hence the quantity of oxygen to be compressed, will have to be increased.

Regarding the fuel cell itself we have conferred with General Electric, the supplier, and have made the following assumptions. The cell will operate at about 150° F. Feed gases must be saturated with water vapor at that temperature and 14.7 psia. Purge gases will also be saturated under the same conditions.

PROCESSES UTILIZING DISSOCIATION OF AMMONIA

Alternate II - Dissociation at High Pressure by Electrical Energy

Alternate II - Dissociation at High Pressure by Electrical Energy

General Description

This alternate is viewed as an intermediate stage in the development of a submarine hydrogen plant based on ammonia dissociation. It has not been studied intensively and will be described briefly with reference to Alternates I and III.

It differs from Alternate I chiefly in that the ammonia is cracked at, or near to, the pressure at which the dissociation products are separated. Thus, the greater part of the duty of the Crude Hydrogen Compressor is assumed by a much more compact liquid ammonia pump, which requires less power and makes less noise.

Although a high-pressure dissociator for this process is offered by at least one vendor, we are not aware of any industrial experience with this type of equipment. The nitriding and/or embrittlement which attack low-pressure dissociators would be more rapid at high pressure. Also the percentage of undissociated ammonia in the gas leaving the dissociator is expected to increase as the pressure is raised, if dissociation is limited by approach to equilibrium, as seems likely. It may be assumed that there will be little or no saving in dissociator volume. Also the cell off-gases will have to be compressed all the way to the pressure at which the dissociation products are separated, as in Alternate III. If the purge streams are compressed separately for additional safety, the compressors will occupy almost as much space as the Crude Hydrogen Compressor of Alternate I. It appears then that Alternate II offers little advantage in space over Alternate I.

Since it does consume less fuel cell power, however, the entire plant may be scaled down. To avoid detailed design calculations, the following approximations have been used;

1. The parasitic power load of Alternate I is reduced by deleting the requirements of the Crude Hydrogen Compressor and the Off-Gas Booster.
2. The requirements of the Off-Hydrogen and Off-Oxygen Boosters are added to the result to get a parasitic power load for Alternate II.
3. The hydrogen flow corresponding to this parasitic power is added to the design requirement of 70 lbs./hr. of net real hydrogen to get a total hydrogen output for Alternate II.
4. Using material balance ratios from Alternate I, the oxygen and ammonia requirements are calculated from the hydrogen output.
5. Finally, the plant volume is calculated from that of Alternate I by assuming volumes vary directly with hydrogen output.

PROCESSES UTILIZING DISSOCIATION OF AMMONIA

Alternate III - Dissociation at High Pressure by Chemical Energy

Alternate III

Dissociation of Ammonia at High Pressure by Chemical Energy

General Description

In this process the high parasitic power load of Alternate I is reduced in two ways: (1) combustion of ammonia in the process stream is used, instead of electrical energy, to supply the heat of dissociation; (2) dissociation is carried out at the pressure required to separate the products, as in Alternate II. At present we consider this the most efficient process that has been proposed. In view of its low power requirement, the combination of process and fuel cell should be more compact than that of any other process under consideration.

A firm design of this alternate would require bench scale and pilot development of a catalyst or catalysts and a dissociator. Since this design at present includes more uncertainty than Alternate I, we have not carried our material balances, energy balances and equipment designs as far as those of Alternate I. We have not sized or laid out the piping as in Alternate I, but the flows and conditions show that it would occupy less space in this case.

Process Description

The following description refers to Drawing No. FS-5-D (Item 7 in the Appendix to this report). As in Alternate I the process consists of dissociation of ammonia followed by condensation of the nitrogen produced. The hydrogen stream and the oxygen used in its purification are fed to the fuel cell.

Liquid ammonia is pumped to 340 psia in the Ammonia Pump. It is vaporized, preheated and fed to the Ammonia Dissociator. That part of the oxygen supply which is used for combustion is also pumped to separation pressure in the Liquid Oxygen Pump, vaporized, preheated and fed to the Ammonia Dissociator.

The dissociator is a two-stage, fixed-bed catalytic reactor. At the top of each bed the oxygen feed to that bed reacts completely with part of the ammonia and hydrogen, liberating heat which elevates the gas temperature. In the rest of the bed as the gas supplies the heat of dissociation of the remaining ammonia, the temperature falls again. This simplified two-step mechanism leads to the most conservative design.

On a dry basis the cracked ammonia contains about 0.1% residual ammonia and no oxygen. This stream is used to preheat ammonia and oxygen. On being cooled and finally chilled most of the water produced by combustion of ammonia condenses, along with the residual ammonia. The weak aqua ammonia drops out in the Separator and is wasted to the sea.

The crude hydrogen is dried and sent to the Cold Exchanger. Here it is cooled and partly condensed before going to the Scrubbing Column, which is actually a partial condenser, as in Alternate I. Liquid nitrogen is drawn off the bottom of the column. When the pressure is reduced to atmospheric, the hydrogen flashes off along with some nitrogen. The

remaining liquid nitrogen goes to storage in a vacant compartment of the liquid oxygen tank. The flash gas is re-compressed in the Off-Hydrogen Booster.

The overhead product of the Scrubbing Column is 90% hydrogen, 10% nitrogen, as in Alternate I. This is warmed to 26° F. in the Cold Exchanger and expanded to 24.7 psia. Here again it supplies power for the Oxygen Compressor and intermediate-level refrigeration for the plant before it is heated, saturated and fed to the fuel cells.

Two refrigerant oxygen streams are used, as in Alternate I. After compression of the low-level stream, they are combined, heated, saturated, and fed to the fuel cells.

In Alternate I the cell off-gases were mixed before recompression. This entailed an increase in the hydrogen purge to keep the oxygen concentration of the mixture outside the flammable range. We included backup instrumentation to insure safe operation.

In this alternate the purge gas streams are compressed separately and injected into the crude hydrogen ahead of the Dryers. Thus the purge streams can be sized for the minimum power requirement compatible with satisfactory operation of the fuel cell. The oxygen concentration is well below the flammable limit at all times. However, there is some loss of simplicity and compactness, which can be borne by this process.

Equipment Description and Arrangement

The arrangement of this equipment is shown on Drawing P-2-D (Item 9 in the Appendix). This indicates that the allowable space is exceeded, but by much less volume than Alternate I. There was insufficient time to study special designs of compressors; use of custom built units for these small loads might bring the total volume within the allowable space.

Here again much of the equipment is conventional and will not be described. Even liquid oxygen pumps, for example, are now in widespread use in industry and rocketry. The pressures in this case are not exceptional.

The Ammonia Dissociator is a completely new design. Since oxidation and dissociation are both carried out catalytically in this piece of equipment, there must be two catalysts or one catalyst that will accelerate both reactions. There is considerable published information on oxidation catalysts which indicates that the rate is high and that the side reaction which produces oxides of nitrogen may be minimized. The Research Laboratories of our company have developed data on dissociation catalysts which appear to be better at low pressure and low conversions than those in commercial use and to be effective in the presence of water vapor. These may also catalyze the oxidation reaction. Application of the above mentioned data to our fixed-bed reactor model has given us a preliminary reactor design.

This is a down flow reactor with two fixed beds in series. The shell is lined with refractory which can expand independently on heating. Tentatively the shell is made of carbon steel; if hot spots develop, it may be necessary to use alloys to reduce nitriding and embrittlement. The space between beds for injection of oxygen is filled with material to reduce the risk of explosion.

Although the Off-Gas Boosters are shown as separate machines, they are actually a multipurpose compressor driven by one motor. Incidentally, this is also true of the Crude Hydrogen Compressor and Off-Gas Booster of Alternate I. Machines of this type minimize space and maintenance requirements and are widely used in industry.

Utilities

The most attractive characteristic of this Alternate is its low power consumption:

<u>Equipment</u>	<u>Maximum Operating Load (KW)</u>
Liquid Oxygen Pump	0.165
Ammonia Pump	0.718
Crude Hydrogen Dryers	4.000
Off-Hydrogen Booster	19.300
Off-Oxygen Booster	0.718
H ₂ Saturator Bottoms Pump	0.773
O ₂ Saturator Bottoms Pump	0.347
Instrumentation	1.000
Lighting	<u>1.000</u>
Total	28.02

Assuming again that the fuel cells consume 0.1 lb. of hydrogen per KWH, the above process load requires the production of 2.80 lbs./hr. The remaining 98.0 lbs./hr. of the usable hydrogen output of this process exceeds by 40% the 70 lbs./hr. of net real hydrogen required for an acceptable design.

The water distribution is shown on Process Flowsheet FS-5-D (Item 7 in the Appendix). The cooling water requirement is 26.3 GPM at 95° F. In addition, 2.7 GPM of 160° F. water is used for saturating the gases going to the cells; and 0.28 GPM of condensate from the process is wasted to the sea as dilute aqua ammonia.

Instrumentation and Manpower

The proposed instrumentation is shown on Engineering Flowsheet FS-4-D. As before, the control point to be re-set with change in load is the ammonia flow rate. The remaining adjustments follow automatically.

In this case, the temperatures in the Dissociator are maintained by changes in the flow rate of oxygen to the unit and to the bottom bed. Otherwise, the major process instrumentation follows the pattern of Alternate I.

Exact residence time has not been calculated, since we have not firmly sized the equipment or piping. It is less than the 50 seconds calculated for Alternate I, largely because the Dissociator is smaller. For the same reason the hydrogen inventory is less than 350 cubic feet. The panel dimensions, instrumentation types, and operator manpower are the same as those given for Alternate I above.

Cost Estimate

The installed cost of this plant would be \$515,000, including contingency. The bases of this estimate are the same as those for Alternate I, with one addition. We have assumed the success of a development program without estimating its cost. Under Future Program we have outlined the development work involved; details will be furnished on request.

Assumptions

All of the assumptions listed for Alternate I, except those for the Dissociator, apply to Alternate III. We have indicated the process assumptions for the Dissociator under Equipment Description and Arrangement: available low pressure and low conversion data may be applied to operation at high pressure and high conversion; a single catalyst will accelerate both reactions or the added volume for a separate oxidation catalyst is negligible; under the chosen conditions the extent of the side reactions leading to oxides of nitrogen is negligible.

The mechanical design limitations for this Dissociator are much less stringent than those for the Dissociator of Alternate I. Here the design temperature of the pressure vessel is far below the reaction temperature, since the process heat is not transferred through it. This allows a higher working strength and reduces the risk of attack by the process gases. The insulation may be supported on the lower head of the shell without being tied to it, thus reducing the transmittal of shock loads to it. Therefore, the assumption that this unit can be designed to meet the shock test is less questionable than it is for Alternate I.

FUTURE PROGRAM

FUTURE PROGRAMS

Generation of hydrogen for submarine propulsion by decomposition of ammonia is indicated by this study to be feasible, using any one of the three processes discussed in this report. These processes have several items of equipment and instrumentation in common. Therefore, it is possible to design, procure and test the common equipment while other items are being developed. Using this possibility should enable us to reduce the time required to test the fuel cell installation.

The following programs to begin at the same time are suggested. Program No. 2 is considered marginal and may be dropped without affecting performance of Program No. 3, which is considered the most promising one.

1. Begin firm design of the equipment to supply hydrogen by Alternate I. Procure and test the individual items on a test bed and modify where necessary to withstand shock and minimize noise.
2. Design, build and operate a pilot dissociator for Alternate II. If this is demonstrated successfully before program 1 is completed, design and purchase a full scale pressure dissociator. Re-design associated process equipment only where necessary, converting the plant design to Alternate II.
3. Begin bench scale and pilot plant studies of the dissociator of Alternate III. Depending on the time required this program would fit in with the previous ones as follows:

- a. If piloting is completed successfully before programs 1 and 2 are completed, the plant design should be changed where necessary to convert it to Alternate III.
- b. If piloting is completed successfully after Alternate I or II is demonstrated, the installed plant should be modified to Alternate III.

The following subjects would be investigated in the laboratory and pilot plant:

1. Effect of changes in pressure, temperature and concentration on catalyst activity.
2. Relative rates of ammonia cracking vs. ammonia-hydrogen oxidation.
3. Catalyst life and mechanical integrity under the high pressure and temperature conditions.
4. Materials of construction and dissociator design details.
5. Explosive limits in the ammonia-hydrogen-oxygen-water vapor system under the operating conditions.

Details of the development program are available if required.

BIBLIOGRAPHY


BIBLIOGRAPHY

1. Andrussov, L. - Z. Angew. Chem., 39, 321-332 (1926).
2. Andrussov, L. - ibid., 40, 166-174 (1927).
3. Andrussov, L. - Ber., 60, 2005-2018 (1927).
4. Andrussov, L. - Bull. Soc. Chim. France, 5 18, 45-50 (1951).
5. Arentzen, E. S. and P. Mandel - Trans. Soc. Naval Architects & Marine Engineers, 68, 622-692 (1960).
6. Ayen, R. J. and M. S. Peters - I.E.C. Process Design and Development, 1, No. 3, 204-7 (7/62).
7. Bodenstein, M. - Z. Angew. Chem., 40, 174-7 (1927).
8. Cronan, C. S. - Chem. Eng., 54-5 (8/22/60).
9. Johnson, V. J. and R. B. Stewart (Editors) - A Compendium of the Properties of Materials at Low Temperatures (Phase I, Part I, II, and III; Phase II), WADD Technical Reports, 60-56, Parts I, II, III and IV.
10. MIL-S-901B (Navy) Shockproof Equipment, Class HI (High Impact), Shipboard Application, Tests For, incl. Amendment 3 (9/16/58).
11. MIL-STD-740 (Ships) - Noise Measurements of Shipboard Machinery and Equipment (2/6/61).
12. MIL-E-22843 (Ships) - Equipment, Low Noise Level, (Naval Shipboard Use) (3/15/61).
13. Submarine, The - NAVPERS 16160-B


APPENDIX


APPENDIX


<u>Item</u>		<u>Drawing No.</u>
1	Electrical Energy for Dissociation - Process Flowsheet Alternate I	FS-1-D
2	Electrical Energy for Dissociation - Service Flowsheet Alternate I	FS-2-D
3	Electrical Energy for Dissociation - Engineering Flowsheet Alternate I	FS-3-D
4	Line Schedule for Engineering Flowsheet FS-3-D Alternate I	LS-1-B
5	Line Schedule for Engineering Flowsheet FS-3-D Alternate I	LS-2-B
6	Chemical Energy for Dissociation - Engineering Flowsheet Alternate III	FS-4-D
7	Chemical Energy for Dissociation - Process Flowsheet Alternate III	FS-5-D
8	Electrical Energy for Dissociation - General Arrangement of Equipment and Piping - Alternate I	P-1-D
9	Chemical Energy for Dissociation - General Arrangement of Equipment - Alternate III	P-2-D
10	Summary of Process Requirements and Outputs	
11	Drafting Standards and Symbols for Flow Diagrams	FS-6-D
12	Photograph of Model of Alternate I Installation (facing port)	
13	Photograph of Model of Alternate I Installation (facing starboard)	

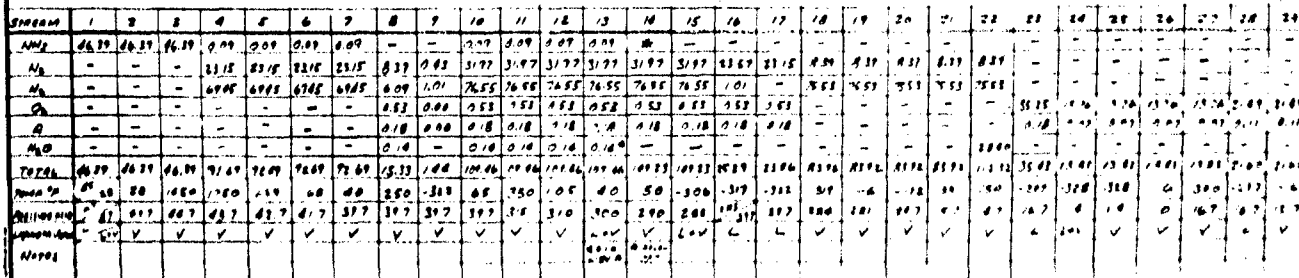

1940-1941		1942-1943		1944-1945		1946-1947		1948-1949		1950-1951		1952-1953		1954-1955		1956-1957		1958-1959		1960-1961		1962-1963		1964-1965		1966-1967		1968-1969		1970-1971		1972-1973		1974-1975		1976-1977		1978-1979		1980-1981		1982-1983		1984-1985		1986-1987		1988-1989		1990-1991		1992-1993		1994-1995		1996-1997		1998-1999		2000-2001		2002-2003		2004-2005		2006-2007		2008-2009		2010-2011		2012-2013		2014-2015		2016-2017		2018-2019		2020-2021		2022-2023		2024-2025		2026-2027		2028-2029		2030-2031		2032-2033		2034-2035		2036-2037		2038-2039		2040-2041		2042-2043		2044-2045		2046-2047		2048-2049		2050-2051		2052-2053		2054-2055		2056-2057		2058-2059		2060-2061		2062-2063		2064-2065		2066-2067		2068-2069		2070-2071		2072-2073		2074-2075		2076-2077		2078-2079		2080-2081		2082-2083		2084-2085		2086-2087		2088-2089		2090-2091		2092-2093		2094-2095		2096-2097		2098-2099		2100-2101		2102-2103		2104-2105		2106-2107		2108-2109		2110-2111		2112-2113		2114-2115		2116-2117		2118-2119		2120-2121		2122-2123		2124-2125		2126-2127		2128-2129		2130-2131		2132-2133		2134-2135		2136-2137		2138-2139		2140-2141		2142-2143		2144-2145		2146-2147		2148-2149		2150-2151		2152-2153		2154-2155		2156-2157		2158-2159		2160-2161		2162-2163		2164-2165		2166-2167		2168-2169		2170-2171		2172-2173		2174-2175		2176-2177		2178-2179		2180-2181		2182-2183		2184-2185		2186-2187		2188-2189		2190-2191		2192-2193		2194-2195		2196-2197		2198-2199		2200-2201		2202-2203		2204-2205		2206-2207		2208-2209		2210-2211		2212-2213		2214-2215		2216-2217		2218-2219		2220-2221		2222-2223		2224-2225		2226-2227		2228-2229		2230-2231		2232-2233		2234-2235		2236-2237		2238-2239		2240-2241		2242-2243		2244-2245		2246-2247		2248-2249		2250-2251		2252-2253		2254-2255		2256-2257		2258-2259		2260-2261		2262-2263		2264-2265		2266-2267		2268-2269		2270-2271		2272-2273		2274-2275		2276-2277		2278-2279		2280-2281		2282-2283		2284-2285		2286-2287		2288-2289		2290-2291		2292-2293		2294-2295		2296-2297		2298-2299		2300-2301		2302-2303		2304-2305		2306-2307		2308-2309		2310-2311		2312-2313		2314-2315		2316-2317		2318-2319		2320-2321		2322-2323		2324-2325		2326-2327		2328-2329		2330-2331		2332-2333		2334-2335		2336-2337		2338-2339		2340-2341		2342-2343		2344-2345		2346-2347		2348-2349		2350-2351		2352-2353		2354-2355		2356-2357		2358-2359		2360-2361		2362-2363		2364-2365		2366-2367		2368-2369		2370-2371		2372-2373		2374-2375		2376-2377		2378-2379		2380-2381		2382-2383		2384-2385		2386-2387		2388-2389		2390-2391		2392-2393		2394-2395		2396-2397		2398-2399		2400-2401		2402-2403		2404-2405		2406-2407		2408-2409		2410-2411		2412-2413		2414-2415		2416-2417		2418-2419		2420-2421		2422-2423		2424-2425		2426-2427		2428-2429		2430-2431		2432-2433		2434-2435		2436-2437		2438-2439		2440-2441		2442-2443		2444-2445		2446-2447		2448-2449		2450-2451		2452-2453		2454-2455		2456-2457		2458-2459		2460-2461		2462-2463		2464-2465		2466-2467		2468-2469		2470-2471		2472-2473		2474-2475		2476-2477		2478-2479		2480-2481		2482-2483		2484-2485		2486-2487		2488-2489		2490-2491		2492-2493		2494-2495		2496-2497		2498-2499		2500-2501		2502-2503		2504-2505		2506-2507		2508-2509		2510-2511		2512-2513		2514-2515		2516-2517		2518-2519		2520-2521		2522-2523		2524-2525		2526-2527		2528-2529		2530-2531		2532-2533		2534-2535		2536-2537		2538-2539		2540-2541		2542-2543		2544-2545		2546-2547		2548-2549		2550-2551		2552-2553		2554-2555		2556-2557		2558-2559		2560-2561		2562-2563		2564-2565		2566-2567		2568-2569		2570-2571		2572-2573		2574-2575		2576-2577		2578-2579		2580-2581		2582-2583		2584-2585		2586-2587		2588-2589		2590-2591		2592-2593		2594-2595		2596-2597		2598-2599		2600-2601		2602-2603		2604-2605		2606-2607		2608-2609		2610-2611		2612-2613		2614-2615		2616-2617		2618-2619		2620-2621		2622-2623		2624-2625		2626-2627		2628-2629		2630-2631		2632-2633		2634-2635		2636-2637		2638-2639		2640-2641		2642-2643		2644-2645		2646-2647		2648-2649		2650-2651		2652-2653		2654-2655		2656-2657		2658-2659		2660-2661		2662-2663		2664-2665		2666-2667		2668-2669		2670-2671		2672-2673		2674-2675		2676-2677		2678-2679		2680-2681		2682-2683		2684-2685		2686-2687		2688-2689		2690-2691		2692-2693		2694-2695		2696-2697		2698-2699		2700-2701		2702-2703		2704-2705		2706-2707		2708-2709		2710-2711		2712-2713		2714-2715		2716-2717		2718-2719		2720-2721		2722-2723		2724-2725		2726-2727		2728-2729		2730-2731		2732-2733		2734-2735		2736-2737		2738-2739		2740-2741		2742-2743		2744-2745		2746-2747		2748-2749		2750-2751		2752-2753		2754-2755		2756-2757		2758-2759		2760-2761		2762-2763		2764-2765		2766-2767		2768-2769		2770-2771		2772-2773		2774-2775		2776-2777		2778-2779		2780-2781		2782-2783		2784-2785		2786-2787		2788-2789		2790-2791		2792-2793		2794-2795		2796-2797		2798-2799		2800-2801		2802-2803		2804-2805		2806-2807		2808-2809		2810-2811		2812-2813		2814-2815		2816-2817		2818-2819		2820-2821		2822-2823		2824-2825		2826-2827		2828-2829		2830-2831		2832-2833		2834-2835		2836-2837		2838-2839		2840-2841		2842-2843		2844-2845		2846-2847		2848-2849		2850-2851		2852-2853		2854-2855		2856-2857		2858-2859		2860-2861		2862-2863		2864-2865		2866-2867		2868-2869		2870-2871		2872-2873		2874-2875		2876-2877		2878-2879		2880-2881		2882-2883		2884-2885		2886-2887		2888-2889		2890-2891		2892-2893		2894-2895		2896-2897		2898-2899		2900-2901		2902-2903		2904-2905		2906-2907		2908-2909		2910-2911		2912-2913		2914-2915		2916-2917		2918-2919		2920-2921		2922-2923		2924-2925		2926-2927		2928-2929		2930-2931		2932-2933		2934-2935		2936-2937		2938-2939		2940-2941		2942-2943		2944-2945		2946-2947		2948-2949		2950-2951		2952-2953		2954-2955		2956-2957		2958-2959		2960-2961		2962-2963		2964-2965		2966-2967		2968-2969		2970-2971		2972-2973		2974-2975		2976-2977		2978-2979		2980-2981		2982-2983		2984-2985		2986-2987		2988-2989		2990-2991		2992-2993		2994-2995		2996-2997		2998-2999		3000-3001		3002-3003		3004-3005		3006-3007		3008-3009		3010-3011		3012-3013		3014-3015		3016-3017		3018-3019		3020-3021		3022-3023		3024-3025		3026-3027		3028-3029		3030-3031		3032-3033		3034-3035		3036-3037		3038-3039		3040-3041		3042-3043		3044-3045		3046-3047		3048-3049		3050-3051		3052-3053		3054-3055		3056-3057		3058-3059		3060-3061		3062-3063		3064-3065		3066-3067		3068-3069		3070-3071		3072-3073		3074-3075		3076-3077		3078-3079		3080-3081		3082-3083		3084-3085		3086-3087		3088-3089		3090-3091		3092-3093		3094-3095		3096-3097		3098-3099		3100-3101		3102-3103		3104-3105		3106-3107		3108-3109		3110-3111		3112-3113		3114-3115		3116-3117		3118-3119		3120-3121		3122-3123		3124-3125		3126-3127		3128-3129		3130-3131		3132-3133		3134-3135		3136-3137		3138-3139		3140-3141		3142-3143		3144-3145		3146-3147		3148-3149		3150-3151		3152-3153		3154-3155		3156-3157		3158-3159		3160-3161		3162-3163		3164-3165		3166-3167		3168-3169		3170-3171		3172-3173		3174-3175		3176-3177		3178-3179		3180-3181		3182-3183		3184-3185		3186-3187		3188-3189		3190-3191		3192-3193		3194-3195		3196-3197		3198-3199		3200-3201		3202-3203		3204-3205		3206-3207		3208-3209		3210-3211		3212-3213		3214-3215		3216-3217		3218-3219		3220-3221		3222-3223		3224-3225		3226-3227		3228-3229		3230-3231		3232-3233		3234-3235		3236-3237		3238-3239		3240-3241		3242-3243		3244-3245		3246-3247		3248-3249		3250-3251		3252-3253		3254-3255		3256-3257		3258-3259		3260-3261		3262-3263		3264-3265		3266-3267		3268-3269		3270-3271		3272-3273		3274-3275		3276-3277		3278-3279		3280-3281		3282-3283		3284-3285		3286-3287		3288-3289		3290-3291		3292-3293		3294-3295		3296-3297		3298-3299		3300-3301		3302-3303		3304-3305		3306-3307		3308-3309		3310-3311		3312-3313		3314-3315		3316-3317		3318-3319		3320-3321		3322-3323		3324-3325		3326-3327		3328-3329		3330-3331		3332-3333		3334-3335		3336-3337		3338-3339		3340-3341		3342-3343		3344-3345		3346-3347		3348-3349		3350-3351		3352-3353		3354-3355		3356-3357		3358-3359		3360-3361		3362-3363		3364-3365		3366-3367		3368-3369		3370-3371		3372-3373		3374-3375		3376-3377		3378-3379		3380-3381		3382-3383		3384-3385		3386-3387		3388-3389		3390-3391		3392-3393		3394-3395	
-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--

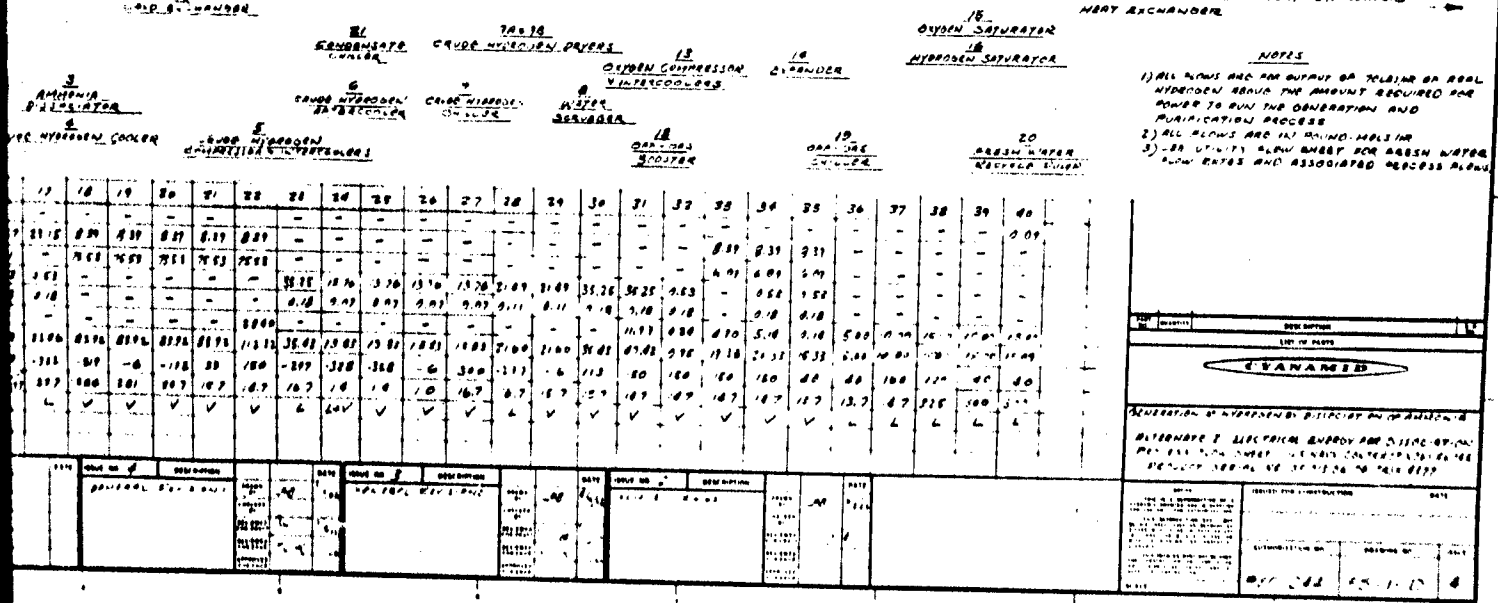

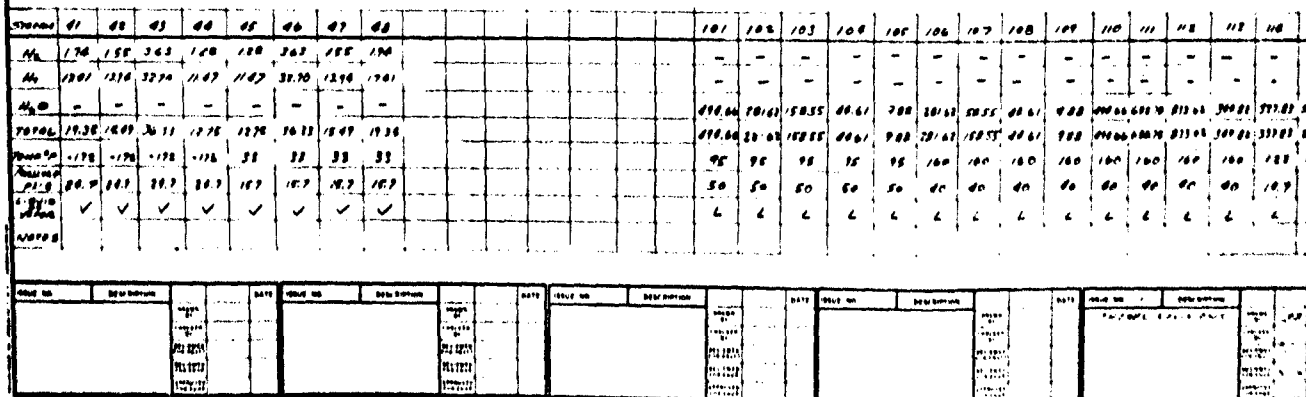

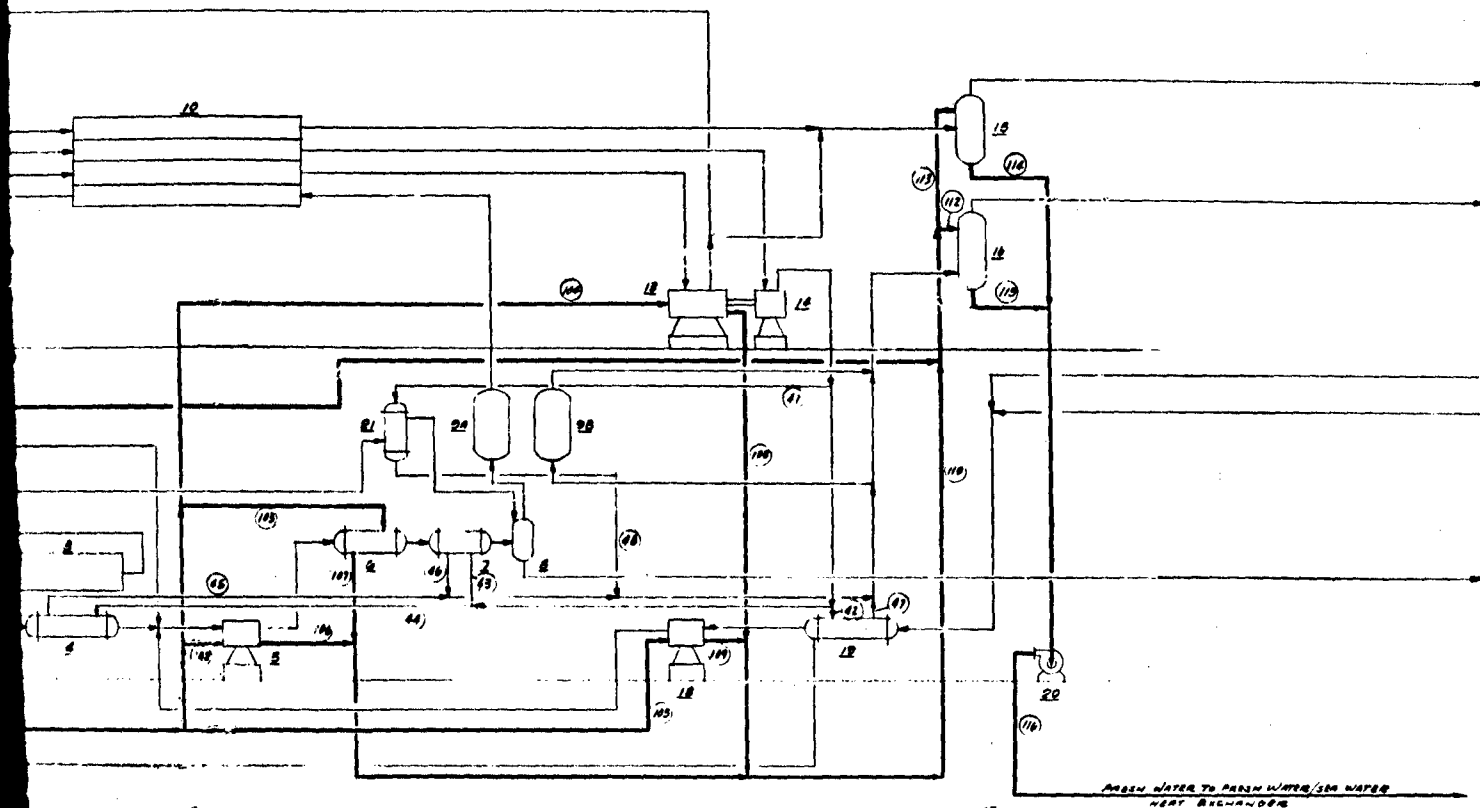

504 544000

21
COMPENSATION
CHARGE

74-90
SEYED HYAROON Deyars

128 13
OXYGEN COMPRESSION
9 INTERCOOLERS

14
EXPAND

15
OXYGEN SATURATOR

OXYGEN SATURATOR
14
HYDROGEN SATURATOR

ARMONIA
DISCOGRAPHY

WILSON GOODE

6200 N. 100th St 6200 N. 100th St
Edmonton Edmonton

2000
NT00000000

2000
2001
2002

07046006

12
Dr. J. S. S.
DOCTOR


12
RAF - ON
CHILLI

20
FRESH WATER
RECYCLE PUMP

NOTES

- 1) ALL FLOWS ARE FOR OUTPUT OF 7062 KW OF GPM
HYDROGEN ABOVE THE AMOUNT REQUIRED FOR
POWER TO RUN THE GENERATION AND
PURIFICATION PROCESS
- 2) ALL FLOWS ARE IN POUNDS MPIS/HR

[illegible][illegible][illegible]

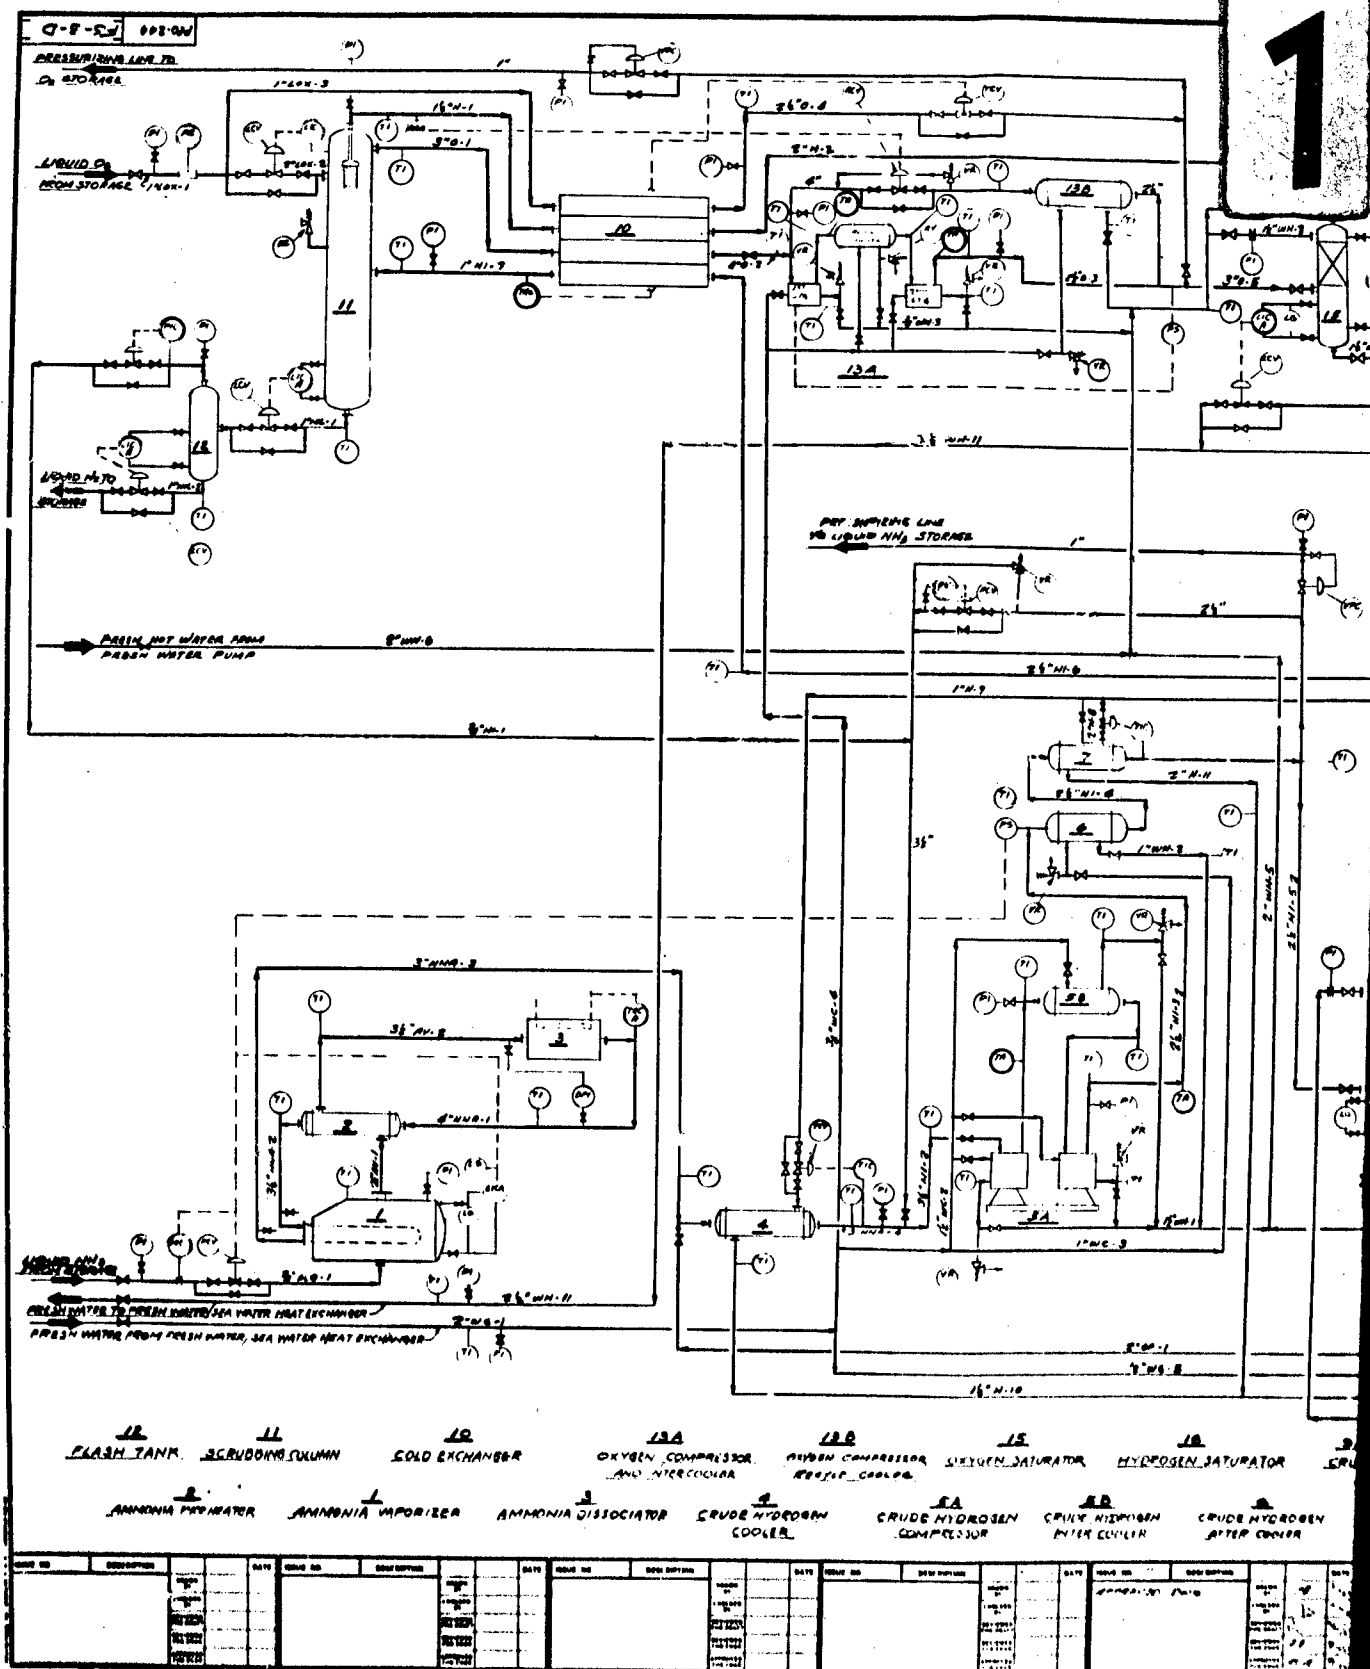

ALL STAIN. STL. TYPE 304
ALL ALUM ALLOY 3003

PROJECT ENGINEERING

LINE NO	FROM	TO	SIZE	MATL	INSUL	INSUL MATL	PIPE SPEC	PIPE CLEAN	TESTING	HYDRO PHS	AIR PHS	TRACED	STR
ALQ-1	NH ₃ STORE.	NH ₃ VAPORIZER	3"	S/S	NO	-	SCH 5S						
AV-1	NH ₃ VAPORIZER	NH ₃ PREHTR.	2"	S/S	YES		SCH 5S						
AV-2	NH ₃ PREHTR.	NH ₃ DISSOCIATOR	3"	S/S	YES								
HNA-1	NH ₃ DISSOCIATOR	NH ₃ PREHTR.	4"	S/S	YES								
HNA-2	NH ₃ PREHTR.	NH ₃ VAPORIZER	3"	S/S	YES		SCH 5S						
HNA-3	NH ₃ VAPORIZER	CRUDE H ₂ COOLER	3"	S/S	NO		SCH 5S						
HNA-4	CRUDE H ₂ COOLER	LINE HI-2	3"	S/S	YES		SCH 5S						
OF-1	OFF-GAS BOOSTER	CRUDE HYD. COOLER	2"	S/S	YES		SCH 10S						
HI-1	FLASH TANK	LINE HI-2	3"	AL	YES		SCH 40						
HI-2	LINE HNA-4	CRUDE H ₂ COMP.	3"	S/S	YES		SCH 5S						
HI-3	CRUDE H ₂ COMP.	CRUDE H ₂ AFTER COOLER	2"	S/S	YES		SCH 10S						
HI-4	CRUDE H ₂ AFTER COOLER	CRUDE H ₂ CHILLER	2"	S/S	NO		SCH 10S						
HI-5	CRUDE H ₂ CHILLER	WATER SCRUBBER	2"	S/S	YES		SCH 10S						
HI-6	WATER SCRUBBER	COLD EXCH.	2"	S/S	YES		SCH 10S						
HI-7	COLD EXCH.	SCRUBBING COLUMN	1"	AL	YES		SCH 40						
NIL-1	SCRUBBING COLUMN	FLASH TANK	1"	AL	YES		SCH 40						
NIL-2	FLASH TANK	LIO. NITROGEN STORAGE	1"	AL	YES		SCH 40						
H-1	SCRUBBING COLUMN	COLD EXCH.	1"	AL	YES		SCH 40						
H-2	COLD EXCH.	EXPANDER	2"	S/S	YES		SCH 10S						
H-3	EXPANDER	LINES H-2, H-3, H-4 (DWG. LS-2-B)	2"	AL	YES		SCH 40						
H-4	H ₂ SATURATOR	H ₂ SATURATOR	3"	S/S	NO		SCH 5S						
H-5	H ₂ SATURATOR	FUEL CELL	4"	S/S	YES		SCH 5S						
LOX-1	LIQUID OXYGEN STORAGE	LINES LOX-2, LOX-3	1"	AL	YES		SCH 40						
LOX-2	LINE LOX-1	SCRUBBING TOWER	2"	AL	YES		SCH 40						
O-1	SCRUBBING TOWER	COLD EXCH.	3"	AL	YES		SCH 40						
O-2	COLD EXCH.	OXYGEN COMP.	4"	S/S	YES		SCH 5S						
O-3	OXY COMP.	LINE O-5	2"	S/S	YES		SCH 10S						
LOX-3	LINE LOX-1	COLD EXCH.	1"	AL	YES		SCH 40						
O-4	COLD EXCH.	LINE O-5	2"	S/S	YES		SCH 5S						
O-5	LINES O-3 & O-4	OXYGEN SATURATOR	3"	S/S	YES		SCH 5S						
O-6	OXYGEN SATURATOR	FUEL CELL	4"	S/S	YES		SCH 5S						
O-7	FUEL CELL	LINE OF-2	1"	S/S	YES		SCH 5S						
HI-8	FUEL CELL	LINE OF-2	2"	S/S	YES		SCH 5S						
OF-2	LINES O-7 & HI-8	OFF-GAS CHILLER	2"	S/S	YES		SCH 5S						
OF-3	OFF-GAS CHILLER	OFF-GAS BOOSTER	2"	S/S	YES		SCH 5S						

ISSUE	P	D											
MADE BY	JR	JO											
DRAWN BY	ST												
APPROVED BY													
DATE	7/15/64	7/20/64											

AMERICAN CYANAMID COMPANY
ENGINEERING & CONSTRUCTION DIVISION
NEW YORK, N.Y., U.S.A.

1

NG

ALL

TRACED

STRAINER

VENTED

DRAINS

**SLOPED
FOR
DRAINAGE**

SPECTACLE FLANGES

PIPE
SHEET

MILL CERTIFICATE

23

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

**PLAYING
IMP PRES**

MEDIUM
NAME: _____

PR	
TOTAL	

FLOW

PG	VISC
----	------

SERVICE

C

25 2318

2

YANAMID COMPANY
CONSTRUCTION DIVISION
NEW YORK, N.Y., U.S.A.

LINE SCHEDULE FOR
FLOW SHEET

1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26

100

1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 26

PGO-200

LS-1-F

RS-1-D

75-3-0

1-MINIMUM CORROSION ALLOWANCE USED IN DETERMINATION OF MINIMUM THICKNESS SHALL BE:
(a) FOR CARBON STEEL AND FERRITIC ALLOYS (LOW ALLOY STEEL)
(b) FOR AUSTENITIC OR STAINLESS STEEL ALLOYS, 0.030" SHALL BE USED
2-SPECIAL CONDITIONS MAY REQUIRE HIGHER CORROSION ALLOWANCE

S ENGINEERING

SPG	VISC	SERVICE FACTOR	OVER DESIGN FACTOR	CORROSION ALLOWANCE	LINE DATA										STREAM NO	SERVICE CLASS NO
															1	
															2	
															3	
															4	
															5	
															6	
															7	
															8	
															9	
															10	
															11	
															12	
															13	
															14	
															15	
															16	
															17	
															18	
															19	
															20	
															21	
															22	
															23	
															24	
															25	
															26	
															27	
															28	
															29	
															30	
															31	
															32	
															33	
															34	
															35	

3

ANCE USED IN DETERMINATION OF PIPE WALL THICKNESS SHALL BE AS FOLLOWS
 FERRITIC ALLOYS (LOW ALLOY STEEL) 0.030" SHALL BE USED.
 LESS STEEL ALLOYS, 0.030" SHALL BE USED
 REQUIRE HIGHER CORROSION ALLOWANCE IF SO NOTE THEM UNDER THIS COLUMN

LINE SCHEDULE FO

AUTHORIZATION NO	DRAWING NO
1250-244	LS-1-B

4

LINE DATA										STREAM NO	SERVICE CLASS NO	REMARKS
										1		
										2		
										3		
										4		
										5		
										6		
										7		
										8		
										9		
										10		
										11		
										12		
										13		
										14		
										15		
										16		
										17		
										18		
										19		
										20		
										21		
										22		
										23		
										24		
										25		
										26		
										27		
										28		
										29		
										30		
										31		
										32		
										33		
										34		
										35		

WALL THICKNESS SHALL BE AS FOLLOWS
 0.050" SHALL BE USED.
 IF SO NOTE THEM UNDER THIS COLUMN

LINE SCHEDULE FOR FLOW SHEET

AUTHORIZATION NO.	DRAWING NO.	REF FLOW SHEET NO.
1250-244	LS-1-B	1250-244

1

LIN
AUTHOR
150



LINE SCHEDULE FOR
FLOW SHEET

AUTHORIZATION NO. PEO-244	DISPATCH NO. -5-2-8	REF. FLOW SHEET NO. FS-1-D, FS-2-0 FS-3-D
------------------------------	------------------------	---

1-MINIMUM CORROSION ALLOWANCE USED IN DETERMINATION OF PIPE W
(a) FOR CARBON STEEL AND FERRITIC ALLOYS (LOW ALLOY STEEL) 0.005
(b) FOR AUSTENITIC OR STAINLESS STEEL ALLOYS, 0.030" SHALL BE US
2-SPECIAL CONDITIONS MAY REQUIRE HIGHER CORROSION ALLOWANCE IF

[illegible]

LINE SCHEDULE FOR
FL

AUTHORIZATION NO PCO-244	DRAWING NO LS-7-B	REV CS
-----------------------------	----------------------	-----------

4

LINE DATA

STREAM
NOSERVICE
CLASS
NO

REMARKS

36

37

38

39

40

41

42

43

44

45

46

47

48

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

A

- FS-1-D

X

- FS-2-D

Y

ALL THICKNESS SHALL BE AS FOLLOWS
DO NOT SHALL BE USED.
ED
SO NOTE THEM UNDER THIS COLUMN

LINE SCHEDULE FOR
FLOW SHEET

AUTHORIZATION NO

PEO-244


DRAWING NO

LS-2-B

REF. FLOW SHEET NO

FS-1-D, FS-2-D
FS-3-D

2

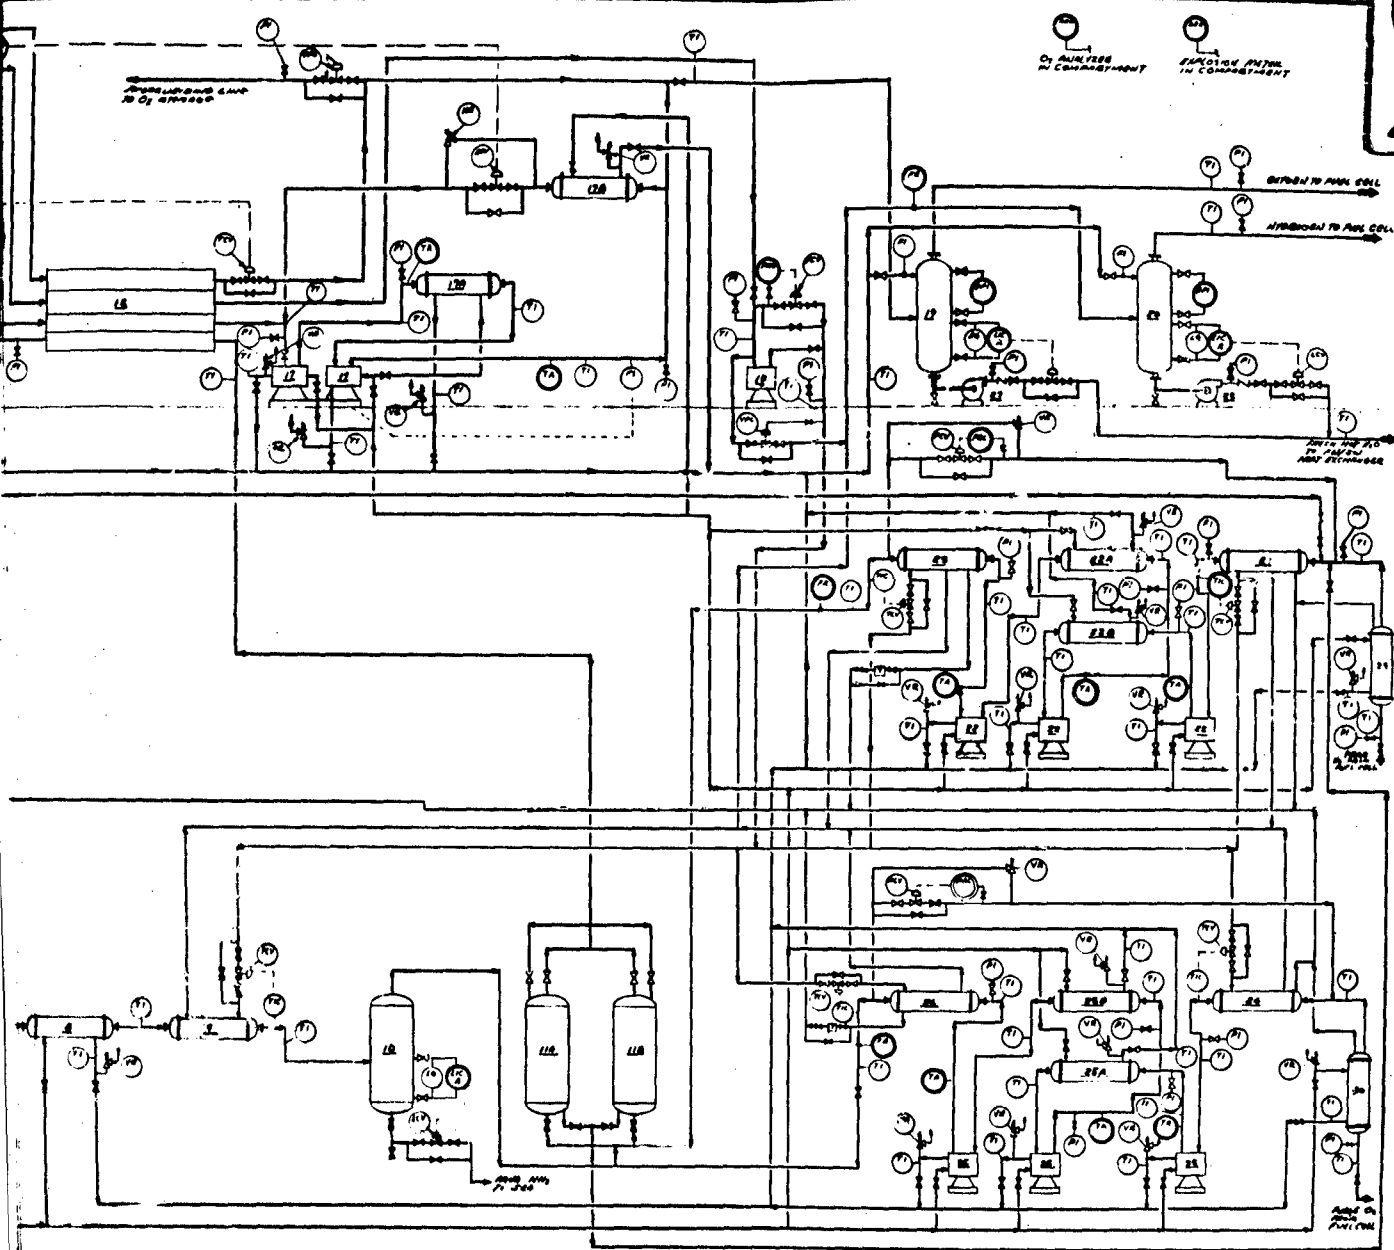


- 1. FEED TANKS
- 2. FEED TANKS
- 16. FEED TANKS
- 17A. FEED TANKS
- 17B. FEED TANKS
- 18. FEED TANKS
- 19. FEED TANKS
- 20. FEED TANKS
- 21. FEED TANKS
- 22. FEED TANKS
- 23. FEED TANKS
- 24. FEED TANKS
- 25. FEED TANKS
- 26. FEED TANKS
- 27. FEED TANKS
- 28. FEED TANKS
- 29. FEED TANKS
- 30. FEED TANKS
- 31. FEED TANKS
- 32. FEED TANKS
- 33. FEED TANKS
- 34. FEED TANKS
- 35. FEED TANKS
- 36. FEED TANKS
- 37. FEED TANKS
- 38. FEED TANKS
- 39. FEED TANKS
- 40. FEED TANKS
- 41. FEED TANKS
- 42. FEED TANKS
- 43. FEED TANKS
- 44. FEED TANKS
- 45. FEED TANKS
- 46. FEED TANKS
- 47. FEED TANKS
- 48. FEED TANKS
- 49. FEED TANKS
- 50. FEED TANKS
- 51. FEED TANKS
- 52. FEED TANKS
- 53. FEED TANKS
- 54. FEED TANKS
- 55. FEED TANKS
- 56. FEED TANKS
- 57. FEED TANKS
- 58. FEED TANKS
- 59. FEED TANKS
- 60. FEED TANKS
- 61. FEED TANKS
- 62. FEED TANKS
- 63. FEED TANKS
- 64. FEED TANKS
- 65. FEED TANKS
- 66. FEED TANKS
- 67. FEED TANKS
- 68. FEED TANKS
- 69. FEED TANKS
- 70. FEED TANKS
- 71. FEED TANKS
- 72. FEED TANKS
- 73. FEED TANKS
- 74. FEED TANKS
- 75. FEED TANKS
- 76. FEED TANKS
- 77. FEED TANKS
- 78. FEED TANKS
- 79. FEED TANKS
- 80. FEED TANKS
- 81. FEED TANKS
- 82. FEED TANKS
- 83. FEED TANKS
- 84. FEED TANKS
- 85. FEED TANKS
- 86. FEED TANKS
- 87. FEED TANKS
- 88. FEED TANKS
- 89. FEED TANKS
- 90. FEED TANKS
- 91. FEED TANKS
- 92. FEED TANKS
- 93. FEED TANKS
- 94. FEED TANKS
- 95. FEED TANKS
- 96. FEED TANKS
- 97. FEED TANKS
- 98. FEED TANKS
- 99. FEED TANKS
- 100. FEED TANKS

NOTE: PUMP SIZE, IN GENERAL, ARE SMALL TO BE SMALLER THAN IN ALTERNATE E. PUMP SIZE IS 2.0. PUMP MATERIALS ON EQUIPMENT ARE STEEL, TO ALUMINUM E. 322. DEVICES 1.1.1.1 AND 1.1.1.1

DESCRIPTION LOT OF DATA CYANIDE SEPARATION OF HYDROGEN BY DISSOCIATION OF AMMONIA APPROXIMATE CHEMICAL ENERGY FOR DISSOCIATION APPROXIMATE FLOW SHEET. US NAVY CONTRACT NO. 13000 PROJECT SERIAL NO. 25-03-00-00 TASK 4577	
DATE 1940-01-01	DATE 1940-01-01
SYNTHESIS NO. 190-010	SYNTHESIS NO. 190-010

REVISION	DATE	DESCRIPTION	REVISION	DATE	DESCRIPTION
1	1940-01-01	INITIAL DESIGN	2	1940-01-01	REVISION
3	1940-01-01	REVISION	4	1940-01-01	REVISION
5	1940-01-01	REVISION	6	1940-01-01	REVISION
7	1940-01-01	REVISION	8	1940-01-01	REVISION
9	1940-01-01	REVISION	10	1940-01-01	REVISION
11	1940-01-01	REVISION	12	1940-01-01	REVISION
13	1940-01-01	REVISION	14	1940-01-01	REVISION
15	1940-01-01	REVISION	16	1940-01-01	REVISION
17	1940-01-01	REVISION	18	1940-01-01	REVISION
19	1940-01-01	REVISION	20	1940-01-01	REVISION
21	1940-01-01	REVISION	22	1940-01-01	REVISION
23	1940-01-01	REVISION	24	1940-01-01	REVISION
25	1940-01-01	REVISION	26	1940-01-01	REVISION
27	1940-01-01	REVISION	28	1940-01-01	REVISION
29	1940-01-01	REVISION	30	1940-01-01	REVISION
31	1940-01-01	REVISION	32	1940-01-01	REVISION
33	1940-01-01	REVISION	34	1940-01-01	REVISION
35	1940-01-01	REVISION	36	1940-01-01	REVISION
37	1940-01-01	REVISION	38	1940-01-01	REVISION
39	1940-01-01	REVISION	40	1940-01-01	REVISION
41	1940-01-01	REVISION	42	1940-01-01	REVISION
43	1940-01-01	REVISION	44	1940-01-01	REVISION
45	1940-01-01	REVISION	46	1940-01-01	REVISION
47	1940-01-01	REVISION	48	1940-01-01	REVISION
49	1940-01-01	REVISION	50	1940-01-01	REVISION
51	1940-01-01	REVISION	52	1940-01-01	REVISION
53	1940-01-01	REVISION	54	1940-01-01	REVISION
55	1940-01-01	REVISION	56	1940-01-01	REVISION
57	1940-01-01	REVISION	58	1940-01-01	REVISION
59	1940-01-01	REVISION	60	1940-01-01	REVISION
61	1940-01-01	REVISION	62	1940-01-01	REVISION
63	1940-01-01	REVISION	64	1940-01-01	REVISION
65	1940-01-01	REVISION	66	1940-01-01	REVISION
67	1940-01-01	REVISION	68	1940-01-01	REVISION
69	1940-01-01	REVISION	70	1940-01-01	REVISION
71	1940-01-01	REVISION	72	1940-01-01	REVISION
73	1940-01-01	REVISION	74	1940-01-01	REVISION
75	1940-01-01	REVISION	76	1940-01-01	REVISION
77	1940-01-01	REVISION	78	1940-01-01	REVISION
79	1940-01-01	REVISION	80	1940-01-01	REVISION
81	1940-01-01	REVISION	82	1940-01-01	REVISION
83	1940-01-01	REVISION	84	1940-01-01	REVISION
85	1940-01-01	REVISION	86	1940-01-01	REVISION
87	1940-01-01	REVISION	88	1940-01-01	REVISION
89	1940-01-01	REVISION	90	1940-01-01	REVISION
91	1940-01-01	REVISION	92	1940-01-01	REVISION
93	1940-01-01	REVISION	94	1940-01-01	REVISION
95	1940-01-01	REVISION	96	1940-01-01	REVISION
97	1940-01-01	REVISION	98	1940-01-01	REVISION
99	1940-01-01	REVISION	100	1940-01-01	REVISION

2

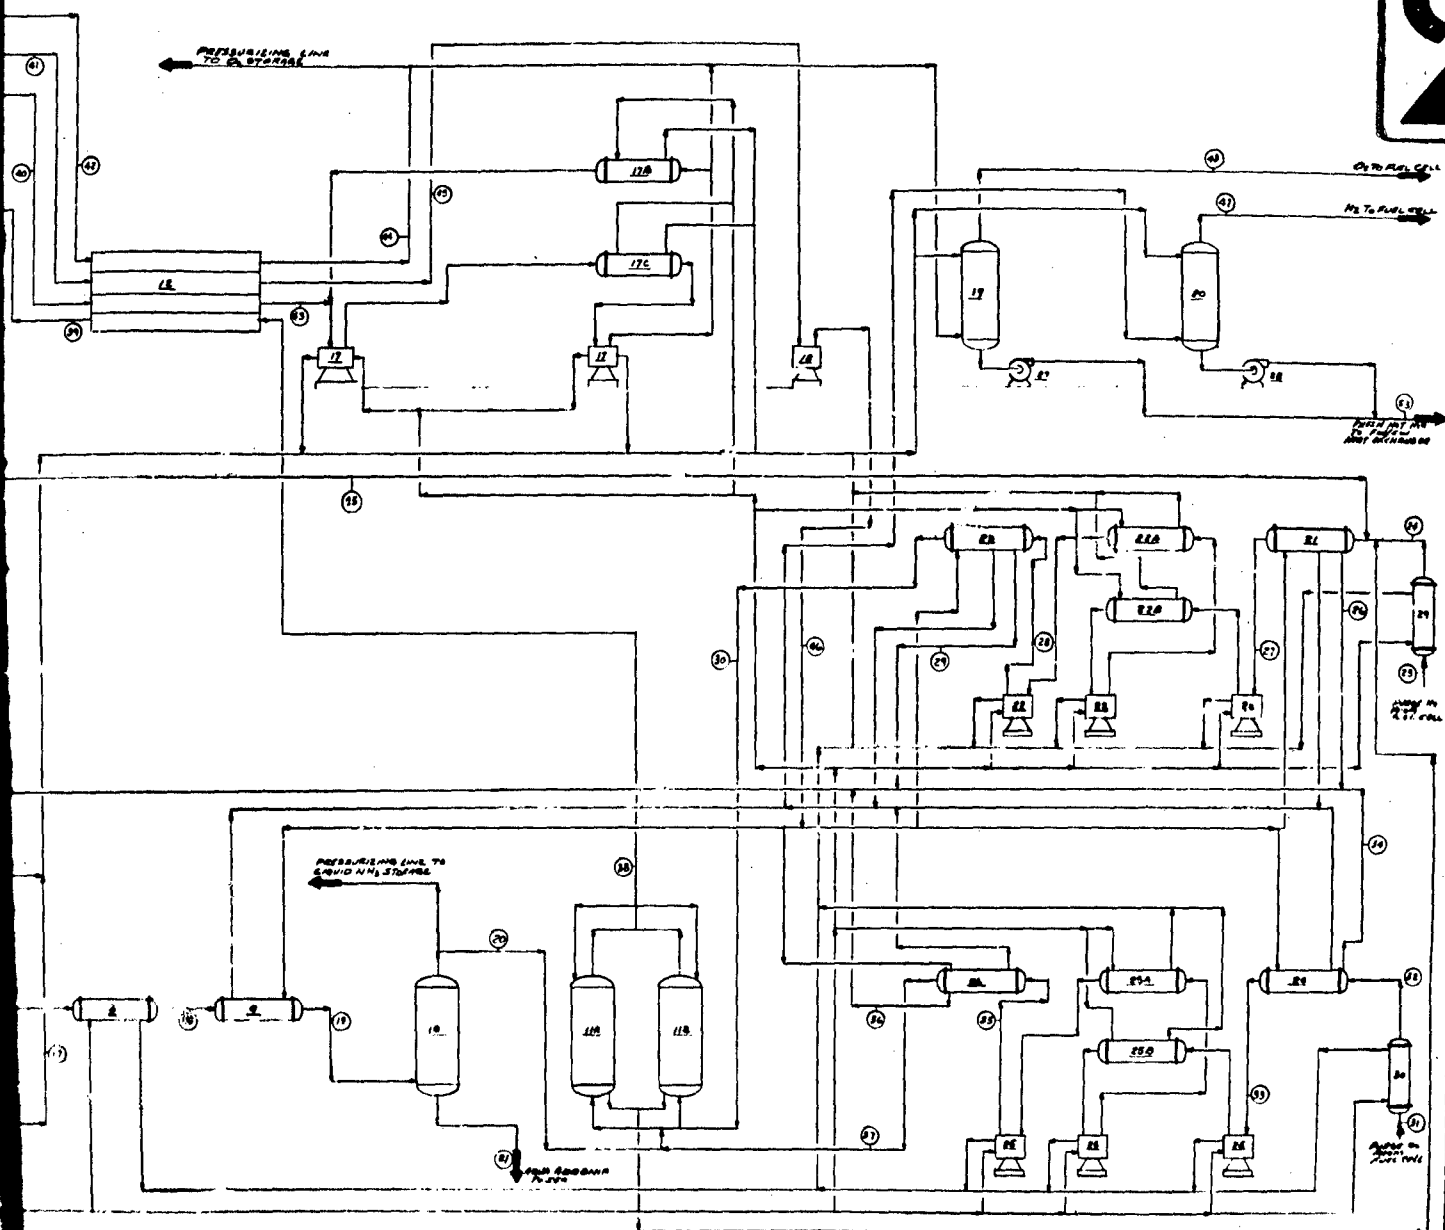

- 1. COND. THERMOP. COOLING
- 2. COND. THERMOP. COOLING
- 3. COND. THERMOP. COOLING
- 4. COND. THERMOP. COOLING
- 5. COND. THERMOP. COOLING
- 6. COND. THERMOP. COOLING
- 7. COND. THERMOP. COOLING
- 8. COND. THERMOP. COOLING
- 9. COND. THERMOP. COOLING
- 10. COND. THERMOP. COOLING
- 11. COND. THERMOP. COOLING
- 12. COND. THERMOP. COOLING
- 13. COND. THERMOP. COOLING
- 14. COND. THERMOP. COOLING
- 15. COND. THERMOP. COOLING
- 16. COND. THERMOP. COOLING
- 17. COND. THERMOP. COOLING
- 18. COND. THERMOP. COOLING
- 19. COND. THERMOP. COOLING
- 20. COND. THERMOP. COOLING
- 21. COND. THERMOP. COOLING
- 22. COND. THERMOP. COOLING
- 23. COND. THERMOP. COOLING
- 24. COND. THERMOP. COOLING
- 25. COND. THERMOP. COOLING
- 26. COND. THERMOP. COOLING
- 27. COND. THERMOP. COOLING
- 28. COND. THERMOP. COOLING
- 29. COND. THERMOP. COOLING
- 30. COND. THERMOP. COOLING

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

DATE	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION	DATE	DESCRIPTION

1. COND. THERMOP. COOLING

2. COND. THERMOP. COOLING

3. COND. THERMOP. COOLING

4. COND. THERMOP. COOLING

5. COND. THERMOP. COOLING

6. COND. THERMOP. COOLING

7. COND. THERMOP. COOLING

8. COND. THERMOP. COOLING

9. COND. THERMOP. COOLING

10. COND. THERMOP. COOLING

11. COND. THERMOP. COOLING

12. COND. THERMOP. COOLING

13. COND. THERMOP. COOLING

14. COND. THERMOP. COOLING

15. COND. THERMOP. COOLING

16. COND. THERMOP. COOLING

17. COND. THERMOP. COOLING

18. COND. THERMOP. COOLING

19. COND. THERMOP. COOLING

20. COND. THERMOP. COOLING

21. COND. THERMOP. COOLING

22. COND. THERMOP. COOLING

23. COND. THERMOP. COOLING

24. COND. THERMOP. COOLING

25. COND. THERMOP. COOLING


26. COND. THERMOP. COOLING

27. COND. THERMOP. COOLING


28. COND. THERMOP. COOLING

29. COND. THERMOP. COOLING

30. COND. THERMOP. COOLING

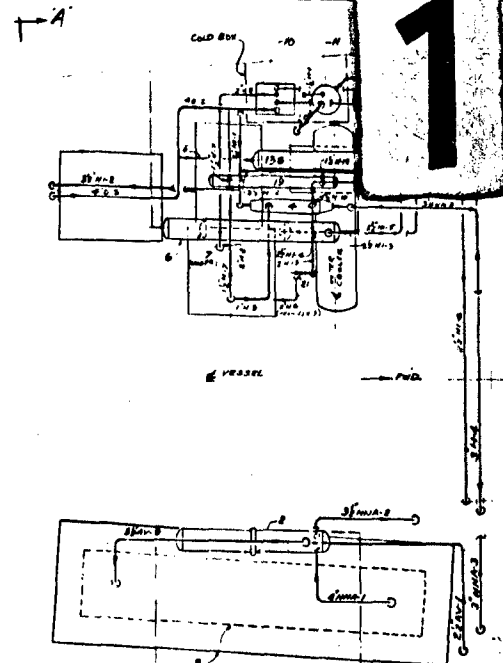


PLAN VIEW U-2
UPPER LEVEL

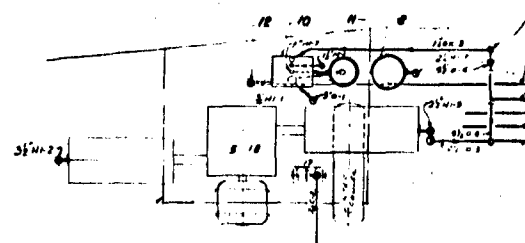


PLAN VIEW - C
 100' 0" 15' 0"

[illegible]

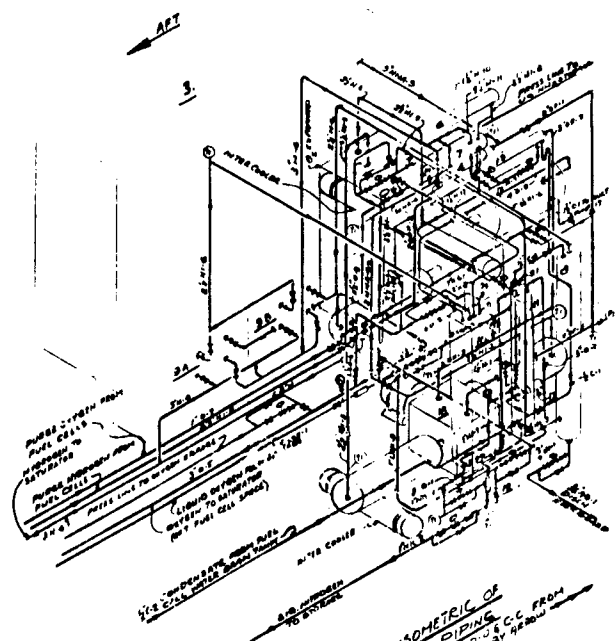

PART ISOMETRIC OF
 PROCESS PIPING
 100% AT PLANT FROM DUSCC FROM
 PORT SIDE 73 INDICATED 81 4200

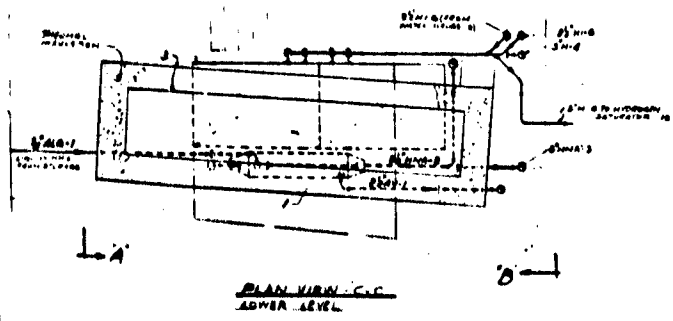

- [illegible]


ITEM 10
SUMMARY OF PROCESS REQUIREMENTS & OUTPUTS

<u>Alternate</u>	<u>I</u>	<u>II</u>	<u>III</u>
Usable Hydrogen Produced, lbs/hr. (Note A)	140.0	118.4	100.8
Parasitic Power Load, KW	615.8	484.3	28.0
Net Real Hydrogen Produced, lbs/hr. (Note B)	78.4	70.0	98.0
Ammonia Usage (lbs. NH_3 /lb Net Real H_2)	10.1	9.54	6.96
Oxygen Usage (lbs. O_2 /lb Net Real H_2)	14.5	13.6	9.9
Total Equipment Weight, tons (estimated)	60	-----	25
Gross Plant Volume, cu. ft.	1480	1252	1295
Fuel Cell Volume for Parasitic Power, cu. ft. (Note C)	205.2	161.4	9.3
Cooling Water Requirement, GPM	17.8	-----	26.3
Estimated Start-up Time, hrs.	8	8	2
Additional Load to Air Conditioning Refrigeration Requirements, Tons	11	-----	0
Fuel Requirements, BTU/Net KWH			
Full Load	8081	-----	5568
1/2 Load	12062	-----	5732
1/4 Load	20569	-----	6090
Fuel Costs, ¢/Net KWH (Note D)			
Full Load	4.04	-----	2.78
1/2 Load	5.06	-----	2.86
1/4 Load	10.28	-----	3.04
Oxygen Costs, ¢/Net KWH (Note D)			
Full Load	4.35	-----	2.97
1/2 Load	5.44	-----	3.05
1/4 Load	11.07	-----	3.24

- Notes: A. "Usable hydrogen" is real (100%) hydrogen fed to the cell less real hydrogen purged from the cell.
 B. "Net real hydrogen" is usable hydrogen less hydrogen required for the parasitic power load, assuming 0.1 lbs. of real hydrogen required per KWH produced by the cell.
 C. This assumes 3 KW/cubic foot of cell volume.
 D. Fuel and Oxygen Costs are based on \$80.00/ton ammonia and \$60.00/ton oxygen.

1	AMMONIUM AIR (WT)	1	HYDROGEN	1	HYDROGEN	1	HYDROGEN
2	AMMONIUM AIR (WT)	2	HYDROGEN	2	HYDROGEN	2	HYDROGEN
3	AMMONIUM AIR (WT)	3	HYDROGEN	3	HYDROGEN	3	HYDROGEN
4	AMMONIUM AIR (WT)	4	HYDROGEN	4	HYDROGEN	4	HYDROGEN
5	AMMONIUM AIR (WT)	5	HYDROGEN	5	HYDROGEN	5	HYDROGEN
6	AMMONIUM AIR (WT)	6	HYDROGEN	6	HYDROGEN	6	HYDROGEN
7	AMMONIUM AIR (WT)	7	HYDROGEN	7	HYDROGEN	7	HYDROGEN
8	AMMONIUM AIR (WT)	8	HYDROGEN	8	HYDROGEN	8	HYDROGEN
9	AMMONIUM AIR (WT)	9	HYDROGEN	9	HYDROGEN	9	HYDROGEN
10	AMMONIUM AIR (WT)	10	HYDROGEN	10	HYDROGEN	10	HYDROGEN
11	AMMONIUM AIR (WT)	11	HYDROGEN	11	HYDROGEN	11	HYDROGEN
12	AMMONIUM AIR (WT)	12	HYDROGEN	12	HYDROGEN	12	HYDROGEN
13	AMMONIUM AIR (WT)	13	HYDROGEN	13	HYDROGEN	13	HYDROGEN
14	AMMONIUM AIR (WT)	14	HYDROGEN	14	HYDROGEN	14	HYDROGEN
15	AMMONIUM AIR (WT)	15	HYDROGEN	15	HYDROGEN	15	HYDROGEN
16	AMMONIUM AIR (WT)	16	HYDROGEN	16	HYDROGEN	16	HYDROGEN
17	AMMONIUM AIR (WT)	17	HYDROGEN	17	HYDROGEN	17	HYDROGEN
18	AMMONIUM AIR (WT)	18	HYDROGEN	18	HYDROGEN	18	HYDROGEN
19	AMMONIUM AIR (WT)	19	HYDROGEN	19	HYDROGEN	19	HYDROGEN
20	AMMONIUM AIR (WT)	20	HYDROGEN	20	HYDROGEN	20	HYDROGEN
21	AMMONIUM AIR (WT)	21	HYDROGEN	21	HYDROGEN	21	HYDROGEN
22	AMMONIUM AIR (WT)	22	HYDROGEN	22	HYDROGEN	22	HYDROGEN
23	AMMONIUM AIR (WT)	23	HYDROGEN	23	HYDROGEN	23	HYDROGEN
24	AMMONIUM AIR (WT)	24	HYDROGEN	24	HYDROGEN	24	HYDROGEN
25	AMMONIUM AIR (WT)	25	HYDROGEN	25	HYDROGEN	25	HYDROGEN
26	AMMONIUM AIR (WT)	26	HYDROGEN	26	HYDROGEN	26	HYDROGEN
27	AMMONIUM AIR (WT)	27	HYDROGEN	27	HYDROGEN	27	HYDROGEN
28	AMMONIUM AIR (WT)	28	HYDROGEN	28	HYDROGEN	28	HYDROGEN
29	AMMONIUM AIR (WT)	29	HYDROGEN	29	HYDROGEN	29	HYDROGEN
30	AMMONIUM AIR (WT)	30	HYDROGEN	30	HYDROGEN	30	HYDROGEN
31	AMMONIUM AIR (WT)	31	HYDROGEN	31	HYDROGEN	31	HYDROGEN
32	AMMONIUM AIR (WT)	32	HYDROGEN	32	HYDROGEN	32	HYDROGEN
33	AMMONIUM AIR (WT)	33	HYDROGEN	33	HYDROGEN	33	HYDROGEN
34	AMMONIUM AIR (WT)	34	HYDROGEN	34	HYDROGEN	34	HYDROGEN
35	AMMONIUM AIR (WT)	35	HYDROGEN	35	HYDROGEN	35	HYDROGEN
36	AMMONIUM AIR (WT)	36	HYDROGEN	36	HYDROGEN	36	HYDROGEN
37	AMMONIUM AIR (WT)	37	HYDROGEN	37	HYDROGEN	37	HYDROGEN
38	AMMONIUM AIR (WT)	38	HYDROGEN	38	HYDROGEN	38	HYDROGEN
39	AMMONIUM AIR (WT)	39	HYDROGEN	39	HYDROGEN	39	HYDROGEN
40	AMMONIUM AIR (WT)	40	HYDROGEN	40	HYDROGEN	40	HYDROGEN
41	AMMONIUM AIR (WT)	41	HYDROGEN	41	HYDROGEN	41	HYDROGEN
42	AMMONIUM AIR (WT)	42	HYDROGEN	42	HYDROGEN	42	HYDROGEN
43	AMMONIUM AIR (WT)	43	HYDROGEN	43	HYDROGEN	43	HYDROGEN
44	AMMONIUM AIR (WT)	44	HYDROGEN	44	HYDROGEN	44	HYDROGEN
45	AMMONIUM AIR (WT)	45	HYDROGEN	45	HYDROGEN	45	HYDROGEN
46	AMMONIUM AIR (WT)	46	HYDROGEN	46	HYDROGEN	46	HYDROGEN
47	AMMONIUM AIR (WT)	47	HYDROGEN	47	HYDROGEN	47	HYDROGEN
48	AMMONIUM AIR (WT)	48	HYDROGEN	48	HYDROGEN	48	HYDROGEN
49	AMMONIUM AIR (WT)	49	HYDROGEN	49	HYDROGEN	49	HYDROGEN
50	AMMONIUM AIR (WT)	50	HYDROGEN	50	HYDROGEN	50	HYDROGEN
51	AMMONIUM AIR (WT)	51	HYDROGEN	51	HYDROGEN	51	HYDROGEN
52	AMMONIUM AIR (WT)	52	HYDROGEN	52	HYDROGEN	52	HYDROGEN
53	AMMONIUM AIR (WT)	53	HYDROGEN	53	HYDROGEN	53	HYDROGEN
54	AMMONIUM AIR (WT)	54	HYDROGEN	54	HYDROGEN	54	HYDROGEN
55	AMMONIUM AIR (WT)	55	HYDROGEN	55	HYDROGEN	55	HYDROGEN
56	AMMONIUM AIR (WT)	56	HYDROGEN	56	HYDROGEN	56	HYDROGEN
57	AMMONIUM AIR (WT)	57	HYDROGEN	57	HYDROGEN	57	HYDROGEN
58	AMMONIUM AIR (WT)	58	HYDROGEN	58	HYDROGEN	58	HYDROGEN
59	AMMONIUM AIR (WT)	59	HYDROGEN	59	HYDROGEN	59	HYDROGEN
60	AMMONIUM AIR (WT)	60	HYDROGEN	60	HYDROGEN	60	HYDROGEN
61	AMMONIUM AIR (WT)	61	HYDROGEN	61	HYDROGEN	61	HYDROGEN
62	AMMONIUM AIR (WT)	62	HYDROGEN	62	HYDROGEN	62	HYDROGEN
63	AMMONIUM AIR (WT)	63	HYDROGEN	63	HYDROGEN	63	HYDROGEN
64	AMMONIUM AIR (WT)	64	HYDROGEN	64	HYDROGEN	64	HYDROGEN
65	AMMONIUM AIR (WT)	65	HYDROGEN	65	HYDROGEN	65	HYDROGEN
66	AMMONIUM AIR (WT)	66	HYDROGEN	66	HYDROGEN	66	HYDROGEN
67	AMMONIUM AIR (WT)	67	HYDROGEN	67	HYDROGEN	67	HYDROGEN
68	AMMONIUM AIR (WT)	68	HYDROGEN	68	HYDROGEN	68	HYDROGEN
69	AMMONIUM AIR (WT)	69	HYDROGEN	69	HYDROGEN	69	HYDROGEN
70	AMMONIUM AIR (WT)	70	HYDROGEN	70	HYDROGEN	70	HYDROGEN
71	AMMONIUM AIR (WT)	71	HYDROGEN	71	HYDROGEN	71	HYDROGEN
72	AMMONIUM AIR (WT)	72	HYDROGEN	72	HYDROGEN	72	HYDROGEN
73	AMMONIUM AIR (WT)	73	HYDROGEN	73	HYDROGEN	73	HYDROGEN
74	AMMONIUM AIR (WT)	74	HYDROGEN	74	HYDROGEN	74	HYDROGEN
75	AMMONIUM AIR (WT)	75	HYDROGEN	75	HYDROGEN	75	HYDROGEN
76	AMMONIUM AIR (WT)	76	HYDROGEN	76	HYDROGEN	76	HYDROGEN
77	AMMONIUM AIR (WT)	77	HYDROGEN	77	HYDROGEN	77	HYDROGEN
78	AMMONIUM AIR (WT)	78	HYDROGEN	78	HYDROGEN	78	HYDROGEN
79	AMMONIUM AIR (WT)	79	HYDROGEN	79	HYDROGEN	79	HYDROGEN
80	AMMONIUM AIR (WT)	80	HYDROGEN	80	HYDROGEN	80	HYDROGEN
81	AMMONIUM AIR (WT)	81	HYDROGEN	81	HYDROGEN	81	HYDROGEN
82	AMMONIUM AIR (WT)	82	HYDROGEN	82	HYDROGEN	82	HYDROGEN
83	AMMONIUM AIR (WT)	83	HYDROGEN	83	HYDROGEN	83	HYDROGEN
84	AMMONIUM AIR (WT)	84	HYDROGEN	84	HYDROGEN	84	HYDROGEN
85	AMMONIUM AIR (WT)	85	HYDROGEN	85	HYDROGEN	85	HYDROGEN
86	AMMONIUM AIR (WT)	86	HYDROGEN	86	HYDROGEN	86	HYDROGEN
87	AMMONIUM AIR (WT)	87	HYDROGEN	87	HYDROGEN	87	HYDROGEN
88	AMMONIUM AIR (WT)	88	HYDROGEN	88	HYDROGEN	88	HYDROGEN
89	AMMONIUM AIR (WT)	89	HYDROGEN	89	HYDROGEN	89	HYDROGEN
90	AMMONIUM AIR (WT)	90	HYDROGEN	90	HYDROGEN	90	HYDROGEN
91	AMMONIUM AIR (WT)	91	HYDROGEN	91	HYDROGEN	91	HYDROGEN
92	AMMONIUM AIR (WT)	92	HYDROGEN	92	HYDROGEN	92	HYDROGEN
93	AMMONIUM AIR (WT)	93	HYDROGEN	93	HYDROGEN	93	HYDROGEN
94	AMMONIUM AIR (WT)	94	HYDROGEN	94	HYDROGEN	94	HYDROGEN
95	AMMONIUM AIR (WT)	95	HYDROGEN	95	HYDROGEN	95	HYDROGEN
96	AMMONIUM AIR (WT)	96	HYDROGEN	96	HYDROGEN	96	HYDROGEN
97	AMMONIUM AIR (WT)	97	HYDROGEN	97	HYDROGEN	97	HYDROGEN
98	AMMONIUM AIR (WT)	98	HYDROGEN	98	HYDROGEN	98	HYDROGEN
99	AMMONIUM AIR (WT)	99	HYDROGEN	99	HYDROGEN	99	HYDROGEN
100	AMMONIUM AIR (WT)	100	HYDROGEN	100	HYDROGEN	100	HYDROGEN

1



ANALYSIS		HYDROGEN CONCENTRATION	
AA	ANALYSIS ALARM	AA	HYDROGEN CONCENTRATION
AB	ANALYSIS CONTROLLER	AB	HYDROGEN CONCENTRATION CONTROLLER
AC	ANALYSIS CONTROLLER VALVE	AC	HYDROGEN CONCENTRATION CONTROLLER VALVE
AD	ANALYSIS ELEMENT	AD	HYDROGEN CONCENTRATION INDICATOR
AE	ANALYSIS INDICATOR	AE	HYDROGEN CONCENTRATION INDICATOR VALVE
AF	ANALYSIS RECORDER	AF	HYDROGEN CONCENTRATION INDICATOR VALVE
AG	ANALYSIS RECORDER CONTROLLER	AG	HYDROGEN CONCENTRATION INDICATOR VALVE
AH	ANALYSIS RECORDER TRANSMITTER	AG	HYDROGEN CONCENTRATION INDICATOR VALVE
CONDUCTIVITY		SPECIFIC GRAVITY OR DENSITY	
CA	CONDUCTIVITY ALARM	CA	SPECIFIC GRAVITY ALARM
CB	CONDUCTIVITY CONTROLLER	CB	SPECIFIC GRAVITY CONTROLLER
CC	CONDUCTIVITY CONTROLLER VALVE	CC	SPECIFIC GRAVITY CONTROLLER VALVE
CD	CONDUCTIVITY ELEMENT	CD	SPECIFIC GRAVITY INDICATOR
CE	CONDUCTIVITY INDICATOR	CE	SPECIFIC GRAVITY INDICATOR VALVE
CF	CONDUCTIVITY INDICATOR CONTROLLER	CF	SPECIFIC GRAVITY INDICATOR VALVE
CG	CONDUCTIVITY INDICATOR CONTROLLER VALVE	CG	SPECIFIC GRAVITY INDICATOR VALVE
CH	CONDUCTIVITY RECORDER	CH	SPECIFIC GRAVITY INDICATOR VALVE
CI	CONDUCTIVITY RECORDER CONTROLLER	CH	SPECIFIC GRAVITY INDICATOR VALVE
CJ	CONDUCTIVITY RECORDER TRANSMITTER	CH	SPECIFIC GRAVITY INDICATOR VALVE
FLOW		TEMPERATURE	
FA	FLOW ALARM	FA	TEMPERATURE ALARM
FB	FLOW CONTROLLER	FB	TEMPERATURE CONTROLLER
FC	FLOW CONTROLLER VALVE	FB	TEMPERATURE CONTROLLER VALVE
FD	FLOW CONTROL VALVE (PRESSURE)	FB	TEMPERATURE CONTROLLER VALVE
FE	FLOW ELEMENT (TEMPERATURE, PRESSURE, etc.)	FB	TEMPERATURE CONTROLLER VALVE
FF	FLOW INDICATING CONTROLLER	FB	TEMPERATURE CONTROLLER VALVE
FG	FLOW INDICATING CONTROLLER VALVE	FB	TEMPERATURE CONTROLLER VALVE
FH	FLOW MEASUREMENT CONTROLLER	FB	TEMPERATURE CONTROLLER VALVE
FI	FLOW SWITCH	FB	TEMPERATURE CONTROLLER VALVE
FJ	FLOW TRANSMITTER	FB	TEMPERATURE CONTROLLER VALVE
FK	FLOW TOTALIZER	FB	TEMPERATURE CONTROLLER VALVE
HUMIDITY		MISC VALVES	
HA	HUMIDITY ALARM	HA	MISC VALVE
HB	HUMIDITY CONTROLLER	HA	MISC VALVE
HC	HUMIDITY CONTROLLER VALVE	HA	MISC VALVE
HD	HUMIDITY INDICATOR	HA	MISC VALVE
HE	HUMIDITY INDICATOR CONTROLLER	HA	MISC VALVE
HF	HUMIDITY INDICATOR CONTROLLER VALVE	HA	MISC VALVE
HG	HUMIDITY RECORDER	HA	MISC VALVE
HH	HUMIDITY RECORDER CONTROLLER	HA	MISC VALVE
HI	HUMIDITY RECORDER TRANSMITTER	HA	MISC VALVE
TIME PROGRAM OR COUNTING		WEIGHT & FORCE	
IA	TIME PROGRAM CONTROLLER	IA	WEIGHT ALARM
IB	TIME PROGRAM CONTROLLER VALVE	IA	WEIGHT ALARM
IC	CLOCK	IA	WEIGHT ALARM
ID	TIME OF OPERATION RECORDER	IA	WEIGHT ALARM
IE	TIME OF OPERATION RECORDER VALVE	IA	WEIGHT ALARM
IF	OPERATION JOURNAL	IA	WEIGHT ALARM
SPEED		MISCELLANEOUS	
JA	SPEED ALARM	JA	MISCELLANEOUS
JB	SPEED CONTROLLER	JA	MISCELLANEOUS
JC	SPEED CONTROLLER VALVE	JA	MISCELLANEOUS
JD	SPEED INDICATOR	JA	MISCELLANEOUS
JE	SPEED INDICATOR CONTROLLER	JA	MISCELLANEOUS
JF	SPEED INDICATOR CONTROLLER VALVE	JA	MISCELLANEOUS
JG	SPEED RECORDER	JA	MISCELLANEOUS
JH	SPEED RECORDER CONTROLLER	JA	MISCELLANEOUS
JI	SPEED TRANSMITTER	JA	MISCELLANEOUS
LEVEL		PROCESS VARIABLES	
KA	LEVEL ALARM	KA	PROCESS VARIABLE
KB	LEVEL CONTROLLER	KA	PROCESS VARIABLE
KC	LEVEL CONTROLLER VALVE	KA	PROCESS VARIABLE
KD	LEVEL CONTROLLER VALVE (PRESSURE)	KA	PROCESS VARIABLE
KE	LEVEL INDICATOR	KA	PROCESS VARIABLE
KF	LEVEL INDICATOR CONTROLLER	KA	PROCESS VARIABLE
KG	LEVEL INDICATOR CONTROLLER VALVE	KA	PROCESS VARIABLE
KH	LEVEL RECORDER	KA	PROCESS VARIABLE
KI	LEVEL RECORDER CONTROLLER	KA	PROCESS VARIABLE
KJ	LEVEL TRANSMITTER	KA	PROCESS VARIABLE
PRESSURE		WEIGHT OR FORCE	
LA	PRESSURE ALARM	LA	WEIGHT OR FORCE
LB	PRESSURE CONTROLLER	LA	WEIGHT OR FORCE
LC	PRESSURE CONTROLLER VALVE	LA	WEIGHT OR FORCE
LD	PRESSURE CONTROLLER VALVE (PRESSURE)	LA	WEIGHT OR FORCE
LE	PRESSURE ELEMENT (TEMPERATURE, PRESSURE, etc.)	LA	WEIGHT OR FORCE
LF	PRESSURE INDICATING CONTROLLER	LA	WEIGHT OR FORCE
LG	PRESSURE INDICATING CONTROLLER VALVE	LA	WEIGHT OR FORCE
LH	PRESSURE INDICATOR	LA	WEIGHT OR FORCE
LI	PRESSURE INDICATOR CONTROLLER	LA	WEIGHT OR FORCE
LJ	PRESSURE INDICATOR CONTROLLER VALVE	LA	WEIGHT OR FORCE
LK	PRESSURE RECORDER	LA	WEIGHT OR FORCE
LL	PRESSURE RECORDER CONTROLLER	LA	WEIGHT OR FORCE
LM	PRESSURE RECORDER TRANSMITTER	LA	WEIGHT OR FORCE

[illegible]

TABLE II
INSTRUMENT SYMBOLS

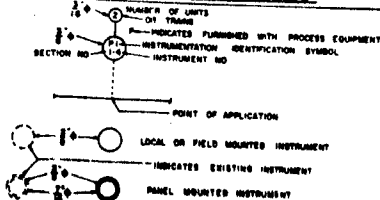
[illegible]

TABLE III
GRAPHIC SYMBOLS FOR USE ON FLOW DIAGRAMS

	ANGLE VALVE (HIGH PRESSURE TYPE)		HOSE, FLEXIBLE (ARMORED)
	ANGLE VALVE (LOW PRESSURE TYPE)		HOSE, METAL (FLEXIBLE)
	AIR CYLINDER OPERATED VALVE		HOSE, PLASTIC
	8000 #P VALVE (NEEDLE TYPE 1)		HOSE, RUBBER
	8000 #P VALVE (BIC TYPE)		HYDRAULIC CYLINDER OPERATED VALVE
	BLOCK VALVE NEEDLE TYPE 3 WAY (SELECT OPERATED)		LEVEL GLASS
	BLOW OFF or BLOW DOWN VALVE (TRANSFER VALVE 1)		LINE SEPARATOR
	BURNER		LINE BLIND VALVE (HANGER TYPE)
	BUTTERFLY VALVE ON SUMP		NEEDLE VALVE
	PILOT TUBE		BAROMETRIC CONDENSER
	CHECK VALVE (LIFT or DUMP)		OPEN DRAIN
	CHECK VALVE (DIP BLOCK TYPE FOR DOWN)		PISTON OPERATED VALVE
	CUCK VALVE (PISTON OPERATED)		FLUSH VALVE
	CHECK VALVE (BALL TYPE)		PLUG or COCK VALVE (TWO WAY)
	CHECK VALVE (EXCESS FLOW TYPE)		PLUG or COCK VALVE (THREE WAY)
	DIAPHRAGM VALVE PNEUMATIC OPERATED		PLUG or COCK VALVE (FOUR WAY)
	DIAPHRAGM VALVE (SELF OPERATED)		RESTRICTION ORIFICE
	DIAPHRAGM MOTOR OPERATED VALVE		QUENCH VALVE
	DIAPHRAGM VALVE (BLOOM SERVICE)		QUICK OPENING VALVE (LEVER OPERATED)
	DIAPHRAGM VALVE (GATE SERVICE)		REDUCER (CONCENTRIC)
	DRINKING FOUNTAIN		REDUCER (ECCENTRIC)
	EYE WASH FOUNTAIN		RELIEF VALVE (SAFETY)
	EJECTOR		REPLACER DEC. IN. (or VAC. IN. BREAKER)
	ELECTRIC MOTOR OPERATED VALVE		SEPARATOR
	EXHAUST HEAD		SHOWER HEAD
	EXPANSION JOINT (COMMERCIAL, BELLOWS TYPE)		SIGHT GLASS
	EXPANSION JOINT (INDUSTRIAL, SLIDE TYPE)		SOLENOID VALVE
	EXPANSION JOINT (SPECIAL DESIGN, BELLOWS TYPE)		STEAM TRAP
	EXPANSION JOINT (SPECIAL DESIGN, SLIDE TYPE)		STOP CHECK VALVE
	EXPANSION VALVE		STRAINER (TEMPORARY)
	FIGURE EIGHT		STRAINER Y TYPE WITH VALVE
	FLAME ARRESTER		STRAINER Y TYPE WITH PLUG
	FLAME ON TOUCH		STRAIGHTENING VALVE
	FLOW ELEMENT ON ORIFICE		VENTURI or FLOW VALVE
	FLOW TOTALIZER (DISPLACEMENT METER)		CONDENSATION VENT
	FOOT VALVE		INTERNAL THREAD VALVE
	GATE VALVE		WEIGHT OPERATED VALVE (GATE)
	GATE VALVE (JACKETED)		WEIGHT OPERATED VALVE (GLOBE)
	GLOBE VALVE		INSTRUMENT AIR LINE (NO DRAIN WEIGHT)
	GLOBE VALVE (ISOLATION)		INSTRUMENT AIR ELECTRICAL (NO DRAIN WEIGHT)
	HEAT EXCHANGER (SHELL AND TUBE)		INSTRUMENT AIR (NO DRAIN WEIGHT)
	HEAT EXCHANGER (TUBE SHEET)		INSTRUMENT AIR (NO DRAIN WEIGHT)


TABLE IV
EQUIPMENT SYMBOLS (PROCESS)

	CENTRIFUGAL PUMP		ROTARY OR GEAR PUMP
	RECIPROCATING PUMP		VACUUM PUMP
	PROPORTIONING PUMP		SUMP PUMP
	DOUBLE STAGE RECIPROCATING COMPRESSOR		DOUBLE OR TWO STAGE RECIPROCATING COMPRESSOR
	CENTRIFUGAL COMPRESSOR		THREE STAGE COMPRESSOR
	VERTICAL PUMP		ROTARY COMPRESSOR
	STEAM ENGINE		STEAM TURBINE
	TWO STAGE STEAM ENGINE		STEAM TURBINE
	TWO STAGE CONDENSER OR COOLER		STORAGE TANK
	CENTRIFUGAL FAN		HEAT EXCHANGER OR COOLER
	HEAT EXCHANGER OR COOLER		STEAM ENGINE

**DRAWING STANDARDS & SYMBOLS
FOR FLOW DIAGRAMS**

FIG. 1

STBD.

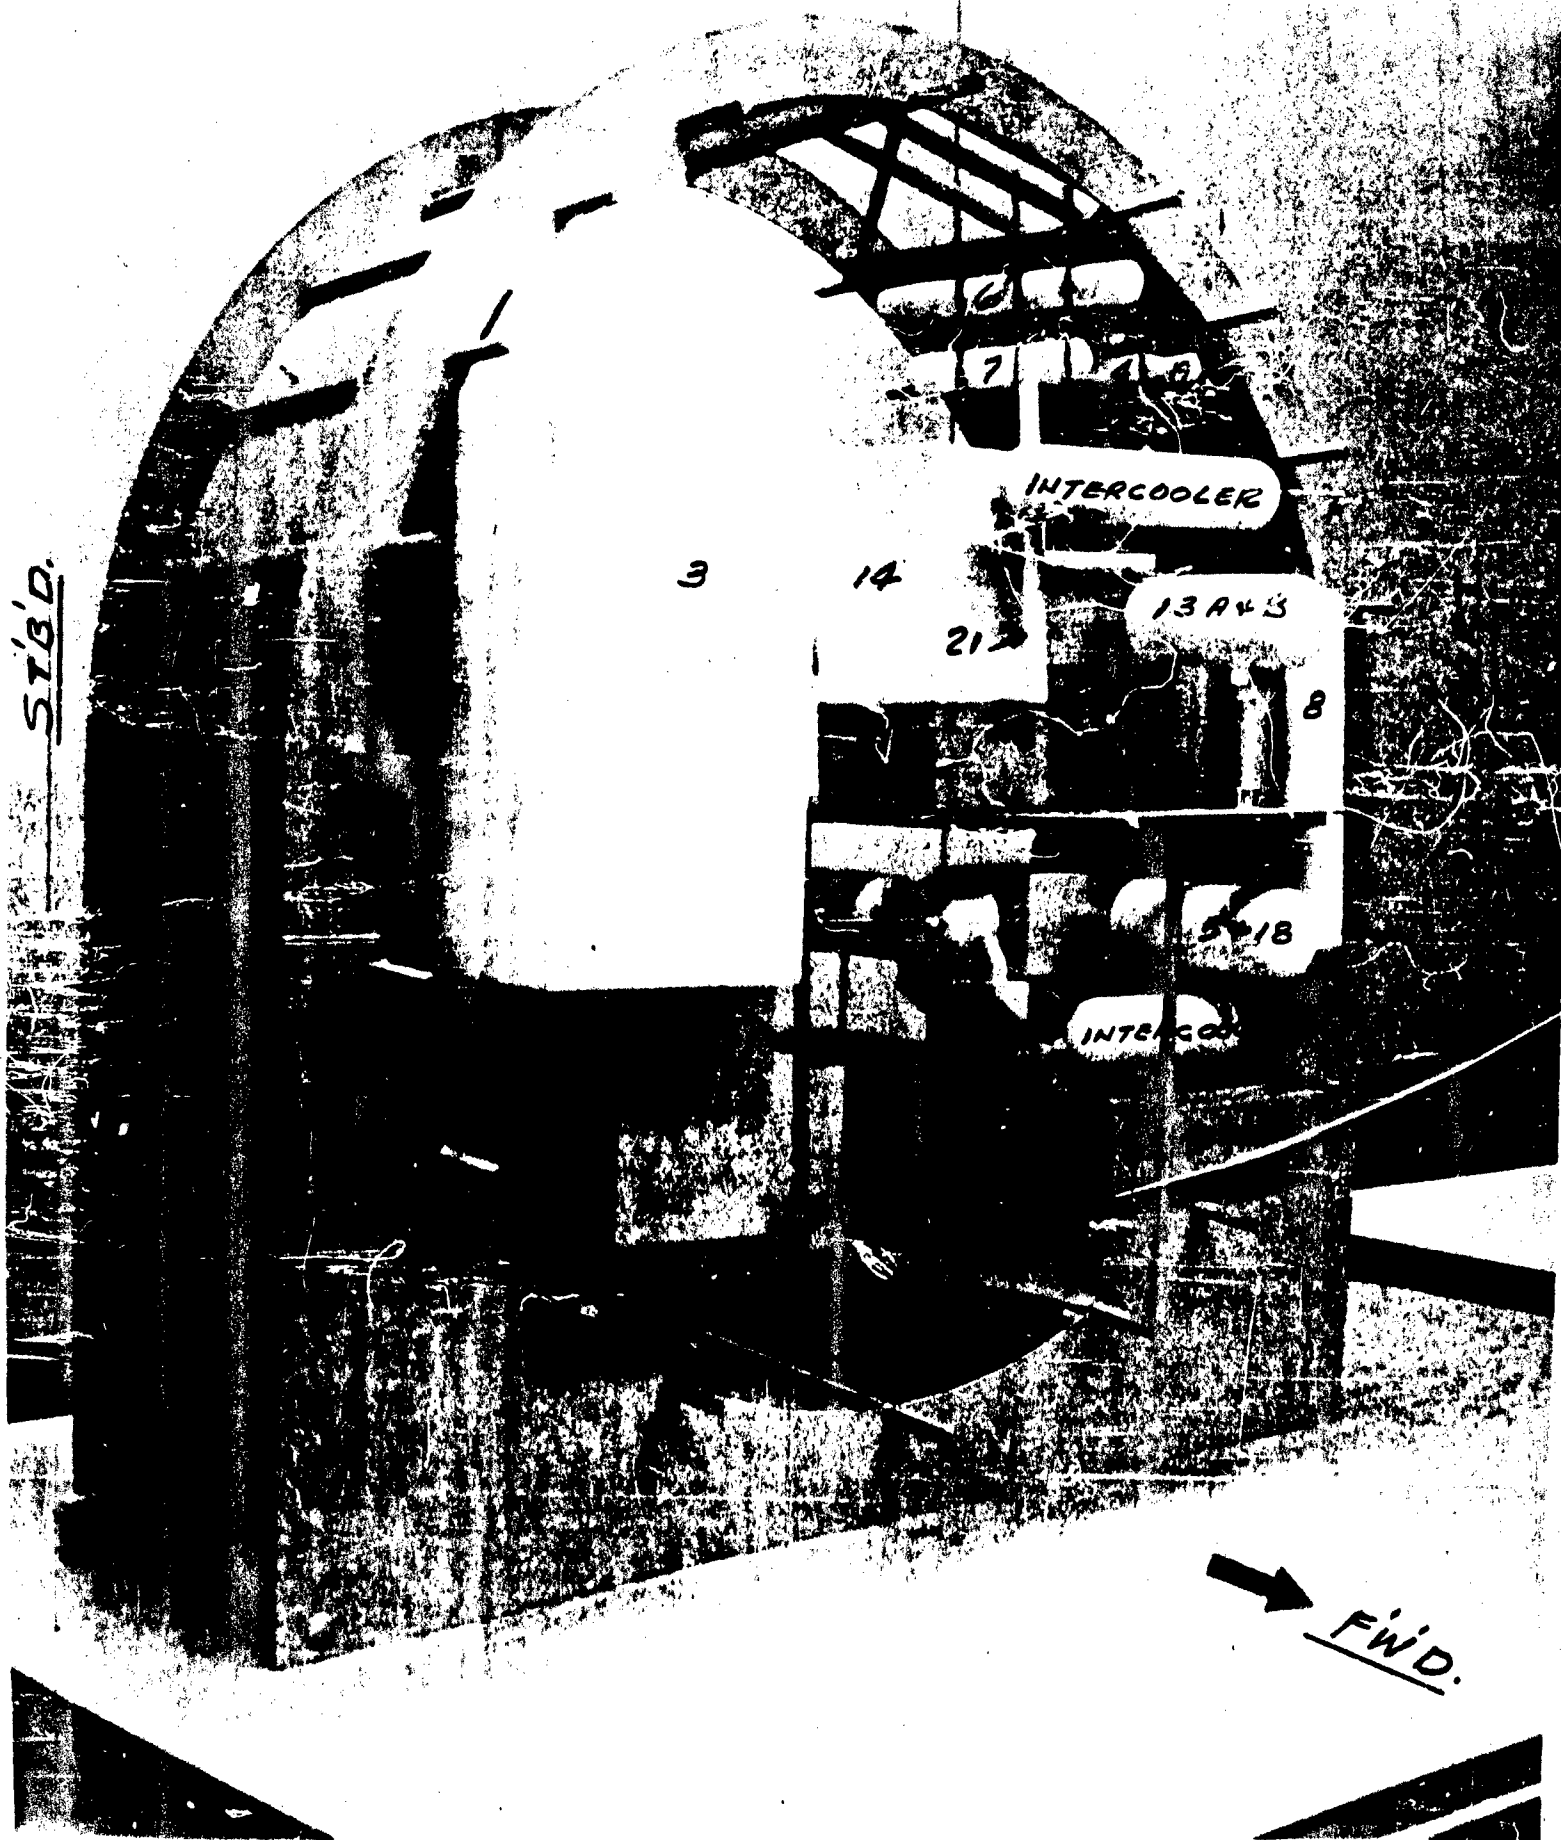


MODEL VIEW - ALTERNATE I.
LOOKING TO PORT

P20-344
P-4-B

3	AMMONIA DISSOCIATOR
4	CRUDE HYDROGEN COOLER
5A	CRUDE HYDROGEN COMPRESSOR & INTERCOOLER 5B
6	CRUDE HYDROGEN AFTER COOLER
7	CRUDE HYDROGEN CHILLER
8	WATER SCRUBBER
9A	CRUDE HYDROGEN DRYER
9B	CRUDE HYDROGEN DRYER
11	SCRUBBING COLUMN
13A	OXYGEN COMPRESSOR, INTERCOOLER & RECYCLE COOLER 13-B
14	EXPANDER
18	OFF GAS BOOSTER
19	OFF GASS CHILLER
21	CONDENSATE CHILLER

PEO-244
P-3-B.

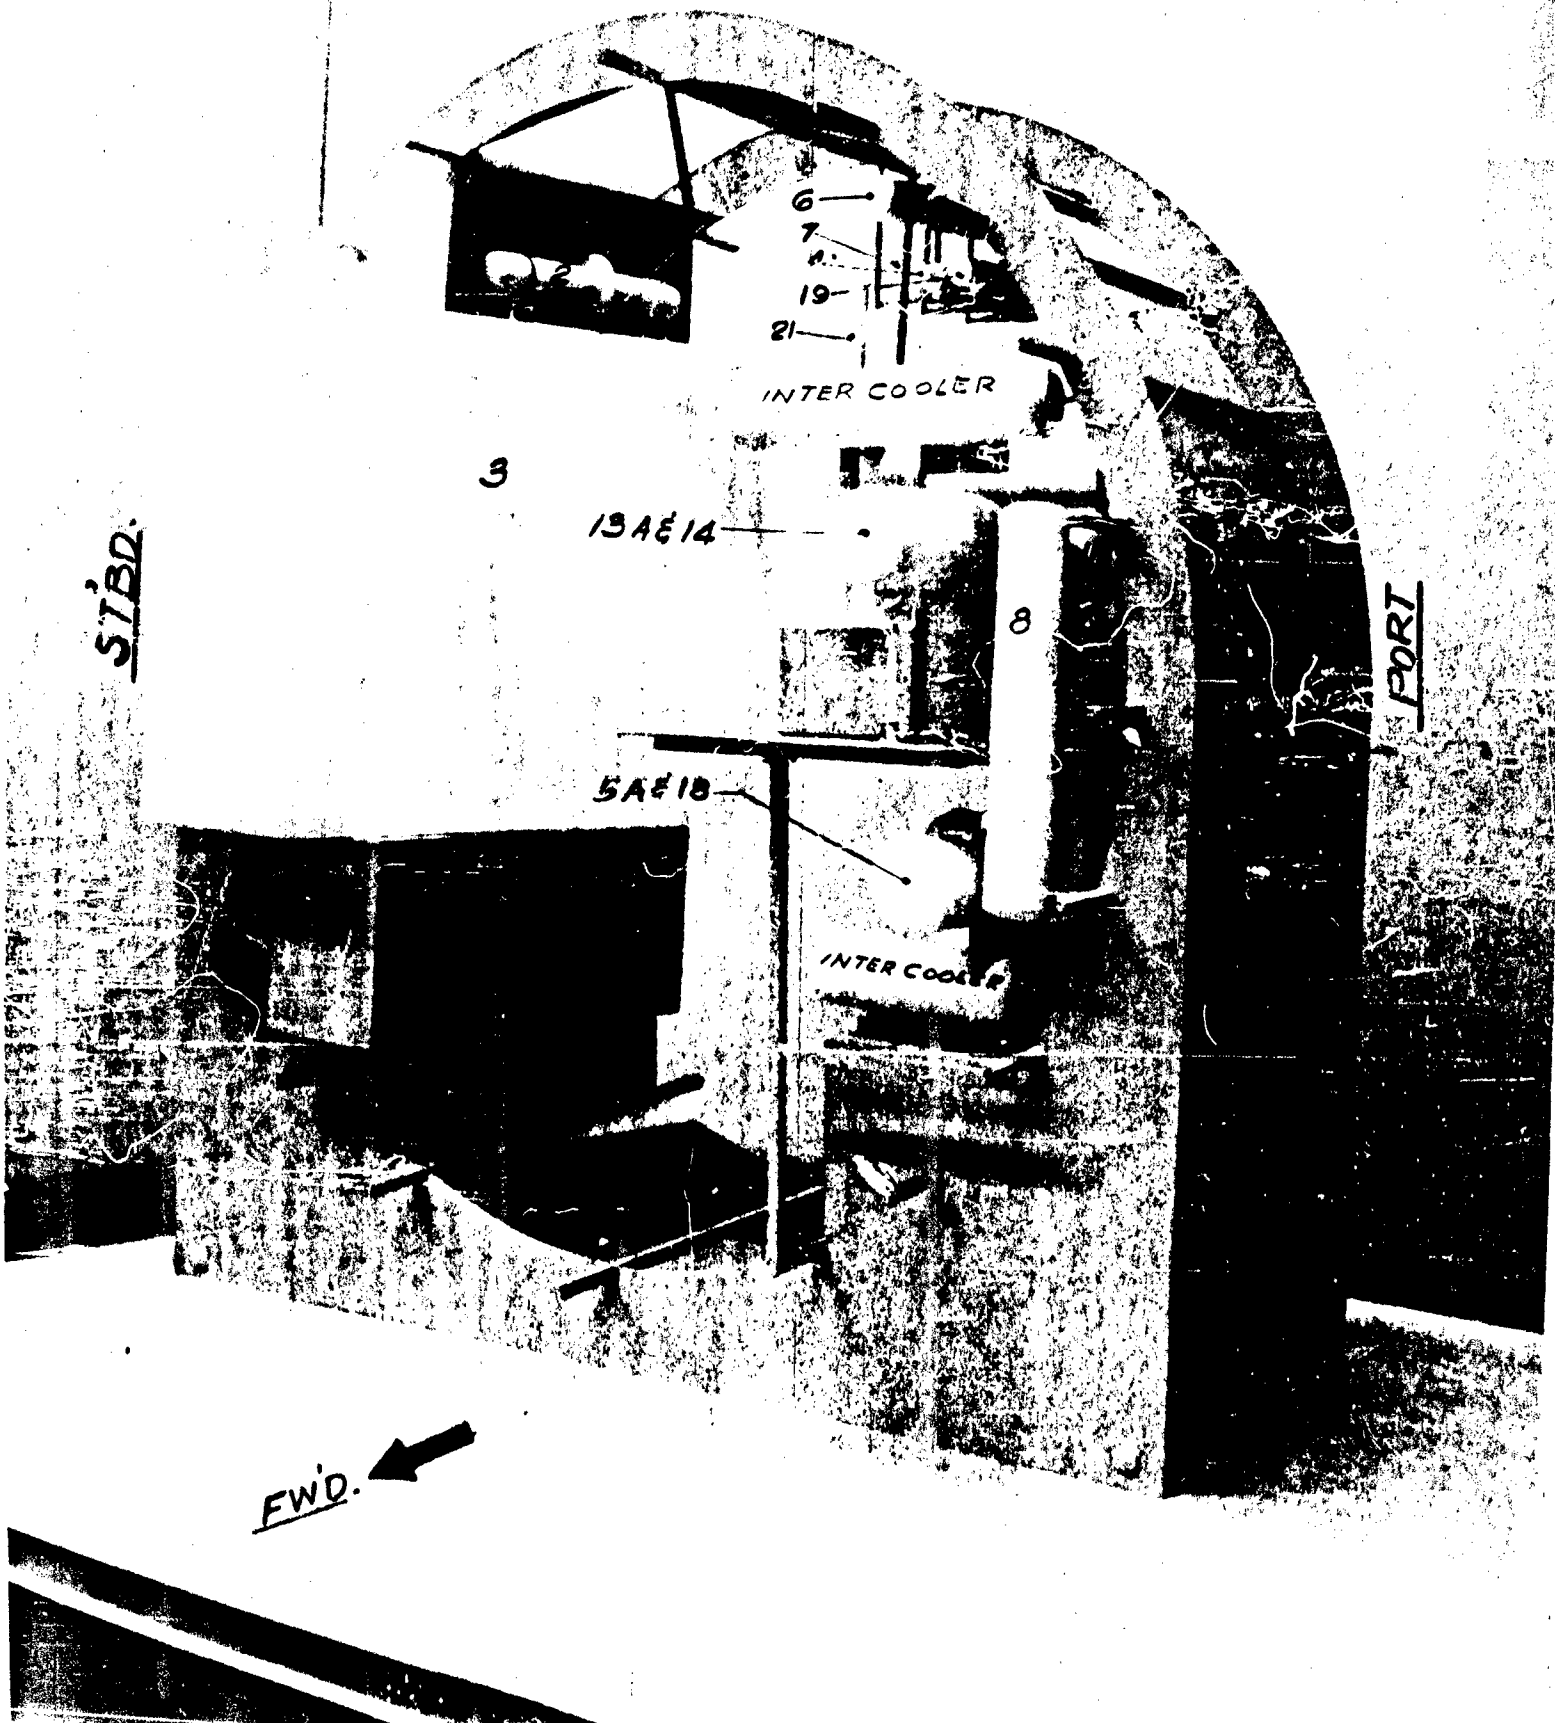

MODEL VIEW - ALTERNATE I
LOOKING TO STBD

UNCLASSIFIED

UNCLASSIFIED