

UNCLASSIFIED

AD 295 775

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


62-1435

295 775

. METHOD FOR GENERATING EQUIPROBABLE BINARY NUMBERS
AND A DEVICE FOR ITS REALIZATION

By

I. A. Danil'chenko



295775

UNEDITED ROUGH DRAFT TRANSLATION

A METHOD FOR GENERATING EQUIPROBABLE BINARY NUMBERS
AND A DEVICE FOR ITS REALIZATION

BY: I. A. Danil'chenko

English Pages: 4

SOURCE: Soviet Patent Nr. 131141 (644100/26),
14 November 1959.

SOV/19-60-0-16-95-134

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.	PREPARED BY: TRANSLATION SERVICES BRANCH FOREIGN TECHNOLOGY DIVISION WP-AFB, OHIO.
--	--

FTD-TT- 62-1435/1+2+4

Date 17 Jan. 1963

A METHOD FOR GENERATING EQUIPOBABLE BINARY NUMBERS
AND A DEVICE FOR ITS REALIZATION

I. A. Danil'chenko

Methods are known for generating random binary numbers (enumeration of a random pulses train over a constant interval).

The proposed method differs from these in that it allows starting of a digital converter by a determined pulses train during a random time interval.

The device for realizing the proposed method differs in that, with the aim of generating a random time interval, it contains a static flip-flop, one of the inputs of which is connected to a sync-signal source, and the other to a random-pulse generator.

The block diagram of the device for generating equiprobable binary numbers with a random interval between numbers, which realizes the proposed method, is shown in the figure.

The device contains a fluctuation source 1, an amplifier-shaper 2, which converts voltage fluctuation into a random pulse train; an interval flip-flop, controllable at one input by random pulses, and at the other by "beginning of formation" signals; and a digital converter

circuit, consisting of a single-digit binary counter 4 and gate 5, which passes a determined series of pulses 6 to start the binary counter. Gate 5 is controlled by the interval flip-flop.

The beginning of formation of a random number is determined by the instant of arrival of a "beginning of formation" pulse 7 at the interval flip-flop, which, in this, is reduced to the working state and opens gate 5. Determined pulse train 6 starts to be enumerated by counter 4. The very first random signal which enters the second input of the interval flip-flop returns it to the initial state and, thereby, closes gate 5. The binary counter remains in one of its two stable positions, which can be received as a binary number. Inasmuch as the interval over which the forming counter is started has a random value, each of two stable positions of the counter in which it shows up after closing gate 5 will be generated randomly and with equal probability. Generation of the next number is accomplished similarly after the arrival of a new "beginning of formation" signal.


The proposed method allows the rate of generation of random numbers to be increased and the stability of reproduction of the required law of distribution to be raised.

Object of Invention

1. The method of generating equiprobable binary numbers is distinguished by the fact that, with the aim of increasing the formation rate and increasing the degree of stability of the probability near the required value, each number is formed by a determined pulse train over a random time interval.

2. The device for accomplishing this method is distinguished by the fact that, in order to obtain a random time interval, it contains a static flip-flop, one of the inputs of which is connected to

a sync-signal source, and the other to a random-pulse generator.

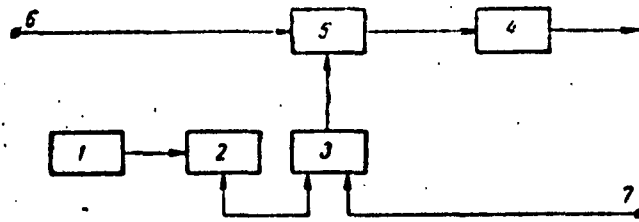

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE	Nr. Copies	MAJOR AIR COMMANDS	Nr. Copies
		AFSC	
		SCFTR	1
HEADQUARTERS USAF		ASTIA	25
		TD-B1a	5
AFPCIN-3D2	1	TD-B1b	3
ARL (ARB)	1	AEDC (AEY)	1
		SSD (SSF)	2
		APGC (PGF)	1
		ESD (ESY)	1
OTHER AGENCIES		RADC (RAY)	1
		AFSWC (SWF)	1
CIA	1	AFMTC (MTW)	1
NSA	6		
AID	2		
OFS	2		
REC	2		
PWS	1		
NASA	1		
RAND	1		