
AD-A067 268 SCHOOL OF AEROSPACE MEDICINE BROOKS AFB TEX F/G 20/3
ANALYSIS OF A FORTRAN PROGRAM FOR COMPUTING ELECTRIC FIELD DIST--ETC(U)
DEC 78 J W PENN, D K COHOON

UNCLASSIFIED SAM-TR-78-40 NL

1 OF 1
AD A067 268

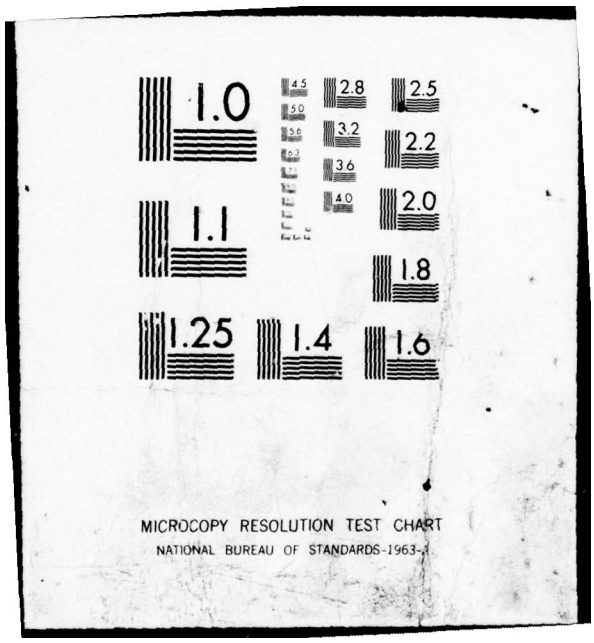

END
DATE FILMED
6 -79
DDC


1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
4.5
5.0
5.6
6.3
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A067268

LEVEL II

Report SAM-TR-78-40

2
B.S

ANALYSIS OF A FORTRAN PROGRAM FOR COMPUTING ELECTRIC FIELD DISTRIBUTIONS IN HETEROGENEOUS PENETRABLE NONMAGNETIC BODIES OF ARBITRARY SHAPE THROUGH APPLICATION OF TENSOR GREEN'S FUNCTIONS

John W. Penn, B.S.
David K. Cohoon, Ph.D.

DDC
RECEIVED
APR 12 1979
F

December 1978

Preliminary Report for Period September 1976 - April 1977

Approved for public release; distribution unlimited.

DDC FILE COPY

USAF SCHOOL OF AEROSPACE MEDICINE
Aerospace Medical Division (AFSC)
Brooks Air Force Base, Texas 78235

79 04 09 068

NOTICES

This preliminary report was submitted by personnel of the Biomathematics Modeling Branch, Data Sciences Division, USAF School of Aerospace Medicine, Aerospace Medical Division, AFSC, Brooks Air Force Base, Texas, under job order 7757-01-43.

When U.S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Information Office (OI) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

John W. Penn

JOHN W. PENN, B.S.
Project Scientist

Richard A. Albanese

RICHARD A. ALBANESE, M.D.
Supervisor

L J Enders

LAWRENCE J. ENDERS
Colonel, USAF, MC
Commander

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER: SAM-TR-78-40

2. GOVT ACCESSION NO.

3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle): ANALYSIS OF A FORTRAN PROGRAM FOR COMPUTING ELECTRIC FIELD DISTRIBUTIONS IN HETEROGENEOUS PENETRABLE NONMAGNETIC BODIES OF ARBITRARY SHAPE THROUGH APPLICATION OF TENSOR GREEN'S FUNCTIONS.

5. TYPE OF REPORT & PERIOD COVERED: Preliminary Report, Sep 76 - Apr 77

6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s):
John W. Penn B.S.
David K. Cohoon Ph.D.

8. CONTRACT OR GRANT NUMBER(s)

9. PERFORMING ORGANIZATION NAME AND ADDRESS:
USAF School of Aerospace Medicine (BR)
Aerospace Medical Division (AFSC)
Brooks Air Force Base, Texas 78235

10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS:
62202F
7757-01-43
01

11. CONTROLLING OFFICE NAME AND ADDRESS:
USAF School of Aerospace Medicine (RZL)
Aerospace Medical Division (AFSC)
Brooks Air Force Base, Texas 78235

12. REPORT DATE: December 1978

13. NUMBER OF PAGES: 83

14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office): 86p.

15. SECURITY CLASS. (of this report): Unclassified

15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)
Strongly singular integral operators
Electromagnetic scattering
Principle value integrals
Symmetry group analysis
Heterogeneous penetrable biological bodies

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

An integral equation whose solution is the electromagnetic field induced in a heterogeneous, penetrable, nonmagnetic body--e.g.,a biological body--by an external source is derived and approximated by a linear equation for computer implementation. A computer program for carrying out the discrete approximation of the integral equation is described. The use of symmetry groups in saving computer storage is explained. The scattering of a plane wave by a homogeneous ball is analyzed by this program and the results are compared with those produced by a computer program that implements the Mie solution.

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

79 04 09 068

317 000

TABLE OF CONTENTS

	Page
PURPOSE	3
MATHEMATICAL DESCRIPTION	3
PROGRAM DESCRIPTION	5
REFERENCES	8
APPENDIXES	
A--SOME IDENTITIES IN VECTOR AND DYADIC ANALYSIS	9
B--DERIVATION OF THE FIELD EQUATIONS OF ELECTROMAGNETIC SCATTERING	15
C--DISCRETIZATION OF THE INTEGRAL EQUATION OF ELECTROMAGNETIC SCATTERING	31
D--UTILIZATION OF SYMMETRY GROUPS IN SIMPLIFYING THE INTEGRAL EQUATION	42
E--SAMPLE PROBLEMS WITH COMPUTER RESULTS	50
F--COMPUTER PRINTOUT OF PROGRAM WITH RESULTS	57

White Section
Buff Section
ILABILITY CODES
and/or SPECIAL
A

List of Illustrations

Figure No.	
B-1--Surface Charge Density	23
D-1--Division of Space Into Octants	43

List of Tables

Table No.	
1--Input Data Description	6
2--Format Statements for Input Files	7
D-1--The Symmetry Group Multiplication Table	42
E-1--The Transparent Sphere	51
E-2--The Translucent Sphere	54

ANALYSIS OF A FORTRAN PROGRAM FOR COMPUTING ELECTRIC FIELD DISTRIBUTIONS IN HETEROGENEOUS PENETRABLE NONMAGNETIC BODIES OF ARBITRARY SHAPE THROUGH APPLICATION OF TENSOR GREEN'S FUNCTIONS

PURPOSE

TGR is a Fortran IV program written for the IBM 360/65 System to compute the electric field distribution, power density distribution, and total absorbed power in a bounded, penetrable, heterogeneous, nonmagnetic body subject to an incident electric field. Results are obtained through the discretization and simplification of the integral equation of electromagnetic scattering derived from Maxwell's equations by applying simplifying assumptions appropriate for the method of retarded potentials.

In the body of the text we give a terse description of the integral equation that we use. Appendix A contains the mathematical preliminaries needed to understand the complete derivation, which is given in Appendix B. The discretization of the integral equation and its representation as a matrix equation is explained in Appendix C. The reduction by the use of symmetry groups of the size of the matrix used to define the approximation of the integral equation is explained in Appendix D. Without using the latter technique the cost of running the program would be greater by from one-hundred to seven-hundred percent than it is at the present time when the scattering obstacle possesses a lesser or a greater amount of symmetry.

With this program the authors were able to observe resonance effects and predict hot spots in a biological body subjected to microwave radiation. In this preliminary report a comparison is made between results produced by the method of this report and the classical Mie solution results in the case where the impinging field is a plane wave and the scattering obstacle is a homogeneous, non-biological ball with a relative dielectric constant close to unity and a conductivity that is small. Good agreement was found between the computations produced by the two methods; the results of two numerical experiments are reported in Appendix E. The error analysis for biological bodies is being carried out, and the results will appear in a future report. The listing of the computer program along with the computer output for one of the sample problems is given in Appendix F.

MATHEMATICAL DESCRIPTION

A biological body is subjected to a time-harmonic electromagnetic wave traveling in the direction of the positive z-axis. This incident electric vector is normalized so that its amplitude is 1 volt per meter.

The incident electric vector may have the form

$$\vec{E}^i = \vec{i}\cos(k_0 z), \tag{1}$$

$$\vec{E}^i = \vec{i}\sin(k_0 z), \tag{2}$$

or

$$\vec{E}^i = \vec{i}\,(\cos(k_0 z) - i\sin(k_0 z)), \tag{3}$$

where $\vec{i}$ is a unit vector in the direction of the positive x-axis

and $k_0 = \omega\sqrt{\mu_0\varepsilon_0}$ is the free space wave number.

We use the MKS (meter-kilogram-second) system of units. The magnetic field intensity H which is measured in ampere-turns per meter is given by

$$\vec{H} = (1/i\omega\mu_0)(\partial/\partial z)E_x\vec{i}\ , \tag{4}$$

or

$$\vec{H} = -\sqrt{(\varepsilon_0/\mu_0)}\vec{e}_2\exp(-ik_0 z). \tag{5}$$

The Poynting vector (Stratton [6 , p. 132]) is given by

$$\vec{S} = \vec{E}\times\vec{H}, \tag{6}$$

and has the units of watts per square meter. In the MKS units

$$\varepsilon_0 = 8.854\text{x}10^{-12} \text{ farads per meter}, \tag{7}$$

$$\mu_0 = 1.257\text{x}10^{-6} \text{ henrys per meter}, \tag{8}$$

and

$$\sqrt{\varepsilon_0/\mu_0} = 2.654\text{x}10^{-3} \text{ mhos}. \tag{9}$$

Thus, the power density for a 1 volt per meter electric field is

$$|\vec{S}| = 2.654\text{x}10^{-3} \text{ watts per square meter}. \tag{10}$$

According to Johnson et al. [1, p. 14], power density is normally measured in milliwatts per square centimeter. If the amplitude of the incident electric field were multiplied by 61.38, then the power density would be 1 milliwatt per square centimeter.

To get the power that would be absorbed from a 1 milliwatt-per-square-centimeter beam, we simply multiply the normal output of this program by 3767., remembering that the wave impedance of free space is 376.7 ohms according to Stratton [6, p. 601] .

The authors define the tensor Green's function

$$G(r,r') = (1/(4\pi))\left(I + (1/k_0^2)\text{grad}_r\text{grad}_r\right)\left(\frac{\exp(-ik_0|r - r'|)}{|r - r'|}\right), \quad (11)$$

and show the connection between the Maxwell equations, the calculations of Van Bladel [7, p. 563] and Livesay and Chen [4, p. 1273], and obtain by neglecting surface electric current and surface magnetic charge the integral equation

$$\left(1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right)\vec{E}(r) - PV\int\tau(r')\vec{E}(r')G(r,r')dv(r') = \vec{E}^i(r), \quad (12)$$

where the PV indicates that the principal value of the integral is taken, and

$$\tau(r) = \sigma(r) + i\omega(\varepsilon(r) - \varepsilon_0). \quad (13)$$

Equation (12) is solved by subdividing the body into subregions in which the electric vector is assumed to be constant as a function of space coordinates. Thus, we assume, at least, that the diameter of a subregion does not exceed one-fourth of a wavelength. Since the velocity of light is about 30 billion centimeters per second, this means that at 1 megahertz the diameter may be only 7.5 centimeters and at 1 gigahertz the diameter may be only .0075 centimeters. Thus, without modification, it would be impossible on the present computer system to determine accurately the effect of 1 gigahertz radiation on a 180-centimeter man, because of the memory that would be needed to store information about all of the cells that would be involved in the approximation.

PROGRAM DESCRIPTION

The program is adapted from a program written by Livesay and Chen [4]. We have adopted the same input and output format adding only the capability of printing the total absorbed power. This program is faster than Chen's program and requires less storage in view of the fact that the matrix inversion routine stores and operates only on about half of the symmetric matrix defined by the discretization of (12).

Following Chen we divide space into octants. The first octant is that region of x-y-z space where x,y and z are all positive. Part or all of the scattering obstacle is assumed to occupy octant one. If it occupies any other octant it is symmetric with respect to that part that is in octant one. The use of symmetry is explained in Appendix D.

We now explain the input data. Table 1 lists the files for this input data. Table 2 is a listing of the formats for these files.

TABLE 1. INPUT DATA DESCRIPTION

Data File	Contents
1	N DIV
2	COMP: Q(J), J=1,...,8; FMEG, FIELD
3	NX, NY, NZ
4	N
5	$\{AMX, AMY, AMZ, RLEPI, SIGI, DXCM\}_1$
N cards	
	$\{AMX, AMY, AMZ, RLEPI, SIGI, DXCM\}_N$

Here, NDIV contains the number of subdivisions of each side of a subvolume. Next, COMP is a code name for the components of the induced electric field; it contains one of the members of the set of alpha strings denoted by {X-ONLY, XANDY., X, Y, Z.}. If an octant J is used, then the number of that octant is placed in the field for Q(J) and otherwise a blank is placed in the field; octant 1 is always used. The variable FMEG denotes the frequency in megahertz. The variable FIELD specifies the character of the input field and is an α-string belonging to the set {EXPKZ, COSKZ, SINKZ, TOTAL, EINCZ} for respectively fields of the form

EXPKZ = $\vec{i}\ \exp(-ik_0 z)$, (if we use only octants 1 - 4)

COSKZ = $\vec{i}\ \cos(k_0 z)$,

SINKZ = $\vec{i}\ \sin(k_0 z)$,

TOTAL = $\vec{i}\ \exp(-ik_0 z)$,

or

EINCZ = $\vec{i}$.

The variables NX, NY, and NZ approximate the number of cells in the X, Y, and Z directions; this information is not used. The variable N denotes the number of cells. The variables AMX, AMY, and AMZ correspond to the maximum values of X, Y, and Z coordinates of a cell in the first octant. The variables RLEPI and SIGI denote the relative dielectric constant and conductivity in mhos per meter of the cell in question. The variable DXCM is the length of the edge of the cubical cell in centimeters. The values of RLEPI and SIGI may be determined from [1] and [2].

The output is clearly labeled by the program and is self-explanatory.

The reader should be able to see how the program is used by examining the sample problem and the source listing.

TABLE 2. FORMAT STATEMENTS FOR INPUT FILES

```
1        FORMAT (I1)

2        FORMAT (A6,4X,8A1,2X,F10.0,10X,A5)

3        FORMAT (3(I2,3X))

4        FORMAT (I3)

5        FORMAT (8F10.3)
```

REFERENCES

1. Johnson, C. C., et al. Radiofrequency radiation dosimetry handbook. SAM-TR-76-35, Sept 1976.

2. Johnson, C. C., and A. W. Guy. Nonionizing electromagnetic wave effects in biological materials and systems. Proc IEEE 60: 692-718 (1972).

3. Jones, D. S. The theory of electromagnetism. New York: Pergamon Press, 1964.

4. Livesay, D. E., and Kun-Mu Chen. Electromagnetic fields induced inside arbitrarily shaped biological bodies. IEEE Trans Microwave Theory Techniques MTT-22 (No. 12):1273-1280 (1974).

5. Morse, P. M., and H. Feshbach. Methods of theoretical physics Part I. New York: McGraw-Hill, 1953.

6. Stratton, J. A. Electromagnetic theory. New York: McGraw-Hill, 1941.

7. Van Bladel, J. Some remarks on Green's Dyadic for infinite space. IRE Trans Antennas Propagation AP-9:563-566 (1961).

APPENDIX A

SOME IDENTITIES IN VECTOR AND DYADIC ANALYSIS

Definition A.1. A vector in R^3 or C^3 is a triple (a_1,a_2,a_3) of real or complex numbers. We write $\vec{A} = a_1\vec{i} + a_2\vec{i} + a_3\vec{k}$ to denote that function on the set $\{\vec{i},\vec{j},\vec{k}\}$ of unit vectors along the x,y, and z axes respectively which assigns the value a_1 to $\vec{i}$, a_2 to $\vec{j}$ and a_3 to $\vec{k}$.

Definition A.2. If $\vec{A} = a_1\vec{i} + a_2\vec{j} + a_3\vec{k}$ and $\vec{B} = b_1\vec{i} + b_2\vec{j} + b_3\vec{k}$ are vectors then

$$\vec{A}\cdot\vec{B} = a_1b_1 + a_2b_2 + a_3b_3 \tag{A.1}$$

and

$$\vec{A}\times\vec{B} = (a_2b_3-a_3b_2)\vec{i} + (a_3b_1-a_1b_3)\vec{j} + (a_1b_2-a_2b_1)\vec{k}\ . \tag{A.2}$$

Definition A.3. Let ψ be a member of $C^1(R^3)$ and let $\vec{A}$ be a vector each component of which is a member of $C^1(R^3)$. Then we define

$$\text{grad } \psi = \nabla\psi = \frac{\partial\psi}{\partial x}\vec{i} + \frac{\partial\psi}{\partial y}\vec{j} + \frac{\partial\psi}{\partial z}\vec{k} \tag{A.3}$$

and for $\vec{A} = a_1\vec{i} + a_2\vec{j} + a_3\vec{k}$, we define $\text{curl}(\vec{A}) = \nabla\times\vec{A} =$

$$(\frac{\partial a_3}{\partial y} - \frac{\partial a_2}{\partial z})\vec{i} + (\frac{\partial a_1}{\partial z} - \frac{\partial a_3}{\partial x})\vec{j} + (\frac{\partial a_2}{\partial x} - \frac{\partial a_1}{\partial y})\vec{k} \tag{A.4}$$

and

$$\operatorname{div}(\vec{A}) = \vec{\nabla}\cdot\vec{A} = \frac{\partial a_1}{\partial x} + \frac{\partial a_2}{\partial y} + \frac{\partial a_3}{\partial z} \ . \tag{A.5}$$

We now introduce the concept of a dyad as follows.

Definition A.4. Suppose that the unit vectors $\vec{i} = (1,0,0)$, $\vec{j} = (0,1,0)$, and $\vec{k} = (0,0,1)$ are considered to be letters in an alphabet. Then form all the two letter "words"

$$W = \{\vec{i}\vec{i},\vec{i}\vec{j},\vec{i}\vec{k},\vec{j}\vec{i},\vec{j}\vec{j},\vec{j}\vec{k},\vec{k}\vec{i},\vec{k}\vec{j},\vec{k}\vec{k}\} \ . \tag{A.6}$$

A dyad G can be thought of as a "three by three matrix" expressed in the form

$$G = a_{(1,1)}\vec{i}\vec{i} + a_{(1,2)}\vec{i}\vec{j} + a_{(1,3)}\vec{i}\vec{k} + a_{(2,1)}\vec{j}\vec{i} + a_{(2,2)}\vec{j}\vec{j} + a_{(2,3)}\vec{j}\vec{k} + a_{(3,1)}\vec{k}\vec{i} + a_{(3,2)}\vec{k}\vec{j} + a_{(3,3)}\vec{k}\vec{k} \ . \tag{A.7}$$

Also, we may say that G is a function from the set W into R or C whose values on $\vec{i}\vec{i},\vec{i}\vec{j},\vec{i}\vec{k},\vec{j}\vec{i},\vec{j}\vec{j},\vec{j}\vec{k},\vec{k}\vec{i},\vec{k}\vec{j},\vec{k}\vec{k}$ are respectively

$$a_{(1,1)},a_{(1,2)},a_{(1,3)},a_{(2,1)},a_{(2,2)},a_{(2,3)},a_{(3,1)},a_{(3,2)},a_{(3,3)} \ .$$

Dyads are formed naturally in several ways.

Definition A.5. If $\vec{A} = a_1\vec{i} + a_2\vec{j} + a_3\vec{k}$ and $\vec{B} = b_1\vec{i} + b_2\vec{j} + b_3\vec{k}$ are vectors, then $\vec{A}\vec{B} = a_1b_1\vec{i}\vec{i} + a_1b_2\vec{i}\vec{j} + a_1b_3\vec{i}\vec{k} + a_2b_1\vec{j}\vec{i} + a_2b_2\vec{j}\vec{j} + a_2b_3\vec{i}\vec{k} + a_3b_1\vec{k}\vec{i} + a_3b_2\vec{k}\vec{j} + a_3b_3\vec{k}\vec{k}$. (A.8)

Definition A.6. If b_1, b_2, and b_3 are functions in $C^1(R^3)$, then $\vec{B} = b_1\vec{i} + b_2\vec{j} + b_3\vec{k}$ implies that $\text{grad}(\vec{B}) = \nabla\vec{B} =$

$$\frac{\partial b_1}{\partial x}\vec{ii} + \frac{\partial b_2}{\partial x}\vec{ij} + \frac{\partial b_3}{\partial x}\vec{ik}$$

$$+ \frac{\partial b_1}{\partial y}\vec{ji} + \frac{\partial b_2}{\partial y}\vec{jj} + \frac{\partial b_3}{\partial y}\vec{jk}$$

$$+ \frac{\partial b_1}{\partial z}\vec{ki} + \frac{\partial b_2}{\partial z}\vec{kj} + \frac{\partial b_3}{\partial z}\vec{kk} \quad . \tag{A.9}$$

Whereas we used (A.5) and the divergence operation to obtain a scalar valued function from a vector valued function, we also use the divergence to obtain a vector valued function from a dyadic valued function as follows.

Definition A.7. Let $G = a_{(1,1)}\vec{ii} + a_{(1,2)}\vec{ij} + a_{(1,3)}\vec{ik} + a_{(2,1)}\vec{ji}$

$$+ a_{(2,2)}\vec{jj} + a_{(2,3)}\vec{jk} + a_{(3,1)}\vec{ki} + a_{(3,2)}\vec{kj}$$

$$+ a_{(3,3)}\vec{kk} \tag{A.10}$$

and define

$$\text{div}(G) = \nabla\cdot G = [(\partial/\partial x)a_{(1,1)} + (\partial/\partial y)a_{(2,1)} + (\partial/\partial z)a_{(3,1)}]\vec{i} +$$

$$[(\partial/\partial x)a_{(1,2)} + (\partial/\partial y)a_{(2,2)} + (\partial/\partial z)a_{(3,2)}]\vec{j} + [(\partial/\partial x)a_{(3,1)} +$$

$$(\partial/\partial y)a_{(3,2)} + (\partial/\partial z)a_{(3,3)}]\vec{k} \, . \tag{A.11}$$

Now we may make the following generalization of the Gauss divergence theorem which we will use later on.

Theorem A.1. Let G be a differentiable dyadic function on a neighborhood of the region V of R^3 with boundary ∂V.
Let $\vec{n}$ denote the normal vector to the surface ∂V bounding V.
Then

$$\int_{\partial V} \vec{n} \cdot G \, da = \int_{V} \operatorname{div}(G) \, dv \,, \tag{A.12}$$

where da is the surface area and dv is the volume differential of ∂V and V respectively.

Proof of Theorem A.1. The proof follows by using (A.11) and the usual Gauss divergence theorem component by component.

For the sake of completeness we list the following identities for vector valued functions, which we also use later in the paper.

Proposition A.1. For all differentiable vector valued functions P and Q we have

$$\operatorname{div}(\vec{P} \times \vec{Q}) = \vec{Q} \cdot \operatorname{curl}(\vec{P}) - \vec{P} \cdot \operatorname{curl}(\vec{Q}) \tag{A.13}$$

and

$$\operatorname{curl}(\operatorname{curl}(\vec{P})) = \operatorname{grad}(\operatorname{div}(\vec{P})) - \Delta \vec{P} \,, \tag{A.14}$$

where the Laplacian Δ acts on each component of $\vec{P}$ by the rule,

$$\Delta \psi = \frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} + \frac{\partial^2 \psi}{\partial z^2} \tag{A.15}$$

for all scalar functions ψ. Also $\vec{P} = b_1\vec{i} + b_2\vec{j} + b_3\vec{k}$ implies

$$\text{grad}(\vec{P}) = \nabla\vec{P} = (\nabla b_1)\vec{i} + (\nabla b_2)\vec{j} + (\nabla b_3)\vec{k}\,, \tag{A.16}$$

$$\text{div}(\vec{P}\times \text{curl}(\vec{Q})) = \text{curl}(\vec{P})\cdot\text{curl}(\vec{Q}) - \vec{P}\cdot\text{curl}(\text{curl}(\vec{Q}))\,, \tag{A.17}$$

$$\text{div}(\vec{P} \times \text{curl}(\vec{Q}) - \vec{Q} \times \text{curl}(\vec{P})) =$$

$$\vec{Q}\cdot\text{curl}(\text{curl}(\vec{P})) - \vec{P}\cdot\text{curl}(\text{curl}(\vec{Q})) \tag{A.18}$$

and

$$\text{curl}(P\times Q) = \vec{P}\,\text{div}(\vec{Q}) - \vec{Q}\text{div}(\vec{P}) + (\vec{Q}\cdot\nabla)\vec{P} - (\vec{P}\cdot\nabla)\vec{Q} \tag{A.19}$$

where for any vector functions $\vec{A}$ and $\vec{B}$ we define

$$(\vec{A}\cdot\nabla)\vec{B} = Lb_1\vec{i} + Lb_2\vec{j} + Lb_3\vec{k} \tag{A.20}$$

where the operator L is defined by the rule

$$L\psi = a_1(\partial/\partial x)\psi + a_2(\partial/\partial y)\psi + a_3(\partial/\partial z)\psi$$

for any scalar functions ψ.

We also need the following.

Proposition A.2. Let ϕ be a scalar function and $\vec{A}$ a vector function. Then

$$\vec{Q} = \phi\vec{A}$$

implies

$$\nabla\times\vec{Q} = \nabla\phi \times \vec{A} \ . \tag{A.21}$$

We make use of this result and the following immediate consequence of the Gauss divergence theorem to derive the basic integral equation of electromagnetic scattering.

Proposition A.3. Let V be a region with a boundary surface ∂V whose normal is $\vec{n}$. Then for all smooth vector valued functions $\vec{P}$ and $\vec{Q}$ we have the relation

$$\int_{\partial V} (\vec{P}\times(\nabla\times\vec{Q}) - \vec{Q}\times(\nabla\times\vec{P}))\cdot\vec{n}\ da$$

$$= \int_V (\vec{Q}\cdot\nabla\times\nabla\times\vec{P} - \vec{P}\cdot\nabla\times\nabla\times\vec{Q})dv \ . \tag{A.22}$$

Remark. The reader may find it interesting to extend the definitions A.2 and A.3 to functions defined on the n-letter words formed from the "letters" $\vec{i},\vec{j}$, and $\vec{k}$. These generalizations will be the subject of a future report.

APPENDIX B

DERIVATION OF THE FIELD EQUATIONS OF ELECTROMAGNETIC SCATTERING

We use Maxwell's equations in the form

$$\nabla \times \vec{E} + \frac{\partial \vec{B}}{\partial t} = -\vec{J}^* \,, \tag{B.1}$$

$$\nabla \times \vec{H} - \frac{\partial \vec{D}}{\partial t} = \vec{J} \,, \tag{B.2}$$

$$\nabla \cdot \vec{B} = \rho^* \,, \tag{B.3}$$

and

$$\nabla \cdot \vec{D} = \rho \,. \tag{B.4}$$

The constitutive relations have the form,

$$\vec{B} = \mu \vec{H} \tag{B.5}$$

and

$$\vec{D} = \varepsilon \vec{E} \,. \tag{B.6}$$

The sources are $\vec{J}^*$, magnetic current density, $\vec{J}$, electrical current density, ρ^*, magnetic charge density, and ρ, electrical charge density. According to Stratton [6, page 229], the magnetic moment of a magnetized piece of matter is

$$\vec{m} = \int_V \vec{r}\, \rho^*(\xi,\eta,\zeta)dv + \int_{\partial V} \vec{r}\, \omega^*(\xi,\eta,\zeta)da \tag{B.7}$$

where ω^* is a surface density and $\vec{r}$ is the position vector of points in V or ∂V. We define the magnetization vector $\vec{M}$ by the relation

$$\vec{M} = \int_V \vec{m}\, dv \,. \tag{B.8}$$

Let us assume $\vec{J}^* = 0$ and $\rho^* = 0$. Also assume that $\vec{B}$ and $\vec{E}$ are time harmonic, which means that

$$\vec{B} = \vec{B}(x,y,z)\exp(-i\omega t), \tag{B.9}$$

and

$$\vec{E} = \vec{E}(x,y,z)\exp(-i\omega t). \tag{B.10}$$

Then (B.1) -(B.6) and (B.9) -(B.10)

imply that

$$\nabla \times \vec{E} - i\omega\mu\vec{H} = 0, \tag{B.11}$$

$$\nabla \times \vec{H} + i\omega\varepsilon\vec{E} = \vec{J}, \tag{B.12}$$

$$\nabla \cdot \vec{H} = 0, \tag{B.13}$$

and

$$\nabla \cdot \vec{E} = \rho/\varepsilon. \tag{B.14}$$

The continuity equation implies that

$$\nabla \cdot \vec{J} - i\omega\rho = 0. \tag{B.15}$$

From (B.11) and (B.12) we deduce that

$$\nabla \times \nabla \times \vec{E} = \omega^2\mu\varepsilon\vec{E} + i\omega\mu\vec{J}. \tag{B.16}$$

If we define

$$k^2 = \omega^2\mu\varepsilon, \tag{B.17}$$

we deduce from (B.16) and the definition

$$\vec{P} = \vec{E}, \tag{B.18}$$

that

$$\nabla \times \nabla \times \vec{P} = k^2\vec{E} + i\omega\mu\vec{J}.$$

We define

$$\phi = \exp(ikr)/r \tag{B.19}$$

and

$$\vec{Q} = \phi \vec{A}, \tag{B.20}$$

where

$$\vec{A} = A_1\vec{i} + A_2\vec{j} + A_3\vec{k}$$

is a unit vector in an arbitrary direction.

A calculation shows that

$$\Delta\phi + k^2\phi = 0, \tag{B.21}$$

and

$$\nabla\times\nabla\times\vec{Q} = k^2\vec{A}\phi + (\vec{A}\cdot\nabla)\nabla\vec{\phi} \ . \tag{B.22}$$

Let us observe that

$$(\vec{A}\cdot\nabla)\vec{\nabla\phi} = A_1\frac{\partial}{\partial x}(\vec{\nabla\phi}) + A_2(\frac{\partial}{\partial y}\vec{\nabla\phi}) + A_3(\frac{\partial}{\partial z}\vec{\nabla\phi})$$

$$= \vec{i}\left[A_1\frac{\partial^2\phi}{\partial x} + A_2\frac{\partial^2\phi}{\partial x\partial y} + A_3\frac{\partial^2\phi}{\partial x\partial z}\right]$$

$$+ \vec{j}\left[A_1\frac{\partial^2\phi}{\partial x\partial y} + A_2\frac{\partial^2\phi}{\partial y^2} + A_3\frac{\partial^2\phi}{\partial y\partial z}\right]$$

$$+ \vec{k}\left[A_1\frac{\partial^2\phi}{\partial x\partial z} + A_2\frac{\partial^2\phi}{\partial y\partial z} + A_3\frac{\partial^2}{\partial z^2}\right]$$

$$= \text{grad}\,(A_1\frac{\partial}{\partial x} + A_2\frac{\partial\phi}{\partial y} + A_3\frac{\partial\phi}{\partial z})$$

$$= \nabla(\vec{A}\cdot\nabla\vec{\phi}). \tag{B.23}$$

Therefore, we conclude that

$$\nabla\times\nabla\times\vec{Q} = \vec{A}k^2\phi + \nabla(\vec{A}\cdot\nabla\vec{\phi}) \ . \tag{B.24}$$

Also,

$$\nabla\times\nabla\times\vec{P} = k^2\vec{E} + i\omega\mu\vec{J} \ . \tag{B.25}$$

Thus, from proposition A-3 we see that

$$\int_V (\vec{Q}\cdot\nabla\times\nabla\times\vec{P} - \vec{P}\cdot\nabla\times\nabla\times\vec{Q})dv =$$

$$\int\{\phi\,\vec{A}\cdot(k^2\vec{E} + i\omega\mu\,\vec{J}) - \vec{E}\cdot(k^2\vec{A}\,\phi + \nabla(\vec{A}\cdot\vec{\nabla}\phi)\}dv$$

$$= \int_S\left[\vec{E}\times(\vec{\nabla\phi}\times\vec{A}) - \phi\vec{A}\times(\nabla\times\vec{E})\right]\cdot\vec{n}\;da$$

$$= \int_S\left[(\vec{n}\times\vec{E})\cdot(\nabla\phi\times\vec{A}) - i\omega\mu(\phi\vec{A}\times\vec{H})\cdot\vec{n}\right]da$$

$$= \int_S\left[(\vec{n}\times\vec{E})\times\vec{\nabla}\phi\right]\cdot\vec{A} - i\omega\mu(\nabla\vec{\phi}\times\vec{A})\cdot(\vec{H}\times\vec{n})da$$

$$= \int_S\left[(\vec{n}\times\vec{E})\times\vec{\nabla\phi} + i\omega\mu\phi(\vec{n}\times\vec{H})\right]\cdot\vec{A}\;da \qquad (B.26)$$

Simplifying (B.26) we find that

$$\int_V(\vec{Q}\cdot\nabla\times\nabla\times\vec{P} - \vec{P}\cdot\nabla\times\nabla\times\vec{Q})dv$$

$$= \vec{A}\cdot\int_V i\omega\mu\vec{J}\phi\;dv - \int_V\vec{E}\cdot\nabla(\vec{A}\cdot\nabla\phi)\,dv$$

$$= \vec{A}\cdot\left[\int_S\{(\vec{n}\times\vec{E})\times\vec{\nabla}\phi + i\omega\mu\phi(\vec{n}\times\vec{H})\}\;da\right] \qquad (B.27)$$

Now we make use of the fact that

$$\int_S(\vec{E}(\vec{\nabla\phi}\cdot\vec{A}))\cdot\vec{n}\;da = \int_V \mathrm{div}(\vec{E}(\vec{\nabla\phi}\cdot\vec{A}))dv$$

$$= \int_V\left[\vec{E}\cdot\nabla(\vec{\nabla\phi}\cdot\vec{A}) + (\vec{\nabla\phi}\cdot\vec{A})(\nabla\cdot\vec{E})\right]\,dv \quad . \qquad (B.28)$$

Thus,

$$\int_V\vec{E}\cdot\nabla(\vec{\nabla\phi}\cdot\vec{A}) = -\vec{A}\cdot\left[\int_V(\nabla\cdot\vec{E})\vec{\nabla\phi}dv - \int_S(\vec{E}\cdot n)\,\vec{\nabla\phi}\;da\right] \qquad (B.29)$$

Substituting (B.29) into (B.27), we deduce that

$$\vec{A}\cdot\left[\int_V \{i\omega\mu\vec{J}\phi + (\nabla\cdot\vec{E})\vec{\nabla\phi}\}dv - \int_S (\vec{E}\cdot\vec{n})\vec{\nabla\phi}\, da\right]$$

$$= \vec{A}\cdot\left[\int_S \{(n\times\vec{E})\times\vec{\nabla\phi} + i\omega\mu\,(\vec{n}\times\vec{H})\,\phi\}da\right] . \qquad (B.30)$$

Therefore, since $\vec{A}$ is arbitrary

$$\int_V \{i\omega\mu\,\vec{J}\phi + (\nabla\cdot E)\,\vec{\nabla\phi}\}\,dv =$$

$$\int_S \{(\vec{E}\cdot\vec{n})\,\vec{\nabla\phi} + (\vec{n}\times\vec{E})\times\vec{\nabla\phi} + i\omega\mu(\vec{n}\times\vec{H})\,\phi\}da . \qquad (B.31)$$

Let S consist of the boundary of V together with a sphere, ∂B, of radius r_1 circumscribed about the point (x^1,y^1,z^1) whose normal is directed out of V towards the center of the ball B of radius r_1. We must compute the contribution of the right side of (B.31) to the integral over the sphere. We have

$$\vec{\nabla\phi} = [\frac{ikexp(ikr)}{r} - \frac{exp(ikr)}{r^2}]\vec{e_r} , \qquad (B.32)$$

where $\vec{e_r}$ is a vector from the center of B outward. Since

$$\lim_{r_1\to 0} \int_0^{2\pi}\int_0^{\pi} i\omega\,\mu(\vec{n}\times\vec{H})\,\frac{\exp(ikr_1)}{r_1}\,r_1^2\sin\phi\,d\phi\,d\theta, = 0 , \qquad (B.33)$$

we observe that

$$\lim_{r_1\to 0} \int_{\partial B} \{i\omega\,\mu(\vec{n}\times\vec{H})\phi + (\vec{n}\times\vec{E})\times\vec{\nabla\phi} + (\vec{n}\cdot\vec{E})\,\vec{\nabla\phi}\}da$$

$$= \lim_{r_1\to 0} \int_{\partial B} \{\vec{n}\times\vec{E})\times\vec{\nabla\phi} + (\vec{n}\cdot\vec{E})\,\vec{\nabla\phi}\}da.$$

Thus,

$$\int \{i\omega\mu\vec{J}\phi + (\rho/\varepsilon)\vec{\nabla}\phi\}dv =$$

$$\lim_{r_1 \to 0} \int_{\partial B} \psi(r_1) \left[(\vec{n} \times \vec{E}) \times \vec{n} + (\vec{n} \cdot \vec{E})\vec{n} \right] da , \tag{B.34}$$

where we have used the fact that

$$\vec{e_r} = -\vec{n} \tag{B.35}$$

and

$$\psi(r_1) = \left(\frac{1}{r_1} - ik \right) \phi\ (r_1) . \tag{B.36}$$

We now prove the following Lemma.

Lemma B.1. If $\vec{n} = A\vec{i} + B\vec{j} + C\vec{k}$, then $(\vec{n} \times \vec{E}) \times \vec{n} + (\vec{n} \cdot \vec{E})\vec{n} =$

$$(A^2 + B^2 + C^2)\ \vec{E} . \tag{B.37}$$

Proof of Lemma B.1.

Observe that

$$\vec{n} \times \vec{E} = \begin{vmatrix} i & j & k \\ A & B & C \\ E_x & E_y & E_z \end{vmatrix}$$

$$= \vec{i}(BE_z - CE_y) - \vec{j}(AE_z - CE_x) + \vec{k}(AE_y - BE_x)$$

$$= \vec{i}(BE_z - CE_y) + \vec{j}(CE_x - AE_z) + \vec{k}(AE_y - BE_x) . \tag{B.38}$$

Also,

$$(\vec{n} \times \vec{E}) \times \vec{n} =$$

$$\begin{vmatrix} \vec{i} & \vec{j} & \vec{k} \\ BE_z - CE_y & CE_x - AE_z & AE_y - BE_x \\ A & B & C \end{vmatrix} .$$

Thus,

$$(\vec{n}\times\vec{E})\times\vec{n} =$$

$$(C^2E_x - ACE_z - ABE_y + B^2E_x)\vec{i}$$

$$+ [(A^2+C^2)E_y - BAE_x - BCE_z]\vec{j}$$

$$+ [(B^2+A^2)E_z - CBE_y - ACE_x]\vec{k} \quad . \tag{B.39}$$

We conclude that

$$(\vec{n}\times\vec{E})\times\vec{n} + (\vec{n}\cdot\vec{E})\vec{n} = \{[(B^2+C^2)E_x - A(BE_y+CE_z)]\vec{i}$$

$$+ [(A^2+C^2)E_y - B(AE_x+CE_z)]\vec{j}$$

$$+ [(A^2+B^2)E_z - C(AE_x+BE_y)]\vec{k}\} + [A(AE_x+BE_y+CE_z)]\vec{i}$$

$$+ B(AE_x+BE_y+CE_z)\vec{j}$$

$$+ C(AE_x+BE_y+CE_z)\vec{k}$$

$$= (A^2+B^2+C^2)\{E_x\vec{i} + E_y\vec{j} + E_z\vec{k}\} \; . \tag{B.40}$$

This completes the proof of Lemma B.1.

Lemma B.2. If $\phi(r) = \exp(ikr)/r$,

then

$$\lim_{r_1\to 0} \int_{\partial B} \{i\omega\mu(\vec{n}\times\vec{H})\phi + (\vec{n}\times\vec{E})\times\vec{\nabla}\phi + (\vec{n}\cdot\vec{E})\vec{\nabla}\phi\}da$$

$$= 4\pi\vec{E}(x^1,y^1,z^1) \; , \tag{B.41}$$

where

$$r_1 = \sqrt{(x-x^1)^2 + (y-y^1)^2 + (z-z^1)^2} \tag{B.42}$$

and where B is the ball of radius r_1 centered at (x^1,y^1,z^1).

Proof of Lemma B.2. If $\vec{n} = -\vec{e}_r = -\vec{\nabla}\phi/\|\vec{\nabla}\phi\|$, then applying Lemma B.1 and (B.33) - (B.36), we observe that

$$\lim_{r_1 \to 0} \int_{\partial B} \{i\omega\mu(\vec{n}\times\vec{H})\phi + (\vec{n}\times\vec{E})\times\nabla\vec{\phi} + (\vec{n}\cdot\vec{E})\nabla\vec{\phi}\}da$$

$$= \lim_{r_1 \to 0} \int_{\partial B} \psi(r_1)\,\vec{E}(x,y,z)da$$

$$= \lim_{r_1 \to 0} \int_0^{2\pi}\int_0^{\pi} \left[\frac{ik\exp(ikr_1)}{r_1} - \frac{\exp(ikr_1)}{r_1^2}\right]\vec{E}(x,y,z)r_1^2\sin\phi d\phi d\theta$$

$$= \vec{E}(x',y',z')\int_0^{2\pi}\int_0^{\pi}\sin(\phi)d\phi d\theta = 4\pi\vec{E}(x',y',z'). \qquad (B.43)$$

Theorem B.1. In a nonmagnetic media with $\vec{J}^* = 0$ we observe that

$$\vec{E}(x',\,y',\,z') = \frac{1}{4\pi}\int_V (i\omega\mu\vec{J}\phi + (\nabla\cdot E)\nabla\phi)dv$$

$$- \frac{1}{4\pi}\int_S \left[i\omega\mu(\vec{n}\times\vec{H})\phi + (\vec{n}\times\vec{E})\times\nabla\vec{\phi} + (\vec{n}\cdot\vec{E})\nabla\vec{\phi}\right]da \quad . \qquad (B.44)$$

Proof. This follows from the basic relation (B.26) and Lemmas B.1 and B.2. where $\vec{P} = \vec{E}$ and $\vec{Q} = \phi\vec{A}$.

A material nonmagnetic body can be conceived as a region of free space filled with charges with density ρ, a current with flux density $\vec{J}$, and bounded by a surface with a charge density η. If we assume time-harmonic fields, then the continuity equation implies that

$$\mathrm{div}(\vec{J}) + i\omega\rho = 0 \qquad (B.45)$$

which implies that

$$\rho = \left(\frac{-1}{i\omega}\right)\mathrm{div}(\vec{J}) = \frac{i}{\omega}\,\mathrm{div}(\vec{J}) \quad . \qquad (B.46)$$

Now we wish to define surface charge density η. In figure B.1 $\vec{J}-$ denotes the current density inside the surface and $\vec{J}+$ denotes the current density immediately outside the surface.

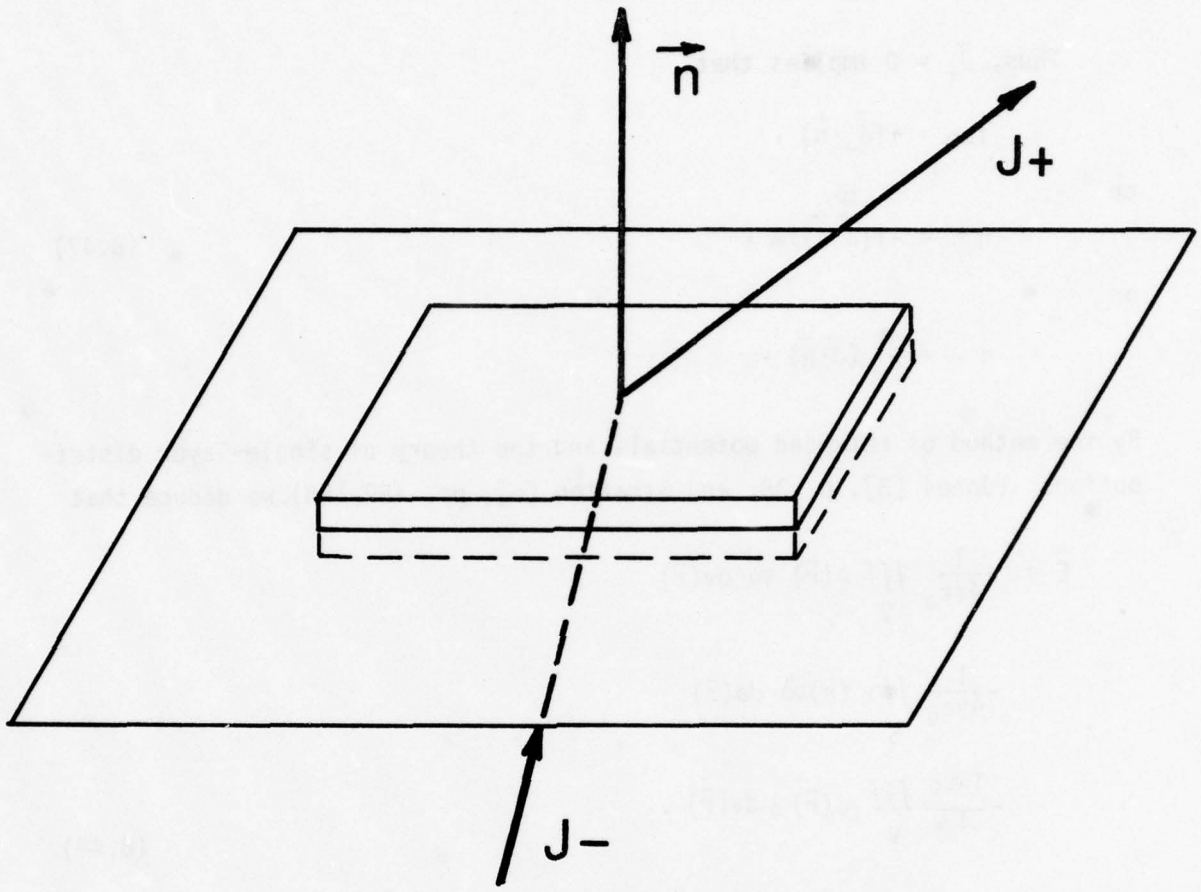


Figure B-1. Surface charge density.

By conservation of surface charge density

$$\eta(t+\Delta t)A - \eta(t)\,A + [(\vec{J}_+ \cdot \vec{n})\,A - (\vec{J}_- \cdot \vec{n})A]\Delta t = 0\,.$$

Thus, $\vec{J}_+ = 0$ implies that

$$i\omega\eta = +(\vec{J}_- \cdot \vec{n}) ,$$

or

$$\eta = -i(\vec{J} \cdot \vec{n})/\omega , \tag{B.47}$$

or

$$\eta = \frac{1}{i\omega} (\vec{J} \cdot \vec{n}) .$$

By the method of retarded potentials and the theory of single-layer distributions (Jones [3], p. 38, and Stratton [6], pp. 187-188), we deduce that

$$\vec{E} = -\frac{1}{4\pi\varepsilon_0} \iiint_V \rho(\bar{r})\, \vec{\nabla\phi}\, dv(\bar{r})$$

$$-\frac{1}{4\pi\varepsilon_0} \iint_S \eta(\bar{r})\vec{\nabla\phi}\, da(\bar{r})$$

$$-\frac{i\omega\mu_0}{4\pi} \iiint_V \vec{J}(\bar{r})\, \phi\, dv(\bar{r}) . \tag{B.48}$$

From (B.48), (B.47) and (B.46) we deduce that

$$\vec{E} = -\frac{i}{4\pi\varepsilon_0\omega} \iiint_V \mathrm{div}(\vec{J})\vec{\nabla\phi}\, dv$$

$$+ \frac{i}{4\pi\varepsilon_0\omega} \iint_S (\vec{J} \cdot \vec{n})\vec{\nabla\phi}\, da - \frac{i\omega\mu_0}{4\pi} \iiint_V \vec{J}(\bar{r})\phi\, dv . \tag{B.49}$$

By dyadic analysis for all vectors $\vec{A}$ and $\vec{B}$, we have

$$\operatorname{div}(\vec{A}\vec{B}) = \operatorname{div}(\vec{A})\vec{B} + \vec{A} \cdot (\operatorname{grad} \vec{B}) . \tag{B.50}$$

Thus,

$$\iiint_V \operatorname{div}(\vec{A}\vec{B})dv = \iint_S (\vec{n}\cdot\vec{A})\vec{B}\, dS$$

$$= \iiint_V \left[\operatorname{div}(\vec{A})\vec{B} + \vec{A}\cdot\operatorname{grad} \vec{B}\right] dv . \tag{B.51}$$

Letting

$$\vec{A} = \vec{J} \tag{B.52}$$

and

$$\vec{B} = \operatorname{grad}\phi \tag{B.53}$$

in (B.51), we deduce that

$$\frac{1}{i\omega 4\pi\varepsilon_0} \iiint_V \operatorname{div}(\vec{J})\operatorname{grad}_r\phi dv =$$

$$\frac{1}{i\omega 4\pi\varepsilon_0}\left[\iint_{S+\Sigma} (\vec{n}\cdot\vec{J})\operatorname{grad}_r\phi\, da - \iiint_V \vec{J}\cdot\operatorname{grad}_r\operatorname{grad}_r\phi dv\right] . \tag{B.54}$$

Substituting (B.54) into (B.49) we deduce that

$$\vec{E} = \frac{1}{4\pi\varepsilon_0 i\omega}\left[\iint_{S+\Sigma} (\vec{n}\cdot\vec{J})\operatorname{grad}_r\phi da - \iiint_V \vec{J}\cdot\operatorname{grad}_r\operatorname{grad}_r\phi dv\right]$$

$$- \frac{1}{4\pi\varepsilon_0 i\omega}\iint_S (\vec{n}\cdot\vec{J})\operatorname{grad}_r\phi da - \frac{i\omega\mu_0}{4\pi}\iiint_V \vec{J}(\bar{r})\phi dv(\bar{r}) \tag{B.55}$$

which implies that

$$\vec{E} = -\frac{1}{4\pi\varepsilon_0 i\omega} \iiint_V \vec{J}\cdot\text{grad}_r\ \text{grad}_r\phi\ dv$$

$$-\frac{i\omega\mu_0}{4\pi} \iiint_V \vec{J}(\bar{r})\,\phi\ dv(\bar{r})$$

$$+\frac{1}{4\pi\varepsilon_0 i\omega} \iint_{\Sigma_\rho} (\vec{n}\cdot\vec{J})\text{grad}_r\,\phi\ da, \tag{B.56}$$

where Σ_ρ is a spherical surface of radius ρ surrounding the observation point.

Lemma B.3. If $\phi(r,\bar{r})$ is defined by

$$\phi(r,\bar{r}) = \frac{\exp(-ik_0|r-\bar{r}|)}{|r-\bar{r}|}\ , \tag{B.57}$$

then

$$\lim_{\rho\to 0} \int_{\Sigma_\rho} (\vec{n}\cdot\vec{J})\text{grad}_r\phi da = -\frac{4\pi}{3}\vec{J}(r)\ . \tag{B.58}$$

Proof of Lemma B.3. Observe that $\lim_{\rho\to 0} \int_{\Sigma_\rho} (\vec{n}\cdot\vec{J})\text{grad}_r\phi da =$

$$-\lim_{\rho\to 0} \int_{\Sigma_\rho} (\sin\phi\cos\theta\ A + \sin\phi\sin\theta B + \cos\phi C)\text{grad}\,\phi\ da, \tag{B.59}$$

where $\vec{J} = A\vec{i} + B\vec{j} + C\vec{k}$ and

$$\text{grad}\,\phi = \frac{1}{\rho^2}(\vec{i}\sin\phi\cos\theta + \vec{j}\sin\phi\sin\theta + \vec{k}\cos\theta)$$

$$+ F(\rho,\phi,\theta)/\rho\ , \tag{B.60}$$

where $F(\rho,\phi,\theta)$ is a bounded function.

Thus, substituting (B.60) into (B.59), we find that

$$\lim_{\rho \to 0} \int_{\Sigma_\rho} (\vec{n} \cdot \vec{J}) \operatorname{grad}_r \phi \, da =$$

$$- \Bigg[\vec{i} \int_0^{2\pi} \int_0^{\pi} (\sin\phi\cos\theta A + \sin\phi\sin\theta B + \cos\phi C)(\sin\phi\cos\theta) \sin\phi \, d\phi \, d\theta$$

$$+ \vec{j} \int_0^{2\pi} \int_0^{\pi} (\sin\phi\cos\theta A + \sin\phi\sin\theta B + \cos\phi C)(\sin\phi\sin\theta) \sin\phi \, d\phi \, d\theta$$

$$+ \vec{k} \int_0^{2\pi} \int_0^{\pi} (\sin\phi\cos\theta A + \sin\phi\sin\theta B + \cos\phi C) \cos\phi \sin\phi \, d\phi \, d\theta \Bigg] . \qquad (B.61)$$

To evaluate the right side of (B.61) we must evaluate three simple integrals.

These are

$$I_1 = \int_0^{2\pi} \int_0^{\pi} \sin^3\phi \cos^2\theta \, d\phi \, d\theta , \qquad (B.62)$$

$$I_2 = \int_0^{2\pi} \int_0^{\pi} \sin^3\phi \sin^2\theta \, d\phi \, d\theta , \qquad (B.63)$$

and

$$I_3 = \int_0^{2\pi} \int_0^{\pi} \sin\phi \cos^2\phi \, d\phi \, d\theta . \qquad (B.64)$$

Observe that $I_2 = I_3$ and that

$$I_3 = 2\pi \left(\frac{-\cos^3\phi}{3} \right) \Bigg|_0^{\pi} = 4\pi/3 . \qquad (B.65)$$

Hence,

$$I_1 = \left[-\int_{\phi=0}^{\phi=\pi} (1-\cos^2\phi) \, d\cos\phi \right] \left[\int_0^{2\pi} \left[\frac{1 + \cos(2\theta)}{2} \right] d\theta \right]$$

$$= - \left(\cos\phi - \frac{\cos^3\phi}{3} \right) \Bigg|_0^{\pi} \cdot \pi = 4\pi/3 . \qquad (B.66)$$

Thus, we deduce that

$$\lim_{\rho \to 0} \int_{\Sigma_\rho} (\vec{n}\cdot\vec{J})\,\mathrm{grad}_r\,\phi\,da = -(4\pi/3)(A\vec{i} + B\vec{j} + C\vec{k}) \tag{B.67}$$

when $\vec{J}$ is a constant vector. Since $\vec{J}(\bar{r})$ is continuous, this proves (B.58).

Substituting (B.58) into (B.56) we obtain the following result.

Theorem B.2 If $\vec{J}$ is the current density in a region, V, of free space, then,

$$\vec{E}(r) = -\frac{1}{4\pi\varepsilon_0 i\omega} \iiint_V \vec{J}\cdot\mathrm{grad}_{r'}\,\mathrm{grad}_r\,\phi\,dv$$

$$- \frac{i\omega\mu_0}{4\pi} \iiint_V \vec{J}(r)\,\phi\,dv - \frac{1}{3\varepsilon_0 i\omega}\,\vec{J}(r) \tag{B.68}$$

at every point r in V.

We now introduce the Green's function dyadic.

Definition B.1. For every pair of points r and $\bar{r}$ we define

$$G(r,\bar{r}) = -\frac{1}{4\pi}\left(I + \frac{1}{k_0^2}\,\mathrm{grad}_r\mathrm{grad}_r\right)\frac{\exp(-ik_0|r-\bar{r}\,|)}{|r-\bar{r}\,|} \tag{B.69}$$

where $k_0^2 = \omega^2\mu_0\varepsilon_0$ and where I is the identity dyadic.

Theorem B.3 If $\vec{J}$ is the current density in a region, V, of free space, then

$$\vec{E}(r) + \frac{\vec{J}(r)}{3i\omega\varepsilon_0} = i\omega\mu_0\left(PV\left\{\int_V \vec{J}(\bar{r})\cdot G(r,\bar{r})\,dv\right\}\right) \tag{B.70}$$

where the right side of (B.70) is a principal value integral.

Proof. Observe that

$$-\frac{i\omega\mu_0}{4\pi k_0^2} = -\frac{i\omega\mu_0}{4\pi\omega^2\mu_0\varepsilon_0} = \frac{1}{4\pi i\omega\varepsilon_0}$$

and that

$$\text{grad}_{r'}\,\text{grad}_r\,\phi = -\text{grad}_r\text{grad}_r\,\phi\ .$$

Thus, (B.70) follows from Definition B.1 and (B.68).

Define $G_{(x_p,x_q)}(r,r')$ to be the (p,q)-entry of the Green's matrix.

We have

$$G_{(x_p,x_q)}(r,r') = -i\omega\mu_0\left[S_{(p,q)} + \frac{1}{k_0^2}\frac{\partial^2}{\partial x_p\partial x_q}\phi(r,r')\right] \tag{B.71}$$

Observe that if we define

$$\psi(\rho) = \phi(r,r') = \frac{\exp(-ik_0|r-r'|)}{|r-r'|}, \tag{B.72}$$

and

$$\rho = |r-r'|, \tag{B.73}$$

then

$$\frac{\partial\phi}{\partial x_p} = \psi'(\rho)\,\frac{(x_p - x_p')}{\rho} \tag{B.74}$$

and

$$\frac{\partial^2\phi}{\partial x_q\partial x_p} = \psi''(\rho)\,\frac{(x_q - x_q')(x_p - x_p')}{\rho^2}$$

$$+\ \psi'(\rho)\left[\delta_{(p,q)} - \frac{(x_p-x_p')(x_q-x_q')}{\rho^2}\right]\ . \tag{B.75}$$

Lemma B.4. If we assume that the penetrable dielectric is replaced by free space with an equivalent current distribution, then this distribution is given by

$$\vec{J}_{eq} = \left[\sigma(r) + i\omega(\varepsilon(r)-\varepsilon_0) \right]\vec{E} = \tau(r)\vec{E} \ . \tag{B.76}$$

Proof. Let us assume that we are in free space. Then the Maxwell equation becomes

$$\nabla \times \vec{H} - i\omega\varepsilon_0 \vec{E} = \vec{J}_{eq}. \tag{B.77}$$

However, the actual equation is

$$\nabla \times \vec{H} - i\omega\varepsilon \vec{E} = \sigma\vec{E} \ . \tag{B.78}$$

From (B.77) and (B.78) we deduce (B.76).

Thus,

$$\vec{E}^s(r) = PV \int_V \vec{J}_{eq}(r')\cdot G(r,r')dv(r') - \frac{\vec{J}_{eq}(r)}{3k\omega\varepsilon_0} \tag{B.79}$$

and

$$(\vec{E} - \vec{E}^i) = PV \int_V \tau(r') \vec{E}(r')\cdot G(r,r')dv(r') - \frac{\tau(r)\vec{E}(r)}{3j\omega\varepsilon_0} \tag{B.80}$$

which implies that

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0} \right]\vec{E}(r) - PV \left\{ \int_V \tau(r')\vec{E}(r')\cdot G(r,r')dv(r') \right\} = \vec{E}^i(r) \tag{B.81}$$

APPENDIX C

DISCRETIZATION OF THE INTEGRAL EQUATION OF ELECTROMAGNETIC SCATTERING

We now carry out the discretization of the integral equation making full use of symmetry relations. The basic integral equation according to (B.69), (B.71) -(B.72), and (B.81) is

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0} \right] \vec{E}(r) - PV \int_V \tau(r')\vec{E}(r')\cdot G(r,r')dv(r') = \vec{E}^i(r) , \tag{C.1}$$

where

$$G(r,r') = -i\omega\mu_0\left[I+(1/k_0^2)\text{grad}_r\text{grad}_r\right]\phi(r,r') . \tag{C.2}$$

Let us introduce some notation that will enable us to represent the dyadic in a compact form. We write

$$\rho = |r-r'| = \sqrt{(x_1-x_1')^2+(x_2-x_2')^2+(x_3-x_3')^2} , \tag{C.3}$$

$$\psi(\rho) = \phi(r,r') = \frac{\exp(-ik_0|r-r'|)}{4\pi|r-r'|} , \tag{C.4}$$

and

$$\Delta x_i = x_i - x_i' . \tag{C.5}$$

Thus, to compute $\text{grad}_r\text{grad}_r\psi$, we must compute $(\partial/\partial x_p)\psi$ and $(\partial^2/\partial x_p \partial x_q)\psi$. Observe that

$$(\partial/\partial x_p)\psi(\rho) = (-ik_0 - \frac{1}{\rho})\,\psi(\rho)\,\frac{\Delta x_\rho}{\rho}$$

$$= \frac{\exp(-ik_0\rho)}{4\pi}\left[-ik_0\Delta x_p/\rho^2 - \Delta x_p/\rho^3\right] . \tag{C.6}$$

Also appearing in the Green's function are terms of the form $(\partial^2/\partial x_p\, \partial x_q)\psi(\rho)$. Observe that (C.6) implies that

$$\frac{\partial^2\psi}{\partial x_p \partial x_q} = (-ik_0 - 1/\rho)^2\psi(\rho)\left[\frac{\Delta x_p \Delta x_q}{\rho^2}\right]$$

$$+ (1/\rho^2)\psi(\rho)\left[\frac{\Delta x_p \Delta x_q}{\rho^2}\right] + (-ik_0 - 1/\rho)\psi(\rho)\left[\frac{\delta_{(p,q)}}{\rho}\right]$$

$$- (-ik_0 - 1/\rho)\psi(\rho)\frac{\Delta x_p \Delta x_q}{\rho^3} =$$

$$\left[-k_0^2 + \frac{2ik_0}{\rho} + \frac{1}{\rho^2} + \frac{1}{\rho^2} + \frac{ik_0}{\rho} + \frac{1}{\rho^2}\right]\psi(\rho)\frac{\Delta x_p \Delta x_q}{\rho^2}$$

$$+ (-ik_0 - 1/\rho)\psi(p)\left[\frac{\delta_{(p,q)}}{\rho}\right] =$$

$$\left[-k_0^2 + \frac{3}{\rho^2} + \frac{3ik_0}{\rho}\right]\psi(p)\frac{\Delta x_p \Delta x_q}{\rho^2} + (-ik_0 - 1/\rho)\psi(\rho)\left[\frac{\delta_{(p,q)}}{\rho}\right], \quad (C.7)$$

where $\delta_{(p,q)}$ is the Kronecker delta function.

Substituting the definition (C.4) into (C.7) we find that

$$\frac{\partial^2\psi}{\partial x_p \partial x_q} = \left(-k_0^2 + \frac{3}{\rho^2} + \frac{3ik_0}{\rho}\right)\frac{\exp(-ik_0\rho)}{4\pi\rho}\frac{\Delta x_p \Delta x_q}{\rho^2}$$

$$- (ik_0/\rho + 1/\rho^2)\frac{\exp(-ik_0\rho)}{4\pi\rho}\delta_{(p,q)} . \quad (C.8)$$

Another representation of $(\partial^2/\partial x_p\, \partial x_q)\psi$ which is useful for integration is obtained by differentiating both sides of the expression

$$\frac{\partial\psi}{\partial x_p} = \psi'(\rho)\frac{\Delta x_p}{\rho} \quad (C.9)$$

with respect to x_q. We obtain the relation,

$$\frac{\partial^2\psi}{\partial x_q \partial x_p} = \psi''(\rho)\frac{\Delta x_p \Delta x_q}{\rho^2} + \frac{\psi'(\rho)}{\rho}\left[\delta(p,q) - \frac{\Delta x_p \Delta x_q}{\rho^2}\right]. \tag{C.10}$$

Decompose the region V into subvolumes $\{V_1,\ldots,V_N\}$. We approximate (C.1) by the sums,

$$-\left[1 + \frac{\tau(r_m)}{3i\omega\varepsilon_0}\right]\vec{E}(r_m) + \sum_{\substack{n=1 \\ n\neq m}}^{N} \tau(r_n')\,\vec{E}(r_n')\,G(r_m,r_n')V(r_n')$$

$$+ \int_0^{a_m}\int_0^{2\pi}\int_0^{\pi} \tau(\rho)\vec{E}(\rho)G(r_m,r_m')\rho^2 \sin\phi\, d\phi\, d\theta\, d\rho = -\vec{E}^i(r_m), \tag{C.11}$$

where a_m is the radius of a sphere centered at r_m.

Let us write

$$R_{(m,n)} = |r_m - r_n|, \tag{C.12}$$

$$\alpha_{(m,n)} = k_0 R_{(m,n)}, \tag{C.13}$$

and

$$\cos\left\{\theta^{(m,n)}_{x_p}\right\} = \left\{\frac{x_p^m - x_p^n}{R_{(m,n)}}\right\}, \tag{C.14}$$

where $p \in \{1,2,3\}$.

Then (C.7) and $\rho = |r_m - r_n|$ imply that

$(1/k_0^2)(\partial^2/\partial x_p \partial x_q)\,\psi(\rho) =$

$$k_0 \frac{\exp\left[-i\alpha_{(m,n)}\right]}{4\pi\alpha^3_{(m,n)}}\left[\left[-\alpha^2_{(m,n)} + 3i\alpha_{(m,n)} + 3\right]\cos(\theta^{(m,n)}_{x_p})\cos(\theta^{(m,n)}_{x_q})\right.$$

$$\left. - (i\alpha_{(m,n)} + 1)\delta_{(p,q)}\right]. \tag{C.15}$$

If we express (C.11) in the form

$$\sum_{q=1}^{3}\sum_{n=1}^{N} G^{(m,n)}_{(x_p,x_q)} \vec{E}_{x_q}(r_n) = \vec{E}^{i}(r_m), \tag{C.16}$$

then $m \neq n$ implies that

$$G^{(m,n)}_{(x_p,x_q)} = \frac{-i\omega\mu_0 k_0 \tau(r_n)}{4\pi\alpha^3_{(m,n)}} (V_n)\exp(-i(\alpha_{(m,n)})$$

$$\left[\frac{k_0^3\,\rho^3}{k}\,\frac{1}{\rho} - (i\alpha_{(m,n)} + 1)\right]\delta(p,q)$$

$$+ \left[3 - \alpha^2_{(m,n)} + 3i\alpha_{(m,n)}\right]\cos(\theta^{(m,n)}_{x_p})\cos(\theta^{(m,n)}_{x_q}) \; . \tag{C.17}$$

From (C.17) we deduce the relation

$$G^{(m,n)}_{(x_p,x_q)} =$$

$$\frac{-i\omega\mu_0 k_0\,\tau(r_n)V_n}{4\pi\alpha^{\,3}_{(m,n)}}\exp(-i\alpha_{(m,n)})\left[(\alpha^2_{(m,n)} - i\alpha_{(m,n)} - 1)\delta_{(p,q)}\right.$$

$$\left. + \left[3 - \alpha^2_{(m,n)} + 3i\alpha_{(m,n)}\right]\cos(\theta^{(m,n)}_{x_p})\cos(\theta^{(m,n)}_{x_q})\right] \tag{C.18}$$

for $m \neq n$.

We remind the reader of the relation,

$$\phi(r_n,r_n') = \frac{\exp(-ik\,|r_n - r_n'|)}{4\pi|r_n - r_n'|} = \psi(\rho) \; . \tag{C.19}$$

Then, the (n,n) entry of the coefficient matrix of (C.11) has the form

$$G^{(n,n)}_{(x_p,x_q)} = -\delta_{(p,q)} \left[1 + \frac{\tau(r_n)}{3i\omega\varepsilon_0} \right]$$

$$+ \tau(r_n)\ PV \int_{V_n} \left[-i\omega\mu_0 \{\delta_{(p,q)} + \frac{1}{k_0^2} \left(\frac{\partial^2}{\partial x_p \partial x_q} \right) \} \phi(r_n, r') \right] dv(r'). \quad (C.20)$$

Here, we assume that V_n is replaced by a sphere of radius

$$a_n = \left(\frac{3V_n}{4\pi} \right)^{1/3} \quad (C.21)$$

and we carry out the integration in spherical coordinates.

We prove a series of lemmas in which we evaluate terms in the principal value integral defining the right side of (C.16).

Lemma C.1. For every positive number η we have

$$\int_\eta^{a_n} \int_0^\pi \int_0^{2\pi} \frac{\psi'(\rho)}{\rho} \rho^2 \sin\theta d\phi d\theta d\rho =$$

$$\left[\exp(-ik_0 a_n) - \exp(-ik_0 \eta) \right] - 4\pi \int_\eta^{a_n} \psi(\rho) d\rho \ . \quad (C.22)$$

Proof of Lemma C.1. The integral is given by

$$I = \int_\eta^{a_n} \int_0^\pi \int_0^{2\pi} \left(\frac{\psi'(\rho)}{\rho} \right) \rho^2 \sin\theta d\phi d\theta d\rho =$$

$$4\pi \int_\eta^{a_n} \psi'(\rho) \rho d\rho = 4\pi \int_{\rho=\eta}^{\rho=a_n} \rho d\psi(\rho), \quad (C.23)$$

which is the right side of (C.20).

Lemma C.2. For every positive number η we have

$$\int_{\eta}^{a_n}\int_{0}^{\pi}\int_{0}^{2\pi}\left[\frac{\psi''(\rho)}{\rho^2}\right]\Delta x_p \Delta x_q(\rho^2\sin\theta)d\phi d\theta d\rho =$$

$$(4\pi/3)\,\delta_{(p,q)}\left\{\frac{\exp(-ik_0\eta)[ik_0\eta+1] - \exp(ik_0a_n)[ik_0a_n+1]}{4\pi}\right.$$

$$-2\left[[\exp(-ik_0a_n) - \exp(-ik_0\eta)]/4\pi\right]$$

$$\left. + 2\int_{\eta}^{a_n}\psi(\rho)d\rho\right\} . \qquad (C.24)$$

Proof of Lemma C.2. Observe that

$$(\Delta x_1/\rho) = \sin\theta\cos\phi ,$$

$$(\Delta x_2/\rho) = \sin\theta\sin\phi ,$$

and

$$(\Delta x_3/\rho) = \cos\theta . \qquad (C.25)$$

Now we make use of another lemma which we use to prove Lemma C.2.

Lemma C.3. For all p and q we have

$$\int_{0}^{\pi}\int_{0}^{2\pi}\frac{\Delta x_p \Delta x_q}{\rho^2}\sin\theta d\phi d\theta = \delta_{(p,q)}4\pi/3 . \qquad (C.26)$$

Proof of Lemma C.3. This follows from calculations used in establishing Lemma B.3 and from orthogonality relations.

Continuation of Proof of Lemma C.2. The integral I representing the left side of (C.24) is given by

$$I = (4\pi/3)\delta_{(p,q)}\int_{\eta}^{a_n}\psi''(\rho)\rho^2 d\rho . \qquad (C.27)$$

Integrating by parts we find that

$$I = (4\pi/3)\delta_{(p,q)} \left[\rho^2 \psi'(\rho) \Big|_{\eta}^{a_n} - \int_{\eta}^{a_n} 2\rho\psi'(\rho)d\rho \right] . \tag{C.28}$$

Since by definition (C.4) and a direction calculation

$$\psi^1(\rho) = \frac{-\exp(-ik_0\rho)}{4\pi} \left[\frac{ik_0}{\rho} + \frac{1}{\rho^2} \right] , \tag{C.29}$$

(C.25) and Lemma C.1 imply that

$$I = (4\pi/3)\delta_{(p,q)} \left\{ \frac{-\exp(-k_0\rho)}{4\pi} \left[ik_0\rho+1 \right] \Big|_{\eta}^{an} \right.$$

$$\left. -2\left[\frac{\exp(-ik_0\rho)}{4\pi}\right] \Big|_{\eta}^{a_n} + 2 \int_{\eta}^{a_n} \psi(\rho)d\rho \right\} . \tag{C.30}$$

Thus, we see that

$$I = (4\pi/3)\delta_{(p,q)} \left[-\exp(-ik_0a_n) \left[ik_0a_n+1 \right] \right.$$

$$\left. + \exp(-ik_0\eta) \left[ik_0\eta +1 \right] \right]$$

$$-2[\exp(-ik_0a_n) - \exp(-ik_0\eta)]/(4\pi)$$

$$+ 2 \left(\int_{\eta}^{a_n} \psi(\rho)d\rho \right) . \tag{C.31}$$

Lemma C.4. For every positive number η we have

$$\int_{\eta}^{a_n} \int_{0}^{\pi} \int_{0}^{2\pi} \frac{\psi'(\rho)}{\rho} \left[\frac{\Delta x_p \Delta x_q}{\rho^2} \right] \rho^2 \sin\theta d\phi d\theta d\rho =$$

$$(4\pi/3)\{ \left[\frac{\exp(ik_0a_n) - \exp(-ik_0\eta)}{4\pi} \right] - \int_{\eta}^{a_n} \psi(\rho)d\rho \} . \tag{C.32}$$

Proof of Lemma C.4. This follows immediately from Lemma C.3 and the fact that

$$\int_{\eta}^{a_n} \psi'(\rho)\rho\, d\rho = \rho\psi(\rho)\Big|_{\eta}^{a_n} - \int_{\eta}^{a_n} \psi(\rho)d\rho .$$

Lemma C.5. For every positive number η, we have

$$\int_{B(a_n)} \psi(\rho)dv(\rho) = \left[\frac{a_n \exp(-ik_0 a_n)}{-ik_0} - \frac{\exp(-ik_0 a_n)}{-k_0^2}\right]$$

$$- \left[\frac{\eta \exp(-ik_0\eta)}{-ik_0} - \frac{\exp(-ik_0\eta)}{-k_0^2}\right] . \tag{C.33}$$

Proof of Lemma C.5. We have

$$\int_{\eta}^{a_n} \psi(\rho)\rho^2 d\rho = \int_{\eta}^{a_n} \left[\frac{\exp(-ik_0\rho)}{4\pi}\right]\rho d\rho . \tag{C.34}$$

Since

$$\int \exp(as)s\,ds = s\exp(as)/a - \exp(as)/a^2, \tag{C.35}$$

$$\int_{\eta}^{a_n} \psi(\rho)\rho^2 d\rho = \left(\frac{1}{4\pi}\right)\left[\frac{\rho\exp(-ik_0\rho)}{-ik_0} - \frac{\exp(-ik_0\rho)}{-k_0^2}\right]\Bigg|_{\eta}^{a_n} . \tag{C.36}$$

Theorem C.1. The principal value integral appearing as a term in the expression of the (n,n) entry of the coefficient matrix is defined by

$$I^n_{(p,q)} = \tau(r_n)PV\int_{V_n} \left(-i\omega\mu_o\left[\delta_{(p,q)} + (1/k_o^2)(\partial^2/\partial x_p \partial x_q)\right]\phi(r_n,r')\right)dv(r')$$

$$= -\frac{2i\omega\mu_o\tau(r_n)}{3k_o^2}\,\delta_{(p,q)}[\exp(-ik_o a_n)[ik_o a_n + 1] - 1]. \qquad (C.37)$$

Proof of Theorem C.1. We need to evaluate

$$PV\int_{V_n} \tau(r_n)[-i\omega\mu_o\left[\delta_{(p,q)} + (1/k_o^2)(\partial^2/\partial x_p \partial x_q)\right]\phi(r_n,r')]dv(r')$$

$$-i\omega\mu_o\tau(r_n)PV\int_{V_n}\left[\delta_{(p,q)} + (1/k_o^2)(\partial^2/\partial x_p \partial x_q)\right]\phi(r_n,r')dv(r') \qquad (C.38)$$

Letting B_n be V_n with a ball of radius η removed, we use (C.10) to define

$$I_\eta = \int_{B_n}\left[\delta_{(p,q)} + (1/k_o^2)(\partial^2/\partial x_p \partial x_q)\right]\psi(\rho)dv(\rho)$$

$$= \delta_{(p,q)}\int_{B_n}\psi(\rho)dv(\rho) + (1/k_o^2)\int_{B_n}\psi''(\rho)\frac{\Delta x_p \Delta x_q}{\rho^2}dv(\rho)$$

$$+ (1/k_o^2)\delta_{(p,q)}\int_{B_n}\frac{\psi'(\rho)}{\rho}dv(\rho)$$

$$-(1/k_o^2)\int_{B_n}\frac{\psi'(\rho)}{\rho}\,\frac{\Delta x_p \Delta x_q}{\rho^2}\,dv(\rho) \qquad (C.39)$$

Using Lemma C.5, Lemma C.2, Lemma C.1, and Lemma C.4 as we proceed from left to right, we find that

$$I_\eta = \delta_{(p,q)}\left(\left[\frac{a_n \exp(-ik_0 a_n)}{-ik_0} - \frac{\exp(-ik_0 a_n)}{-k_0^2}\right] - \left[\frac{\eta \exp(-ik_0\eta)}{-k_0} - \frac{\exp(-ik_0\eta)}{-k_0^2}\right]\right)$$

$$+ (1/3)\delta_{(p,q)}\left[\exp(-ik_0\eta)\left[ik_0\eta+1\right] - \exp(-ik_0 a_n)\left[ik_0 a_n+1\right]\right.$$

$$\left. - 2(\exp(-ik_0 a_n) - \exp(-ik_0\eta))\right]\left(\frac{1}{k_0^2}\right)$$

$$+ \left(\frac{1}{k_0^2}\right)\delta_{(p,q)}(8\pi/3)\int_\eta^{a_n}\psi(\rho)d\rho$$

$$+\left(\frac{1}{k_0^2}\right)\delta_{(p,q)}\left[\exp(-ik_0 a_n) - \exp(-ik_0\eta)\right] - 4\pi\left(\int_\eta^{a_n}\psi(\rho)d\rho\right)\delta_{(p,q)}\left(\frac{1}{k_0^2}\right)$$

$$-(1/3)\left[\exp(-ik_0 a_n) - \exp(-ik_0\eta)\right]\delta_{(p,q)}\left(\frac{1}{k_0^2}\right)$$

$$+ (4\pi/3)\left(\int_\eta^{a_n}\psi(\rho)d\rho\right)\delta_{(p,q)}\left(\frac{1}{k_0^2}\right). \qquad (C.40)$$

Collecting terms in (C.40) we observe that the terms involving the singular integral cancel out. We have

$$I_\eta = \delta_{(p,q)} \exp(-ik_0 a_n)\left[\frac{a_n}{-ik_0} + \frac{1}{k_0^2} - \left(\frac{ik_0 a_{n+1}}{k_0^2}\right)\left(\frac{1}{3}\right)\right.$$

$$\left. - \left(\frac{2}{3k_0^2}\right) + \frac{1}{k_0^2} - \frac{1}{3k_0^2}\right]$$

$$+ \delta_{(p,q)} \exp(-ik_0\eta)\left[\frac{\eta}{ik_0} - \frac{1}{k_0^2} + \frac{i\eta}{3k_0} + \frac{1}{3k_0^2}\right.$$

$$\left. + \frac{2}{3k_0^2} - \frac{1}{k_0^2} + \frac{1}{3k_0^2}\right] . \qquad \text{(C.41)}$$

Collecting terms still further we have

$$I_\eta = \delta_{(p,q)} \exp(-ik_0 a_n)\left[\frac{2ia_n}{3k_0} + \frac{2}{3k_0^2}\right]$$

$$+ \delta_{(p,q)} \exp(-ik_0\eta)\left[\frac{-2i\eta}{3k_0} - \frac{2}{3k_0^2}\right] . \qquad \text{(C.42)}$$

Taking the limit as $\eta \to 0$ we find that

$$\lim_{\eta \to 0} I_\eta = \left(\frac{2}{3k_0^2}\right)\delta_{(p,q)} \exp(-ik_0 a_n)[ik_0 a_n + 1] - \left(\frac{2}{3k_0^2}\right) . \qquad \text{(C.43)}$$

APPENDIX D

UTILIZATION OF SYMMETRY GROUPS IN SIMPLIFYING THE INTEGRAL EQUATION

Define a group G generated by the operations I, R_1, R_2, and R_3 where

$$R_1(x_1,x_2,x_3) = (-x_1,x_2,x_3), \tag{D.1}$$

$$R_2(x_1,x_2,x_3) = (x_1,-x_2,x_3), \tag{D.2}$$

and

$$R_3(x_1,x_2,x_3) = (x_1,x_2,-x_3). \tag{D.3}$$

Then the multiplication table for the group is given in Table D.1.

TABLE D-1. THE SYMMETRY GROUP MULTIPLICATION TABLE

	I	R_1	R_2	R_3	R_1R_2	R_1R_3	R_2R_3	$R_1R_2R_3$
I	I	R_1	R_2	R_3	R_1R_2	R_1R_3	R_2R_3	$R_1R_2R_3$
R_1	R_1	I	R_1R_2	R_1R_3	R_2	R_3	$R_1R_2R_3$	R_2R_3
R_2	R_2	R_1R_2	I	R_2R_3	R_1	$R_1R_2R_3$	R_3	R_1R_3
R_3	R_3	R_1R_3	R_2R_3	I	$R_1R_2R_3$	R_1	R_2	R_1R_2
R_1R_2	R_1R_2	R_2	R_1	$R_1R_2R_3$	I	R_2R_3	R_1R_3	R_3
R_1R_3	R_1R_3	R_3	$R_1R_2R_3$	R_1	R_2R_3	I	R_1R_2	R_2
R_2R_3	R_2R_3	$R_1R_2R_3$	R_3	R_2	R_1R_3	R_1R_2	J	R_1
$R_1R_2R_3$	$R_1R_2R_3$	R_2R_3	R_1R_3	R_1R_2	R_3	R_2	R_1	I

Let

$$G = \{I,R_1,R_2,R_3,R_1R_2,R_1R_3,R_2R_3,R_1R_2R_3\}. \tag{D.4}$$

The transformation group whose multiplication group is given in Table D-1 simply permutes the octants depicted in Figure D-1.

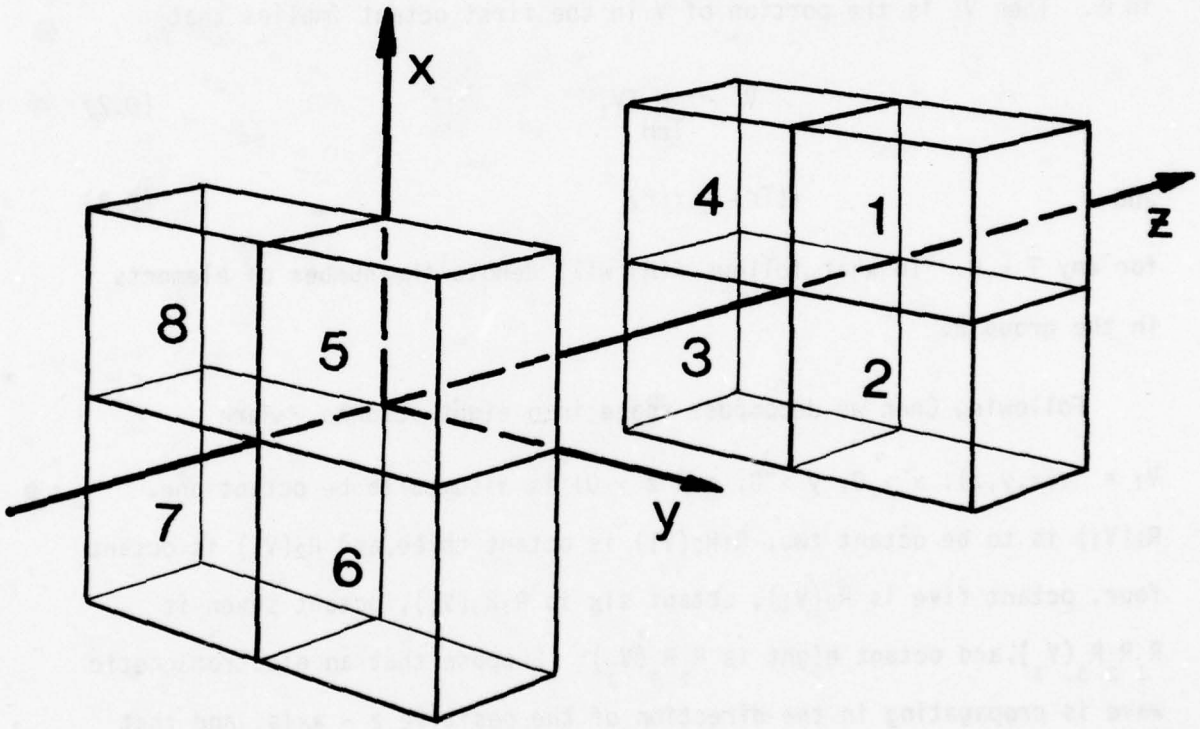


Figure D-1. Division of space into octants.

The basic integral equation is

$$\left[I + \frac{\tau(r)}{3i\omega \varepsilon_0} \right] \vec{E}(r) - PV \int_V \tau(r') \vec{E}(r') \cdot G(r,r') dv(r') = \vec{E}^i(r) . \qquad (D.5)$$

Assume that for all $T \in G$, that

$$G(Tr,Tr') = G(r,r') . \qquad (D.6)$$

Assume that region V is invariant under a subgroup H of transformations in G. Then V_1 is the portion of V in the first octant implies that

$$V = \bigcup_{T \in H} TV_1 \qquad (D.7)$$

and

$$\tau(Tr) = \tau(r) \qquad (D.8)$$

for any $T \in H$. In what follows #(H) will denote the number of elements in the group H.

Following Chen we decompose space into eight octants. Here $V_1 = \{(x,y,z): x > 0, y > 0, \text{ and } z > 0\}$ is assumed to be octant one, $R_1(V_1)$ is to be octant two, $R_1R_2(V_1)$ is octant three, and $R_2(V_1)$ is octant four, octant five is $R_3(V_1)$, octant six is $R_1R_3(V_1)$, octant seven is $R_1R_2R_3(V_1)$, and octant eight is $R_2R_3(V_1)$. Suppose that an electromagnetic wave is propagating in the direction of the positive z - axis, and that $\vec{E}^i$ is a function of z and t only and is polarized so that $\vec{E}^i$ is parallel to the positive x - axis.

Suppose that

$$\vec{E}^i = \vec{C}^i + \vec{S}^i , \qquad (D.9)$$

where $\vec{E}^i$ is assumed to depend only on z. Thus,

$$\vec{C}^i(z) = (\vec{E}^i(z) + \vec{E}^i(-z))/2 \tag{D.10}$$

and

$$\vec{S}^i(z) = (\vec{E}^i(z) - \vec{E}^i(-z))/2 . \tag{D.11}$$

Then

$$\vec{C}^i(z) = \vec{C}^i(-z) \tag{D.12}$$

and

$$\vec{S}^i(z) = -\vec{S}^i(-z). \tag{D.13}$$

From (D.5) and (D.7) we deduce that

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0} \right] \vec{E}(r) - \sum_{T \in H} \left\{ PV \int_{T(V_1)} \tau(r')\vec{E}(r')\cdot G(r,r')\, dv(r') \right\} = \vec{E}^i(r). \tag{D.14}$$

Letting $r' = T\xi'$, we deduce that

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0} \right] \vec{E}(r) - \sum_{T \in H} \left\{ PV \int_{V_1} \tau(\xi')\, \vec{E}(T\xi')\, G(r,T\xi')dv(\xi') \right\} = \vec{E}^i(r), \tag{D.15}$$

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0} \right] \vec{E}(Sr) - \sum_{T \in H} \left\{ PV \int_{V_1} \tau(\xi')\, \vec{E}(T\xi')\, G(Sr,T\xi')dv(\xi') \right\} = \vec{E}^i(Sr) . \tag{D.16}$$

Now there are two possibilities. Let us define

$$\vec{C}^i(r) = (1/\#(H)) \left(\sum_{S \in H} \vec{C}^i(Sr) \right) \tag{D.17}$$

and

$$\vec{S}^i(r) = (1/\#(H)) \left\{ \sum_{S \in H} C_S \vec{S}^i(Sr), \text{ where } C_S = +1 \text{ when } Sr = (x,y,z) \Rightarrow z > 0, \right.$$

$$\left. C_S = -1 \text{ when } Sr = (x,y,z) \Rightarrow z < 0 \text{ if } r \text{ is in the first octant} \right\} . \tag{D.18}$$

Note that if we define an operator L_C by the rule

$$L_C\vec{F}(r) = \left(\sum_{S\in H} \vec{F}(Sr)\right)/\#(H) , \tag{D.19}$$

and an operator L_S in a similar way using (D.18), then

$$\vec{E}^i(r) = \vec{C}^i(r) + \vec{S}^i(r) = L_C\vec{C}^i(r) + L_S\vec{S}^i(r) \tag{D.20}$$

Lemma D.1. For every $T\in H$, $\sum_{S\in H} G(Sr,T\xi') = \sum_{S\in H} G(Sr,\xi')$. (D.21)

Proof of Lemma D.1.

Observe that

$$\sum_{S\in H} G(Sr,T\xi') = \sum_{S\in H} G(TTSr,T\xi') = \sum_{S\in H} g(TSr,\xi') \tag{D.22}$$

by (D.6). But as S runs over H, so does TS. Hence, (D.22) implies that (D.21) is correct.

Theorem D.1. Let us define

$$\vec{\psi}(r) = \sum_{S\in H} \vec{E}_C(Sr)/\#(H) .$$

where $\vec{E}_C$ is the solution of (D.5) obtained when $\vec{E}^i$ is replaced by $\vec{C}^i$. Then

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right]\vec{\psi}(r) - PV\int_{V_1} \tau(\xi')\vec{\psi}(\xi')\left(\sum_{S\in H} G(Sr,\xi')\right) dv(\xi') = \vec{C}^i(r) . \tag{D.23}$$

Proof of Theorem D.1. This is an immediate consequence of Lemma D.1 and equation (D.17) which defines (D.23).

Lemma D.2. Let us define C_T for every T in the subgroup H of isometries of $\mathbb{R}^3$ according to (D.18). Then

$$\sum_{S\in H} C_S\, G(Sr,T\xi') = C_T \sum_{S\in H} C_S G(Sr,\xi') . \tag{D.24}$$

Proof of Lemma D.2. Observe that

$$\sum_{S\in H} C_S\, G(Sr,T\xi') = \sum_{S\in H} C_S\, G(TTSr,T\xi') = \sum_{S\in H} C_S G(TSr,\xi'). \tag{D.25}$$

Since $C_T = 1$ and $C_{TS} = C_T C_S$, (D.25) implies that

$$\sum_{S\in H} C_S G(Sr_1 T\xi') = C_T \sum_{S\in H} C_{TS}\, G(TSr_1\xi'). \tag{D.26}$$

Since as S runs over H, TS also runs over H, equation (D.26) implies (D.24).

Theorem D.2. Let us define

$$\vec{\Phi}(r) = \left(\sum_{S\in H} C_S \vec{E}_S(Sr)\right)/\#(H). \tag{D.27}$$

where $\vec{E}_S$ is the solution of (D.5) obtained by replacing $\vec{E}^i$ by $\vec{S}^i$. Then

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right]\vec{\Phi}(r) - PV\int_{V_1} \tau(\xi')\vec{\Phi}(\xi') \sum_{S\in H} C_S G(Sr,\xi')dv(\xi') = \vec{S}^i(r). \tag{D.28}$$

Proof. Multiplying all terms of (D.16) by C_S and summing over S in H and dividing by #(H), we deduce that

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right]\vec{\Phi}(r) - \sum_{T\in H}\left(PV\int_{V_1}\left[\frac{\tau(\xi')\vec{E}(T\xi')}{\#(H)} \sum_{S\in H} C_S G(Sr,T\xi')\right]dv(\xi')\right)$$

$$= \vec{S}^i(r). \tag{D.29}$$

From Lemma D.2 we deduce that

$$\left[1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right]\vec{\Phi}(r) - \sum_{T\in H}\left(PV\int_{V_1}\left[\frac{\tau(\xi')C_T\vec{E}(T\xi')}{\#(H)} \sum_{S\in H} C_S G(Sr,\xi')\right]dv(\xi')\right)$$

$$= \vec{S}^i(r) \tag{D.30}$$

which immediately yields (D.28).

We note now that $\vec{\Psi}$ satisfies the same integral equation that is satisfied by $\vec{E}_C$. By the uniqueness theorem we see that $\vec{E}_C$ must be equal to $\vec{\Psi}$. Note however that the fact that $\vec{\Psi}(Tr) = \vec{\Psi}(r)$ for every T in H implies that the same is true of $\vec{E}_C$. This means that we can completely determine all values of $\vec{E}_C$ just by solving an integral equation involving integrals over part of the first octant.

Secondly, observe that $\vec{\Phi}$ satisfies the same integral equation that is satisfied by $\vec{E}_S$. By the same reasoning we conclude that $\vec{E}_S = \vec{\Phi}$ everywhere in V. We observe that if r is in the first octant, then $\vec{\Phi}(Tr) = C_T\vec{\Phi}(r)$ for every transformation T in H. This being true of $\vec{E}_S$ as well enables us to deduce the value of $\vec{E}_S$ in any octant just by knowing its value in the first octant.

Finally, since $\vec{E} = \vec{E}_C + \vec{E}_S$, we see that we may determine the value of $\vec{E}$ in any octant simply by knowing the values of $\vec{E}_C$ and $\vec{E}_S$ in the first octant.

Exercise D.1. Reconstruct the integral equation satisfied by $\vec{E}_C$ from the integral equation satisfied by $\vec{\Psi}$.

Solution of Exercise D.1. Observe that since $S^2 = I$ that

$$C^i(r) - \left(1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right)\vec{\Psi}(r) =$$

$$-PV\int_{V_1}\tau(r')\vec{\Psi}(r')\sum_{S\in H}G(Sr,r')dv(r') =$$

$$-PV\int_{V_1}\tau(r')\vec{\Psi}(r')\sum_{S\in H}G(SSr,Sr')dv(r') =$$

$$-\sum_{S\in H}PV\int_{V_1}\tau(Sr')\vec{\Psi}(Sr')G(r,Sr')dv(Sr') . \quad (D.31)$$

Exercise D.2. Reconstruct the integral equation satisfied by $\vec{E}_S$ from the integral equation satisfied by $\vec{\phi}$.

Solution of Exercise D.2. We observe that since $S^2 = I$ and $C_S\vec{\phi}(Sr') = \vec{\phi}(r')$, we see that

$$\vec{S}^i(r) - \left(1 + \frac{\tau(r)}{3i\omega\varepsilon_0}\right)\vec{\phi}(r) =$$

$$-PV\int_{V_1}\tau(r')\vec{\phi}(r')\sum_{S\in H} C_S G(Sr,r')dv(r') =$$

$$-\sum_{S\in H} PV\int_{V_1}\tau(Sr')\vec{\phi}(Sr')C_S G(SSr,Sr')dv(Sr') =$$

$$-PV\int_{V}\tau(r')\vec{\phi}(r')G(r,r')dv(r') , \qquad (D.32)$$

which is exactly the integral equation that was originally satisfied by $\vec{E}_S$.

Thus, Exercises D.1 and D.2 give us proofs of the fact that $\vec{E}_C = \vec{\psi}$ and $\vec{E}_S = \vec{\phi}$ and shed light on the connection between the integral equations involving integrals over V_1, the part of the scattering obstacle that is in the first octant, and the integral equations involving integrals over the entire scatterer.

APPENDIX E

SAMPLE PROBLEMS WITH COMPUTER RESULTS

In this section we describe a numerical check of the program's validity. We approximate a ten-centimeter-diameter sphere filled with biological material by a complex of 528 one-centimeter cubes. Each of these cubes is filled with a biological material whose electrical properties are identical to that of the material filling the homogeneous sphere being approximated. We use the Mie solution (developed by Professor Gustav Mie in 1908) to compute the power density at values of r, θ, and ϕ corresponding to the centers of the cubes (Stratton [6], pp.563-570).

We describe here the results of two numerical experiments. The first experiment is scattering by a transparent region bounded by a sphere, and the second problem considers a translucent region delimited by a sphere.

In the transparent-sphere problem a sphere with zero conductivity and a relative dielectric constant of one was struck by a plane wave with a frequency of 1000 megahertz and a strength of one volt per meter. The problem was solved by the computer program implementing the technique described in this paper. The Mie-solution method was also used. The y and z components of the electric vector computed by the Mie-solution program are 14 orders of magnitude smaller than the x component determined by this program. In the integral equation program described in this paper the y and z components of the electric vector are found to be identically zero, which is their correct value. The approximating cubes found in the first octant of three-dimensional space are called cells; there are 66 cubes in the first octant that are used in approximating the scatterer. Both the Mie-solution program and the integral equation program are used to compute the fields at the centers of these cubes; the results obtained by the two methods are listed in Table E-1. In this table we list the real and imaginary parts of the x component of the electric vector that was computed by the two methods.

TABLE E-1. THE TRANSPARENT SPHERE

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD		INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD	
	$Re(E_x)$	$Im(E_x)$	$Re(E_x)$	$Im(E_x)$
1	.9954	-.1046	.9945	-.1046
2	.9510	-.3093	.9510	-.3092
3	.8658	-.5004	.8658	-.5003
4	.7427	-.6696	.7428	-.6695
5	.5872	-.8095	.5873	-.8094
6	.9954	-.1046	.9945	-.1046
7	.9510	-.3093	.9510	-.3092
8	.8658	-.5004	.6858	-.5003
9	.7428	-.6696	.7428	-.6695
10	.5872	-.8095	.5873	-.8094
11	.9954	-.1046	.9945	-.1046
12	.9510	-.3093	.9510	-.3092
13	.8658	-.5004	.8658	-.5003
14	.7427	-.6696	.7428	-.6695
15	.9945	-.1046	.9946	-.1046
16	.9510	-.3093	.9510	-.3092
17	.8658	-.5004	.8658	-.5003
18	.7427	-.6696	.7428	-.6695
19	.9945	-.1046	.9945	-.1046
20	.9510	-.3093	.9510	-.3092
21	.9945	-.1046	.9945	-.1046
22	.9510	-.3093	.9510	-.3092
23	.8658	-.5004	.8658	-.5003

TABLE E-1. (continued)

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD		INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD	
	$Re(E_x)$	$Im(E_x)$	$Re(E_x)$	$Im(E_x)$
24	.7427	-.6696	.7428	-.6695
25	.5872	-.8095	.5873	-.8094
26	.9945	-.1046	.9945	-.1046
27	.9510	-.3093	.9510	-.3092
28	.8658	-.5004	.8658	-.5003
29	.7427	-.6696	.7428	-.6695
30	.5872	-.8094	.5873	-.8094
31	.9945	-.1046	.9945	-.1046
32	.9510	-.3093	.9510	-.3092
33	.8658	-.5004	.8658	-.5003
34	.7427	-.6696	.7428	-.6695
35	.9945	-.1046	.9945	-.1046
36	.9510	-.3093	.9510	-.3092
37	.8658	-.5004	.8658	-.5003
38	.9945	-.1046	.9945	-.1046
39	.9510	-.3093	.9510	-.3092
40	.9945	-.1046	.9945	-.1046
41	.9510	-.3093	.9510	-.3092
42	.8658	-.5004	.8658	-.5003
43	.7427	-.6696	.7428	-.6695
44	.9954	-.1046	.9945	-.1046
45	.9510	-.3093	.9510	-.3092
46	.8658	-.5004	.8658	-.5003
47	.7427	-.6696	.7428	-.6695
48	.9510	-.3093	.9510	-.3092
49	.9945	-.1046	.9945	-.1046
50	.8658	-.5004	.8658	-.5003
51	.9945	-.1046	.9945	-.1046

TABLE E-1. (continued)

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD		INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD	
	$Re(E_x)$	$Im(E_x)$	$Re(E_x)$	$Im(E_x)$
52	.9510	-.3093	.9510	-.3092
53	.9945	-.1046	.9945	-.1046
54	.9510	-.3093	.9510	-.3092
55	.8658	-.5004	.8658	-.5004
56	.7427	-.6696	.7428	-.6695
57	.9945	-.1046	.9945	-.1046
58	.9510	-.3093	.9510	-.3092
59	.8658	-.5004	.8658	-.5003
60	.9945	-.1046	.9945	-.1046
61	.9510	-.3093	.9510	-.3092
62	.9945	-.1046	.9945	-.1046
63	.9945	-.1045	.9945	-.1046
64	.9510	-.3093	.9510	-.3092
65	.9945	-.1046	.9945	-.1046
66	.9510	-.3093	.9510	-.3092

In the next problem a plane wave with a frequency of 1000 megahertz strikes a ball whose radius is 5 centimeters, whose relative dielectric constant is $\varepsilon = 1.015625$ and whose conductivity is $\sigma = .015625$ mhos per meter. The results of the comparison of the results of the Mie-solution program and the integral-equation program described in this paper is found in Table E-2 which follows. In this table we list in addition to the real and imaginary parts of the x component of the electric vector the estimate of the power density in each cell obtained by using the values of E and H at the center of the cell. The power density is denoted by P_d in Table E-2.

TABLE E-2. THE TRANSLUCENT SPHERE

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD			INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD		
	$Re(E_x)$	$Im(E_x)$	P_d	$Re(E_x)$	$Im(E_x)$	P_d
1	.9376	-.0964	.00694	.9389	-.0956	.00695
2	.8969	-.2941	.00690	.8978	-.2943	.00697
3	.8179	-.4745	.00698	.8181	-.4761	.00700
4	.7056	-.6310	.00700	.7048	-.6336	.00702
5	.5589	-.7655	.00701	.5639	-.7607	.00701
6	.9385	-.0913	.00695	.9398	-.0913	.00695
7	.8986	-.2886	.00696	.8992	-.2901	.00697
8	.8205	-.4685	.00697	.8201	-.4721	.00699
9	.7079	-.6267	.00698	.7071	-.6298	.00700
10	.5558	-.7669	.00701	.5665	-.7574	.00699
11	.9402	-.0814	.00695	.9415	-.0830	.00698
12	.9020	-.2781	.00696	.9019	-.2819	.00697
13	.8262	-.4562	.00696	.8237	-.4642	.00698
14	.7130	-.6163	.00694	.7116	-.6225	.00698
15	.9428	-.0673	.00698	.9440	-.0704	.00700
16	.9063	-.2658	.00697	.9060	-.2695	.00698
17	.8324	-.4468	.00697	.8291	-.4523	.00697
18	.7352	-.5838	.00688	.7183	-.6113	.00695
19	.9490	-.0597	.00706	.9472	-.5345	.00703
20	.9094	-.2661	.00701	.9111	-.2532	.00698
21	.9380	-.0948	.00694	.9394	-.0924	.00696
22	.8973	-.2928	.00696	.8988	-.2912	.00697
23	.8176	-.4739	.00698	.8195	-.4731	.00670
24	.7071	-.6271	.00698	.7065	-.6309	.00701
25	.5892	-.7328	.00691	.5659	-.7582	.00700
26	.9390	-.8994	.00695	.9402	-.0883	.00697

TABLE E-2. (continued)

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD			INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD		
	$Re(E_x)$	$Im(E_x)$	P_d	$Re(E_x)$	$Im(E_x)$	P_d
27	.8988	-.2874	.00696	.9001	-.2871	.00697
28	.8207	-.4671	.00697	.8213	-.4692	.00699
29	.7119	-.6205	.00697	.7087	-.6272	.00700
30	.5837	-.7379	.00693	.5685	-.7549	.00698
31	.9406	-.8101	.00696	.9419	-.0799	.00698
32	.9020	-.2767	.00696	.9028	-.2789	.00698
33	.8271	-.4533	.00695	.8249	-.4614	.00698
34	.7241	-.6010	.00692	.7132	-.6199	.00698
35	.9413	-.0638	.00696	.9443	-.0675	.00700
36	.9065	-.2585	.00695	.9067	-.2667	.00698
37	.8352	-.4277	.00689	.8303	-.4496	.00696
38	.9423	-.0156	.00695	.9473	-.0510	.00704
39	.9114	-.2261	.00690	.9117	-.2505	.00699
40	.9390	-.0914	.00696	.9403	-.0862	.00697
41	.8984	-.2893	.00697	.9005	-.2851	.00698
42	.8200	-.4720	.00700	.8221	-.4674	.00699
43	.6906	-.6510	.00705	.7098	-.6255	.00700
44	.9395	-.0862	.00696	.9411	-.0819	.00698
45	.8991	-.2857	.00696	.9019	-.2809	.00698
46	.8219	-.4673	.00699	.8239	-.4634	.00699
47	.7082	-.6283	.00701	.7121	-.6218	.00699
48	.9431	-.0777	.00700	.9427	-.0737	.00699
49	.9032	-.2763	.00698	.9045	-.2728	.00698
50	.8268	-.4547	.00696	.8275	-.4556	.00698
51	.9496	-.0907	.00712	.9451	-.0614	.00701
52	.9078	-.2662	.00700	.9083	-.2607	.00698
53	.9405	-.0854	.00698	.9415	-.0771	.00699
54	.9001	-.2852	.00698	.9030	-.2762	.00698
55	.8353	-.4377	.00696	.8258	-.4589	.00699
56	.7048	-.6364	.00708	.7146	-.6177	.00698

TABLE E-2. (continued)

CELL NUMBER	INDUCED FIELD PREDICTED BY INTEGRAL EQUATION METHOD			INDUCED FIELD PREDICTED BY MIE SOLUTION METHOD		
	$Re(E_x)$	$Im(E_x)$	P_d	$Re(E_x)$	$Im(E_x)$	P_d
57	.9403	-.0826	.00697	.9423	-.0727	.00699
58	.8997	-.2891	.00699	.9044	-.2719	.00698
59	.8215	-.4702	.00702	.8277	-.4548	.00698
60	.9409	-.0409	.00695	.9439	-.0645	.00700
61	.9018	-.2796	.00698	.9070	-.2638	.00698
62	.9426	-.0704	.00702	.9461	-.0524	.00703
63	.9423	-.0556	.00698	.9429	-.0651	.00700
64	.9005	-.2905	.00702	.9062	-.2644	.00699
65	.9474	-.0863	.00709	.9438	-.0607	.00701
66	.9001	-.3136	.00713	.9076	-.2601	.00699

A complete error analysis of the integral-equation method, not attempted here, will be carried out in a future report.

In both of the numerical experiments described in this section, the coordinates of the outer edges of the cells is the same as that listed in the computer output in Appendix F, and this list is, thus, not repeated in this Appendix. Many parts of the program remain nearly identical to the one supplied by Professor Kun Mu Chen, and the authors express our gratitude to him for supplying the listing.

APPENDIX F

COMPUTER PRINTOUT OF PROGRAM WITH RESULTS

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

LISTING OF COMPUTER PROGRAM

```
//HBF16TG2 JOB (3H01,B020,60,,,0010,1,Y,58),'HBM376@@10B COHOON',
// MSGLEVEL=(1,1),PRTY=5,TIME=56,MSGCLASS=A

// EXEC PLOTGCLG,REGION.GO=225K,TIME=56
//FORT.SYSIN DD *
      REAL*8 COMP,XYZCOM,XONLYC,XANDY,SCAT,EXPKZ,COSKZ,SINKZ,EINCX,TOTAL        1
      COMPLEX G(19701),E(198),C(198),BUF(500),FRONT,BACK,GMAT                   2
      COMMON VOL(198,7),X0,Y0,Z0,START1,START2,START3,ADD1,ADD2,ADD3,C1,        3
     1C2,C3,C4,PK0,NDIV,IP,IQ,N                                                 4
      INTEGER*2 IQD,IVI,BLNK                                                    5
      DIMENSION IVI(8),JQ(8),IQD(8)                                             6
      DATA EXPKZ/'EXPKZ'/,COSKZ/'COSKZ'/,SINKZ/'SINKZ'/,EINCX/'EINCX'/,T        7
     1OTAL/'TOTAL'/,BLNK/' '/,XYZCOM/'X,Y,Z.'/,XONLYC/'X-ONLY'/,XANDY/'X       8
     1ANDY.'/                                                                   9
      DATA IVI/'1','2','3','4','5','6','7','8'/,PI/3.14159265358/,E0/8.8      10
     154E-12/,PMU0/1.257E-6/                                                    11
C           READ FIRST DATA CARD FOR NDIV                                       12
      READ 5,NDIV                                                               13
    5 FORMAT (I1)                                                               14
C           READ 2ND CARD FOR COMPONENTS,QUADRANTS,FREQUENCY AND TYPE OF        15
C             INCIDENT ELECTRIC FIELD.                                          16
      READ 10,COMP,IQD,FMEG,SCAT                                                17
   10 FORMAT (A8,2X,8A1,2X,F10.0,10X,A5)                                        18
      IF (COMP.EQ.XONLYC) GO TO 20                                              19
      IF (COMP.EQ.XANDY) GO TO 25                                               20
      IF (COMP.EQ.XYZCOM) GO TO 30                                              21
      PRINT 15,COMP                                                             22
   15 FORMAT ('0(',A6,') ERROR IN COLS 1-6 OF SECOND DATA CARD')                23
      GO TO 395                                                                 24
   20 NDIM=1                                                                    25
      GO TO 35                                                                  26
   25 NDIM=2                                                                    27
      GO TO 35                                                                  28
   30 NDIM=3                                                                    29
C           CHECK QUADRANT CODES                                                30
   35 IF (IQD(1).EQ.IVI(1)) GO TO 45                                            31
      PRINT 40                                                                  32
   40 FORMAT ('1QUADRANT CODES READ IN DO NOT INCLUDE QUADRANT 1')              33
      STOP                                                                      34
   45 ISW=0                                                                     35
      JQ(1)=1                                                                   36
      DO 55 I=2,8                                                               37
      IF (IQD(I).EQ.IVI(I)) GO TO 50                                            38
      JQ(I)=0                                                                   39
      IF (IQD(I).NE.BLNK)ISW=1                                                  40
      GO TO 55                                                                  41
   50 JQ(I)=I                                                                   42
   55 CONTINUE                                                                  43
      IF (ISW.EQ.0) GO TO 65                                                    44
      PRINT 60,IQD,JQ                                                           45
   60 FORMAT ('1QUADRANT CODE ERRORS. SET READ IS',10X,8(1X,A1)/24X,'SET       46
     1 USED IS',10X,8I2)                                                        47
   65 IFRONT=JQ(5)+JQ(6)+JQ(7)+JQ(8)                                            48
      IBACK=JQ(1)+JQ(2)+JQ(3)+JQ(4)                                             49
      IF (SCAT.EQ.COSKZ) GO TO 75                                               50
      IF (SCAT.EQ.SINKZ) GO TO 80                                               51
      IF (SCAT.EQ.EINCX) GO TO 85                                               52
      IF (SCAT.EQ.EXPKZ) GO TO 90                                               53
      IF (SCAT.EQ.TOTAL) GO TO 95                                               54
      PRINT 70,SCAT                                                             55
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
   70 FORMAT ('0(',A6,') ERROR IN COLS 41-46 OF SECOND DATA CARD.')          56
      GO TO 395                                                              57
   75 ISCAT=1                                                                58
      GO TO 105                                                              59
   80 ISCAT=2                                                                60
      GO TO 105                                                              61
   85 ISCAT=3                                                                62
      GO TO 105                                                              63
   90 ISCAT=4                                                                64
      GO TO 105                                                              65
   95 IF (IFRONT.EQ.0) GO TO 100                                             66
      ISCAT=5                                                                67
      GO TO 105                                                              68
  100 SCAT=EXPKZ                                                             69
      ISCAT=4                                                                70
  105 IS1=ISCAT                                                              72
      IF (IS1.NE.5) GO TO 110                                                73
      ISCAT=1                                                                74
      SCAT=COSKZ                                                             75
C           READ 3RD CARD FOR NUMBER OF CELLS IN X,Y,AND Z DIRECTIONS        71
  110 READ 115,NX,NY,NZ                                                      76
  115 FORMAT (3(I2,3X))                                                      77
C           READ 4TH CARD FOR THE TOTAL NUMBER OF CELLS IN THE BODY          78
      READ 120,NCELL                                                         79
  120 FORMAT (I3)                                                            80
      MA=NDIM*NCELL                                                          81
      IF (MA.LE.198) GO TO 130                                               82
      PRINT 125,MA                                                           83
  125 FORMAT ('-NUMBER OF DIMENSIONS TIMES NUMBER OF CELLS =',I4,' EXCED     84
     1ES PROGRAM DIMENSIONS')                                                85
      GO TO 395                                                              86
  130 M1=(MA*(MA+1))/2.                                                      87
      DO 135 I=1,MA                                                          88
  135 E(I)=CMPLX(0.,0.)                                                      89
C           PRINT TITLES                                                     90
      PRINT 140                                                              91
  140 FORMAT ('1',15X,'THE PARAMETERS OF EACH CELL AS READ IN ARE GIVEN      92
     1BELOW IN CMS.'/'-',6X,'N',8X,'AMX',11X,'AMY',11X,'AMZ',10X,'DXCM',     93
     110X,'DYCM',10X,'DZCM'/)                                                94
      OMEG=2.*PI*FMEG*1.E6                                                   95
      FK0=OMEG*SQRT(FMU0*E0)                                                 96
C           READ IN LOCATION AND ELECTRICAL PROPERTIES OF CELL M             97
      DO 170 M=1,NCELL                                                       98
      READ 145,AMX,AMY,AMZ,RLEP1,SIG1,DXCM,DYCM,DZCM                         99
  145 FORMAT (8F10.3)                                                       100
      DYCM=DXCM                                                             101
      DZCM=DXCM                                                             102
      VOL(M,1)=(AMX-.5*DXCM)/100.                                           103
      VOL(M,2)=(AMY-.5*DYCM)/100.                                           104
      VOL(M,3)=(AMZ-.5*DZCM)/100.                                           105
      DELTAX=DXCM/100.                                                      106
      DELTAY=DYCM/100.                                                      107
      DELTAZ=DZCM/100.                                                      108
      VOL(M,4)=DELTAX*DELTAY*DELTAZ                                         109
      VOL(M,5)=RLEP1                                                        110
      VOL(M,6)=SIG1                                                         111
      VOL(M,7)=DELTAX                                                       112
      Z=VOL(M,3)*FK0                                                        113
      GO TO (150,155,160,165),ISCAT                                         114
  150 E(M)=CMPLX(-COS(Z),0.)                                                115
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      GO TO 170                                                          116
  155 E(M)=CMPLX(0.,SIN(Z))                                              117
      GO TO 170                                                          118
  160 E(M)=CMPLX(-1.,0.)                                                 119
      GO TO 170                                                          120
  165 E(M)=-CEXP(CMPLX(0.,-Z))                                           121
  170 PRINT 175,M,AMX,AMY,AMZ,DXCM,DYCM,DZCM                             122
  175 FORMAT (I8,1PD15.4,5D14.4)                                         123
      PRINT 180                                                          124
  180 FORMAT ('-',14X,'X,Y,Z CORRESPOND TO CENTRAL LOCATION OF EACH CELL 125
     1 IN METERS'/'-',6X,'N',9X,'X',13X,'Y',13X,'Z',10X,'VOLUME',10X,'EP 126
     1S',8X,'SIG(MHO/M)'/)                                               127
      DO 185 J=1,NCELL                                                   128
      PRINT 175,J,(VOL(J,L),L=1,6)                                       129
  185 VOL(J,5)=(VOL(J,5)-1.)*OMEG*E0                                     130
C           PRINT THE INCIDENT FIELD VALUES AT THE CENTRAL LOCATION OF   131
C             EACH SMALL SUBVOLUME                                       132
C           PRINT FREQUENCY,MAXIMUM NUMBER OF DIMENSIONS OF BODY,TYPE OF 133
C             COMPONENTS,AND THE NUMBER OF QUADRANTS USED FOR SYMMETRY.  134
      PRINT 190,SCAT,FMEG,NX,NY,NZ,COMP,JQ,NDIV                          135
  190 FORMAT ('1',9X,' THE INCIDENT FIELD IS OF THE FORM ',A8/'0',17X,'F 136
     1REQUENCY =',F12.6,' MHZ.',5X,'( NX =',I3,5X,'NY =',I3,5X,'NZ =',I3 137
     1,3H ) /'0',17X,' FIELD COMPONENTS= ',A6,5X,'QUADRANTS USED =',8I2/ 138
     1'0',18X,'NUMBER OF PARTITIONS PER EDGE IN INTEGRATION =',I2/'0',14 139
     1X,'INCIDENT ELECTRIC FIELD HAS THE FOLLOWING COMPONENTS'/'0',12X,' 140
     1E INCIDENT X-DIRECTION',5X,'E INCIDENT Y-DIRECTION',5X,'EINCIDENT  141
     1Z-DIRECTION'/'0',7X,'N',7X,'REAL',10X,'IMAG',10X,'REAL',10X,'IMAG' 142
     1,10X,'REAL',10X,'IMAG'/)                                           143
      GO TO (195,210,220),NDIM                                           144
  195 DO 200 I=1,NCELL                                                   145
  200 PRINT 205,I,E(I)                                                   146
  205 FORMAT (I9,2X,1P6D14.4)                                            147
      GO TO 230                                                          148
  210 DO 215 J=1,NCELL                                                   149
      JPN=J+NCELL                                                        150
  215 PRINT 205,J,E(J),E(JPN)                                            151
      GO TO 230                                                          152
  220 DO 225 K=1,NCELL                                                   153
      KPN=K+NCELL                                                        154
      KNN=KPN+NCELL                                                      155
  225 PRINT 205,K,E(K),E(KPN),E(KNN)                                     156
  230 GRID=NDIV                                                          157
      GFACT=0.5*((1./GRID)-1.)                                           158
      C1=-2.*OMEG*FMU0/(3.*PK0*PK0)                                      159
      C2=3./(4.*PI)                                                      160
      C3=3.*OMEG*E0                                                      161
      C4=-OMEG*FMU0*PK0/(4.*PI*GRID**3)                                  162
C           CALCULATE THE G MATRIX                                       163
      J1=0                                                               164
      I1=1                                                               165
      DO 270 IP=1,NDIM                                                   166
      DO 270 M=1,NCELL                                                   167
      X0=VOL(M,1)                                                        168
      Y0=VOL(M,2)                                                        169
      Z0=VOL(M,3)                                                        170
      K=(IP-1)*NCELL+M                                                   171
      DO 270 IQ=IP,NDIM                                                  172
      N1=1                                                               173
      IF (IP.EQ.IQ)N1=M                                                  174
      DO 270 N=N1,NCELL                                                  175
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      L=(IQ-1)*NCELL+N                                                    176
      DELTAX=VOL(N,7)                                                     177
      DELTAY=DELTAX                                                       178
      DELTAZ=DELTAX                                                       179
      STAPT1=GFACT*DELTAX                                                 180
      STAPT2=GFACT*DELTAY                                                 181
      START3=GFACT*DELTAZ                                                 182
      ADD1=DELTAX/GRID                                                    183
      ADD2=DELTAY/GRID                                                    184
      ADD3=DELTAZ/GRID                                                    185
      GO TO (235,240,245),IQ                                              186
  235 BACK=GMAT(JQ(1))+GMAT(JQ(2))+GMAT(JQ(3))+GMAT(JQ(4))                187
      FRONT=GMAT(JQ(5))+GMAT(JQ(6))+GMAT(JQ(7))+GMAT(JQ(8))               188
      GO TO 250                                                           189
  240 BACK=GMAT(JQ(1))-GMAT(JQ(2))+GMAT(JQ(3))-GMAT(JQ(4))                190
      FRONT=GMAT(JQ(5))-GMAT(JQ(6))+GMAT(JQ(7))-GMAT(JQ(8))               191
      GO TO 250                                                           192
  245 BACK=GMAT(JQ(1))-GMAT(JQ(2))-GMAT(JQ(3))+GMAT(JQ(4))                193
      FRONT=-GMAT(JQ(5))+GMAT(JQ(6))+GMAT(JQ(7))-GMAT(JQ(8))              194
  250 GO TO (255,260,255,255,265),IS1                                     195
  255 G(I1)=BACK+FRONT                                                    196
      GO TO 270                                                           197
  260 G(I1)=BACK-FRONT                                                    198
      GO TO 270                                                           199
  265 G(I1)=BACK+FRONT                                                    200
      J1=J1+1                                                             201
      BUF(J1)=BACK-FRONT                                                  202
      IF (J1.LT.500) GO TO 270
      WRITE (9)(BUF(I),I=1,500)                                           204
      J1=0                                                                205
  270 I1=I1+1                                                             206
      IF (IS1.NE.5) GO TO 280                                             207
      IF (J1.EQ.0) GO TO 275                                              208
      WRITE (9)(BUF(I),I=1,J1)                                            209
  275 REWIND 9                                                            210
C             CALCULATE THE INDUCED FIELDS                                211
  280 CALL MATPCH(G,E,MA,1,IER,1.E-35)                                    212
      IF (IER.NE.0) GO TO 395                                             213
      PRINT 285                                                           214
  285 FORMAT ('-',24X,'(INDUCED ELECTRIC FIELDS IN QUADRANT 1)'/ '0',16X  215
     1,'N',9X,'EX(V/M)',11X,'EY(V/M)',11X,'EZ(V/M)',5X,'PWR DEN (W/CU. M  216
     1FT.)'/)                                                             217
      CALL PRSUB(E,NDIM,NCELL,POWT)                                       218
C             CHECK FOR CREATING TOTAL POWER                              219
      IF (IS1.EQ.5) GO TO 305                                             220
      IF (IFRONT.NE.0) GO TO 395                                          221
      IF (IBACK.EQ.10) GO TO 290                                          222
      IF (IBACK.EQ.1.OR.IBACK.GT.5) GO TO 395                             223
      XMUL=2.                                                             224
      GO TO 295                                                           225
  290 XMUL=4.                                                             226
  295 POWT=XMUL*POWT                                                      227
      PRINT 300,POWT                                                      228
  300 FORMAT ('-TOTAL POWER IN THE BODY =',1PE15.5,' WATTS')              229
      GO TO 395                                                           230
  305 SCAT=SINKZ                                                          231
      DO 315 I=1,MA                                                       232
      C(I)=E(I)                                                           233
      IF (I.GT.NCELL) GO TO 310                                           234
      E(I)=CMPLX(0.,SIN(VOL(I,3)*FK0))                                    235
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      GO TO 315                                                          236
  310 E(I)=CMPLX(0.,0.)                                                  237
  315 CONTINUE                                                           238
      PRINT 190,SCAT,FMEG,NX,NY,NZ,COMP,JQ,NDIV                          239
      GO TO (320,330,340),NDIM                                           240
  320 DO 325 I=1,NCELL                                                   241
  325 PRINT 205,I,E(I)                                                   242
      GO TO 350                                                          243
  330 DO 335 J=1,NCELL                                                   244
      JPN=J+NCELL                                                        245
  335 PRINT 205,J,E(J),E(JPN)                                            246
      GO TO 350                                                          247
  340 DO 345 K=1,NCELL                                                   248
      KPN=K+NCELL                                                        249
      KNN=KPN+NCELL                                                      250
  345 PRINT 205,K,E(K),E(KPN),E(KNN)                                     251
  350 I1=I1-1                                                            252
      K2=0                                                               253
  355 K1=K2+1                                                            254
      K2=K2+500                                                          255
      IF (K2.GT.I1)K2=I1                                                 256
      READ (9)(G(K),K=K1,K2)                                             257
      IF (K2.LT.I1) GO TO 355                                            258
      CALL MATPCH(G,E,MA,1,IER,1.E-35)                                   259
      IF (IER.NE.0) GO TO 395                                            260
      PRINT 285                                                          261
      CALL PRSUB(E,NDIM,NCELL,POWT)                                      262
      DO 360 I=1,MA                                                      263
      G(I)=E(I)+C(I)                                                     264
  360 E(I)=E(I)-C(I)                                                     265
      PRINT 365,(JQ(I),I=5,8)                                            266
  365 FORMAT ('1FIELDS IN FRONT LAYER  (OCTANTS',4I2,' )')               267
      PRINT 370,FMEG,NX,NY,NZ,COMP,JQ,NDIV                               268
  370 FORMAT (1H0,24X,'(INDUCED ELECTRIC FIELDS IN ONE OCTANT)'/'0',17X,  269
     1'FREQUENCY =',F12.6,' MHZ.',5X,'( NX =',I3,5X,'NY =',I3,5X,'NZ =',  270
     1I3,3H ) /'0',17X,' FIELD COMPONENTS= ',A6,5X,'QUADRANTS USED =',8I  271
     12/'0',18X,'NUMBER OF PARTITIONS PER EDGE IN INTEGRATION =',I2/'-',  272
     116X,'N',9X,'EX(V/M)',11X,'EY(V/M)',11X,'EZ(V/M)',5X,'PWR DEN (W/CU  273
     1. MET.)'/)                                                         274
      CALL PRSUB(E,NDIM,NCELL,POWF)                                      275
      PRINT 375,(JQ(I),I=1,4)                                            276
  375 FORMAT ('1FIELDS IN BACK LAYER  (OCTANTS',4I2,' )')                 277
      PRINT 370,FMEG,NX,NY,NZ,COMP,JQ,NDIV                               278
      CALL PRSUB(G,NDIM,NCELL,POWB)                                      279
      IF (IFRONT+IBACK.EQ.36) GO TO 385                                  280
      IF (IFRONT.EQ.11.AND.IBACK.EQ.3) GO TO 380                         281
      IF (IFRONT.EQ.12.AND.IBACK.EQ.4) GO TO 380                         281
      IF (IFRONT.EQ.13.AND.JQ(5).EQ.5.AND.IBACK.EQ.5) GO TO 380
      IF (IFRONT.NE.5.OR.IBACK.NE.1) GO TO 395                           282
      XMUL=1.                                                            283
      GO TO 390                                                          284
  380 XMUL=2.                                                            285
      GO TO 390                                                          286
  385 XMUL=4.                                                            287
  390 POWT=XMUL*(POWF+POWB)                                              288
      PRINT 300,POWT                                                     289
  395 STOP                                                               290
      END                                                                291
      SUBROUTINE PRSUB(X,NDIM,NCELL,PTOT)                                  1
      COMPLEX X(1)                                                         2
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      COMMON VOL(198,7)                                                  3
      PTOT=0.D0                                                          4
      DO 20 M=1,NCELL                                                    5
      EFA=CABS(X(M))                                                     6
      IF (NDIM.EQ.1) GO TO 5                                             7
      J=M+NCELL                                                          8
      EFB=CABS(X(J))                                                     9
      IF (NDIM.EQ.2) GO TO 10                                           10
      K=J+NCELL                                                         11
      EFC=CABS(X(K))                                                    12
      GO TO 15                                                          13
    5 EFB=0.D0                                                          14
   10 EFC=0.D0                                                          15
   15 PWR=0.5*VOL(M,6)*(EFA*EFA+EFB*EFB+EFC*EFC)                        16
      PTOT=PTOT+PWR*VOL(M,4)                                            17
   20 PRINT 25,M,EFA,EFB,EFC,PWR                                        18
   25 FORMAT (I18,1P4D18.5)                                             19
      PRINT 30,PTOT                                                     20
   30 FORMAT (1H-,18X,'TOTAL POWER ABSORBED IN THE FIRST OCTANT =',1PE14 21
     1.5,'  WATTS'/'-  N',4X,'EXREAL',6X,'EXIMAG',6X,'EX-ABS',3X,'THETA- 22
     1X',3X,'EYREAL',6X,'EYIMAG',6X,'EY-ABS',3X,'THETA-Y',3X,'EZREAL',6X 23
     1,'EZIMAG',6X,'EZ-ABS',2X,'THETA-Z'/)                              24
C           PRINT REAL,IMAGINARY,ABS. VALUE AND PHASE ANGLE OF INDUCED   25
C             FIELD                                                     26
      DO 70 M=1,NCELL                                                   27
      GO TO (45,40,35),NDIM                                             28
   35 K=M+2*NCELL                                                       29
      EFC=CABS(X(K))                                                    30
      CALL ANGLES(X(K),EF3)                                             31
   40 J=M+NCELL                                                         32
      EFB=CABS(X(J))                                                    33
      CALL ANGLES(X(J),EF2)                                             34
   45 EFA=CABS(X(M))                                                    35
      CALL ANGLES(X(M),EF1)                                             36
      GO TO (50,60,65),NDIM                                             37
   50 PRINT 55,M,X(M),EFA,EF1                                           38
   55 FORMAT (I4,3(1P3E12.4,0PF7.1))                                    39
      GO TO 70                                                          40
   60 PRINT 55,M,X(M),EFA,EF1,X(J),EFB,EF2                              41
      GO TO 70                                                          42
   65 PRINT 55,M,X(M),EFA,EF1,X(J),EFB,EF2,X(K),EFC,EF3                 43
   70 CONTINUE                                                          44
      RETURN                                                            45
      END                                                               46
      FUNCTION GMAT(IQD)                                                 1
      DIMENSION U(3)                                                     2
      COMPLEX TAUN,FCTR1,FCTR2,EXP0,TOTAL,GMAT                           3
      COMMON VOL(198,7),X0,Y0,Z0,START1,START2,START3,ADD1,ADD2,ADD3,C1,  4
     1C2,C3,C4,FK0,NDIV,IP,IQ,N                                          5
      IF (IQD.NE.0) GO TO 10                                             6
    5 GMAT=CMPLX(0.,0.)                                                  7
      GO TO 80                                                           8
   10 GO TO (15,20,25,30,35,40,45,50),IQD                                9
   15 U(1)=X0-VOL(N,1)                                                  10
      U(2)=Y0-VOL(N,2)                                                  11
      U(3)=Z0-VOL(N,3)                                                  12
      GO TO 55                                                          13
   20 U(1)=X0+VOL(N,1)                                                  14
      U(2)=Y0-VOL(N,2)                                                  15
      U(3)=Z0-VOL(N,3)                                                  16
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      GO TO 55                                                          17
25    U(1)=X0+VOL(N,1)                                                  18
      U(2)=Y0+VOL(N,2)                                                  19
      U(3)=Z0-VOL(N,3)                                                  20
      GO TO 55                                                          21
30    U(1)=X0-VOL(N,1)                                                  22
      U(2)=Y0+VOL(N,2)                                                  23
      U(3)=Z0-VOL(N,3)                                                  24
      GO TO 55                                                          25
35    U(1)=X0-VOL(N,1)                                                  26
      U(2)=Y0-VOL(N,2)                                                  27
      U(3)=Z0+VOL(N,3)                                                  28
      GO TO 55                                                          29
40    U(1)=X0+VOL(N,1)                                                  30
      U(2)=Y0-VOL(N,2)                                                  31
      U(3)=Z0+VOL(N,3)                                                  32
      GO TO 55                                                          33
45    U(1)=X0+VOL(N,1)                                                  34
      U(2)=Y0+VOL(N,2)                                                  35
      U(3)=Z0+VOL(N,3)                                                  36
      GO TO 55                                                          37
50    U(1)=X0-VOL(N,1)                                                  38
      U(2)=Y0+VOL(N,2)                                                  39
      U(3)=Z0+VOL(N,3)                                                  40
55    VN=VOL(N,4)                                                       41
      TAUN=CMPLX(VOL(N,6),VOL(N,5))                                     42
      IF (U(1)*U(1)+U(2)*U(2)+U(3)*U(3).NE.0.) GO TO 60                 43
      IF (IP.NE.IQ) GO TO 5                                             44
      FCTR1=CMPLX(0.,C1)*TAUN                                           45
      A=(C2*VN)**.3333333333333333                                      46
      EXP0=CEXP(CMPLX(0.,-FK0*A))                                       47
      FCTR2=EXP0*CMPLX(1.,FK0*A)-CMPLX(1.,0.)                           48
      GMAT=FCTR1*FCTP2-CMPLX(1.,0.)-TAUN/CMPLX(0.,C3)                   49
      GO TO 80                                                          50
60    TOTAL=CMPLX(0.,0.)                                                51
      U1MIN=U(1)+START1                                                 52
      U2MIN=U(2)+START2                                                 53
      U(3)=U(3)+START3                                                  54
      DO 75 IZ=1,NDIV                                                   55
      U(1)=U1MIN                                                        56
      DO 70 IX=1,NDIV                                                   57
      U(2)=U2MIN                                                        58
      DO 65 IY=1,NDIV                                                   59
      R=SQRT(U(1)*U(1)+U(2)*U(2)+U(3)*U(3))                             60
      A=FK0*R                                                           61
      ASQ=A*A                                                           62
      FCTR1=CEXP(CMPLX(0.,-A))/(ASQ*A)                                  63
      FCTR2=(U(IP)*U(IQ)/(R*R))*CMPLX(3.-ASQ,3.*A)                      64
      IF (IP.EQ.IQ)FCTR2=FCTR2-CMPLX(1.-ASQ,A)                          65
      TOTAL=TOTAL+FCTR1*FCTR2                                           66
65    U(2)=U(2)+ADD2                                                    67
70    U(1)=U(1)+ADD1                                                    68
75    U(3)=U(3)+ADD3                                                    69
      GMAT=CMPLX(0.,C4*VN)*TAUN*TOTAL                                   70
80    RETURN                                                            71
      END                                                               72
      SUBROUTINE MATPCH(A,B,N,M,IER,EP)                                  1
      COMPLEX A(1),B(N,M),S                                              2
      IER=0                                                              3
      NM1=N-1                                                            4
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      I1=1                                                                5
      I2=N                                                                6
      DO 20 I=1,NM1                                                       7
      C=CABS(A(I1))                                                       8
      IF (C.LT.1.D-15) PRINT 5,I,A(I1)                                    9
    5 FORMAT ('0FOR ROW',I4,' PIVOT IS',1P2D12.4)                        10
      IF (C.LT.EP) GO TO 25                                              11
      IP1=I+1                                                            12
      I3=I1                                                              13
      K1=I3+N-I+1                                                        14
      DO 15 J=IP1,N                                                      15
      I3=I3+1                                                            16
      S=A(I3)/A(I1)                                                      17
      J1=I3                                                              18
      DO 10 K=J,N                                                        19
      A(K1)=A(K1)-S*A(J1)                                                20
      J1=J1+1                                                            21
   10 K1=K1+1                                                            22
      DO 15 L=1,M                                                        23
   15 B(J,L)=B(J,L)-S*B(I,L)                                             24
      I1=I1+I2                                                           25
   20 I2=I2-1                                                            26
      C=CABS(A(K1-1))                                                    27
      IF (C.LT.1.D-15) PRINT 5,N,A(K1-1)                                 28
      I=N                                                                29
      IF (C.GE.EP) GO TO 35                                              30
   25 IER=1                                                              31
      PRINT 30,N,I                                                       32
   30 FORMAT ('-THIS SYSTEM OF ORDER',I4,' IS SINGULAR FOR ROW',I4,'.'/'  33
     1 THE PROGRAM CANNOT HANDLE THIS CASE.')                            34
      RETURN                                                             35
   35 I3=(N*(N+1))/2                                                     36
      I4=2                                                               37
      DO 50 I=1,N                                                        38
      K=N-I+1                                                            39
      KP1=K+1                                                            40
      DO 50 L=1,M                                                        41
      S=0.D0                                                             42
      IF (K.EQ.N) GO TO 45                                               43
      J1=I3+1                                                            44
      DO 40 J=KP1,N                                                      45
      S=S+A(J1)*B(J,L)                                                   46
   40 J1=J1+1                                                            47
   45 B(K,L)=(B(K,L)-S)/A(I3)                                            48
      I3=I3-I4                                                           49
   50 I4=I4+1                                                            50
      RETURN                                                             51
      END                                                                52
      SUBROUTINE ANGLES(X,EF)                                             1
      COMPLEX X                                                           2
C           DETERMINE ANGLE BETWEEN REAL AND IMAGINARY PARTS OF EFIELD    3
      A=REAL(X)                                                           4
      B=AIMAG(X)                                                          5
      IF (B)  5,15,25                                                     6
    5 IF (A.NE.0.) GO TO 10                                               7
      EF=-90.0                                                            8
      GO TO 30                                                            9
   10 EF=57.2957795131*ATAN2(B,A)                                        10
      GO TO 30                                                           11
   15 IF (A.GE.0.) GO TO 20                                              12
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
      EF=-180.                                                          13
      GO TO 30                                                          14
   20 EF=0.                                                             15
      GO TO 30                                                          16
   25 IF (A.NE.0.) GO TO 10                                             17
      EF=90.                                                            18
   30 RETURN                                                            19
      END                                                               20
//GO.FT09F001 DD UNIT=SYSDA,SPACE=(TRK,(10,5)),DISP=(NEW,PASS)
//GO.SYSIN DD *
1
X,Y,Z.     12345678        1000.          TOTAL
 5     5     5
 66
         1.          1.          1.   1.015625  0.015625          1.          1.          1.
         1.          1.          2.   1.015625  0.015625          1.          1.          1.
         1.          1.          3.   1.015625  0.015625          1.          1.          1.
         1.          1.          4.   1.015625  0.015625          1.          1.          1.
         1.          1.          5.   1.015625  0.015625          1.          1.          1.
         1.          2.          1.   1.015625  0.015625          1.          1.          1.
         1.          2.          2.   1.015625  0.015625          1.          1.          1.
         1.          2.          3.   1.015625  0.015625          1.          1.          1.
         1.          2.          4.   1.015625  0.015625          1.          1.          1.
         1.          2.          5.   1.015625  0.015625          1.          1.          1.
         1.          3.          1.   1.015625  0.015625          1.          1.          1.
         1.          3.          2.   1.015625  0.015625          1.          1.          1.
         1.          3.          3.   1.015625  0.015625          1.          1.          1.
         1.          3.          4.   1.015625  0.015625          1.          1.          1.
         1.          4.          1.   1.015625  0.015625          1.          1.          1.
         1.          4.          2.   1.015625  0.015625          1.          1.          1.
         1.          4.          3.   1.015625  0.015625          1.          1.          1.
         1.          4.          4.   1.015625  0.015625          1.          1.          1.
         1.          5.          1.   1.015625  0.015625          1.          1.          1.
         1.          5.          2.   1.015625  0.015625          1.          1.          1.
         2.          1.          1.   1.015625  0.015625          1.          1.          1.
         2.          1.          2.   1.015625  0.015625          1.          1.          1.
         2.          1.          3.   1.015625  0.015625          1.          1.          1.
         2.          1.          4.   1.015625  0.015625          1.          1.          1.
         2.          1.          5.   1.015625  0.015625          1.          1.          1.
         2.          2           1.   1.015625  0.015625          1.          1.          1.
         2.          2.          2.   1.015625  0.015625          1.          1.          1.
         2.          2.          3.   1.015625  0.015625          1.          1.          1.
         2.          2.          4.   1.015625  0.015625          1.          1.          1.
         2.          2.          5.   1.015625  0.015625          1.          1.          1.
         2.          3.          1.   1.015625  0.015625          1.          1.          1.
         2.          3.          2.   1.015625  0.015625          1.          1.          1.
         2.          3.          3.   1.015625  0.015625          1.          1.          1.
         2.          3.          4.   1.015625  0.015625          1.          1.          1.
         2.          4.          1.   1.015625  0.015625          1.          1.          1.
         2.          4.          2.   1.015625  0.015625          1.          1.          1.
         2.          4.          3.   1.015625  0.015625          1.          1.          1.
         2.          5.          1.   1.015625  0.015625          1.          1.          1.
         2.          5.          2.   1.015625  0.015625          1.          1.          1.
         3.          1.          1.   1.015625  0.015625          1.          1.          1.
         3.          1.          2.   1.015625  0.015625          1.          1.          1.
         3.          1.          3.   1.015625  0.015625          1.          1.          1.
         3.          1.          4.   1.015625  0.015625          1.          1.          1.
         3.          2.          1.   1.015625  0.015625          1.          1.          1.
         3.          2.          2.   1.015625  0.015625          1.          1.          1.
         3.          2.          3.   1.015625  0.015625          1.          1.          1.
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

3.	2.	4.	1.015625	0.015625	1.	1.	1.
3.	3.	1.	1.015625	0.015625	1.	1.	1.
3.	3.	2.	1.015625	0.015625	1.	1.	1.
3.	3.	3.	1.015625	0.015625	1.	1.	1.
3.	4.	1.	1.015625	0.015625	1.	1.	1.
3.	4.	2.	1.015625	0.015625	1.	1.	1.
4.	1.	1.	1.015625	0.015625	1.	1.	1.
4.	1.	2.	1.015625	0.015625	1.	1.	1.
4.	1.	3.	1.015625	0.015625	1.	1.	1.
4.	1.	4.	1.015625	0.015625	1.	1.	1.
4.	2.	1.	1.015625	0.015625	1.	1.	1.
4.	2.	2.	1.015625	0.015625	1.	1.	1.
4.	2.	3.	1.015625	0.015625	1.	1.	1.
4.	3.	1.	1.015625	0.015625	1.	1.	1.
4.	3.	2.	1.015625	0.015625	1.	1.	1.
4.	4.	1.	1.015625	0.015625	1.	1.	1.
5.	1.	1.	1.015625	0.015625	1.	1.	1.
5.	1.	2.	1.015625	0.015625	1.	1.	1.
5.	2.	1.	1.015625	0.015625	1.	1.	1.
5.	2.	2.	1.015625	0.015625	1.	1.	1.

560 RECORDS PRINTED

RESULTS OF COMPUTER PROGRAM

THE PARAMETERS OF EACH CELL AS READ IN ARE GIVEN BELOW IN CMS.

N	AMX	AMY	AMZ	DXCM	DYCM	DZCM
1	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
2	1.0000E+00	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
3	1.0000E+00	1.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
4	1.0000E+00	1.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
5	1.0000E+00	1.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
6	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
7	1.0000E+00	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
8	1.0000E+00	2.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
9	1.0000E+00	2.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
10	1.0000E+00	2.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
11	1.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
12	1.0000E+00	3.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
13	1.0000E+00	3.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
14	1.0000E+00	3.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
15	1.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
16	1.0000E+00	4.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
17	1.0000E+00	4.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
18	1.0000E+00	4.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
19	1.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
20	1.0000E+00	5.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
21	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
22	2.0000E+00	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
23	2.0000E+00	1.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
24	2.0000E+00	1.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
25	2.0000E+00	1.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
26	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
27	2.0000E+00	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

28	2.0000E+00	2.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
29	2.0000E+00	2.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
30	2.0000E+00	2.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
31	2.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
32	2.0000E+00	3.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
33	2.0000E+00	3.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
34	2.0000E+00	3.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
35	2.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
36	2.0000E+00	4.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
37	2.0000E+00	4.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
38	2.0000E+00	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
39	2.0000E+00	5.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
40	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
41	3.0000E+00	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
42	3.0000E+00	1.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
43	3.0000E+00	1.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
44	3.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
45	3.0000E+00	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
46	3.0000E+00	2.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
47	3.0000E+00	2.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
48	3.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
49	3.0000E+00	3.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
50	3.0000E+00	3.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
51	3.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
52	3.0000E+00	4.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
53	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
54	4.0000E+00	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
55	4.0000E+00	1.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
56	4.0000E+00	1.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
57	4.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
58	4.0000E+00	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
59	4.0000E+00	2.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
60	4.0000E+00	3.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
61	4.0000E+00	3.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
62	4.0000E+00	4.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
63	5.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
64	5.0000E+00	1.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
65	5.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00
66	5.0000E+00	2.0000E+00	2.0000E+00	1.0000E+00	1.0000E+00	1.0000E+00

X,Y,Z CORRESPOND TO CENTRAL LOCATION OF EACH CELL IN METERS

N	X	Y	Z	VOLUME	EPS	SIG(MHO/M)
1	5.0000E-03	5.0000E-03	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
2	5.0000E-03	5.0000E-03	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
3	5.0000E-03	5.0000E-03	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
4	5.0000E-03	5.0000E-03	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
5	5.0000E-03	5.0000E-03	4.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
6	5.0000E-03	1.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
7	5.0000E-03	1.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
8	5.0000E-03	1.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
9	5.0000E-03	1.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
10	5.0000E-03	1.5000E-02	4.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
11	5.0000E-03	2.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
12	5.0000E-03	2.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
13	5.0000E-03	2.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
14	5.0000E-03	2.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
15	5.0000E-03	3.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
16	5.0000E-03	3.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

17	5.0000E-03	3.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
18	5.0000E-03	3.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
19	5.0000E-03	4.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
20	5.0000E-03	4.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
21	1.5000E-02	5.0000E-03	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
22	1.5000E-02	5.0000E-03	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
23	1.5000E-02	5.0000E-03	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
24	1.5000E-02	5.0000E-03	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
25	1.5000E-02	5.0000E-03	4.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
26	1.5000E-02	1.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
27	1.5000E-02	1.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
28	1.5000E-02	1.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
29	1.5000E-02	1.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
30	1.5000E-02	1.5000E-02	4.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
31	1.5000E-02	2.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
32	1.5000E-02	2.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
33	1.5000E-02	2.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
34	1.5000E-02	2.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
35	1.5000E-02	3.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
36	1.5000E-02	3.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
37	1.5000E-02	3.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
38	1.5000E-02	4.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
39	1.5000E-02	4.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
40	2.5000E-02	5.0000E-03	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
41	2.5000E-02	5.0000E-03	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
42	2.5000E-02	5.0000E-03	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
43	2.5000E-02	5.0000E-03	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
44	2.5000E-02	1.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
45	2.5000E-02	1.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
46	2.5000E-02	1.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
47	2.5000E-02	1.5000E-02	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
48	2.5000E-02	2.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
49	2.5000E-02	2.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
50	2.5000E-02	2.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
51	2.5000E-02	3.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
52	2.5000E-02	3.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
53	3.5000E-02	5.0000E-03	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
54	3.5000E-02	5.0000E-03	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
55	3.5000E-02	5.0000E-03	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
56	3.5000E-02	5.0000E-03	3.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
57	3.5000E-02	1.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
58	3.5000E-02	1.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
59	3.5000E-02	1.5000E-02	2.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
60	3.5000E-02	2.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
61	3.5000E-02	2.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
62	3.5000E-02	3.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
63	4.5000E-02	5.0000E-03	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
64	4.5000E-02	5.0000E-03	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02
65	4.5000E-02	1.5000E-02	5.0000E-03	1.0000E-06	1.0156E+00	1.5625E-02
66	4.5000E-02	1.5000E-02	1.5000E-02	1.0000E-06	1.0156E+00	1.5625E-02

THE INCIDENT FIELD IS OF THE FORM COSKZ
FREQUENCY = 1000.00000 MHZ. (NX = 5 NY = 5 NZ = 5)
FIELD COMPONENTS= X,Y,Z. QUADRANTS USED = 1 2 3 4 5 6 7 8
NUMBER OF PARTITIONS PER EDGE IN INTEGRATION = 1
INCIDENT ELECTRIC FIELD HAS THE FOLLOWING COMPONENTS

N	E INCIDENT X-DIRECTION REAL	E INCIDENT X-DIRECTION IMAG	E INCIDENT Y-DIRECTION REAL	E INCIDENT Y-DIRECTION IMAG	EINCIDENT Z-DIRECTION REAL	EINCIDENT Z-DIRECTION IMAG

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

1	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
2	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
3	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
4	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
5	-5.8716E-01	0.0	0.0	0.0	0.0	0.0
6	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
7	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
8	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
9	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
10	-5.8716E-01	0.0	0.0	0.0	0.0	0.0
11	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
12	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
13	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
14	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
15	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
16	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
17	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
18	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
19	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
20	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
21	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
22	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
23	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
24	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
25	-5.8716E-01	0.0	0.0	0.0	0.0	0.0
26	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
27	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
28	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
29	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
30	-5.8716E-01	0.0	0.0	0.0	0.0	0.0
31	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
32	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
33	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
34	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
35	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
36	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
37	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
38	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
39	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
40	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
41	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
42	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
43	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
44	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
45	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
46	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
47	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
48	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
49	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
50	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
51	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
52	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
53	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
54	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
55	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
56	-7.4274E-01	0.0	0.0	0.0	0.0	0.0
57	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
58	-9.5098E-01	0.0	0.0	0.0	0.0	0.0

59	-8.6581E-01	0.0	0.0	0.0	0.0	0.0
60	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
61	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
62	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
63	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
64	-9.5098E-01	0.0	0.0	0.0	0.0	0.0
65	-9.9451E-01	0.0	0.0	0.0	0.0	0.0
66	-9.5098E-01	0.0	0.0	0.0	0.0	0.0

(INDUCED ELECTRIC FIELDS IN QUADRANT 1)

N	EX(V/M)	EY(V/M)	EZ(V/M)	PWR DEN (W/CU. MET.)
1	9.36983E-01	1.16650E-04	4.39036E-04	6.85888E-03
2	8.94267E-01	1.89245E-04	1.36992E-03	6.24777E-03
3	8.10833E-01	2.79607E-04	2.42584E-03	5.13637E-03
4	6.90702E-01	3.59075E-05	4.07694E-03	3.72724E-03
5	5.41293E-01	6.54701E-04	8.53704E-03	2.28962E-03
6	9.37540E-01	3.22093E-04	3.47573E-04	6.86704E-03
7	8.94753E-01	5.23571E-04	1.10161E-03	6.25456E-03
8	8.11256E-01	9.82629E-04	2.31154E-03	5.14174E-03
9	6.91577E-01	4.43049E-04	5.21494E-03	3.73676E-03
10	5.42220E-01	2.07056E-03	9.73820E-03	2.29767E-03
11	9.38720E-01	4.58801E-04	2.60130E-04	6.88433E-03
12	8.95901E-01	4.72050E-04	6.54227E-04	6.27062E-03
13	8.12224E-01	1.50959E-03	1.18478E-03	5.15399E-03
14	6.93112E-01	4.25664E-03	7.45053E-03	3.75373E-03
15	9.40945E-01	1.32281E-03	6.24912E-04	6.91703E-03
16	8.98753E-01	2.79019E-03	1.36109E-03	6.31068E-03
17	8.15822E-01	5.52306E-03	1.95875E-03	5.19999E-03
18	6.93695E-01	7.22310E-03	9.08337E-03	3.76053E-03
19	9.47652E-01	8.54136E-03	1.41916E-03	7.01655E-03
20	9.05825E-01	9.70663E-03	4.25449E-03	6.40551E-03
21	9.37518E-01	3.20135E-04	1.33964E-03	6.86673E-03
22	8.94834E-01	5.18340E-04	4.20401E-03	6.25583E-03
23	8.11453E-01	9.80719E-04	7.31504E-03	5.14461E-03
24	6.90141E-01	4.28729E-04	7.38442E-03	3.72148E-03
25	5.36415E-01	2.11039E-03	2.66135E-02	2.25355E-03
26	9.38123E-01	8.72901E-04	1.06094E-03	6.87560E-03
27	8.95280E-01	1.54425E-03	3.26270E-03	6.26203E-03
28	8.11692E-01	3.60583E-03	6.11035E-03	5.14761E-03
29	6.90967E-01	3.37922E-03	1.19471E-02	3.73116E-03
30	5.37748E-01	1.06205E-02	3.10874E-02	2.26759E-03
31	9.39293E-01	1.42178E-03	5.49487E-04	6.89276E-03
32	8.96235E-01	2.16457E-03	1.25287E-03	6.27533E-03
33	8.12878E-01	5.12383E-03	3.37099E-03	5.16256E-03
34	6.91937E-01	3.27664E-03	2.45949E-02	3.74525E-03
35	9.39204E-01	6.01696E-03	1.33553E-03	6.89173E-03
36	8.97248E-01	2.00605E-03	1.73026E-03	6.28953E-03
37	8.13797E-01	1.81314E-02	1.13791E-02	5.17753E-03
38	9.39014E-01	2.69704E-02	4.68448E-03	6.89451E-03
39	8.97802E-01	3.16571E-02	2.00170E-02	6.30822E-03
40	9.38562E-01	4.61018E-04	2.34492E-03	6.88206E-03
41	8.95691E-01	4.60514E-04	6.85448E-03	6.26804E-03
42	8.13771E-01	1.48904E-03	1.49228E-02	5.17537E-03
43	6.96442E-01	4.24109E-03	2.54309E-02	3.79450E-03
44	9.38968E-01	1.42547E-03	2.29610E-03	6.88803E-03
45	8.96337E-01	2.08380E-03	5.67485E-03	6.27700E-03
46	8.14186E-01	5.07354E-03	1.15139E-02	5.18014E-03
47	6.95028E-01	3.28972E-03	3.24640E-02	3.78225E-03

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

48	9.42282E-01	4.69308E-03	7.76984E-04	6.93685E-03
49	8.99119E-01	2.00579E-03	2.28812E-03	6.31581E-03
50	8.16453E-01	8.93940E-03	2.04557E-02	5.21167E-03
51	9.49551E-01	1.26333E-02	3.37574E-03	7.04545E-03
52	9.03383E-01	2.13066E-02	1.04336E-02	6.38018E-03
53	9.40319E-01	1.41982E-03	4.57470E-03	6.90798E-03
54	8.97150E-01	2.93085E-03	5.13910E-03	6.28838E-03
55	8.11288E-01	5.64438E-03	2.60089E-02	5.14763E-03
56	6.93177E-01	7.30701E-03	6.72053E-02	3.78956E-03
57	9.40161E-01	5.93225E-03	6.25174E-03	6.90607E-03
58	8.99076E-01	1.93610E-03	1.14184E-02	6.31618E-03
59	8.16778E-01	1.84258E-02	3.34787E-02	5.22333E-03
60	9.39014E-01	1.33850E-02	9.47949E-03	6.89075E-03
61	9.01823E-01	2.13939E-02	2.88708E-02	6.36388E-03
62	9.44651E-01	6.48831E-02	1.10014E-02	7.00544E-03
63	9.39642E-01	8.88738E-03	1.25473E-02	6.89971E-03
64	9.02452E-01	9.92238E-03	3.67473E-02	6.37398E-03
65	9.46530E-01	2.75204E-02	1.36353E-02	7.00673E-03
66	9.07039E-01	3.19773E-02	4.10464E-02	6.44865E-03

TOTAL POWER ABSORBED IN THE FIRST OCTANT = 3.72098E-07 WATTS

N	EXREAL	EXIMAG	EX-ABS	THETA-X	EYREAL	EYIMAG	EY-ABS	THETA-Y	EZREAL	EZIMAG	EZ-ABS	THETA-Z
1	9.3696E-01	6.9349E-03	9.3698E-01	0.4	-1.0696E-04	4.6542E-05	1.1665E-04	156.5	-2.9490E-05	-4.3805E-04	4.3904E-04	-93.9
2	8.9419E-01	1.1421E-02	8.9427E-01	0.7	-1.2720E-04	1.4012E-04	1.8924E-04	132.2	-7.1942E-05	-1.3680E-03	1.3699E-03	-93.0
3	8.1060E-01	1.9589E-02	8.1083E-01	1.4	-1.3564E-04	2.4450E-04	2.7961E-04	119.0	-6.1610E-05	-2.4251E-03	2.4258E-03	-91.5
4	6.9005E-01	3.0096E-02	6.9070E-01	2.5	-3.5886E-05	1.2526E-06	3.5908E-05	178.0	2.0050E-04	-4.0720E-03	4.0769E-03	-87.2
5	5.4004E-01	3.6816E-02	5.4129E-01	3.9	-7.9135E-06	-6.5465E-04	6.5470E-04	-90.7	1.6673E-03	-8.3726E-03	8.5370E-03	-78.7
6	9.3746E-01	1.1979E-02	9.3754E-01	0.7	-3.0853E-04	9.2495E-05	3.2209E-04	163.3	-4.8175E-05	-3.4422E-04	3.4757E-04	-98.0
7	8.9460E-01	1.6785E-02	8.9475E-01	1.1	-3.7584E-04	3.6452E-04	5.2357E-04	135.9	-1.3846E-04	-1.0929E-03	1.1016E-03	-97.2
8	8.1086E-01	2.5396E-02	8.1126E-01	1.8	-4.6934E-04	8.6330E-04	9.8263E-04	118.5	-1.0093E-04	-2.3093E-03	2.3115E-03	-92.5
9	6.9071E-01	3.4710E-02	6.9158E-01	2.9	-6.2544E-05	4.3861E-04	4.4305E-04	98.1	6.0892E-04	-5.1793E-03	5.2149E-03	-83.3
10	5.4102E-01	3.5997E-02	5.4222E-01	3.8	8.9071E-05	-2.0686E-03	2.0706E-03	-87.5	1.5659E-03	-9.6115E-03	9.7382E-03	-80.7
11	9.3847E-01	2.1824E-02	9.3872E-01	1.3	-4.5876E-04	5.8766E-06	4.5880E-04	179.3	-4.3316E-05	-2.5650E-04	2.6013E-04	-99.6
12	8.9549E-01	2.7046E-02	8.9590E-01	1.7	-4.7068E-04	3.5942E-05	4.7205E-04	175.6	-2.1006E-04	-6.1959E-04	6.5423E-04	-108.7
13	8.1138E-01	3.7054E-02	8.1222E-01	2.6	-8.8866E-04	1.2203E-03	1.5096E-03	126.1	-5.2743E-04	-1.0609E-03	1.1848E-03	-116.4
14	6.9165E-01	4.5044E-02	6.9311E-01	3.7	-1.6734E-03	3.9139E-03	4.2566E-03	113.1	1.6570E-03	-7.2639E-03	7.4505E-03	-77.2
15	9.4026E-01	3.6006E-02	9.4095E-01	2.2	-1.6400E-04	-1.3126E-03	1.3228E-03	-97.1	1.0288E-04	-6.1639E-04	6.2491E-04	-80.5
16	8.9788E-01	3.9523E-02	8.9875E-01	2.5	3.5281E-04	-2.7678E-03	2.7902E-03	-82.7	3.2454E-04	-1.3218E-03	1.3611E-03	-76.2
17	8.1448E-01	4.6824E-02	8.1582E-01	3.3	1.4232E-03	-5.3365E-03	5.5231E-03	-75.1	-1.2794E-03	1.4832E-03	1.9587E-03	130.8
18	6.8963E-01	7.4986E-02	6.9370E-01	6.2	1.0704E-03	-7.1434E-03	7.2231E-03	-81.5	1.2601E-03	-8.9955E-03	9.0834E-03	-82.0
19	9.4663E-01	4.4070E-02	9.4765E-01	2.7	2.1145E-03	-8.2755E-03	8.5414E-03	-75.7	1.1864E-04	-1.4142E-03	1.4192E-03	-85.2
20	9.0451E-01	4.0594E-02	9.0542E-01	2.6	1.9081E-03	-9.5172E-03	9.7066E-03	-78.7	5.3594E-04	-4.2206E-03	4.2545E-03	-82.8
21	9.3748E-01	8.5816E-03	9.3752E-01	0.5	-3.0680E-04	9.1436E-05	3.2013E-04	163.4	-7.5460E-05	-1.3375E-03	1.3396E-03	-93.2
22	8.9474E-01	1.2899E-02	8.9483E-01	0.8	-3.6732E-04	3.6572E-04	5.1834E-04	135.1	-1.7128E-04	-4.2005E-03	4.2040E-03	-92.3
23	8.1120E-01	2.0307E-02	8.1145E-01	1.4	-4.5715E-04	8.6766E-04	9.8072E-04	117.8	-1.6791E-04	-7.3131E-03	7.3150E-03	-91.3
24	6.8940E-01	3.1864E-02	6.9014E-01	2.6	-2.1228E-04	3.7248E-04	4.2873E-04	119.7	-1.0096E-03	-7.3151E-03	7.3844E-03	-97.9
25	5.3300E-01	6.0425E-02	5.3642E-01	6.5	-9.6061E-05	-2.1082E-03	2.1104E-03	-92.6	4.2435E-03	-2.6273E-02	2.6613E-02	-80.8
26	9.3803E-01	1.3428E-02	9.3812E-01	0.8	-8.6963E-04	7.5462E-05	8.7290E-04	175.0	-1.3664E-04	-1.0521E-03	1.0609E-03	-97.4
27	8.9510E-01	1.8048E-02	8.9528E-01	1.2	-1.1132E-03	1.0702E-03	1.5443E-03	136.1	-4.1231E-04	-3.2365E-03	3.2627E-03	-97.3
28	8.1125E-01	2.6662E-02	8.1169E-01	1.9	-1.5513E-03	3.2551E-03	3.6058E-03	115.5	-5.0171E-04	-6.0897E-03	6.1103E-03	-94.7
29	6.8987E-01	3.8951E-02	6.9097E-01	3.2	-1.0155E-03	3.2230E-03	3.3792E-03	107.5	5.0111E-04	-1.1937E-02	1.1947E-02	-87.6
30	5.3470E-01	5.7140E-02	5.3775E-01	6.1	1.3627E-03	-1.0533E-02	1.0620E-02	-82.6	4.2697E-03	-3.0793E-02	3.1087E-02	-82.1
31	9.3903E-01	2.2237E-02	9.3929E-01	1.4	-1.4216E-03	2.4220E-05	1.4218E-03	179.0	-2.1247E-04	-5.0675E-04	5.4949E-04	-112.7
32	8.9578E-01	2.8390E-02	8.9623E-01	1.8	-1.7337E-03	1.2960E-03	2.1646E-03	143.2	-8.4194E-04	-9.2780E-04	1.2529E-03	-132.2
33	8.1189E-01	4.0055E-02	8.1288E-01	2.8	-2.3899E-03	4.5324E-03	5.1238E-03	117.8	-9.9691E-04	-3.2202E-03	3.3710E-03	-107.2
34	6.8946E-01	5.8549E-02	6.9194E-01	4.9	-6.8196E-04	-3.2049E-03	3.2766E-03	-102.0	4.0784E-03	-2.4254E-02	2.4595E-02	-80.5
35	9.3839E-01	3.9178E-02	9.3920E-01	2.4	-3.3823E-03	4.9763E-03	6.0170E-03	124.2	2.0831E-04	-1.3192E-03	1.3355E-03	-81.0
36	8.9607E-01	4.6013E-02	8.9725E-01	2.9	-1.2175E-03	-1.5943E-03	2.0060E-03	-127.4	2.4504E-04	-1.7128E-03	1.7303E-03	-81.9

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

37	8.1114E-01	6.5704E-02	8.1380E-01	4.6	3.2897E-03	-1.7830E-02	1.8131E-02	-79.5	9.5622E-04	-1.1339E-02	1.1379E-02	-85.2
38	9.3496E-01	8.7210E-02	9.3901E-01	5.3	5.8597E-03	-2.6326E-02	2.6970E-02	-77.5	3.2528E-04	-4.6732E-03	4.6845E-03	-86.0
39	8.9438E-01	7.8341E-02	8.9780E-01	5.0	5.5362E-03	-3.1169E-02	3.1657E-02	-79.9	3.4278E-03	-1.9721E-02	2.0017E-02	-80.1
40	9.3848E-01	1.2073E-02	9.3856E-01	0.7	-4.6100E-04	-3.5678E-06	4.6102E-04	-179.6	-6.4397E-05	-2.3440E-03	2.3449E-03	-91.6
41	8.9554E-01	1.6494E-02	8.9569E-01	1.1	-4.5991E-04	2.3513E-05	4.6051E-04	177.1	-2.7670E-04	-6.8489E-03	6.8545E-03	-92.3
42	8.1342E-01	2.4023E-02	8.1377E-01	1.7	-7.5617E-04	1.2828E-03	1.4890E-03	120.5	3.3290E-04	-1.4919E-02	1.4923E-02	-88.7
43	6.9624E-01	1.6948E-02	6.9644E-01	1.4	-1.4826E-03	3.9735E-03	4.2411E-03	110.5	3.4532E-03	-2.5195E-02	2.5431E-02	-82.2
44	9.3881E-01	1.7205E-02	9.3897E-01	1.0	-1.4254E-03	1.1238E-05	1.4255E-03	179.5	-7.2693E-05	-2.2949E-03	2.2961E-03	-91.8
45	8.9611E-01	2.0119E-02	8.9634E-01	1.3	-1.6326E-03	1.2949E-03	2.0838E-03	141.6	-4.8081E-04	-5.6544E-03	5.6748E-03	-94.9
46	8.1370E-01	2.8210E-02	8.1419E-01	2.0	-2.0882E-03	4.6239E-03	5.0735E-03	114.3	5.3399E-05	-1.1514E-02	1.1514E-02	-89.7
47	6.9403E-01	3.7153E-02	6.9503E-01	3.1	-7.0789E-04	-3.2127E-03	3.2897E-03	-102.4	3.8910E-03	-3.2230E-02	3.2464E-02	-83.1
48	9.4193E-01	2.5841E-02	9.4228E-01	1.6	-1.4812E-03	-4.4532E-03	4.6931E-03	-108.4	-4.8831E-04	-6.0437E-04	7.7698E-04	-128.9
49	8.9862E-01	2.9846E-02	8.9912E-01	1.9	-1.9732E-03	3.6022E-04	2.0058E-03	169.7	-8.7798E-04	-2.1130E-03	2.2881E-03	-112.6
50	8.1537E-01	4.2035E-02	8.1645E-01	3.0	2.1561E-04	-8.9368E-03	8.9394E-03	-88.6	2.4411E-03	-2.0309E-02	2.0456E-02	-83.1
51	9.4946E-01	1.3050E-02	9.4955E-01	0.8	1.1241E-03	-1.2583E-02	1.2633E-02	-84.9	-1.2612E-03	3.1313E-03	3.3757E-03	111.9
52	9.0245E-01	4.1097E-02	9.0338E-01	2.6	2.2484E-03	-2.1188E-02	2.1307E-02	-83.9	1.2674E-03	-1.0356E-02	1.0434E-02	-83.0
53	9.4014E-01	1.8315E-02	9.4032E-01	1.1	-2.9747E-04	-1.3883E-03	1.4198E-03	-102.1	2.9343E-04	-4.5653E-03	4.5747E-03	-86.3
54	8.9692E-01	2.0283E-02	8.9715E-01	1.3	1.0853E-04	-2.9288E-03	2.9308E-03	-87.9	-1.1989E-03	-4.9973E-03	5.1391E-03	-103.5
55	8.0938E-01	5.5664E-02	8.1129E-01	3.9	9.3638E-04	-5.5662E-03	5.6444E-03	-80.5	7.7447E-04	-2.5997E-02	2.6009E-02	-88.3
56	6.9258E-01	2.8641E-02	6.9318E-01	2.4	9.9199E-04	-7.2394E-03	7.3070E-03	-82.2	1.0304E-02	-6.6811E-02	6.7205E-02	-81.2
57	9.3992E-01	2.1185E-02	9.4016E-01	1.3	-3.0554E-03	5.0849E-03	5.9322E-03	121.0	7.3816E-04	-6.2080E-03	6.2517E-03	-83.2
58	8.9890E-01	1.7669E-02	8.9908E-01	1.1	-9.7116E-04	-1.6749E-03	1.9361E-03	-120.1	8.6705E-04	-1.1385E-02	1.1418E-02	-85.6
59	8.1631E-01	2.7562E-02	8.1678E-01	1.9	2.6172E-03	-1.8239E-02	1.8426E-02	-81.8	4.2884E-03	-3.3203E-02	3.3479E-02	-82.6
60	9.3690E-01	6.3031E-02	9.3901E-01	3.8	-1.1375E-03	-1.3337E-02	1.3385E-02	-94.9	1.6144E-03	-9.3410E-03	9.4795E-03	-80.2
61	9.0135E-01	2.9118E-02	9.0182E-01	1.9	2.3294E-03	-2.1267E-02	2.1394E-02	-83.7	4.8749E-03	-2.8456E-02	2.8871E-02	-80.3
62	9.4403E-01	3.4246E-02	9.4465E-01	2.1	1.0676E-02	-6.3999E-02	6.4883E-02	-80.5	1.9568E-03	-1.0826E-02	1.1001E-02	-79.8
63	9.3839E-01	4.8472E-02	9.3964E-01	3.0	7.1187E-04	-8.8588E-03	8.8874E-03	-85.4	1.4389E-03	-1.2464E-02	1.2547E-02	-83.4
64	9.0224E-01	1.9604E-02	9.0245E-01	1.2	8.9712E-04	-9.8817E-03	9.9224E-03	-84.8	6.2307E-03	-3.6215E-02	3.6747E-02	-80.2
65	9.4635E-01	1.8349E-02	9.4653E-01	1.1	4.0939E-03	-2.7214E-02	2.7520E-02	-81.4	1.6266E-03	-1.3538E-02	1.3635E-02	-83.1
66	9.0703E-01	-2.9242E-03	9.0704E-01	-0.2	4.4969E-03	-3.1660E-02	3.1977E-02	-81.9	6.6222E-03	-4.0509E-02	4.1046E-02	-80.7

THE INCIDENT FIELD IS OF THE FORM SINKZ

FREQUENCY = 1000.00000 MHZ. (NX = 5 NY = 5 NZ = 5)

FIELD COMPONENTS= X,Y,Z. QUADRANTS USED = 1 2 3 4 5 6 7 8

NUMBER OF PARTITIONS PER EDGE IN INTEGRATION = 1

INCIDENT ELECTRIC FIELD HAS THE FOLLOWING COMPONENTS

N	E INCIDENT X-DIRECTION REAL	E INCIDENT X-DIRECTION IMAG	E INCIDENT Y-DIRECTION REAL	E INCIDENT Y-DIRECTION IMAG	EINCIDENT Z-DIRECTION REAL	EINCIDENT Z-DIRECTION IMAG
1	0.0	1.0461E-01	0.0	0.0	0.0	0.0
2	0.0	3.0926E-01	0.0	0.0	0.0	0.0
3	0.0	5.0037E-01	0.0	0.0	0.0	0.0
4	0.0	6.6958E-01	0.0	0.0	0.0	0.0
5	0.0	8.0947E-01	0.0	0.0	0.0	0.0
6	0.0	1.0461E-01	0.0	0.0	0.0	0.0
7	0.0	3.0926E-01	0.0	0.0	0.0	0.0
8	0.0	5.0037E-01	0.0	0.0	0.0	0.0
9	0.0	6.6958E-01	0.0	0.0	0.0	0.0
10	0.0	8.0947E-01	0.0	0.0	0.0	0.0
11	0.0	1.0461E-01	0.0	0.0	0.0	0.0
12	0.0	3.0926E-01	0.0	0.0	0.0	0.0
13	0.0	5.0037E-01	0.0	0.0	0.0	0.0
14	0.0	6.6958E-01	0.0	0.0	0.0	0.0
15	0.0	1.0461E-01	0.0	0.0	0.0	0.0
16	0.0	3.0926E-01	0.0	0.0	0.0	0.0
17	0.0	5.0037E-01	0.0	0.0	0.0	0.0
18	0.0	6.6958E-01	0.0	0.0	0.0	0.0
19	0.0	1.0461E-01	0.0	0.0	0.0	0.0
20	0.0	3.0926E-01	0.0	0.0	0.0	0.0

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

21	0.0	1.0461E-01	0.0	0.0	0.0	0.0
22	0.0	3.0926E-01	0.0	0.0	0.0	0.0
23	0.0	5.0037E-01	0.0	0.0	0.0	0.0
24	0.0	6.6958E-01	0.0	0.0	0.0	0.0
25	0.0	8.0987E-01	0.0	0.0	0.0	0.0
26	0.0	1.0461E-01	0.0	0.0	0.0	0.0
27	0.0	3.0926E-01	0.0	0.0	0.0	0.0
28	0.0	5.0037E-01	0.0	0.0	0.0	0.0
29	0.0	6.6958E-01	0.0	0.0	0.0	0.0
30	0.0	8.0987E-01	0.0	0.0	0.0	0.0
31	0.0	1.0461E-01	0.0	0.0	0.0	0.0
32	0.0	3.0926E-01	0.0	0.0	0.0	0.0
33	0.0	5.0037E-01	0.0	0.0	0.0	0.0
34	0.0	6.6958E-01	0.0	0.0	0.0	0.0
35	0.0	1.0461E-01	0.0	0.0	0.0	0.0
36	0.0	3.0926E-01	0.0	0.0	0.0	0.0
37	0.0	5.0037E-01	0.0	0.0	0.0	0.0
38	0.0	1.0461E-01	0.0	0.0	0.0	0.0
39	0.0	3.0926E-01	0.0	0.0	0.0	0.0
40	0.0	1.0461E-01	0.0	0.0	0.0	0.0
41	0.0	3.0926E-01	0.0	0.0	0.0	0.0
42	0.0	5.0037E-01	0.0	0.0	0.0	0.0
43	0.0	6.6958E-01	0.0	0.0	0.0	0.0
44	0.0	1.0461E-01	0.0	0.0	0.0	0.0
45	0.0	3.0926E-01	0.0	0.0	0.0	0.0
46	0.0	5.0037E-01	0.0	0.0	0.0	0.0
47	0.0	6.6958E-01	0.0	0.0	0.0	0.0
48	0.0	1.0461E-01	0.0	0.0	0.0	0.0
49	0.0	3.0926E-01	0.0	0.0	0.0	0.0
50	0.0	5.0037E-01	0.0	0.0	0.0	0.0
51	0.0	1.0461E-01	0.0	0.0	0.0	0.0
52	0.0	3.0926E-01	0.0	0.0	0.0	0.0
53	0.0	1.0461E-01	0.0	0.0	0.0	0.0
54	0.0	3.0926E-01	0.0	0.0	0.0	0.0
55	0.0	5.0037E-01	0.0	0.0	0.0	0.0
56	0.0	6.6958E-01	0.0	0.0	0.0	0.0
57	0.0	1.0461E-01	0.0	0.0	0.0	0.0
58	0.0	3.0926E-01	0.0	0.0	0.0	0.0
59	0.0	5.0037E-01	0.0	0.0	0.0	0.0
60	0.0	1.0461E-01	0.0	0.0	0.0	0.0
61	0.0	3.0926E-01	0.0	0.0	0.0	0.0
62	0.0	1.0461E-01	0.0	0.0	0.0	0.0
63	0.0	1.0461E-01	0.0	0.0	0.0	0.0
64	0.0	3.0926E-01	0.0	0.0	0.0	0.0
65	0.0	1.0461E-01	0.0	0.0	0.0	0.0
66	0.0	3.0926E-01	0.0	0.0	0.0	0.0

(INDUCED ELECTRIC FIELDS IN QUADRANT 1)

N	EX(V/M)	EY(V/M)	EZ(V/M)	PWR DEN (W/CU. MET.)
1	1.03373E-01	3.32363E-05	6.80079E-03	8.38454E-05
2	3.05534E-01	1.22684E-04	6.72298E-03	7.29658E-04
3	4.94166E-01	1.83889E-04	6.47692E-03	1.90814E-03
4	6.61299E-01	1.62400E-04	4.95781E-03	3.41673E-03
5	8.02568E-01	8.36252E-04	2.43417E-03	5.03221E-03
6	1.03327E-01	7.94994E-05	6.93016E-03	8.37848E-05
7	3.05378E-01	3.37337E-04	6.94730E-03	7.28935E-04
8	4.93951E-01	7.35627E-04	6.48946E-03	1.90649E-03
9	6.61615E-01	2.73531E-04	3.67754E-03	3.41990E-03

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

10	8.03081E-01	2.58800E-03	3.35822E-03	5.03872E-03
11	1.03276E-01	2.72338E-05	7.08022E-03	8.37189E-05
12	3.05170E-01	1.86988E-04	7.38645E-03	7.27993E-04
13	4.93458E-01	1.48620E-03	7.69098E-03	1.90283E-03
14	6.61684E-01	4.10392E-03	1.63471E-03	3.42067E-03
15	1.03337E-01	2.42536E-04	6.88374E-03	8.37971E-05
16	3.05467E-01	1.22865E-03	7.05507E-03	7.29388E-04
17	4.93971E-01	3.24238E-03	1.04675E-02	1.90725E-03
18	6.60328E-01	5.04280E-03	1.25865E-03	3.40672E-03
19	1.03787E-01	8.78205E-04	5.74748E-03	8.44177E-05
20	3.06766E-01	3.05535E-03	4.55004E-03	7.35431E-04
21	1.03413E-01	7.98179E-05	2.00460E-02	8.66875E-05
22	3.05676E-01	3.38831E-04	1.97495E-02	7.33031E-04
23	4.94269E-01	7.38849E-04	1.93648E-02	1.91154E-03
24	6.59206E-01	2.26715E-04	2.28478E-02	3.39902E-03
25	7.95170E-01	2.62089E-03	8.23875E-03	4.94039E-03
26	1.03367E-01	2.09191E-04	2.03768E-02	8.67191E-05
27	3.05467E-01	9.81221E-04	2.05045E-02	7.32277E-04
28	4.93861E-01	2.76346E-03	2.03318E-02	1.90874E-03
29	6.59834E-01	1.88209E-03	1.72796E-02	3.40377E-03
30	7.96580E-01	1.40475E-02	1.19165E-02	4.95999E-03
31	1.03263E-01	1.77758E-04	2.08567E-02	8.67049E-05
32	3.05112E-01	1.11888E-03	2.20878E-02	7.31115E-04
33	4.93658E-01	3.34082E-03	2.31515E-02	1.90817E-03
34	6.60495E-01	3.07111E-03	3.92696E-03	3.40843E-03
35	1.03042E-01	3.71495E-04	2.10777E-02	8.64222E-05
36	3.04728E-01	1.58193E-03	2.22673E-02	7.29354E-04
37	4.94004E-01	1.11623E-02	1.72132E-02	1.90985E-03
38	1.02926E-01	2.74438E-03	1.97850E-02	8.58807E-05
39	3.04927E-01	9.83459E-03	1.19882E-02	7.28288E-04
40	1.03482E-01	2.92927E-05	3.23420E-02	9.18316E-05
41	3.05782E-01	1.94506E-04	3.16794E-02	7.38427E-04
42	4.96120E-01	1.51759E-03	2.81695E-02	1.92914E-03
43	6.67951E-01	4.15424E-03	2.06864E-02	3.48909E-03
44	1.03493E-01	1.85195E-04	3.25382E-02	9.19493E-05
45	3.05794E-01	1.13191E-03	3.28896E-02	7.39009E-04
46	4.95605E-01	3.39028E-03	3.17048E-02	1.92688E-03
47	6.65566E-01	3.05016E-03	1.37810E-02	3.46233E-03
48	1.03605E-01	1.91129E-04	3.30372E-02	9.23863E-05
49	3.06159E-01	5.95368E-04	3.46647E-02	7.41682E-04
50	4.96855E-01	5.85658E-03	2.48299E-02	1.93372E-03
51	1.03755E-01	1.25132E-03	3.27529E-02	9.24948E-05
52	3.07304E-01	7.29049E-03	2.80187E-02	7.44326E-04
53	1.03702E-01	2.45270E-04	4.30318E-02	9.84837E-05
54	3.05491E-01	1.25782E-03	4.60493E-02	7.45676E-04
55	4.94041E-01	3.30201E-03	3.34901E-02	1.91570E-03
56	6.65193E-01	5.06010E-03	8.84358E-03	3.45770E-03
57	1.03835E-01	3.77971E-04	4.24913E-02	9.83384E-05
58	3.06823E-01	1.57639E-03	4.25882E-02	7.49663E-04
59	4.97765E-01	1.12319E-02	2.75966E-02	1.94264E-03
60	1.03978E-01	1.31400E-03	4.23936E-02	9.85179E-05
61	3.08748E-01	7.34709E-03	3.40938E-02	7.54230E-04
62	1.04636E-01	5.73599E-03	3.48935E-02	9.53050E-05
63	1.04159E-01	8.97820E-04	5.16493E-02	1.05606E-04
64	3.10077E-01	3.08655E-03	4.13658E-02	7.64596E-04
65	1.04634E-01	2.74666E-03	4.79286E-02	1.03538E-04
66	3.10744E-01	9.81730E-03	3.56886E-02	7.65093E-04

TOTAL POWER ABSORBED IN THE FIRST OCTANT = 9.50342E-08 WATTS

N	EXREAL	EXIMAG	EX-ABS	THETA-X	EYREAL	EYIMAG	EY-ABS	THETA-Y	EZREAL	EZIMAG	EZ-ABS	THETA-Z
1	6.1214E-04	-1.0337E-01	1.0337E-01	-89.7	3.1406E-05	1.0878E-05	3.3236E-05	19.1	6.7698E-03	6.4904E-04	6.8008E-03	5.5
2	2.7021E-03	-3.0552E-01	3.0553E-01	-89.5	1.1771E-04	3.4564E-05	1.2268E-04	16.4	6.6915E-03	6.4963E-04	6.7230E-03	5.5
3	7.2926E-03	-4.9411E-01	4.9417E-01	-89.2	1.8135E-04	3.0458E-05	1.8389E-04	9.5	6.4476E-03	6.1615E-04	6.4769E-03	5.5
4	1.5526E-02	-6.6112E-01	6.6130E-01	-88.7	-1.3187E-04	-9.4779E-05	1.6240E-04	-144.3	4.9541E-03	1.9256E-04	4.9578E-03	2.2
5	1.8890E-02	-8.0235E-01	8.0257E-01	-88.7	-8.2632E-04	-1.2847E-04	8.3625E-04	-171.2	-1.7418E-03	-1.7004E-03	2.4342E-03	-135.7
6	1.0252E-03	-1.0332E-01	1.0333E-01	-89.4	7.4712E-05	2.7170E-05	7.9499E-05	20.0	6.8946E-03	7.0080E-04	6.9302E-03	5.8
7	4.0604E-03	-3.0535E-01	3.0538E-01	-89.2	3.2114E-04	1.0326E-04	3.3734E-04	17.8	6.9093E-03	7.2585E-04	6.9473E-03	6.0
8	9.6766E-03	-4.9386E-01	4.9395E-01	-88.9	7.1576E-04	1.6979E-04	7.3563E-04	13.3	6.4577E-03	6.4143E-04	6.4895E-03	5.7
9	1.7167E-02	-6.6139E-01	6.6161E-01	-88.5	8.3469E-05	-2.6048E-04	2.7353E-04	-72.2	3.6716E-03	-2.0963E-04	3.6775E-03	-3.3
10	1.4808E-02	-8.0294E-01	8.0308E-01	-88.9	-2.5455E-03	-4.6735E-04	2.5880E-03	-169.6	-2.9089E-03	-1.6781E-03	3.3582E-03	-150.0
11	1.7526E-03	-1.0326E-01	1.0328E-01	-89.0	2.5198E-05	1.0333E-05	2.7234E-05	22.3	7.0388E-03	7.6470E-04	7.0802E-03	6.2
12	6.4897E-03	-3.0510E-01	3.0517E-01	-88.8	1.6912E-04	7.9771E-05	1.8699E-04	25.3	7.3371E-03	8.5201E-04	7.3865E-03	6.6
13	1.4777E-02	-4.9324E-01	4.9346E-01	-88.3	1.4020E-03	4.9300E-04	1.4862E-03	19.4	7.6182E-03	1.0558E-03	7.6910E-03	7.9
14	2.1342E-02	-6.6134E-01	6.6168E-01	-88.2	3.9782E-03	1.0082E-03	4.1039E-03	14.2	1.3227E-03	-9.6054E-04	1.6347E-03	-36.0
15	2.5403E-03	-1.0331E-01	1.0334E-01	-88.6	-2.2807E-04	-8.2508E-05	2.4254E-04	-160.1	6.8446E-03	7.3288E-04	6.8837E-03	6.1
16	8.4264E-03	-3.0535E-01	3.0547E-01	-88.4	-1.1710E-03	-3.7206E-04	1.2287E-03	-162.4	7.0257E-03	6.4301E-04	7.0551E-03	5.2
17	1.7910E-02	-4.9365E-01	4.9397E-01	-87.9	-3.0248E-03	-1.1679E-03	3.2424E-03	-158.9	1.0343E-02	1.6075E-03	1.0468E-02	8.8
18	4.5540E-02	-6.5876E-01	6.6033E-01	-86.0	-4.8672E-03	-1.3190E-03	5.0428E-03	-164.8	-5.4553E-04	-1.1343E-03	1.2587E-03	-115.7
19	2.3659E-03	-1.0376E-01	1.0379E-01	-88.7	-8.2785E-04	-2.9309E-04	8.7820E-04	-160.5	5.7297E-03	4.5132E-04	5.7475E-03	4.5
20	4.8519E-03	-3.0673E-01	3.0677E-01	-89.1	-2.9508E-03	-7.9235E-04	3.0554E-03	-165.0	4.5193E-03	5.2806E-04	4.5500E-03	6.7
21	5.6960E-04	-1.0341E-01	1.0341E-01	-89.7	7.4381E-05	2.8955E-05	7.9818E-05	21.3	1.9951E-02	1.9456E-03	2.0046E-02	5.6
22	2.5301E-03	-3.0567E-01	3.0568E-01	-89.5	3.2163E-04	1.0657E-04	3.3883E-04	18.3	1.9655E-02	1.9298E-03	1.9750E-02	5.6
23	6.4507E-03	-4.9423E-01	4.9427E-01	-89.3	7.2017E-04	1.6510E-04	7.3885E-04	12.9	1.9264E-02	1.9716E-03	1.9365E-02	5.8
24	1.7696E-02	-6.5897E-01	6.5921E-01	-88.5	4.5785E-05	-2.2204E-04	2.2671E-04	-78.3	2.2639E-02	3.0809E-03	2.2848E-02	7.7
25	5.6210E-02	-7.9318E-01	7.9517E-01	-85.9	-2.5981E-03	-3.4460E-04	2.6209E-03	-172.4	-6.2500E-03	-5.3679E-03	8.2387E-03	-139.3
26	9.0813E-04	-1.0336E-01	1.0337E-01	-89.5	1.9315E-04	8.0339E-05	2.0919E-04	22.6	2.0269E-02	2.0977E-03	2.0377E-02	5.9
27	3.7305E-03	-3.0544E-01	3.0547E-01	-89.3	9.2309E-04	3.3270E-04	9.8122E-04	19.8	2.0388E-02	2.1860E-03	2.0505E-02	6.1
28	9.4750E-03	-4.9377E-01	4.9386E-01	-88.9	2.6763E-03	6.8855E-04	2.7635E-03	14.4	2.0209E-02	2.2316E-03	2.0332E-02	6.3
29	2.2052E-02	-6.5947E-01	6.5983E-01	-88.1	1.8405E-03	3.9351E-04	1.8821E-03	12.1	1.7233E-02	1.2651E-03	1.7280E-02	4.2
30	4.9046E-02	-7.9507E-01	7.9658E-01	-86.5	-1.3715E-02	-3.0364E-03	1.4047E-02	-167.5	-1.0643E-02	-5.3607E-03	1.1916E-02	-153.3
31	1.5765E-03	-1.0325E-01	1.0326E-01	-89.1	1.6178E-04	7.3663E-05	1.7776E-04	24.5	2.0726E-02	2.3332E-03	2.0857E-02	6.4
32	6.1934E-03	-3.0505E-01	3.0511E-01	-88.8	1.0451E-03	3.9955E-04	1.1189E-03	20.9	2.1929E-02	2.6459E-03	2.2088E-02	6.9
33	1.5210E-02	-4.9342E-01	4.9366E-01	-88.2	3.2523E-03	7.6386E-04	3.3408E-03	13.2	2.2973E-02	2.8724E-03	2.3151E-02	7.1
34	3.4641E-02	-6.5959E-01	6.6050E-01	-87.0	-2.9223E-03	-9.4455E-04	3.0711E-03	-162.1	2.9792E-03	-2.5584E-03	3.9270E-03	-40.7
35	2.9448E-03	-1.0300E-01	1.0304E-01	-88.4	3.7128E-04	1.2599E-05	3.7149E-04	1.9	2.0932E-02	2.4754E-03	2.1078E-02	6.7
36	1.0481E-02	-3.0455E-01	3.0473E-01	-88.0	-1.4395E-03	-6.5606E-04	1.5819E-03	-155.5	2.2118E-02	2.5766E-03	2.2267E-02	6.6
37	2.4072E-02	-4.9342E-01	4.9400E-01	-87.2	-1.0587E-02	-3.2220E-03	1.1162E-02	-163.2	1.7145E-02	1.5346E-03	1.7213E-02	5.1
38	7.3193E-03	-1.0267E-01	1.0293E-01	-85.9	-2.5987E-03	-8.8220E-04	2.7444E-03	-161.2	1.9683E-02	2.0051E-03	1.9785E-02	5.8
39	1.7049E-02	-3.0445E-01	3.0493E-01	-86.8	-9.5128E-03	-2.4952E-03	9.8346E-03	-165.3	1.1940E-02	1.0772E-03	1.1988E-02	5.2
40	5.3008E-04	-1.0348E-01	1.0348E-01	-89.7	2.2722E-05	1.8487E-05	2.9293E-05	39.1	3.2178E-02	3.2535E-03	3.2342E-02	5.8
41	2.9103E-03	-3.0577E-01	3.0578E-01	-89.5	1.6234E-04	1.0714E-04	1.9451E-04	33.4	3.1715E-02	3.2292E-03	3.1879E-02	5.8
42	6.5631E-03	-4.9608E-01	4.9612E-01	-89.2	1.4370E-03	4.8797E-04	1.5176E-03	18.8	2.8038E-02	2.7141E-03	2.8170E-02	5.5
43	-5.6346E-03	-6.6793E-01	6.6795E-01	-90.5	4.0886E-03	7.3563E-04	4.1542E-03	10.2	2.0653E-02	1.1814E-03	2.0686E-02	3.3
44	6.6925E-04	-1.0349E-01	1.0349E-01	-89.6	1.5581E-04	1.0010E-04	1.8520E-04	32.7	3.2354E-02	3.4561E-03	3.2538E-02	6.1
45	3.0112E-03	-3.0578E-01	3.0579E-01	-89.4	1.0337E-03	4.6110E-04	1.1319E-03	24.0	3.2692E-02	3.6028E-03	3.2890E-02	6.3
46	8.2350E-03	-4.9554E-01	4.9560E-01	-89.0	3.3020E-03	7.6882E-04	3.3903E-03	13.1	3.1544E-02	3.1902E-03	3.1705E-02	5.8
47	1.4137E-02	-6.6542E-01	6.6557E-01	-88.8	-2.7311E-03	-1.3582E-03	3.0502E-03	-153.6	1.3747E-02	-9.7472E-04	1.3781E-02	-4.1
48	1.1383E-03	-1.0360E-01	1.0360E-01	-89.4	9.3664E-05	1.6661E-04	1.9113E-04	60.7	3.2817E-02	3.8110E-03	3.3037E-02	6.6
49	4.5494E-03	-3.0613E-01	3.0616E-01	-89.1	5.5641E-04	2.1182E-04	5.9537E-04	20.8	3.4420E-02	4.1118E-03	3.4665E-02	6.8
50	1.1474E-02	-4.9672E-01	4.9686E-01	-88.7	-5.6032E-03	-1.7040E-03	5.8566E-03	-163.1	2.4772E-02	1.7002E-03	2.4830E-02	3.9
51	1.2476E-04	-1.0375E-01	1.0375E-01	-89.9	-1.1093E-03	-5.7896E-04	1.2513E-03	-152.4	3.2521E-02	3.8882E-03	3.2753E-02	6.8
52	5.3326E-03	-3.0726E-01	3.0730E-01	-89.0	-6.9401E-03	-2.2329E-03	7.2905E-03	-162.2	2.7829E-02	3.2565E-03	2.8019E-02	6.7
53	3.6738E-04	-1.0370E-01	1.0370E-01	-89.8	-2.3463E-04	-7.1459E-05	2.4527E-04	-163.1	4.2793E-02	4.5246E-03	4.3032E-02	6.0
54	3.1585E-03	-3.0547E-01	3.0549E-01	-89.4	-1.2203E-03	-3.0496E-04	1.2578E-03	-166.0	4.5726E-02	5.4463E-03	4.6049E-02	6.8
55	2.5934E-02	-4.9336E-01	4.9404E-01	-87.0	-3.2491E-03	-5.8867E-04	3.3020E-03	-169.7	3.3419E-02	2.1884E-03	3.3490E-02	3.7
56	1.2231E-02	-6.6508E-01	6.6519E-01	-88.9	-4.9294E-03	-1.1426E-03	5.0601E-03	-166.9	-6.5665E-03	-5.9237E-03	8.8436E-03	-137.9

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

57	4.0892E-04	-1.0383E-01	1.0383E-01	-89.8	3.7548E-04	4.3349E-05	3.7797E-04	6.6	4.2241E-02	4.6063E-03	4.2491E-02	6.2
58	7.8959E-04	-3.0682E-01	3.0682E-01	-89.9	-1.5002E-03	-4.8424E-04	1.5764E-03	-162.1	4.2317E-02	4.7980E-03	4.2588E-02	6.5
59	5.1883E-03	-4.9774E-01	4.9777E-01	-89.4	-1.0932E-02	-2.5782E-03	1.1232E-02	-166.7	2.7582E-02	9.1181E-04	2.7597E-02	1.9
60	4.0223E-03	-1.0390E-01	1.0398E-01	-87.8	-1.3138E-03	-2.3369E-05	1.3140E-03	-179.0	4.2137E-02	4.6608E-03	4.2394E-02	6.3
61	4.1645E-04	-3.0875E-01	3.0875E-01	-89.9	-7.1410E-03	-1.7280E-03	7.3471E-03	-166.4	3.3899E-02	3.6390E-03	3.4094E-02	6.1
62	-1.4576E-03	-1.0463E-01	1.0464E-01	-90.8	-5.6050E-03	-1.2191E-03	5.7360E-03	-167.7	3.4575E-02	4.7042E-03	3.4893E-02	7.7
63	3.9233E-03	-1.0409E-01	1.0416E-01	-87.8	-8.7637E-04	-1.9510E-04	8.9782E-04	-167.4	5.1361E-02	5.4468E-03	5.1649E-02	6.1
64	-1.7047E-03	-3.1007E-01	3.1008E-01	-90.3	-3.0078E-03	-6.9269E-04	3.0866E-03	-167.0	4.1031E-02	5.2546E-03	4.1366E-02	7.3
65	1.0882E-03	-1.0463E-01	1.0463E-01	-89.4	-2.6224E-03	-8.1672E-04	2.7467E-03	-162.7	4.7711E-02	4.5618E-03	4.7929E-02	5.5
66	-6.9276E-03	-3.1067E-01	3.1074E-01	-91.3	-9.4192E-03	-2.7674E-03	9.8173E-03	-163.6	3.5482E-02	3.8361E-03	3.5689E-02	6.2

FIELDS IN FRONT LAYER (OCTANTS 5 6 7 8)

(INDUCED ELECTRIC FIELDS IN ONE OCTANT)

FREQUENCY = 1000.00000 MHZ. (NX = 5 NY = 5 NZ = 5)

FIELD COMPONENTS= X,Y,Z. QUADRANTS USED = 1 2 3 4 5 6 7 8

NUMBER OF PARTITIONS PER EDGE IN INTEGRATION = 1

N	EX(V/M)	EY(V/M)	EZ(V/M)	PWR DEN (W/CU. MET.)
1	9.42820E-01	1.42890E-04	6.88559E-03	6.94497E-03
2	9.46155E-01	2.66692E-04	7.05799E-03	6.99422E-03
3	9.53512E-01	3.82490E-04	7.18457E-03	7.10341E-03
4	9.65791E-01	1.35778E-04	6.38614E-03	7.28744E-03
5	9.87821E-01	9.72964E-04	7.49270E-03	7.62381E-03
6	9.43509E-01	3.88766E-04	7.02101E-03	6.95515E-03
7	9.47008E-01	7.44336E-04	7.27862E-03	7.00685E-03
8	9.54733E-01	1.37311E-03	7.19183E-03	7.12162E-03
9	9.68613E-01	7.14181E-04	5.83755E-03	7.33005E-03
10	9.90316E-01	3.08299E-03	9.10837E-03	7.66264E-03
11	9.45028E-01	4.83982E-04	7.15536E-03	6.97757E-03
12	9.49025E-01	6.41297E-04	7.68934E-03	7.03678E-03
13	9.56965E-01	2.40339E-03	8.41611E-03	7.15514E-03
14	9.73600E-01	6.35479E-03	6.31226E-03	7.40911E-03
15	9.48008E-01	1.23176E-03	6.87543E-03	7.02162E-03
16	9.53977E-01	2.83927E-03	6.98328E-03	7.11038E-03
17	9.62615E-01	6.09608E-03	1.16234E-02	7.24062E-03
18	9.76334E-01	8.31732E-03	8.06595E-03	7.44814E-03
19	9.55763E-01	8.50741E-03	5.91308E-03	7.13741E-03
20	9.64378E-01	9.98662E-03	6.19813E-03	7.26689E-03
21	9.43578E-01	3.86267E-04	2.02941E-02	6.95900E-03
22	9.47377E-01	7.36082E-04	2.07524E-02	7.01527E-03
23	9.55178E-01	1.37101E-03	2.15363E-02	7.13148E-03
24	9.63557E-01	6.48122E-04	2.58329E-02	7.25867E-03
25	9.77739E-01	3.06116E-03	2.33910E-02	7.47288E-03
26	9.44368E-01	1.06279E-03	2.06469E-02	6.97077E-03
27	9.48253E-01	2.16579E-03	2.14952E-02	7.02852E-03
28	9.55876E-01	4.94565E-03	2.23199E-02	7.14235E-03
29	9.66314E-01	4.60826E-03	2.13131E-02	7.29874E-03
30	9.80878E-01	1.68388E-02	2.94817E-02	7.52559E-03
31	9.45815E-01	1.58412E-03	2.11300E-02	6.99230E-03
32	9.50029E-01	2.91983E-03	2.30495E-02	7.05542E-03
33	9.58801E-01	6.78496E-03	2.47317E-02	7.18716E-03
34	9.71854E-01	3.18245E-03	2.17238E-02	7.38267E-03
35	9.46184E-01	6.22318E-03	2.10681E-02	6.99802E-03
36	9.52447E-01	9.64163E-04	2.22893E-02	7.09104E-03
37	9.65449E-01	2.02178E-02	2.06831E-02	7.28851E-03
38	9.46871E-01	2.68130E-02	2.04775E-02	7.01330E-03
39	9.57201E-01	3.23833E-02	2.24729E-02	7.17022E-03
40	9.45045E-01	4.84228E-04	3.27246E-02	6.98579E-03
41	9.49020E-01	6.27846E-04	3.35419E-02	7.04503E-03

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

42	9.59956E-01	2.33274E-03	3.28410E-02	7.20780E-03
43	9.80650E-01	6.44373E-03	3.14890E-02	7.52115E-03
44	9.45873E-01	1.58373E-03	3.29329E-02	6.99815E-03
45	9.50703E-01	2.79370E-03	3.44399E-02	7.07055E-03
46	9.60770E-01	6.62687E-03	3.47543E-02	7.22134E-03
47	9.77683E-01	2.74454E-03	3.27723E-02	7.47614E-03
48	9.49652E-01	4.88087E-03	3.35963E-02	7.05462E-03
49	9.55115E-01	2.53394E-03	3.58426E-02	7.13700E-03
50	9.67734E-01	9.28293E-03	3.13540E-02	7.32482E-03
51	9.56495E-01	1.22102E-02	3.37909E-02	7.15761E-03
52	9.62375E-01	2.10645E-02	2.98466E-02	7.24610E-03
53	9.47661E-01	1.31835E-03	4.34610E-02	7.03087E-03
54	9.51277E-01	2.94118E-03	4.80731E-02	7.08787E-03
55	9.56666E-01	6.50338E-03	4.31286E-02	7.16494E-03
56	9.71664E-01	8.49902E-03	6.27956E-02	7.40739E-03
57	9.47795E-01	6.09820E-03	4.28886E-02	7.03275E-03
58	9.54935E-01	1.30290E-03	4.44973E-02	7.13971E-03
59	9.66366E-01	2.07085E-02	4.13084E-02	7.31249E-03
60	9.47692E-01	1.33144E-02	4.28731E-02	7.03230E-03
61	9.62206E-01	2.17130E-02	4.32724E-02	7.25143E-03
62	9.55632E-01	6.48564E-02	3.61266E-02	7.17768E-03
63	9.46839E-01	8.80810E-03	5.30383E-02	7.02652E-03
64	9.62186E-01	9.98434E-03	5.41367E-02	7.25650E-03
65	9.53230E-01	2.72385E-02	4.95114E-02	7.12375E-03
66	9.64381E-01	3.20689E-02	5.29088E-02	7.29577E-03

TOTAL POWER ABSORBED IN THE FIRST OCTANT = 4.73599E-07 WATTS

N	EXREAL	EXIMAG	EX-ABS	THETA-X	EYREAL	EYIMAG	EY-ABS	THETA-Y	EZREAL	EZIMAG	EZ-ABS	THETA-Z
1	-9.3634E-01	-1.1031E-01	9.4282E-01	-173.3	1.3837E-04	-3.5664E-05	1.4289E-04	-14.5	6.7992E-03	1.0871E-03	6.8856E-03	9.1
2	-8.9149E-01	-3.1694E-01	9.4616E-01	-160.4	2.4491E-04	-1.0556E-04	2.6669E-04	-23.3	6.7635E-03	2.0177E-03	7.0580E-03	16.6
3	-8.0330E-01	-5.1370E-01	9.5351E-01	-147.4	3.1699E-04	-2.1404E-04	3.8249E-04	-34.0	6.5092E-03	3.0412E-03	7.1846E-03	25.0
4	-6.7452E-01	-6.9121E-01	9.6579E-01	-134.3	-9.5988E-05	-9.6032E-05	1.3578E-04	-135.0	4.7536E-03	4.2646E-03	6.3861E-03	41.9
5	-5.2115E-01	-8.3916E-01	9.8782E-01	-121.8	-8.1841E-04	5.2618E-04	9.7296E-04	147.3	-3.4091E-03	6.6722E-03	7.4927E-03	117.1
6	-9.3644E-01	-1.1530E-01	9.4351E-01	-173.0	3.8324E-04	-6.5325E-05	3.8877E-04	-9.7	6.9428E-03	1.0450E-03	7.0210E-03	8.6
7	-8.9053E-01	-3.2214E-01	9.4701E-01	-160.1	6.9698E-04	-2.6126E-04	7.4434E-04	-20.5	7.0477E-03	1.8187E-03	7.2786E-03	14.5
8	-8.0118E-01	-5.1925E-01	9.5473E-01	-147.1	1.1851E-03	-6.9351E-04	1.3731E-03	-30.3	6.5586E-03	2.9508E-03	7.1918E-03	24.2
9	-6.7354E-01	-6.9610E-01	9.6861E-01	-134.1	1.4601E-04	-6.9910E-04	7.1418E-04	-78.2	3.0626E-03	4.9696E-03	5.8376E-03	58.4
10	-5.2622E-01	-8.3894E-01	9.9032E-01	-122.1	-2.6345E-03	1.6013E-03	3.0830E-03	148.7	-4.4748E-03	7.9334E-03	9.1084E-03	119.4
11	-9.3671E-01	-1.2508E-01	9.4503E-01	-172.4	4.8396E-04	4.4561E-06	4.8398E-04	0.5	7.0821E-03	1.0212E-03	7.1554E-03	8.2
12	-8.8900E-01	-3.3215E-01	9.4902E-01	-159.5	6.3980E-04	4.3829E-05	6.4130E-04	3.9	7.5472E-03	1.4716E-03	7.6893E-03	11.0
13	-7.9660E-01	-5.3029E-01	9.5696E-01	-146.3	2.2907E-03	-7.2730E-04	2.4034E-03	-17.6	8.1456E-03	2.1167E-03	8.4161E-03	14.6
14	-6.7030E-01	-7.0638E-01	9.7380E-01	-133.5	5.6516E-03	-2.9057E-03	6.3548E-03	-27.2	-3.3421E-04	6.3034E-03	6.3123E-03	93.0
15	-9.3772E-01	-1.3931E-01	9.4801E-01	-171.5	-6.4070E-05	1.2301E-03	1.2318E-03	93.0	6.7417E-03	1.3493E-03	6.8754E-03	11.3
16	-8.8946E-01	-3.4487E-01	9.5398E-01	-158.8	-1.5238E-03	2.3957E-03	2.8393E-03	122.5	6.7012E-03	1.9648E-03	6.9833E-03	16.3
17	-7.9657E-01	-5.4047E-01	9.6261E-01	-145.8	-4.4480E-03	4.1687E-03	6.0961E-03	136.9	1.1623E-02	1.2431E-04	1.1623E-02	0.6
18	-6.4409E-01	-7.3374E-01	9.7633E-01	-131.3	-5.9376E-03	5.8243E-03	8.3173E-03	135.6	-1.8056E-03	7.8612E-03	8.0659E-03	102.9
19	-9.4426E-01	-1.4783E-01	9.5576E-01	-171.1	-2.9423E-03	7.9824E-03	8.5074E-03	110.2	5.6111E-03	1.8655E-03	5.9131E-03	18.4
20	-8.9966E-01	-3.4732E-01	9.6438E-01	-158.9	-4.8589E-03	8.7249E-03	9.9866E-03	119.1	3.9833E-03	4.7487E-03	6.1981E-03	50.0
21	-9.3691E-01	-1.1199E-01	9.4358E-01	-173.2	3.8118E-04	-6.2482E-05	3.8627E-04	-9.3	2.0027E-02	3.2831E-03	2.0294E-02	9.3
22	-8.9221E-01	-3.1856E-01	9.4738E-01	-160.4	6.8896E-04	-2.5915E-04	7.3608E-04	-20.6	1.9826E-02	6.1303E-03	2.0752E-02	17.2
23	-8.0475E-01	-5.1453E-01	9.5518E-01	-147.4	1.1773E-03	-7.0256E-04	1.3710E-03	-30.8	1.9432E-02	9.2848E-03	2.1536E-02	25.5
24	-6.7171E-01	-6.9083E-01	9.6356E-01	-134.2	2.5807E-04	-5.9453E-04	6.4812E-04	-66.5	2.3649E-02	1.0396E-02	2.5833E-02	23.7
25	-4.7679E-01	-8.5361E-01	9.7774E-01	-119.2	-2.5021E-03	1.7636E-03	3.0612E-03	144.8	-1.0494E-02	2.0905E-02	2.3391E-02	116.7
26	-9.3712E-01	-1.1679E-01	9.4437E-01	-172.9	1.0628E-03	4.8777E-06	1.0628E-03	0.3	2.0405E-02	3.1499E-03	2.0647E-02	8.8
27	-8.9137E-01	-3.2349E-01	9.4825E-01	-160.1	2.0363E-03	-7.3753E-04	2.1658E-03	-19.9	2.0800E-02	5.4225E-03	2.1495E-02	14.6
28	-8.0178E-01	-5.2043E-01	9.5588E-01	-147.0	4.2276E-03	-2.5665E-03	4.9457E-03	-31.3	2.0711E-02	8.3213E-03	2.2320E-02	21.9
29	-6.6782E-01	-6.9842E-01	9.6631E-01	-133.7	2.8560E-03	-3.6165E-03	4.6083E-03	-51.7	1.6732E-02	1.3202E-02	2.1313E-02	38.3
30	-4.8566E-01	-8.5221E-01	9.8088E-01	-119.7	-1.5078E-02	7.4963E-03	1.6839E-02	153.6	-1.4912E-02	2.5432E-02	2.9482E-02	120.4

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

31	-9.3745E-01	-1.2549E-01	9.4581E-01	-172.4	1.5834E-03	4.9443E-05	1.5841E-03	1.8	2.0938E-02	2.8400E-03	2.1130E-02	7.7
32	-8.8959E-01	-3.3344E-01	9.5003E-01	-159.5	2.7788E-03	-8.9646E-04	2.9198E-03	-17.9	2.2771E-02	3.5737E-03	2.3049E-02	8.9
33	-7.9668E-01	-5.3348E-01	9.5880E-01	-146.2	5.6422E-03	-3.7685E-03	6.7850E-03	-33.7	2.3970E-02	6.0926E-03	2.4732E-02	14.3
34	-6.5481E-01	-7.1814E-01	9.7185E-01	-132.4	-2.2403E-03	2.2603E-03	3.1824E-03	134.7	-1.0992E-03	2.1696E-02	2.1724E-02	92.9
35	-9.3544E-01	-1.4218E-01	9.4618E-01	-171.4	3.7536E-03	-4.9637E-03	6.2232E-03	-52.9	2.0724E-02	3.7945E-03	2.1068E-02	10.4
36	-8.8559E-01	-3.5056E-01	9.5245E-01	-158.4	-2.2196E-04	9.3827E-04	9.6416E-04	103.3	2.1873E-02	4.2894E-03	2.2289E-02	11.1
37	-7.8707E-01	-5.5912E-01	9.6545E-01	-144.6	-1.3977E-02	1.4609E-02	2.0218E-02	133.7	1.6188E-02	1.2873E-02	2.0683E-02	38.5
38	-9.2764E-01	-1.8988E-01	9.4687E-01	-168.4	-8.4584E-03	2.5444E-02	2.6813E-02	108.4	1.9358E-02	6.6783E-03	2.0477E-02	19.0
39	-8.7733E-01	-3.8279E-01	9.5720E-01	-156.4	-1.5049E-02	2.8674E-02	3.2383E-02	117.7	8.5119E-03	2.0799E-02	2.2473E-02	67.7
40	-9.3795E-01	-1.1555E-01	9.4505E-01	-173.0	4.8373E-04	2.2055E-05	4.8423E-04	2.6	3.2242E-02	5.5975E-03	3.2725E-02	9.8
41	-8.9263E-01	-3.2226E-01	9.4902E-01	-160.1	6.2225E-04	8.3624E-05	6.2785E-04	7.7	3.1992E-02	1.0078E-02	3.3542E-02	17.5
42	-8.0685E-01	-5.2010E-01	9.5996E-01	-147.2	2.1932E-03	-7.9478E-04	2.3327E-03	-19.9	2.7706E-02	1.7633E-02	3.2841E-02	32.5
43	-7.0187E-01	-6.8487E-01	9.8065E-01	-135.7	5.5711E-03	-3.2379E-03	6.4437E-03	-30.2	1.7200E-02	2.6377E-02	3.1489E-02	56.9
44	-9.3814E-01	-1.2070E-01	9.4587E-01	-172.7	1.5812E-03	8.8864E-05	1.5837E-03	3.2	3.2427E-02	5.7510E-03	3.2933E-02	10.1
45	-8.9310E-01	-3.2590E-01	9.5070E-01	-160.0	2.6664E-03	-8.3376E-04	2.7937E-03	-17.4	3.3172E-02	9.2573E-03	3.4440E-02	15.6
46	-8.0546E-01	-5.2375E-01	9.6077E-01	-147.0	5.3902E-03	-3.8551E-03	6.6269E-03	-35.6	3.1491E-02	1.4704E-02	3.4754E-02	25.0
47	-6.7990E-01	-7.0257E-01	9.7768E-01	-134.1	-2.0232E-03	1.8545E-03	2.7445E-03	137.5	9.8555E-03	3.1255E-02	3.2772E-02	72.5
48	-9.4079E-01	-1.2944E-01	9.4965E-01	-172.2	1.5748E-03	4.6198E-03	4.8809E-03	71.2	3.3305E-02	4.4158E-03	3.3596E-02	7.6
49	-8.9407E-01	-3.3597E-01	9.5512E-01	-159.4	2.5296E-03	-1.4840E-04	2.5339E-03	-3.4	3.5298E-02	6.2248E-03	3.5843E-02	10.0
50	-8.0390E-01	-5.3876E-01	9.6773E-01	-146.2	-5.8188E-03	7.2328E-03	9.2829E-03	128.8	2.2331E-02	2.2010E-02	3.1354E-02	44.6
51	-9.4934E-01	-1.1681E-01	9.5650E-01	-173.0	-2.2335E-03	1.2004E-02	1.2210E-02	100.5	3.3782E-02	7.5690E-04	3.3791E-02	1.3
52	-8.9712E-01	-3.4835E-01	9.6238E-01	-158.8	-9.1886E-03	1.8955E-02	2.1064E-02	115.9	2.6561E-02	1.3613E-02	2.9847E-02	27.1
53	-9.3977E-01	-1.2202E-01	9.4766E-01	-172.6	6.2839E-05	1.3168E-03	1.3183E-03	87.3	4.2500E-02	9.0899E-03	4.3461E-02	12.1
54	-8.9376E-01	-3.2576E-01	9.5128E-01	-160.0	-1.3288E-03	2.6239E-03	2.9412E-03	116.9	4.6925E-02	1.0444E-02	4.8073E-02	12.5
55	-7.8344E-01	-5.4902E-01	9.5667E-01	-145.0	-4.1855E-03	4.9775E-03	6.5034E-03	130.1	3.2644E-02	2.8186E-02	4.3129E-02	40.8
56	-6.8035E-01	-6.9372E-01	9.7166E-01	-134.4	-5.9214E-03	6.0968E-03	8.4990E-03	134.2	-1.6871E-02	6.0487E-02	6.2796E-02	105.6
57	-9.3951E-01	-1.2502E-01	9.4780E-01	-172.4	3.4309E-03	-5.0415E-03	6.0982E-03	-55.8	4.1503E-02	1.0814E-02	4.2889E-02	14.6
58	-8.9811E-01	-3.2449E-01	9.5494E-01	-160.1	-5.2901E-04	1.1907E-03	1.3029E-03	114.0	4.1450E-02	1.6183E-02	4.4497E-02	21.3
59	-8.1112E-01	-5.2530E-01	9.6637E-01	-147.1	-1.3549E-02	1.5661E-02	2.0708E-02	130.9	2.3293E-02	3.4115E-02	4.1308E-02	55.7
60	-9.3287E-01	-1.6693E-01	9.4769E-01	-169.9	-1.7631E-04	1.3313E-02	1.3314E-02	90.8	4.0522E-02	1.4002E-02	4.2873E-02	19.1
61	-9.0094E-01	-3.3787E-01	9.6221E-01	-159.4	-9.4704E-03	1.9539E-02	2.1713E-02	115.9	2.9024E-02	3.2095E-02	4.3272E-02	47.9
62	-9.4549E-01	-1.3887E-01	9.5563E-01	-171.6	-1.6281E-02	6.2780E-02	6.4856E-02	104.5	3.2618E-02	1.5530E-02	3.6127E-02	25.5
63	-9.3447E-01	-1.5256E-01	9.4684E-01	-170.7	-1.5882E-03	8.6637E-03	8.8081E-03	100.4	4.9922E-02	1.7911E-02	5.3038E-02	19.7
64	-9.0394E-01	-3.2968E-01	9.6219E-01	-160.0	-3.9049E-03	9.1890E-03	9.9843E-03	113.0	3.4800E-02	4.1470E-02	5.4137E-02	50.0
65	-9.4526E-01	-1.2298E-01	9.5323E-01	-172.6	-6.7163E-03	2.6397E-02	2.7238E-02	104.3	4.6084E-02	1.8100E-02	4.9511E-02	21.4
66	-9.1396E-01	-3.0774E-01	9.6438E-01	-151.4	-1.3916E-02	2.8892E-02	3.2069E-02	115.7	2.8860E-02	4.4345E-02	5.2909E-02	56.9

FIELDS IN BACK LAYER (OCTANTS 1 2 3 4)

(INDUCED ELECTRIC FIELDS IN ONE OCTANT)

FREQUENCY = 1000.00000 MHZ. (NX = 5 NY = 5 NZ = 5)

FIELD COMPONENTS= X,Y,Z. QUADRANTS USED = 1 2 3 4 5 6 7 8

NUMBER OF PARTITIONS PER EDGE IN INTEGRATION = 1

N	EX(V/M)	EY(V/M)	EZ(V/M)	PWR DEN (W/CU. MET.)
1	9.42515E-01	9.48994E-05	6.74356E-03	6.94047E-03
2	9.43884E-01	1.74944E-04	6.65844E-03	6.96064E-03
3	9.45576E-01	2.78732E-04	6.63720E-03	6.98561E-03
4	9.46583E-01	1.92069E-04	6.45133E-03	7.00048E-03
5	9.47859E-01	1.14422E-03	1.00733E-02	7.01984E-03
6	9.42923E-01	2.62657E-04	6.85574E-03	6.94649E-03
7	9.43850E-01	4.70967E-04	6.78076E-03	6.96014E-03
8	9.44845E-01	1.06207E-03	6.57192E-03	6.97482E-03
9	9.45417E-01	1.79353E-04	6.88206E-03	6.98328E-03
10	9.47184E-01	3.53059E-03	1.13692E-02	7.01015E-03
11	9.43739E-01	4.33869E-04	7.01392E-03	6.95853E-03
12	9.43868E-01	3.22999E-04	7.13088E-03	6.96046E-03
13	9.43735E-01	1.78856E-03	7.09074E-03	6.95850E-03
14	9.42430E-01	5.43496E-03	8.74761E-03	6.93968E-03
15	9.45195E-01	1.44915E-03	6.94846E-03	6.98003E-03

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

16	9.44491E-01	3.24470E-03	7.38152E-03	6.96974E-03
17	9.44732E-01	6.69868E-03	9.57638E-03	6.97386E-03
18	9.38756E-01	9.27512E-03	1.01550E-02	6.88634E-03
19	9.50868E-01	8.66465E-03	5.92710E-03	7.06453E-03
20	9.47509E-01	1.03622E-02	6.26022E-03	7.01500E-03
21	9.42829E-01	2.61748E-04	1.98852E-02	6.94783E-03
22	9.43826E-01	4.74499E-04	1.96156E-02	6.96244E-03
23	9.45066E-01	1.06572E-03	1.98293E-02	6.98081E-03
24	9.45120E-01	2.24396E-04	2.20401E-02	6.98232E-03
25	9.40266E-01	3.64348E-03	3.17044E-02	6.91499E-03
26	9.43232E-01	6.94192E-04	2.01590E-02	6.95386E-03
27	9.43658E-01	1.41577E-03	2.00029E-02	6.96009E-03
28	9.44344E-01	4.10097E-03	2.00814E-02	6.97035E-03
29	9.44387E-01	2.94731E-03	2.06975E-02	6.97113E-03
30	9.40904E-01	1.83496E-02	3.67108E-02	6.92957E-03
31	9.44088E-01	1.26360E-03	2.05945E-02	6.96663E-03
32	9.43454E-01	1.83005E-03	2.11567E-02	6.95747E-03
33	9.43206E-01	5.36597E-03	2.19765E-02	6.95429E-03
34	9.41042E-01	5.49619E-03	2.77261E-02	6.92467E-03
35	9.43492E-01	5.82714E-03	2.11718E-02	6.95828E-03
36	9.42693E-01	3.48194E-03	2.23794E-02	6.94673E-03
37	9.38359E-01	2.23143E-02	2.05855E-02	6.88624E-03
38	9.42401E-01	2.74031E-02	2.01856E-02	6.94748E-03
39	9.39055E-01	3.38985E-02	2.41612E-02	6.90279E-03
40	9.43453E-01	4.38536E-04	3.21264E-02	6.96199E-03
41	9.43870E-01	3.24992E-04	3.16464E-02	6.96791E-03
42	9.46150E-01	1.89710E-03	3.08852E-02	7.00123E-03
43	9.49054E-01	5.38215E-03	3.40259E-02	7.04601E-03
44	9.43434E-01	1.27449E-03	3.23023E-02	6.96181E-03
45	9.43410E-01	1.85530E-03	3.22761E-02	6.96146E-03
46	9.45498E-01	5.52759E-03	3.26753E-02	6.99270E-03
47	9.46689E-01	5.72005E-03	3.75984E-02	7.01302E-03
48	9.46266E-01	4.50558E-03	3.24869E-02	7.00386E-03
49	9.44485E-01	1.52789E-03	3.36015E-02	6.97799E-03
50	9.43616E-01	1.19269E-02	3.29672E-02	6.96594E-03
51	9.53908E-01	1.31622E-02	3.20385E-02	7.11828E-03
52	9.45995E-01	2.38858E-02	2.99499E-02	7.00292E-03
53	9.44376E-01	1.55372E-03	4.30867E-02	6.98206E-03
54	9.44180E-01	3.41957E-03	4.45295E-02	6.98024E-03
55	9.43038E-01	6.57500E-03	4.16657E-02	6.96171E-03
56	9.49643E-01	9.26071E-03	7.24308E-02	7.08713E-03
57	9.43956E-01	5.78625E-03	4.30089E-02	6.97607E-03
58	9.45016E-01	3.28168E-03	4.36836E-02	6.99199E-03
59	9.46536E-01	2.24162E-02	4.53697E-02	7.01946E-03
60	9.41806E-01	1.35830E-02	4.40006E-02	6.94624E-03
61	9.44130E-01	2.34927E-02	4.60360E-02	6.98478E-03
62	9.45196E-01	6.54145E-02	3.70411E-02	7.02380E-03
63	9.43954E-01	9.05541E-03	5.32645E-02	6.98413E-03
64	9.46221E-01	1.07830E-02	5.64995E-02	7.02065E-03
65	9.51361E-01	2.80695E-02	5.01475E-02	7.09679E-03
66	9.53169E-01	3.47771E-02	5.58358E-02	7.13170E-03

TOTAL POWER ABSORBED IN THE FIRST OCTANT = 4.60666E-07 WATTS

N	EXREAL	EXIMAG	EX-ABS	THETA-X	EYREAL	EYIMAG	EY-ABS	THETA-Y	EZREAL	EZIMAG	EZ-ABS	THETA-Z
1	9.3757E-01	-9.6436E-02	9.4252E-01	-5.9	-7.5557E-05	5.7420E-05	9.4899E-05	142.8	6.7403E-03	2.1100E-04	6.7436E-03	1.8
2	8.9690E-01	-2.9410E-01	9.4388E-01	-18.2	-9.4829E-06	1.7469E-04	1.7494E-04	93.1	6.6196E-03	-7.1840E-04	6.6584E-03	-6.2
3	8.1789E-01	-4.7452E-01	9.4558E-01	-30.1	4.5707E-05	2.7496E-04	2.7873E-04	80.6	6.3859E-03	-1.8089E-03	6.6372E-03	-15.8
4	7.0557E-01	-6.3102E-01	9.4658E-01	-41.8	-1.6776E-04	-9.3527E-05	1.9207E-04	-150.9	5.1546E-03	-3.8794E-03	6.4513E-03	-37.0

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

5	5.5893E-01	-7.6553E-01	9.4786E-01	-53.9	-8.3424E-04	-7.8313E-04	1.1442E-03	-136.8	-7.4451E-05	-1.0073E-02	1.0073E-02	-90.4
6	9.3849E-01	-9.1343E-02	9.4292E-01	-5.6	-2.3381E-04	1.1966E-04	2.6266E-04	152.9	6.8465E-03	3.5658E-04	6.8557E-03	3.0
7	8.9866E-01	-2.8857E-01	9.4385E-01	-17.8	-5.4693E-05	4.6778E-04	4.7097E-04	96.7	6.7708E-03	-3.6703E-04	6.7808E-03	-3.1
8	8.2053E-01	-4.6846E-01	9.4485E-01	-29.7	2.4642E-04	1.0331E-03	1.0621E-03	76.6	6.3567E-03	-1.6679E-03	6.5719E-03	-14.7
9	7.0787E-01	-6.2668E-01	9.4542E-01	-41.5	2.0926E-05	1.7813E-04	1.7935E-04	83.3	4.2805E-03	-5.3889E-03	6.8821E-03	-51.5
10	5.5583E-01	-7.6695E-01	9.4718E-01	-54.1	-2.4564E-03	-2.5360E-03	3.5306E-03	-134.1	-1.3430E-03	-1.1290E-02	1.1369E-02	-96.8
11	9.4022E-01	-8.1437E-02	9.4374E-01	-5.0	-4.3357E-04	1.6209E-05	4.3387E-04	177.9	6.9955E-03	5.0820E-04	7.0139E-03	4.2
12	9.0198E-01	-2.7806E-01	9.4387E-01	-17.1	-3.0156E-04	1.1571E-04	3.2300E-04	159.0	7.1271E-03	2.3243E-04	7.1309E-03	1.9
13	8.2616E-01	-4.5618E-01	9.4373E-01	-28.9	5.1338E-04	1.7133E-03	1.7886E-03	73.3	7.0907E-03	-5.1546E-06	7.0907E-03	-0.0
14	7.1299E-01	-6.1630E-01	9.4243E-01	-40.8	2.3048E-03	4.9221E-03	5.4350E-03	64.9	2.9797E-03	-8.2245E-03	8.7476E-03	-70.1
15	9.4280E-01	-6.7300E-02	9.4520E-01	-4.1	-3.9207E-04	-1.3951E-03	1.4492E-03	-105.7	6.9475E-03	1.1650E-04	6.9485E-03	1.0
16	9.0631E-01	-2.6583E-01	9.4449E-01	-16.3	-8.1816E-04	-3.1399E-03	3.2447E-03	-104.6	7.3502E-03	-6.7882E-04	7.3815E-03	-5.3
17	8.3239E-01	-4.4682E-01	9.4473E-01	-28.2	-1.6015E-03	-6.5044E-03	6.6987E-03	-103.8	9.0639E-03	3.0907E-03	9.5764E-03	18.8
18	7.3517E-01	-5.8377E-01	9.3876E-01	-38.5	-3.7969E-03	-8.4624E-03	9.2751E-03	-114.2	7.1458E-04	-1.0130E-02	1.0155E-02	-86.0
19	9.4899E-01	-5.9689E-02	9.5087E-01	-3.6	1.2866E-03	-8.5686E-03	8.6646E-03	-81.5	5.8484E-03	-9.6288E-04	5.9271E-03	-9.3
20	9.0937E-01	-2.6613E-01	9.4751E-01	-16.3	-1.0428E-03	-1.0310E-02	1.0362E-02	-95.8	5.0552E-03	-3.6925E-03	6.2602E-03	-36.1
21	9.3805E-01	-9.4829E-02	9.4283E-01	-5.8	-2.3242E-04	1.2039E-04	2.6175E-04	152.6	1.9876E-02	6.0809E-04	1.9885E-02	1.8
22	8.9727E-01	-2.9277E-01	9.4383E-01	-18.1	-4.5688E-05	4.7229E-04	4.7450E-04	95.5	1.9484E-02	-2.2707E-03	1.9616E-02	-6.6
23	8.1765E-01	-4.7392E-01	9.4507E-01	-30.1	2.6302E-04	1.0328E-03	1.0657E-03	75.7	1.9096E-02	-5.3415E-03	1.9829E-02	-15.6
24	7.0710E-01	-6.2710E-01	9.4512E-01	-41.6	-1.6650E-04	1.5044E-04	2.2440E-04	137.9	2.1630E-02	-4.2342E-03	2.2040E-02	-11.1
25	5.8921E-01	-7.3276E-01	9.4027E-01	-51.2	-2.6942E-03	-2.4528E-03	3.6435E-03	-137.7	-2.0066E-03	-3.1641E-02	3.1704E-02	-93.6
26	9.3893E-01	-8.9935E-02	9.4323E-01	-5.5	-6.7648E-04	1.5580E-04	6.9419E-04	167.0	2.0132E-02	1.0456E-03	2.0159E-02	3.0
27	8.9883E-01	-2.8740E-01	9.4366E-01	-17.7	-1.9015E-04	1.4029E-03	1.4158E-03	97.7	1.9975E-02	-1.0505E-03	2.0003E-02	-3.0
28	8.2073E-01	-4.6711E-01	9.4434E-01	-29.6	1.1250E-03	3.9436E-03	4.1010E-03	74.1	1.9707E-02	-3.8581E-03	2.0081E-02	-11.1
29	7.1192E-01	-6.2051E-01	9.4439E-01	-41.1	8.2496E-04	2.8295E-03	2.9473E-03	73.7	1.7734E-02	-1.0671E-02	2.0697E-02	-31.0
30	5.8375E-01	-7.3793E-01	9.4090E-01	-51.7	-1.2353E-02	-1.3569E-02	1.8350E-02	-132.3	-6.3729E-03	-3.6153E-02	3.6711E-02	-100.0
31	9.4061E-01	-8.1014E-02	9.4409E-01	-4.9	-1.2598E-03	9.7884E-05	1.2636E-03	175.6	2.0513E-02	1.8265E-03	2.0595E-02	5.1
32	9.0198E-01	-2.7666E-01	9.4345E-01	-17.1	-6.8859E-04	1.6956E-03	1.8301E-03	112.1	2.1087E-02	1.7181E-03	2.1157E-02	4.7
33	8.2710E-01	-4.5337E-01	9.4321E-01	-28.7	8.6245E-04	5.2962E-03	5.3660E-03	80.8	2.1976E-02	-3.4778E-04	2.1978E-02	-0.9
34	7.2410E-01	-6.0104E-01	9.4104E-01	-39.7	-3.6042E-03	-4.1494E-03	5.4962E-03	-131.0	7.0576E-03	-2.6813E-02	2.7726E-02	-75.3
35	9.4133E-01	-6.3822E-02	9.4349E-01	-3.9	-3.0110E-03	4.9889E-03	5.8271E-03	121.1	2.1140E-02	1.1562E-03	2.1172E-02	3.1
36	9.0555E-01	-2.5853E-01	9.4269E-01	-15.9	-2.6570E-03	-2.2504E-03	3.4819E-03	-139.7	2.2363E-02	8.6381E-04	2.2379E-02	2.2
37	8.3521E-01	-4.2771E-01	9.3836E-01	-27.1	-7.3974E-03	-2.1052E-02	2.2314E-02	-109.4	1.8101E-02	-9.8042E-03	2.0586E-02	-28.4
38	9.4227E-01	-1.5455E-02	9.4240E-01	-0.9	3.2610E-03	-2.7208E-02	2.7403E-02	-83.2	2.0008E-02	-2.6681E-03	2.0186E-02	-7.6
39	9.1143E-01	-2.2611E-01	9.3906E-01	-13.9	-3.9766E-03	-3.3664E-02	3.3899E-02	-96.7	1.5367E-02	-1.8644E-02	2.4161E-02	-50.5
40	9.3901E-01	-9.1408E-02	9.4345E-01	-5.6	-4.3828E-04	1.4920E-05	4.3854E-04	178.1	3.2114E-02	9.0944E-04	3.2126E-02	1.6
41	8.9845E-01	-2.8927E-01	9.4387E-01	-17.8	-2.9757E-04	1.3065E-04	3.2499E-04	156.3	3.1439E-02	-3.6196E-03	3.1646E-02	-6.6
42	8.1998E-01	-4.7205E-01	9.4615E-01	-29.9	6.8083E-04	1.7707E-03	1.8971E-03	69.0	2.8371E-02	-1.2205E-02	3.0885E-02	-23.3
43	6.9060E-01	-6.5098E-01	9.4905E-01	-43.3	2.6060E-03	4.7091E-03	5.3821E-03	61.0	2.4106E-02	-2.4014E-02	3.4026E-02	-44.9
44	9.3948E-01	-8.6285E-02	9.4343E-01	-5.2	-1.2696E-03	1.1134E-04	1.2745E-03	175.0	3.2281E-02	1.1611E-03	3.2302E-02	2.1
45	8.9912E-01	-2.8566E-01	9.4341E-01	-17.6	-5.9891E-04	1.7560E-03	1.8553E-03	108.8	3.2211E-02	-2.0516E-03	3.2276E-02	-3.6
46	8.2193E-01	-4.6733E-01	9.4550E-01	-29.6	1.2137E-03	5.3927E-03	5.5276E-03	77.3	3.1597E-02	-8.3237E-03	3.2675E-02	-14.8
47	7.0817E-01	-6.2826E-01	9.4669E-01	-41.6	-3.4390E-03	-4.5708E-03	5.7200E-03	-127.0	1.7638E-02	-3.3205E-02	3.7598E-02	-62.0
48	9.4307E-01	-7.7758E-02	9.4627E-01	-4.7	-1.3875E-03	-4.2866E-03	4.5056E-03	-107.9	3.2328E-02	3.2070E-03	3.2487E-02	5.7
49	9.0317E-01	-2.7628E-01	9.4488E-01	-17.0	-1.4168E-03	5.7204E-04	1.5279E-03	158.0	3.3542E-02	1.9988E-03	3.3602E-02	3.4
50	8.2684E-01	-4.5469E-01	9.4362E-01	-28.8	-5.3876E-03	-1.0641E-02	1.1927E-02	-116.9	2.7213E-02	-1.8609E-02	3.2967E-02	-34.4
51	9.4959E-01	-9.0704E-02	9.5391E-01	-5.5	1.4814E-05	-1.3162E-02	1.3162E-02	-89.9	3.1260E-02	7.0195E-03	3.2039E-02	12.7
52	9.0778E-01	-2.6616E-01	9.4600E-01	-16.3	-4.6917E-03	-2.3421E-02	2.3886E-02	-101.3	2.9096E-02	-7.0998E-03	2.9950E-02	-13.7
53	9.4051E-01	-8.5386E-02	9.4438E-01	-5.2	-5.3210E-04	-1.4598E-03	1.5537E-03	-110.0	4.3087E-02	-4.0714E-05	4.3087E-02	-0.1
54	9.0008E-01	-2.8519E-01	9.4418E-01	-17.6	-1.1118E-03	-3.2338E-03	3.4196E-03	-109.0	4.4527E-02	4.4899E-04	4.4529E-02	0.6
55	8.3531E-01	-4.3770E-01	9.4304E-01	-27.7	-2.3127E-03	-6.1548E-03	6.5750E-03	-110.6	3.4193E-02	-2.3809E-02	4.1666E-02	-34.8
56	7.0482E-01	-6.3644E-01	9.4964E-01	-42.1	-3.9374E-03	-8.3820E-03	9.2607E-03	-115.2	3.7375E-03	-7.2334E-02	7.2431E-02	-87.0
57	9.4033E-01	-8.2649E-02	9.4396E-01	-5.0	-2.6800E-03	5.1282E-03	5.7863E-03	117.6	4.2979E-02	-1.6017E-03	4.3009E-02	-2.1
58	8.9969E-01	-2.8915E-01	9.4502E-01	-17.8	-2.4713E-03	-2.1591E-03	3.2817E-03	-138.9	4.3184E-02	-6.5874E-03	4.3684E-02	-8.7
59	8.2150E-01	-4.7018E-01	9.4654E-01	-29.8	-8.3148E-03	-2.0817E-02	2.2416E-02	-111.8	3.1870E-02	-3.2291E-02	4.5370E-02	-45.4
60	9.4092E-01	-4.0869E-02	9.4181E-01	-2.5	-2.4513E-03	-1.3360E-02	1.3583E-02	-100.4	4.3751E-02	-4.6802E-03	4.4001E-02	-6.1
61	9.0177E-01	-2.7963E-01	9.4413E-01	-17.2	-4.8116E-03	-2.2995E-02	2.3493E-02	-101.8	3.8774E-02	-2.4817E-02	4.6036E-02	-32.6
62	9.4257E-01	-7.0379E-02	9.4520E-01	-4.3	5.0711E-03	-6.5218E-02	6.5415E-02	-85.6	3.6532E-02	-6.1218E-03	3.7041E-02	-9.5

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
 63  9.4231E-01 -5.5613E-02  9.4395E-01   -3.4 -1.6450E-04 -9.0539E-03  9.0554E-03  -91.0  5.2800E-02 -7.0177E-03  5.3265E-02   -7.6
 64  9.0053E-01 -2.9047E-01  9.4622E-01  -17.9 -2.1107E-03 -1.0574E-02  1.0783E-02 -101.3  4.7261E-02 -3.0961E-02  5.6500E-02  -33.2
 65  9.4744E-01 -8.6280E-02  9.5136E-01   -5.2  1.4714E-03 -2.8031E-02  2.8069E-02  -87.0  4.9338E-02 -8.9762E-03  5.0147E-02  -10.3
 66  9.0011E-01 -3.1359E-01  9.5317E-01  -19.2 -4.9223E-03 -3.4427E-02  3.4777E-02  -98.1  4.2104E-02 -3.6673E-02  5.5836E-02  -41.1
TOTAL POWER IN THE BODY =    3.73706E-06 WATTS


HBR16TG2 -- JOB 3876 -- HASP-II OUTPUT COMPLETE AT 11:41
```


THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC