

UNCLASSIFIED

AD 295 981

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

**Best
Available
Copy**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-2-3


USNRDL-TR-604

Copy 109
27 November 1962

CATALOGED BY ASTIA
AS AD NO. 295981

A METHOD OF COMPENSATING FOR
TEMPERATURE-DEPENDENCE OF
A REMOTE AREA GAMMA MONITORING SYSTEM

by
P.A. Covey

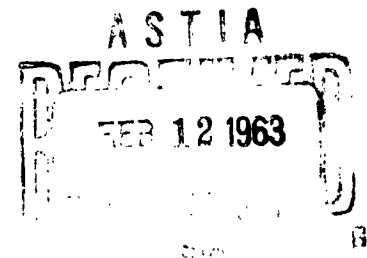

**U.S. NAVAL RADIOLOGICAL
DEFENSE LABORATORY**
SAN FRANCISCO 24, CALIFORNIA

12ND. P7463

TECHNICAL DEVELOPMENTS BRANCH
P. D. LaRiviere, Head

CHEMICAL TECHNOLOGY DIVISION
L. H. Gevantman, Head

ADMINISTRATIVE INFORMATION

The work reported was part of a project sponsored by the Office of Civil and Defense Mobilization under Contract No. CDM SR 59-54. The project is described in this Laboratory's USNRDL Technical Program for Fiscal Years 1961 and 1962, 1 August 1960, where it is designated Program B-3, Problem 3.

Eugene P. Cooper
Eugene P. Cooper
Scientific Director

E. B. Roth
E. B. Roth, CAPT USN
Commanding Officer and Director

ABSTRACT

A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations.

Addition of a thermistor-resistor combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within + 10 % between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range.

SUMMARY

The Problem

The Jordan RAMS II Gamma Radiation Monitoring System, when used in an out-of-doors experiment, gave radiation rate readings which differed by a factor of 3 over the temperature range 30°F to 80°F.

Findings

Addition of a thermistor-resistor combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F - 80°F.

INTRODUCTION

Large-scale decontamination and radiological recovery experiments were conducted recently^{1,2} during which it was necessary to measure continuously the gamma dose rate at a number of key points in a fallout target area. The "target complex" consisted of a 3-1/2-acre site at Camp Parks, California, containing paved areas, buildings, lawns, gardens, and other surfaces found in a typical residential area.

The target complex was contaminated to a gamma radiation level of about 100 mr/hr at 3 ft above the ground by a uniform deposit of simulated fallout. This synthetic fallout consisted of size-graded sand particles which were tagged with the gamma-emitting radionuclides Ba-La¹⁴⁰. The remote area gamma radiation monitoring system* (RAMS II) was used to continuously measure dose rate, indoors and outdoors, for a period of two weeks. Measurements were also taken with hand-held survey meters. During this time the dose rate was changed by weathering (wind and rain), by radioactive decay, and by various decontamination methods which were used to recover the area.

It soon became apparent that wide fluctuations in output indicated by the RAMS II were caused by factors other than changes in gamma radiation flux. An intensive investigation proved that the output fluctuations were caused by atmospheric temperature changes. A temperature change of 50°F (over the range 30°F-80°F) in one 24-hr period caused the output of the RAMS II to change by a factor of 3. The dose rate variations versus temperature are shown in the uncompensated curve in Fig. 1. This error in dose rate readings could not be tolerated and corrective action was required.

DESCRIPTION OF RAMS INSTALLATION

A 24-channel RAMS II was installed with detectors located at strategic points, both indoors and outdoors, throughout the target complex. The detectors were connected through multiple-conductor cables to control panels at a suitable central location. This RAMS II System used

*Jordan Electronics Corporation, Alhambra, Calif.

Neher-White remote-monitoring elements, a control panel for all channels, and a common power supply. The system was capable of detecting and indicating the presence of gamma radiation over the six-decade intensity range, 0.01 mr/hr to 10 r/hr, in two logarithmic ranges. The output of each detector was recorded serially on a multi-channel strip-chart recorder. Individual channels could be read on a panel meter by means of a manual switching system.

DESIGN AND INSTALLATION OF A TEMPERATURE COMPENSATOR

The Neher-White monitoring elements consist of a 50-in.³ unsaturated ion chamber and an electrometer tube mounted within the chamber. The electrometer tube used in the monitoring units is a triode-connected 5886 with a floating grid, so mounted in the ion chamber that the grid lead becomes the collecting element of the chamber (Fig. 2). In this configuration incident gamma photons entering the chamber will produce a logarithmic change in plate current proportional to the photon flux.

Plate current in this system is a function of the negative charge on the control grid of the electrometer tube which in turn is dependent on a number of factors. Those of interest here are ion current in the gas volume of the detector, insulation resistance between the electrometer grid and the outer case of the ion chamber, and the electron emission of the filament of the electrometer tube. If it is assumed, for instance, that an increase in temperature causes insulation resistance to decrease, which in turn causes the electron charge on the control grid to decrease in a manner identical to that which occurs when the gas volume is partially ionized by incident gamma radiation, then plate current will increase and an apparent increase in radiation dose rate will occur. The uncompensated curve of Fig. 1 demonstrates this action.

The plate current vs. filament voltage characteristics of the 5886 electrometer tube indicate that if the electron emission of the filament can be caused to increase with an increase in temperature, in a manner that causes the grid to maintain a constant negative charge, then compensation will be achieved and the system rendered temperature-independent.

An examination of the properties of currently available temperature-compensating devices (thermistors) indicated that several types were suitable when used with the proper parallel trimming resistor. It was

found that a close approximation to complete compensation could be obtained with a Veece type 21D2 thermistor and a 50 Ω variable trimming resistance in series with the filament of the electrometer tube as shown in Fig. 2. The compensated curve of Fig. 1 illustrates the degree of compensation achieved.

CALIBRATION AND RESULTS

It was found by experiment that an initial adjustment of the variable resistor in parallel with the thermistor for a total resistance of 14 ohms at 78°F would adequately (within $\pm 10\%$) cover the temperature range 30°F to 80°F. The system could be made to operate over a greater range by readjustment of the variable resistor. After recalibration of the system, test runs were made using small point sources of γ radiation to check the effectiveness of the modification in the actual installation. Later, during a full-scale contaminating event (Complex III), temperatures were recorded at various points in the area and changes in data compared to temperature records with the results (typical for all detectors) shown in Fig. 1. Both curves are for the same detector and show that the dose rate output variations were less than $\pm 10\%$ at any point on the scale.

DISCUSSION AND CONCLUSIONS

Introduction of the temperature-compensating network necessitates a complete recalibration of the system, which is most easily done with the aid of a climatic simulator. The improvement attainable, however, is well worth the effort, since the RMS is effectively upgraded from a qualitative dose rate indicator to a quantitative research tool. Ignoring rate-energy-dependence inherent in this type of system, the temperature-dependent read-out errors at the extremes of 30 and 80°F are within $\pm 10\%$ of the dose rate indicated at 55°.

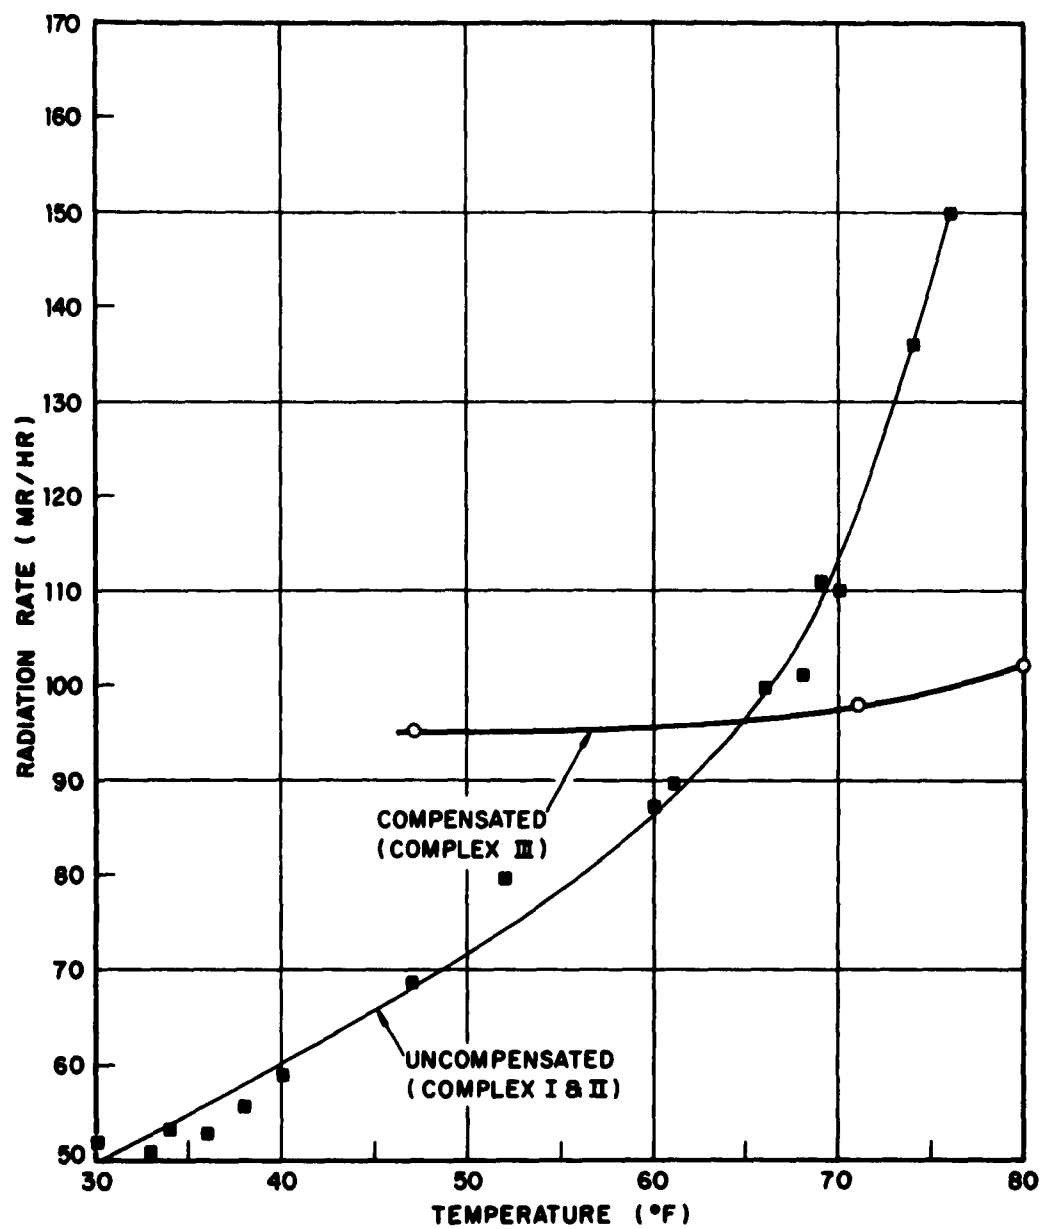


Fig. 1 RAMS II Performance With and Without Temperature Compensation

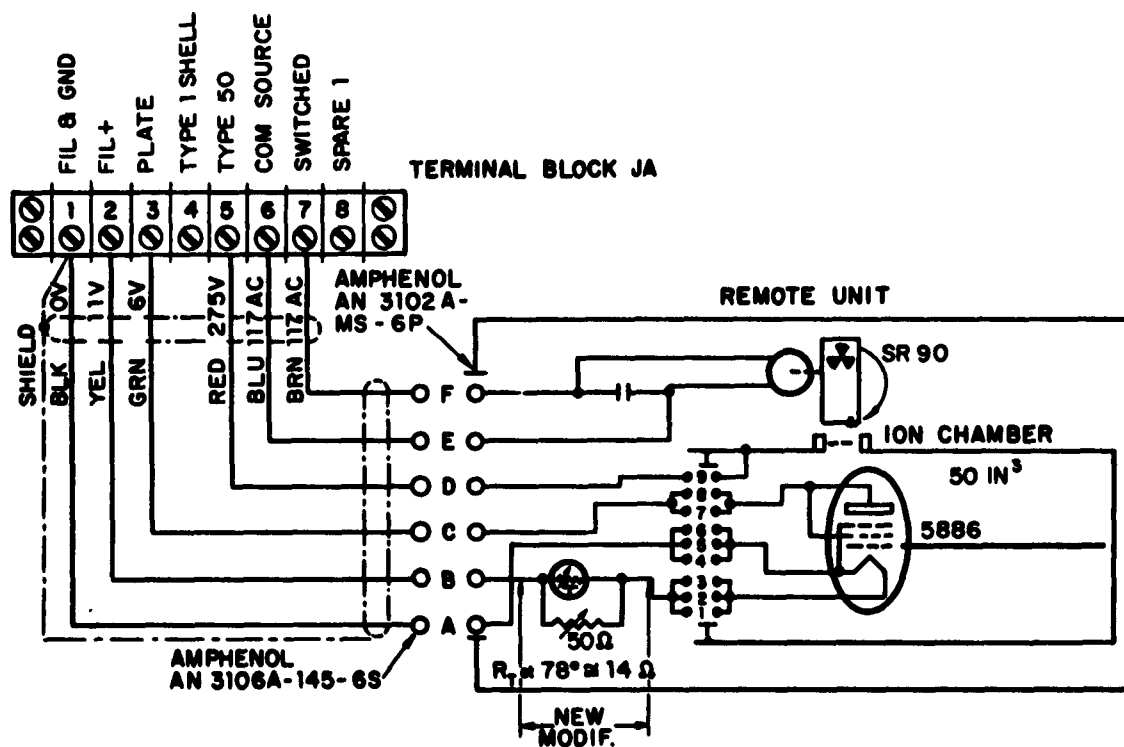


Fig. 2 Schematic of Remote Detector

REFERENCES

1. W. L. Owen, J. D. Sartor. Radiological Recovery of Land Target Components - Complex I and Complex II. U. S. Naval Radiological Defense Laboratory Technical Report, USNRDL-TR-570, 25 May 1962 (U).
2. W. L. Owen, J. D. Sartor. Radiological Recovery of Land Target Components - Complex III. U. S. Naval Radiological Defense Laboratory Technical Report in preparation.

DISTRIBUTION

CopiesNAVY

1-3 Chief, Bureau of Ships (Code 335)
 4 Chief, Bureau of Ships (Code 320)
 5-10 Chief, Bureau of Ships (Code 685C)
 11 Chief, Bureau of Medicine and Surgery
 12 Chief, Bureau of Naval Weapons (RRMA-11)
 13-14 Chief, Bureau of Yards and Docks (Code 74)
 15 Chief, Bureau of Yards and Docks (Code C-400)
 16 Chief of Naval Operations (Op-07T)
 17 Chief of Naval Research (Code 104)
 18 Commander, New York Naval Shipyard (Material Lab.)
 19-21 Director, Naval Research Laboratory (Code 2021)
 22 Office of Naval Research (Code 422)
 23-32 Office of Naval Research, FPO, New York
 33 CO, U.S. Naval Civil Engineering Laboratory
 34 Commander, Naval Air Material Center, Philadelphia
 35 Naval Medical Research Institute
 36 U.S. Naval Postgraduate School, Monterey
 37 CO, Naval Nuclear Ordnance Evaluation Unit (Code 4011)
 38 Office of Patent Counsel, San Diego
 39 Commandant of the Marine Corps
 40 Commandant, Marine Corps Schools, Quantico (CMCLFDA)
 41 Director, Landing Force Development Center

ARMY

42 Chief of Research and Development (Atomic Division)
 43 Chief of Research and Development (Life Science Division)
 44 Deputy Chief of Staff for Military Operations (DGM)
 45 Deputy Chief of Staff for Military Operations (CBR)
 46 Office of Assistant Chief of Staff, G-2
 47 Chief of Engineers (ENCMC-EB)
 48 Chief of Engineers (ENCMC-DE)
 49 Chief of Engineers (ENGCW)
 50 CG, Army Materiel Command (AMCRD-DE-NE)
 51 CG, Ballistic Research Laboratories
 52 CG, USA, CBR Agency
 53 President, Chemical Corps Board

54 CO, Chemical Corps Training Command
 55 Commandant, Chemical Corps Schools (Library)
 56 CG, CBR Combat Developments Agency
 57 CO, Chemical Research and Development Laboratories
 58 Commander, Chemical Corps Nuclear Defense Laboratory
 59 Hq., Army Environmental Hygiene Agency
 60 CG, Aberdeen Proving Ground
 61 Director, Walter Reed Army Medical Center
 62 Hq., Army Nuclear Medicine Research Detach., Europe
 63 CG, Combat Developments Command (CDCMR-V)
 64 CG, Quartermaster Res. and Eng. Command
 65 Hq., Dugway Proving Ground
 66-68 The Surgeon General (MEDNE)
 69 CO, Army Signal Res. and Dev. Laboratory
 70 CG, Army Electronic Proving Ground
 71 CG, Engineer Res. and Dev. Laboratory
 72 Director, Office of Special Weapons Development
 73 CO, Watertown Arsenal
 74 CG, Mobility Command
 75 CG, Munitions Command
 76 CO, Frankford Arsenal
 77 CG, Army Missile Command

AIR FORCE

78 Assistant Chief of Staff, Intelligence (AFCIN-3B)
 79 CG, Aeronautical Systems Division (ASAPRD-NS)
 80 Directorate of Civil Engineering (AFOCE-ES)
 81 Director, USAF Project RAND
 82 Commandant, School of Aerospace Medicine, Brooks AFB
 83 Office of the Surgeon (SUP3.1), Strategic Air Command
 84 Office of the Surgeon General
 85 CG, Special Weapons Center, Kirtland AFB
 86 CG, Special Weapons Center (SWRB)
 87 Director, Air University Library, Maxwell AFB
 88-89 Commander, Technical Training Wing, 3415th TTG
 90 Hq., Second Air Force, Barksdale AFB
 91 Commander, Electronic Systems Division (CRZT)

OTHER DOD ACTIVITIES

92-94 Chief, Defense Atomic Support Agency (Library)
 95 Commander, FC/DASA, Sandia Base (PCDV)
 96 Commander, FC/DASA, Sandia Base (PCTG5, Library)
 97 Commander, FC/DASA, Sandia Base (PCWT)
 98-99 Office of Civil Defense, Washington
 100-101 Civil Defense Unit, Army Library
 102-111 Armed Services Technical Information Agency
 112 Director, Armed Forces Radiobiology Research Institute

AEC ACTIVITIES AND OTHERS

113 Research Analysis Corporation
114 Texas Instruments, Inc. (Mouser)
115 Aerojet General, Azusa
116 Aerojet General, San Ramon
117 Allis-Chalmers Manufacturing Co., Milwaukee
118 Allis-Chalmers Manufacturing Co., Washington
119 Allison Division - GMC
120-121 Argonne Cancer Research Hospital
122-131 Argonne National Laboratory
132 Atomic Bomb Casualty Commission
133 AEC Scientific Representative, France
134-136 Atomic Energy Commission, Washington
137-140 Atomic Energy of Canada, Limited
141-144 Atomics International
145 Babcock and Wilcox Company
146-147 Battelle Memorial Institute
148-149 Beers, Roland F., Inc.
150 Beryllium Corporation
151-154 Brookhaven National Laboratory
155 Bureau of Mines, Albany
156 Bureau of Mines, Salt Lake City
157 Carnegie Institute of Technology
158 Chicago Patent Group
159 Columbia University (Havens)
160 Columbia University (Rossi)
161 Combustion Engineering, Inc.
162 Combustion Engineering, Inc. (NRD)
163 Committee on the Effects of Atomic Radiation
164-168 Defence Research Member
169 Denver Research Institute
170 Dow Chemical Company, Rocky Flats
171-174 duPont Company, Aiken
175 duPont Company, Wilmington
176 Edgerton, Germeshausen and Grier, Inc., Goleta
177 Edgerton, Germeshausen and Grier, Inc., Las Vegas
178 Franklin Institute of Pennsylvania
179 Fundamental Methods Association
180 General Atomic Division
181 General Dynamics/Astronautics (NASA)
182-183 General Dynamics, Fort Worth
184-185 General Electric Company, Cincinnati
186-189 General Electric Company, Richland
190 General Electric Company, San Jose
191 General Electric Company, St. Petersburg
192 General Nuclear Engineering Corporation
193 General Scientific Corporation
194 Gibbs and Cox, Inc.
195 Goodyear Atomic Corporation

196	Hughes Aircraft Company, Culver City
197	Iowa State University
198	Jet Propulsion Laboratory
199-200	Knolls Atomic Power Laboratory
201	Lockheed-Georgia Company
202	Lockheed Missiles and Space Company (NASA)
203-204	Los Alamos Scientific Laboratory (Library)
205	Lovelace Foundation
206	Maritime Administration
207	Martin-Marietta Corporation
208-209	Midwestern Universities Research Association
210	Mound Laboratory
211	NASA, Lewis Research Center
212-213	NASA, Scientific and Technical Information Facility
214	National Bureau of Standards (Library)
215	National Bureau of Standards (Taylor)
216	National Lead Company of Ohio
217-218	Nevada Operations Office
219	New Brunswick Area Office
220	New York Operations Office
221	New York University (Eisenbud)
222	Nuclear Materials and Equipment Corporation
223	Nuclear Metals, Inc.
224	Office of Assistant General Counsel for Patents
225-228	Phillips Petroleum Company
229	Power Reactor Development Company
230-231	Pratt and Whitney Aircraft Division
232	Princeton University (White)
233-234	Public Health Service, Washington
235	Public Health Service, Las Vegas
236	Public Health Service, Montgomery
237	Rensselaer Polytechnic Institute
238	Sandia Corporation, Albuquerque
239	Sandia Corporation, Livermore
240	Space Technology Laboratories, Inc. (NASA)
241	Stanford University (SLAC)
242	States Marine Lines, Inc.
243	Sylvania Electric Products, Inc.
244	Tennessee Valley Authority
245-246	Union Carbide Nuclear Company (ORGD)
247-252	Union Carbide Nuclear Company (ORNL)
253	Union Carbide Nuclear Company (Paducah Plant)
254	United Nuclear Corporation (MDA)
255	U.S. Geological Survey, Denver
256	U.S. Geological Survey, Menlo Park
257	U.S. Geological Survey, Washington
258-259	University of California Lawrence Radiation Lab., Berkeley
260-261	University of California Lawrence Radiation Lab., Livermore
262	University of California, Los Angeles
263	University of California, San Francisco
264	University of Chicago Radiation Laboratory

265 University of Hawaii
266 University of Puerto Rico
267 University of Rochester (Atomic Energy Project)
268 University of Rochester (Marshak)
269 University of Utah
270 University of Washington (Geballe)
271 University of Washington (Rohde)
272-275 Westinghouse Bettis Atomic Power Laboratory
276 Westinghouse Electric Corporation (Rahilly)
277 Westinghouse Electric Corporation (NASA)
278 Western Reserve University (Friedell)
279 Western Reserve University (Major)
280 Yankee Atomic Electric Company
281-305 Technical Information Extension, Oak Ridge

USNRDL

306-350 USNRDL, Technical Information Division

DISTRIBUTION DATE: 21 January 1963

Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED
1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED	Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over) combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED

Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED
Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED
Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED
combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED	combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED

Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED
Naval Radiological Defense Laboratory USNRDL-TR-604 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED

combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F , as opposed to an original factor-of-3 variation over this temperature range.

UNCLASSIFIED

combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F , as opposed to an original factor-of-3 variation over this temperature range.

UNCLASSIFIED

Naval Radiological Defense Laboratory USNRDL-TR-804 A METHOD OF COMPENSATING FOR TEMPERATURE-DEPENDENCE OF A REMOTE AREA GAMMA MONITORING SYSTEM by P.A. Covey 27 November 1963 14 p. illus. 2 refs. UNCLASSIFIED A remote area gamma radiation monitoring system known as RAMS II, was found to be so temperature-dependent that diurnal variations produced intolerably large output variations. Addition of a thermistor-resistor (Over)	1. Gamma counters - Calibration. 2. Thermistors - Applications. 3. Resistors - Applications. 4. Temperature sensitive elements. I. Covey, P.A. II. Title. UNCLASSIFIED
combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED	combination in the cathode circuit of the electrometer tube successfully compensated for temperature effects. The response of the modified system is constant within $\pm 10\%$ between 30°F and 80°F, as opposed to an original factor-of-3 variation over this temperature range. UNCLASSIFIED