

UNCLASSIFIED

AD 297 064

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

N-63-2-5



CATALOGED BY ASTIA
AS AD 297064

MECHANICAL

TECHNOLOGY

INCORPORATED

297 064

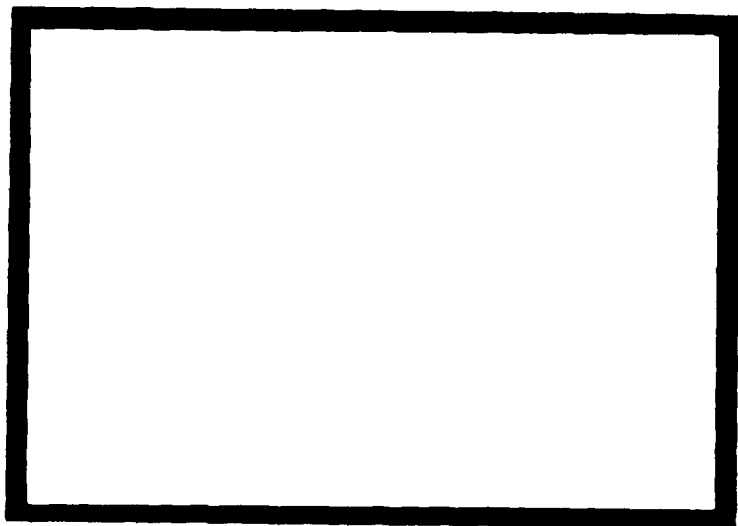

MECHANICAL TECHNOLOGY INCORPORATED
968 Albany-Shaker Road
Latham, New York

MTI-62TR16

TWO PHASE FLOW IN THRUST BEARINGS

PART II


**ANALYSIS OF THE REGION
NEAR THE AXIS OF ROTATION**

by

I. BERETSKY

TWO PHASE FLOW IN THRUST BEARINGS
PART II
ANALYSIS OF THE REGION NEAR THE AXIS OF ROTATION

 I. Beretsky
Author

 C. H. T. Pan
Approved by

 B. Sternlicht
Approved by

Prepared under
Contract No. Nonr-3731(00)(FBM)
Task NR 391-438

Administered by

OFFICE OF NAVAL RESEARCH
Department of the Navy

Reproduction in Whole or in Part is Permitted
for any Purpose of the U. S. Government

MECHANICAL TECHNOLOGY INCORPORATED
LATHAM, NEW YORK

ABSTRACT

The report analyzes the two-phase thrust bearing near the axis of rotation where the radial pressure gradient is non zero and the viscosity is negligible for the gaseous phase. The analysis agrees with the previous work by Sparrow and Gregg (2) for condensate thickness for the limiting case of zero pressure gradient. With radial pressure gradients, the condensate thickness is seen to have the chance of re-evaporation due to the change of vapor temperature in the radial direction. The sensitivity of the condensate thickness to temperature difference is noted. This work is part of the complete analysis of the two-phase thrust bearing being studied.

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION	1
2.0 ANALYSIS	2
2.1 Formulation of the Equations of Motion, Continuity, and Energy.....	3
2.1.1 Momentum Integral Equations for the General Case	4
2.1.1.1 Velocity Profiles	6
2.2 Special Case: Viscous Forces Predominant	14
3.0 DISCUSSION	20
4.0 CONCLUSIONS	23
5.0 RECOMMENDATIONS	23
NOMENCLATURE	24
BIBLIOGRAPHY	26
APPENDIX	27
FIGURES	

1.0 INTRODUCTION

The study presented in this report contains the analysis of the two phase, externally pressurized, thrust bearing in the area near the axis of rotation. This area of the thrust bearing is considered to be Regions II and III, as indicated previously in Reference 1. (See Figure 1.)

Sparrow and Gregg (2) solved the problem of condensation on a rotating disk with no radial pressure gradient by using the similarity substitutions which Von Karman previously introduced for the rotating disk problem, that is,

$$u = r f'(z), \quad v = r g(z), \quad w = -2 f(z)$$

This is possible because the temperature boundary conditions at the interface and disk surface are independent of the radius r . The substitutions reduce equations (1) and (2) to differential equations in z only. The condensate rate dependent on w is then seen to satisfy the temperature boundary conditions, as well as the equations of motion.

Sparrow and Gregg solved the set of nonlinear differential equations by computer, and noted that, if in equations (1) and (2) after the similarity substitutions are made the inertial terms are neglected compared to the viscous forces, the solution is easily evaluated. The results of this formulation led to the results

$$h\left(\frac{w}{v}\right)^{1/2} = \left(\frac{g}{2}\right)^{1/4} \left(\frac{C \Delta T}{\lambda P_r}\right)^{1/4} \quad (a)$$


The same problem can also be analyzed by using the approximate integral method. (See Appendix.) This method again leads exactly to equation (a)

for the condition that $\left(\frac{C \Delta T}{\lambda P_r}\right)^{1/4}$ is small. The range of interest of this parameter for the problem under study can thus be considered equivalent to neglecting the inertial terms. The results of this analysis are shown in Figures 2 and 3, and explained in the Appendix.

The corresponding problem of a thrust bearing does not generally permit the assumptions of zero radial pressure gradient. The acceleration of the vapor flow in the radial direction does, in fact, have a pressure gradient in the case of a bearing, thus requiring the consideration of the pressure gradient and its effect on the condensate thickness and temperature in the vapor.

2.0 ANALYSIS

The problem can be conveniently formulated in cylindrical coordinates, where the coordinate of z is taken as the axis of rotation. Angular symmetry is assumed, that is, $\partial/\partial\theta = 0$. The physical problem is represented by a rotating disk upon which condensate forms due to a temperature difference between the surface of the disk and vapor.

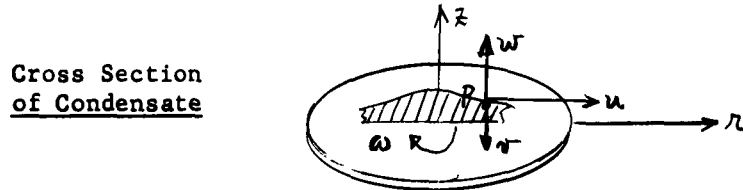

The analysis of the two regions, that is, II and III, is done simultaneously with the following assumptions:

1. Interface shear at $h(r)$ between the vapor and liquid phases is assumed zero; hence, $\frac{\partial u}{\partial z} = \frac{\partial v}{\partial z} = 0$ at $z = h$.
2. The radial pressure gradient, $\frac{\partial p}{\partial r}$, is the same for the liquid and the vapor (that is, $\frac{\partial p}{\partial z} = 0$) and for this problem will be an assumed known function determined solely by the vapor flow and geometry of the region.

2.1 Formulation of the Equations of Motion, Continuity, and Energy

The equations of motion for an incompressible fluid in cylindrical coordinates (3), with axial symmetry, can be written as

$$u \frac{\partial u}{\partial r} + w \frac{\partial u}{\partial z} - \frac{v^2}{r} = -\frac{1}{\rho} \frac{\partial p}{\partial r} + \nu \left\{ \frac{\partial^2 u}{\partial z^2} + \frac{\partial}{\partial r} \left(\frac{\partial u}{\partial r} + \frac{u}{r} \right) \right\} \quad (1)$$

$$u \frac{\partial v}{\partial r} + w \frac{\partial v}{\partial z} + \frac{uv}{r} = \nu \left\{ \frac{\partial^2 v}{\partial z^2} + \frac{\partial}{\partial r} \left(\frac{\partial v}{\partial r} + \frac{v}{r} \right) \right\} \quad (2)$$

$$u \frac{\partial w}{\partial r} + w \frac{\partial w}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial z} + \nu \left\{ \frac{\partial^2 w}{\partial r^2} + \frac{1}{r} \frac{\partial w}{\partial r} + \frac{\partial^2 w}{\partial z^2} \right\} \quad (3)$$

The equation of continuity is

$$\frac{1}{r} \frac{\partial}{\partial r} (ru) = -\frac{\partial w}{\partial z} \quad (4)$$

The energy equation can be written as

$$\partial^2 T / \partial z^2 = 0 \quad (5)$$

which is the well known Nusselt approximation where dissipation is neglected and the predominate mode of heat transfer is by conduction axially across the condensate thickness.

At this point, it is well to consider a limiting condition of the equations of motion and its effect on the formulation of the method of solution.

This problem does not permit the similarity substitutions. However, it can be formulated by using the momentum integral technique. The assumptions that $\frac{\partial^2 u}{\partial z^2} > \frac{\partial^2 u}{\partial r^2}$ and $\frac{\partial^2 v}{\partial z^2} > \frac{\partial^2 v}{\partial r^2}$ are made in addition to the previous assumptions. Note that as $r \rightarrow 0$, due to symmetry, $\frac{\partial p}{\partial r} \rightarrow 0$ if no sources are present. Furthermore, if $\frac{\partial p}{\partial r} \sim O(r)$, the equations of motion will permit the similar solutions of Von Karman (that is, $u = rf'(z)$ etc). The special case of $A = 0$, is that which was solved by Sparrow and Gregg.

The problem of condensation with $\frac{\partial p}{\partial n} \neq 0$ will be formulated for the general case where the inertial terms are not neglected. The value of $\frac{\partial p}{\partial n}$ is assumed a known function of r . However, since it has been shown in the case for $\frac{\partial p}{\partial n} = 0$ that neglecting inertial terms in comparison to viscous terms was equivalent to the case of small film thickness or low heat transfer rates, this assumption will be made subsequently to simplify the problem where the pressure gradient is non zero.

2.1.1 Momentum Integral Equations for the General Case

Equations (1) and (2), neglecting higher order viscous terms (that is, $\frac{\partial^2 u}{\partial z^2} > \frac{\partial^2 u}{\partial n^2}$, $\frac{\partial^2 v}{\partial z^2} > \frac{\partial^2 v}{\partial n^2}$, etc.) become

$$u \frac{\partial u}{\partial n} + w \frac{\partial u}{\partial z} - \frac{u^2}{n} = -\frac{1}{r} \frac{\partial p}{\partial n} + \nu \frac{\partial^2 u}{\partial z^2} \quad (6)$$

$$u \frac{\partial v}{\partial n} + w \frac{\partial v}{\partial z} + \frac{uv}{n} = \nu \frac{\partial^2 v}{\partial z^2} \quad (7)$$

From equation (4), w at $z = h$, can be written as

$$W = -\frac{1}{n} \int_0^h \frac{\partial}{\partial n} (nu) dz \quad (8)$$

Equation (6) can be integrated over the condensate layer thickness, resulting in

$$\int_0^h \left\{ u \frac{\partial u}{\partial n} + \frac{u}{n} \frac{\partial}{\partial n} (nu) - \frac{u^2}{n} - \frac{v}{n} \frac{\partial}{\partial n} (ru) \right\} dz = h F(n) - \frac{\tau_{zn}}{\rho} \quad (9)$$

$$\text{where } F(n) = -\frac{1}{\rho} \frac{\partial p}{\partial n} \quad (10)$$

$$\text{and } \tau_{zn} = \mu \frac{\partial u}{\partial z} \Big|_{z=0} \quad (11)$$

$$U = u(z=h) \quad (12)$$

The following identities,

$$u \frac{\partial u}{\partial r} = \frac{1}{r} \frac{\partial}{\partial r} (r u^2) - \frac{u}{r} \frac{\partial}{\partial r} (r u) \quad (13)$$

and

$$\frac{1}{r} \frac{\partial}{\partial r} (r u V) = \frac{V}{r} \frac{\partial}{\partial r} (r u) + u \frac{\partial V}{\partial r} \quad (14)$$

are substituted into equation (9) resulting in

$$\begin{aligned} \frac{\partial}{\partial r} \int_0^h u(V-u) dz + \frac{1}{r} \int_0^h u(V-u) dz + \frac{dV}{dr} \int_0^h (V-u) dz \\ + Vh \left[\frac{F(r)}{V} + \frac{V^2}{rV} - \frac{dV}{dr} \right] - \int_0^h \frac{V^2 - u^2}{r} dz = \frac{\tau_{rz}}{\rho} \end{aligned} \quad (15)$$

Similarly, equation 7, can be integrated, which results in

$$\begin{aligned} \frac{\partial}{\partial r} \int_0^h u(V-u) dz + \frac{2}{r} \int_0^h u(V-u) dz + \left(\frac{dV}{dr} + \frac{V}{r} \right) \left\{ \int_0^h (V-u) dz - hV \right\} \\ = \frac{\tau_{rz}}{\rho} \end{aligned} \quad (16)$$

where

$$\frac{\tau_{rz}}{\rho} = \mu \frac{\partial V}{\partial z} \Big|_{z=0} \quad (17)$$

The following identities can be made:

$$\partial_r V^2 = \int_0^h V^2 f(1-f) dz \quad (18)$$

$$\partial_r V^2 = \int_0^h V^2 (1-g^2) dz \quad (19)$$

$$\partial_{rv} VV = \int_0^h vV f(1-g) dz \quad (20)$$

$$h^* U = \int_0^h U(1-f) dz \quad (21)$$

$$\text{where } f = \frac{u}{U} \quad \text{and} \quad g = \frac{v}{V} \quad (22a), (22b)$$

Using equations (18) -- (22b), equations (15) and (16) can be written as

$$\begin{aligned} \frac{\partial}{\partial r} (\theta_r U^2) + \frac{1}{r} (\theta_r U^2) + U \frac{dU}{dr} (h^* - h) + U h \left[\frac{F(r)}{U} + \frac{V^2}{r^2} \right] \\ - \frac{\theta_r V^2}{r} = \frac{\tau_{rz}}{\rho} \end{aligned} \quad (23)$$

and

$$\frac{\partial}{\partial r} (\theta_{rv} UV) + \frac{2}{r} (\theta_{rv} UV) + \left(U \frac{dV}{dr} + \frac{UV}{r} \right) (h^* - h) = \frac{\tau_{\theta\theta}}{\rho} \quad (24)$$

Equations (23) and (24) are thus the Momentum Integral Equations for the case of rotational symmetric flow.

In order to solve these equations, velocity profiles for both u and v , (hence, f and g) are assumed to be polynomials in z .

2.1.1.1 Velocity Profiles

Radial Velocity Profile

The radial velocity profile f , is assumed to be a fourth order polynomial in η , where $\eta = z/h$.

$$\text{Hence, } f(\eta) = a\eta + b\eta^2 + c\eta^3 + d\eta^4 \quad (25)$$

The conditions imposed on the radial velocity profile are

$$z=0, u=0, \quad v \frac{\partial u}{\partial z} = \frac{1}{\rho} \frac{\partial p}{\partial r} - r \omega^2 = - (F(r) + r \omega^2)$$

$$z=h, u=U, \quad u_z=0, \quad v \frac{\partial u}{\partial z} = - \left[F(r) + \frac{V^2}{r} - U \frac{dU}{dr} \right]$$

In terms of f , and η

$$\eta=0, \quad f=0, \quad f_{\eta\eta} = - \frac{h^2}{\nu} \left[\frac{F(r)}{U} + \frac{r \omega^2}{U} \right]$$

$$\eta=1, \quad f=1, \quad f_{\eta}=0, \quad f_{\eta\eta} = - \frac{h^2}{\nu} \left[\frac{F(r)}{U} + \frac{V^2}{rU} - \frac{dU}{dr} \right]$$

These boundary conditions are representative of the physical conditions imposed, as well as satisfying the original differential equations.

Using the boundary conditions, the constants a , b , c , d ,

are evaluated and are

$$a = 2 + \frac{\phi_1 - \phi_2}{6} \quad (26a)$$

$$b = -\phi_1/2 \quad (26b)$$

$$c = -2 + 1/2 (\phi_1 + \phi_2) \quad (26c)$$

$$d = 1 - \phi_1/6 - \phi_2/3 \quad (26d)$$

$$\text{where } \phi_1 = \frac{h^2}{\nu} \left(\frac{F(r)}{U} + \frac{r \omega^2}{U} \right) \quad (27)$$

$$\text{and } \phi_2 = \frac{h^2}{\nu} \left(\frac{F(r)}{U} + \frac{V^2}{rU} - \frac{dU}{dr} \right) \quad (28)$$

Finally, f becomes

$$f(\eta) = 1 - (1-\eta)^3(1+\eta) + \frac{\phi_1}{6} \eta(1-\eta)^3 - \frac{\phi_2}{6} \eta(1-\eta)^2(1+2\eta) \quad (29)$$

Tangential Velocity Profile

Similarly, the tangential velocity profile can be written as

$$g = \frac{v}{V} = a + b\eta + c\eta^2 + d\eta^3 + e\eta^4 \quad (30)$$

The boundary conditions are:

$$z=0, \quad v=r\omega, \quad \Rightarrow v_{,\eta} = 0$$

$$z=h, \quad v=V, \quad \frac{\partial v}{\partial \eta} = 0, \quad \Rightarrow v_{,\eta} = \frac{UV}{h} + V \frac{dV}{d\eta}$$

or in terms of g and η

$$\eta=0, \quad g = \frac{r\omega}{V} = 1-S, \quad g_{,\eta} = 0$$

$$\eta=1, \quad g=1, \quad g_{,\eta}=0, \quad g_{,\eta\eta} = \frac{h^2}{V} \left(\frac{U}{h} + \frac{U}{V} \frac{dV}{d\eta} \right)$$

The constants evaluated are

$$a = 1-S \quad (31a)$$

$$b = 2S + \phi_2/6 \quad (31b)$$

$$c = 0 \quad (31c)$$

$$d = -2S - \phi_3/2 \quad (31d)$$

$$e = S + \phi_3/3 \quad (31e)$$

$$\text{where } \phi_3 = \frac{h^2}{V} \left(\frac{U}{h} + \frac{U}{V} \frac{dV}{d\eta} \right)$$

Finally, g becomes

$$g = 1-S(1-\eta)^3(1+\eta) + \frac{\phi_2}{6}(1-\eta)^2(\eta)(4+2\eta) \quad (32)$$

Following the line of thinking similar to Bohlen-Holstein's method, shape parameters can be introduced as in the Karmen-Pohlhausen technique. (3)

It will be apparent later that it was convenient to introduce the so-called "shape parameters", which in this case are defined as

$$K_1 = \frac{\theta_n^2}{\gamma} \frac{F(\eta)}{U} \quad (33)$$

$$K_2 = \frac{\theta_n^2}{\gamma} \frac{V}{\eta} \quad (34)$$

$$K_3 = \frac{\theta_n^2}{\gamma} \frac{U}{\eta} \quad (35)$$

$$K_4 = \frac{\theta_n^2}{\gamma} \omega \quad (36)$$

$$\text{Also, let } \psi = \frac{\theta_n^2}{\gamma} \quad (37)$$

$$\text{Hence, } K_1 = \psi \frac{F(\eta)}{U} \quad (38)$$

$$K_2 = \frac{\psi V}{\eta} \quad (39)$$

$$K_3 = \frac{\psi U}{\eta} \quad (40)$$

$$K_4 = \psi \omega \quad (41)$$

From the definitions of ϕ_1 , ϕ_2 , ϕ_3 , and S, which are

$$\phi_1 = \frac{\hbar^2}{j} \frac{F(r)}{U} + \frac{\hbar^2}{j} \frac{r\omega^2}{U} \quad (42)$$

$$\phi_2 = \frac{\hbar^2}{j} \frac{F(r)}{U} + \frac{\hbar^2}{j} \frac{V^2}{rU} - \frac{\hbar^2}{j} \frac{dU}{dr} \quad (43)$$

$$\phi_3 = \frac{\hbar^2}{j} \frac{U}{r} + \frac{\hbar^2}{j} \frac{U}{V} \frac{dV}{dr} \quad (44)$$

$$\text{and } S = 1 - \frac{r\omega}{V} \quad (45)$$

$$\text{and defining } \lambda_1 = \frac{\hbar^2}{j} \frac{F(r)}{U}, \lambda_2 = \frac{\hbar^2}{j} \frac{V}{r}, \lambda_3 = \frac{\hbar^2}{j} \frac{U}{r}$$

and $\lambda_4 = \frac{\hbar^2 \omega}{j}$, ϕ_1, ϕ_2, ϕ_3 , and S can be written in terms of $\lambda_1, \lambda_2, \lambda_3$ and λ_4 alone.

hence:

$$\phi_1 = \lambda_1 + \frac{\lambda_4^2}{\lambda_3} \quad (46)$$

$$\phi_2 = \lambda_1 + \frac{\lambda_4^2}{\lambda_3} + \frac{\lambda_3}{\lambda_4} r \frac{d\lambda_4}{dr} - \frac{d}{dr}(r\lambda_3) \quad (47)$$

$$\phi_3 = \lambda_3 + \frac{\lambda_3}{\lambda_2} \frac{d}{dr}(r\lambda_2) - \frac{r\lambda_3}{\lambda_4} \frac{d\lambda_4}{dr} \quad (48)$$

$$S = 1 - \frac{\lambda_4}{\lambda_2} \quad (49)$$

This is evident by the following relations:

$$\begin{aligned} \frac{\hbar^2}{j} \frac{dU}{dr} &= \frac{d}{dr} \left(\frac{\hbar^2}{j} U \right) - U \frac{d}{dr} \left(\frac{\hbar^2}{j} \right) \\ &= \frac{d}{dr} (r\lambda_3) - \frac{U r}{r\omega} \frac{d}{dr} \left(\frac{\hbar^2 \omega}{j} \right) = \frac{d}{dr} (r\lambda_3) - r \frac{\lambda_3}{\lambda_4} \frac{d\lambda_4}{dr} \end{aligned} \quad (50)$$

and similarly,

$$\frac{h^2}{v} \frac{dV}{dr} = \frac{d}{dr}(r\lambda_2) - \frac{r\lambda_2}{\lambda_4} \frac{d\lambda_4}{dr} \quad (51)$$

From the definitions, $\Theta_r, \Theta_{rv}, \Theta_v, h^*$ it is readily seen that after integration

$$\frac{h^*}{h} = f_1 = \int_0^1 (1-f) d\eta = \frac{3}{10} - \frac{\phi_1}{120} + \frac{\phi_2}{40} \quad (52)$$

$$\frac{\Theta_r}{h} = f_2 = \int_0^1 f(1-f) d\eta = \frac{37}{315} - \frac{\phi_1}{940} - \frac{\phi_1^2}{9072} + \frac{37\phi_2}{3780} - \frac{19\phi_2^2}{22680} + \frac{5\phi_1\phi_2}{9072} \quad (53)$$

$$\frac{\Theta_v}{h} = f_3 = \int_0^1 (1-g^2) d\eta = \frac{35}{5} - \frac{\phi_3}{20} - \frac{23S^2}{126} - \frac{19\phi_3^2}{22680} + \frac{115\phi_3}{756} \quad (54)$$

$$\frac{\Theta_{rv}}{h} = f_4 = \int_0^1 f(1-g) d\eta = \frac{79S}{630} + \frac{115\phi_1}{3024} - \frac{23\phi_2 S}{3024} - \frac{\phi_3}{40} + \frac{23\phi_3}{3024}$$

$$- \frac{5\phi_1\phi_3}{18144} + \frac{19\phi_2\phi_3}{22680} \quad (55)$$

Hence, it is seen that the shape factors satisfy the universal relationships, that is

$$K_1 = \frac{\Theta_1^2}{v} \frac{F(\lambda)}{U} = f_1^2 \frac{h^2}{v} \frac{F(\lambda)}{U} = f_1^2 \lambda_1 \quad (56)$$

$$K_2 = f_2^2 \lambda_2 \quad (57)$$

$$K_3 = f_3^2 \lambda_3 \quad (58)$$

$$K_4 = f_4^2 \lambda_4 \quad (59)$$

Having defined the shape factors K_i , their expression can be introduced into the momentum integral equations.

Equation (23) can be written as

$$U^2 \frac{d\Theta_n}{dr} + 2\Theta_n U \frac{dU}{dr} + \frac{\Theta_n U^2}{r} + U \frac{dU}{dr} (h^* - h) + hU \left[\frac{F(r)}{U} + \frac{V^2}{rU} \right] - \frac{\Theta_n V^2}{r} = \frac{\tau_{en}}{\rho} \quad (60)$$

Multiplying equation (60) by Θ_n / U and recalling the definitions of $f_1(K_i)$, $f_2(K_i)$, $f_3(K_i)$, and $f_4(K_i)$ given by equations (52), (53), (54), and (55), and the relation

$$\frac{\tau_{en}}{\mu U} \Theta_n = \left(2 + \frac{\phi_1 - \phi_2}{6} \right) f_2(K_i) = F_1(K_i) \quad (61)$$

one obtains, using the definition of $\psi = \Theta_n^2 / U$ (hence, $d\psi/dr = \frac{2}{U} \Theta_n \frac{d\Theta_n}{dr}$), the following equation

$$\frac{U}{2} \frac{d\psi}{dr} + \left\{ K_3 + \frac{1}{f_2} \left(K_1 + \frac{K_2^2}{K_3} \right) - \frac{K_2^2}{K_3} \frac{f_3}{f_2} \right\} + \psi U' \left\{ 2 + f_1(K_i) - \frac{1}{f_2 K_i} \right\} = F_1(K_i) \quad (62)$$

Let

$$F_2(K_i) = F_1(K_i) - \left\{ K_3 + \frac{1}{f_2} \left(K_1 + \frac{K_2^2}{K_3} \right) - \frac{K_2^2}{K_3} \frac{f_3}{f_2} \right\} \quad (63)$$

$$\text{and } F_3(K_i) = 2 + f_1 - \frac{1}{f_2} \quad (64)$$

one obtains

$$\frac{U}{2} \frac{d\psi}{dr} + \psi \frac{dU}{dr} F_3 = F_2 \quad (65^*)$$

In a similar manner, the second momentum integral equation can be written as

$$\frac{U}{2} \frac{d\psi}{dr} + F_4 \psi \frac{dV}{dr} + V \frac{dU}{dr} = F_7 \quad (66)$$

where $F_7 = F_6 - F_5$ (67)

$$F_5 = K_3 \left(\frac{f_1}{f_4} - \frac{1}{f_2} \right) \quad (68)$$

$$F_4 = \frac{K_3}{K_2} \left(\frac{f_1}{f_4} - \frac{1}{f_2} \right) \quad (69)$$

$$F_6 = \frac{K_2}{K_3} \left[\frac{f_2^2}{f_4} (2S + \phi_3) \right] \quad (70)$$

from the definition $K_{2,4} = \psi V / r$

one can obtain $\frac{d}{dr} (r K_2) = \psi \frac{dV}{dr} + V \frac{d\psi}{dr}$ (71)

Equation (65) and (66) subject to the conditions of equation (70) or (71) contain three unknowns; that is, U, V, and h.

Equation (71) is merely an identity introduced for convenience in performing the numerical solution. The third equation needed for the complete solution is one which is obtained by considering the energy equation which relates the value h to the value U under the temperature differentials imposed.

The final set of differential equations will appear as

$$\frac{dU}{dr} = U(U, F, V, \dots) \quad (72a)$$

$$\frac{dV}{dr} = V(U, F, \psi, \dots) \quad (72b)$$

$$\frac{dh}{dr} = h(U, F, \Delta T) \quad (72c)$$

where (72c) is obtained from energy considerations.

These equations generalized to include energy equations correspond to the Karmen-Pohlhausen method, but in rotational symmetric coordinates.

2.2 Special Case: Viscous Forces Predominant

As mentioned before, the range of interest in the problem would be that corresponding to the equations with no inertial terms.

If this is assumed, the following relationships are known:

$$v = r\omega$$

$$s = 0, \quad \phi_1 = \phi_2 = h^2/2 \left(\frac{F(\eta)}{\nu} + \frac{r\omega^2}{\nu} \right)$$

$$g = 1, \quad t_3 = 0 = f_4$$

From equation (61)

$$\frac{\tau_{\theta n}}{\rho} = \frac{\partial v}{\partial \eta} f_2 = \frac{2\partial v}{\partial \eta} \left(\frac{\theta n}{h} \right) = \frac{2\partial v}{h} \quad (73)$$

But also from equation (60), neglecting the inertial terms,

$$\frac{\tau_{\theta n}}{\rho} = h v \left(\frac{F(\eta)}{\nu} + \frac{r\omega^2}{\nu} \right) = h v \frac{\phi}{h^2} = \frac{\partial v}{h} \phi \quad (74)$$

$$\text{From 73, 74, } \phi = 2 = \frac{h^2}{\nu} \left(\frac{F(\eta)}{\nu} + \frac{r\omega^2}{\nu} \right) \quad (75)$$

Since $\phi = 2$, the function f becomes

$$f(\eta) = 2\eta - \eta^2 \quad (76)$$

$$f_1(K_1) = \frac{3}{10} + \frac{\phi}{60} = \frac{3}{10} + \frac{1}{30} = \frac{1}{5} = \int_0^1 (1-f) d\eta \quad (77)$$

$$= 1 - \frac{2}{3}$$

Hence, $\frac{2}{3} = \frac{2}{3}$ (78)

Energy Equation

Using the Nusselt approximation, the energy equation is reduced to the Fourier conduction law across the condensate thickness. Hence, in the annular region of area $2\pi r dr$, the heat flow dq is

$$dq = \frac{k (2\pi r dr) (T - T_w)}{h} \quad (79)$$

This exchange of heat is related to the amount of condensate formed by the relationship

$$dq = \lambda dQ \quad (80)$$

where dQ is the amount of condensate added in the differential area under consideration.

The flow of condensate in the radial direction is given by

$$Q = 2\pi r \rho h \bar{u} \quad (81)$$

where $\bar{u}$ is the average velocity, radially.

Using equations (78) and (75), one obtains

$$Q = 2\pi \rho r h \frac{2}{3} U = \frac{2\pi \rho r h}{3} \left(\frac{h^2}{\delta} \right) [F(r) + r \omega^2] \quad (82)$$

Defining $f(r) = \frac{F(r)}{r \omega^2}$ and $H = h \left(\frac{h}{\delta} \right)^{1/2}$

$$Q = \frac{2\pi r^2}{3} \rho H^3 (\omega)^{1/2} (1 + f(r)) \quad (83)$$

Therefore, since $Q = Q(H, r)$

$$dQ = \frac{\partial Q}{\partial H} dH + \frac{\partial Q}{\partial r} dr \quad (84)$$

$$\frac{\partial Q}{\partial H} = \frac{2\pi r^2}{3} \rho (\omega)^{1/2} H^2 (1 + f(r)) \quad (85)$$

$$\frac{\partial Q}{\partial r} = \frac{2\pi \rho}{3} (\omega)^{1/2} H^3 \left[r^2 \frac{d}{dr} (1 + f) + 2r (1 + f) \right] \quad (86)$$

Using equations (84), (85), (86) and (79)

$$\frac{h(2\pi r dr)(T-T_w)}{\lambda h} = 2\pi r^2 \rho(\omega)^{1/2} H^2(1+f) dH \\ + \frac{2\pi \rho(\omega)^{1/2} H^3}{3} \left[r^2 \frac{d}{dr}(1+f) + 2r(1+f) \right] \quad (87)$$

Making the following substitutions

$$\bar{T} = \frac{T-T_w}{T_s-T_w}, \quad \theta^2 = \frac{C(T_s-T_w)}{\lambda \rho r}$$

reduces equation (87) into the following form:

$$\theta^2 \bar{T} = \frac{r}{4} \frac{d}{dr} (H^4)(1+f) + \frac{H^4}{3} \left(r \frac{d}{dr} (1+f) + 2(1+f) \right) \quad (88)$$

The Clausius-Clapeyron equation relates the pressure to the temperature, namely

$$\frac{\partial P}{\partial T} = \frac{\lambda M P}{R T^2} \quad (89)$$

Integrating,

$$\ln \frac{P}{P_s} = - \frac{\lambda M}{R T_s} \left\{ \frac{\bar{T}-1}{\bar{T} + \frac{T_w}{T_s-T_w}} \right\} \quad (90)$$

Hence,

$$\bar{T}(r) = \frac{1 + \frac{T_w}{\Delta T} \frac{R T_s}{\lambda M} \ln \frac{P}{P_s}}{1 - \frac{R T_s}{\lambda M} \ln \frac{P}{P_s}} \quad (91)$$

Finally, one can let $Y = (H^4 / 3/2 \theta^2)$ (92)

and obtain

$$\frac{dY}{dr} = \frac{\theta}{3r} \frac{\bar{T}}{1+f} - \frac{4}{3} Y \left\{ \frac{\frac{d}{dr}(1+f)}{(1+f)} + \frac{2}{r} \right\} \quad (93)$$

All that is needed is to prescribe $P(r)$, and solve equation (93) numerically. Note that at $R = 0$, $\frac{dY}{dr} \rightarrow 0$, if $Y = 1/(1+f)$

Particular Case: (P)r Is Assumed Parabolic

A parabolic pressure distribution is assumed where $P = a + br^2$ (94)

The boundary conditions are:

$$P = P_s \text{ at } r = 0 \quad (95a)$$

$$P = P_o \text{ at } r = r_o \quad (95b)$$

$$\text{Hence, } \frac{P}{P_s} = 1 + (\alpha - 1) \xi^2 \quad (96)$$

$$\text{where } \xi = \frac{r}{r_o}, \alpha = \frac{P_o}{P_s} \quad (97)$$

$$\text{From equation (96), } \frac{\partial P}{\partial r} = P_s \frac{\partial}{\partial \xi} \left(\frac{P}{P_s} \right) \frac{\partial \xi}{\partial r}$$

$$\frac{\partial P}{\partial r} = \frac{P_s}{r_o} 2 \xi (\alpha - 1)$$

$$\text{But, } F(r) = - \frac{1}{\rho} \frac{\partial P}{\partial r}, \text{ and } f(r) = \frac{F(r)}{r \omega^2}$$

$$\text{Hence, } f(r) = \frac{2(P_s - P_o)}{\rho r_o^2 \omega^2} = \underline{\text{CONST.}} \quad (98)$$

Using equation (96), (97) and (98) results in

$$\frac{dY}{d\xi} = \frac{B}{3} \frac{\bar{T}(\xi)}{\xi} \frac{1}{1+f} - \frac{B}{3} \frac{Y(\xi)}{\xi} \quad (99)$$

$$\text{where } \bar{T}(\xi) = \frac{1 + \frac{T_w}{\Delta T} \frac{RT_s}{\lambda M} \ln(1 + (\alpha - 1) \xi^2)}{1 - \frac{RT_s}{\lambda M} \ln(1 + (\alpha - 1) \xi^2)} \quad (100)$$

Equation (99) can be simplified further by letting $U = Y(1/f)$ resulting in

$$\frac{dY}{d\xi} = \frac{\theta}{3} \bar{f}(\xi) - \frac{\theta}{3} \frac{Y}{\xi} \quad (101)$$

subject to the initial condition $U(0) = 1$.

Equation (101) can be solved numerically by using a Runge-Kutta integration procedure.

APPROXIMATE SOLUTION

Equation (101) possesses a solution which by general theory of first order equations can be written as

$$U(\xi) e^{\int P d\xi} = \int G(\xi) e^{\int P d\xi} d\xi + \text{CONST} \quad (102)$$

$$\text{where } P(\xi) = \frac{\theta}{3\xi} \quad (103)$$

$$G(\xi) = \frac{\theta}{3\xi} \bar{f}(\xi) \quad (104)$$

The integration of $G(\xi) e^{\int P d\xi}$ is not possible analytically, due to $G(\xi)$. However, under certain conditions $G(\xi)$ may be simplified in the following manner:

The value of the function $\ln(1-\eta)$ can be written as

$$\ln(1-\eta) = -\eta - \frac{1}{2}\eta^2 - \frac{1}{3}\eta^3 - \dots \quad (105)$$

for $\eta = 0.2$, $\ln(1-.2) = -0.2 - \frac{1}{2}(.04)$
 $\eta^2 \approx -0.222$

as compared to the exact value of 0.2225.

If $\eta = (1-\alpha)\xi^2$, since the maximum value of $\xi = 1$, the approximate polynomial expression will be good for the full range of ξ for $\alpha \geq 0.8$. For values of $\alpha < 0.8$, the accuracy, of course, decreases. However, for estimation purposes, it is desirable to formulate the solution to equation (101) analytically.

Using the approximation of equation (105), but omitting the cubic term, transform equation (101) to

$$\bar{T}(\eta) = 1 - K_2 K_1 (\eta + \frac{1}{2} \eta^2) / (1 + K_1 (\eta + \frac{1}{2} \eta^2)) \quad (106)$$

where $K_2 = \frac{T_W}{\Delta T}$, $K_1 = \frac{RT_s}{\lambda M}$ (107)

Since $K_1 < 1$, $\eta < 1$, the denominator of equation (106) can be written as $1/(1+\epsilon)$ where $\epsilon \ll 1$

Hence, $\bar{T}(\eta) = [1 - K_2 K_1 \eta (1 + \frac{1}{2} \eta)] [1 - K_1 \eta (1 + \frac{1}{2} \eta)]$

$$\bar{T}(\eta) = 1 - K_1 \eta (1 + \frac{1}{2} \eta) (1 + K_2) \quad (108)$$

neglecting higher order terms.

Hence, $\bar{T}(\xi) = 1 - \frac{RT_s}{\lambda M} \left(\frac{T_s}{\Delta T} \right) \left[(1-\alpha) \xi^2 + \frac{1}{2} (1-\alpha)^2 \xi^4 \right]$ (109)

Using the results of equation (109) in equation (102)

$$U \xi^{8/3} = \frac{Q}{3} \int \xi^{5/3} \left[1 - \frac{RT_s}{\lambda M} \left(\frac{T_s}{\Delta T} \right) \left((1-\alpha) \xi^2 + \frac{1}{2} (1-\alpha)^2 \xi^4 \right) \right] d\xi + \text{const} \quad (110)$$

Hence $U(\xi)$ after integration becomes

$$\frac{U(\xi) - 1}{\left(\frac{RT_s}{\lambda M} \right) \left(\frac{T_s}{\Delta T} \right)} = - \left\{ \frac{4}{7} (1-\alpha) \xi^{5/3} + \frac{1}{5} (1-\alpha)^2 \xi^4 \right\} = -K(\xi, \alpha) \quad (111)$$

Figure 17 shows a plot of $-K(\xi, \alpha)$ with ξ as the abscissa and α as a parameter.

3.0 DISCUSSION

The dimensionless condensate thickness for the special case of zero pressure gradient is shown in Figure (3). The results agree extremely well with those of Sparrow and Gregg (2). The distributions of condensate thickness for various pressure gradients resulting from an assumed parabolic pressure distribution are shown in Figures 4 to 15.

The results are divided into four sets at a constant pressure ratio and varying source pressure. The abscissa of the curves is the dimensionless radius ratio ξ . The ordinate of the curves is essentially the ratio of dimensionless condensate thickness with pressure gradient to that of zero pressure gradient, that is,

$$U^{1/4} = \frac{H}{H_{1s0}} \left\{ 1 + \frac{2P_s(1-\alpha)}{\rho R_0^2 \omega^2} \right\}^{1/4} \quad (112)$$

where $H = h \left(\frac{\omega}{\gamma} \right)^{1/2}$

and $H_{1s0} = \left(\frac{3}{2} \frac{C \Delta T}{\lambda P_s} \right)^{1/4}$

The curves of $U^{1/4}$ versus the radius ratio ξ , show for a given value of source pressure and pressure ratio, $U^{1/4}$ increases with increasing temperature difference and decreasing radius. As the radius ratio approaches zero, the value of $U^{1/4}$ approaches 1, independent of the temperature difference ΔT . As the value of the angular velocity ω , approaches zero, the value of $U^{1/4}$ becomes

$$U^{1/4} = K = h \left[\frac{4 P_s (1-\alpha) \lambda}{3 \gamma k \Delta T R_0^2} \right]^{1/4}$$

where K is determined as a function of ξ , and ΔT . For values of ΔT large, $K \approx 1$. Therefore,

$$h \approx \left[\frac{3 \lambda k \Delta T r_0^2}{4 P_s (1-\alpha) \lambda} \right]^{1/4} ; \alpha \neq 1$$

An interesting aspect of the condensation in the central region of the bearing can be seen by referring to Figure 18. Figure 18 shows a plot of the dimensionless condensate thickness h versus the temperature difference $T_s - T_w$ at $\xi = 1$ for various pressure ratios and at a constant source pressure of 200 psi. From this curve, it is readily seen that the height of the condensate layer at the outer radius of the central region is very sensitive to the temperature difference. For a given pressure ratio α , a narrow range of ΔT exists at the extremes of which the bearing will respectively be dry or attain a maximum thickness of condensate at the exit of this region. This effect of temperature difference on the condensate layer can thus cause extreme variation in the operating characteristics of a particular bearing.

Figures 4 through 19, also indicate that for a given source pressure and pressure ratio there exists a temperature difference such that the condensate layer becomes zero at $\xi = 1$. These points are plotted in Figure 16, where the ordinate is chosen at $\frac{T_w}{\Delta T}$ instead of $T_s - T_w$, the abscissa being α , the pressure ratio. At a constant source pressure, hence a constant source temperature, as $T_w \rightarrow T_s$, $\frac{T_w}{\Delta T} \rightarrow \infty$ and hence a dry condition is prevalent at $\xi = 1$. As $T_s - T_w$ gets larger, a fully wet bearing at $\xi = 1$ can result. Hence, for any constant source pressure P_s , Figure 16, shows that if $T_w/\Delta T$ is above the curve, a dry bearing will always exist at $\xi = 1$, the reverse being true, if the ordinate is below the curve, $P_s = \text{CONST}$.

The effect of U''^4 versus ξ in Figures 4 through 15 shows that for a given ΔT , especially where this ΔT leads to a dry bearing at ξ less than 1, that the values of U''^4 change very rapidly near the point where reevaporation occurs. An explanation of this fairly rapid change in condensate thickness can be attributed to the effect of condensate "thinning" caused by a temperature difference which is now negative (that is, the disk temperature is higher than the vapor at the particular radius) and the continuously applied centrifugal force. Before the temperature reversal, these two effects opposed each other, that is, thinning down of the condensate increases the condensation rate. When this point is reached, these two effects are additive in the sense that they both work in the same direction.

The condensation process as formulated in the report proceeds until the point is reached where the saturation temperature of the vapor is equal to the given wall temperature. Beyond this point the validity of the present analysis is in question. The present equations predict reevaporation over a small radial increment which also infers a negative temperature difference between the wall and interface. This situation that occurs where the liquid temperature at the wall is greater than the vapor temperature is in disagreement with the initial assumptions of thermodynamic equilibrium. A new self consistent physical model needs to be formulated for the evaporation process. Whereas the present analysis cannot be depended on to describe the evaporation process precisely, it does suggest that the evaporation takes place in a small radial distance. The existence of a superheated fluid at a temperature above the corresponding saturation temperature is a phenomenon which is attributed to a process which is not in thermodynamic equilibrium but rather one where a boiling process is prevalent.

4.0 CONCLUSIONS

1. For a given degree of subcooling, the condensate film thickness near the axis of rotation is strongly dependent on the magnitude of the radial pressure drop (See Fig. 18). Hence, the ratio of mass flow between the liquid and the vapor phases entering the bearing region is influenced by both these parameters.

2. The limiting case of zero radial pressure gradient is obtained from the present analysis which agrees with the work of Sparrow and Gregg (2).

3. The limiting case of zero angular velocity reduces to the case of condensation in axisymmetric flow. The results for this case can readily be obtained by using the same curve in this report as pointed out in the Discussion.

5.0 RECOMMENDATIONS

1. The results contained in this analysis can be used as the initial conditions for the two phase lubrication equations which are derived in reference 1.

2. The present analysis is applicable to the rotating condenser. Further study of the implications of the analysis to a condenser should be evaluated.

NOMENCLATURE

(All dimensional quantities are in consistent units)

C	Specific Heat
h	Condensate Thickness
h*	Displacement Thickness of Condensate, Defined by Equation (52)
k	Thermal Conductivity
q	Heat Flow
r	Radial Coordinate
u	Radial Velocity
v	Tangential Velocity
w	Axial Velocity
z	Axial Coordinate
H	Dimensionless condensate thickness, $= h(\frac{\omega}{\nu})^{1/2}$
M	Molecular Weight
P	Pressure
P _s	Source Pressure
P _o	Final Pressure
P _r	Prandtl Number
Q	Mass Flow
R	Gas Coolant
T	Temperature
T _s	Source Temperature
T _o	Final Temperature
T _w	Disk Temperature
$\bar{T}$	Dimensionless Temperature

α	Pressure Ratio, $\frac{P_o}{P_s}$
γ	Dimensionless Thickness, = δ/h
θ^2	Dimensionless Parameter, = $c(T_s - T_w)/\lambda Pr$
ρ	Density
$\underline{r}$	Dimensionless Radius, = r/r_o
ν	Kinematic Viscosity
ω	Angular Velocity
λ	Heat of Vaporization
τ	Shearing Stress

BIBLIOGRAPHY

1. MTI-62TR9, "Two Phase Flow in Thrust Bearings", Part I- Derivation of Equation", June 11, 1962, I. Beretsky.
2. E. M. Sparrow and J. L. Gregg, "A Theory of Rotating Condensation", Journal of Heat Transfer, Transactions of ASME, Series C, Volume 81, 1959, pp 113-120.
3. H. Schlichting, "Boundary Layer Theory", McGraw-Hill, Published 1960.

APPENDIX

The case of condensation on a rotating isothermal surface can be analyzed using the approximate integral method, which leads to a solution which is in agreement with that by Sparrow and Gregg. (2)

Since the pressure gradient is zero, (that is, $F(r) = 0$), equation (15) can be written as

$$\frac{\partial}{\partial r} \int_0^h r u (u - V) dz + \int_0^h r u \frac{\partial V}{\partial r} dz - \int_0^h \frac{u^2}{r} dz = - \frac{\partial}{\partial z} \left(\frac{u^2}{2} \right) \Big|_0 \quad (I-1)$$

and equation (16) as

$$\frac{\partial}{\partial r} \int_0^h r u (u - V) dz + \int_0^h u v dz + \int_0^h r u \frac{\partial V}{\partial r} dz = - \frac{\partial}{\partial z} \left(\frac{u^2}{2} \right) \Big|_0 \quad (I-2)$$

Defining $\zeta = \beta h$, being the condensate height, (in this case, a constant), and letting

$$u = r F'(\zeta) = r \frac{\partial F}{\partial \zeta} \quad (I-3)$$

$$v = r G(\zeta) \quad (I-4)$$

$$U = \beta r \omega \quad (I-5)$$

$$V = \alpha r \omega \quad (I-6)$$

Equation (I-1) becomes

$$\int_0^1 3 F'^2 d\zeta - 2\beta \int_0^1 F' d\zeta - \int_0^1 G^2 d\zeta = - \frac{\partial}{\partial \zeta} \left(\frac{u^2}{2} \right) \Big|_0 \quad (I-7)$$

and equation (I-2)

$$\int_0^1 (2F'G - \alpha F) d\zeta = - \frac{\partial}{\partial \zeta} \left(\frac{u^2}{2} \right) \Big|_0 \quad (I-8)$$

The velocity profiles $F(\zeta)$ and $G(\zeta)$ are assumed to be polynomials, which satisfy the boundary conditions and the original differential equations.

Assume $F(\zeta)$ to be a fourth order polynomial, that is,

$$F(\zeta) = a + b\zeta + c\zeta^2 + d\zeta^3 + e\zeta^4 \quad (\text{I-9})$$

The conditions which govern the constants a, b, c, d and e are:

$$F(0) = 0 \quad (\text{I-10a})$$

$$F'(0) = 0 \quad (\text{I-10b})$$

$$F'(1) = \beta \omega \quad (\text{I-10c})$$

$$F''(1) = 0 \quad (\text{I-10d})$$

$$F'''(0) = -\omega^2 h^2 / \gamma \quad (\text{I-10e})$$

Thus,

$$F(\zeta) = \frac{\beta \omega}{8} (6\zeta^2 - \zeta^4) + \frac{\omega^2 h^2}{48\gamma} (6\zeta^2 - 8\zeta^3 + 3\zeta^4) \quad (\text{I-11})$$

The tangential velocity profile $G(\zeta)$ is determined by

$$G'(\zeta) = a + b\zeta + c\zeta^2 + d\zeta^3 \text{ subject to the conditions} \quad (\text{I-12a})$$

$$G(0) = \omega \quad (\text{I-12b})$$

$$G(1) = \alpha \omega \quad (\text{I-12c})$$

$$G'(1) = 0 \quad (\text{I-12d})$$

$$G''(0) = 0 \quad (\text{I-12e})$$

thus

$$G(\zeta) = \omega \left[1 - \left(\frac{1-\alpha}{2} \right) (3\zeta - \zeta^3) \right] \quad (\text{I-13})$$

Substituting equations (I-11) and (I-13), and their corresponding derivatives into equations (I-7) and (I-8) and performing the corresponding integrations, result in

$$\frac{29}{35} \beta^2 + \beta \left[\frac{11}{105} H^2 + \frac{6}{H^2} \right] + \frac{H^4}{140} = 3 - (1-\alpha)5 + (1-\alpha)^2 \frac{68}{35} \quad (\text{I-14})$$

$$\left[\frac{3}{H^2} - \frac{8H^2}{105} \right] - \alpha \left[\frac{H^2}{140} + \frac{3}{H^2} \right] = \frac{\beta}{70} [97\alpha + 78] \quad (\text{I-15})$$

$$\text{where } H^2 = \frac{\omega}{\gamma} h^2$$

The total mass flow in the radial direction is given by

$$G = 2\pi\rho r h \int_0^1 u(r, s) ds$$

$$\text{but } u(r, s) = r F'(s)$$

(I-17)

$$\text{where } F'(s) = \frac{\beta\omega}{2}(3s-s^3) + \frac{\omega H^2}{4}[s-2s^2+s^3]$$

Substituting equation (I-17) into equation (I-16)

$$G = 2\pi\rho r^2\omega \left[\frac{5}{8}\beta h + \frac{\omega h^3}{480} \right]$$

(I-18)

$$\text{Since } dG = dG/\lambda = k(2\pi r)dr dT/\lambda h$$

(I-19)

$$\text{and } G = G(r)$$

$$\therefore \frac{k(2\pi r dr) dT}{\lambda h} = 4\pi\rho r\omega \left[\frac{5}{8}\beta h + \frac{\omega h^3}{480} \right]$$

(I-20)

Evaluating equation (I-20) in terms of H,

$$H^2 = 15\beta \left\{ \left[1 + \frac{48\theta^2}{450\beta^2} \right]^{1/2} - 1 \right\}$$

(I-21)

$$\text{where } \theta^2 = \frac{C\Delta T}{\lambda P_h}$$

(I-22)

The solution of H, α , and β as a function of θ are sought which can be determined uniquely from equations (I-14), (I-15), and (I-21).

Simplified Solution

Equations (I-14) and (I-15) are considerably simplified if H is considered small, compared to unity.

Equation (I-14) reduces to

$$\frac{29\beta^2}{35} + \frac{6\beta}{H^2} = 3 - 5(1-\alpha) + (1-\alpha)^2 \frac{68}{35}$$

(I-23)

and equation (I-15) reduces to

$$\frac{3}{H^2}(1-\alpha) = \frac{\beta}{70}(97\alpha + 78)$$

(I-24)

This results in

$$\beta \approx H^2/2$$

(I-25),

$$(1-\alpha) \approx 5/12 H^4$$

(I-26)

Substituting these results into equation (I-21)

$$H = (3/2)^{1/4} \theta^{1/2}$$

(I-27)

$$\beta = (3/8)^{1/2} \theta$$

(I-28)

$$\alpha = 1 - 5/8 \theta^2$$

(I-29)

The results agree with the work of Sparrow and Gregg, as shown by equation (8) of this report.

A solution for large values of H was performed numerically by solving for α and β from equations (I-14) and (I-15) for values of H. The value of $\beta(H)$ from equations (I-14) and (I-15) were solved graphically with equation (I-2) which involved β versus H for various values of θ . This solution is shown in Figure 2. The intersection points were cross-plotted to obtain Figure 3, where α , β , and H are shown as functions of θ .

FIGURES

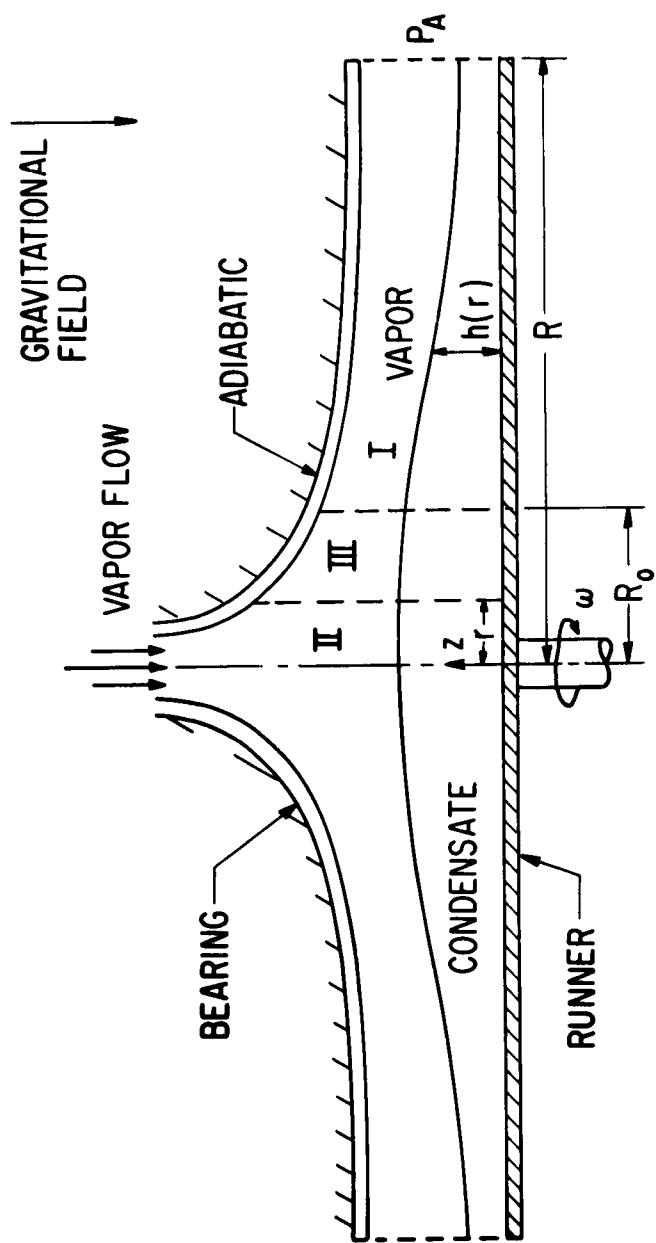


FIG. 1 SCHEMATIC OF THRUST BEARING

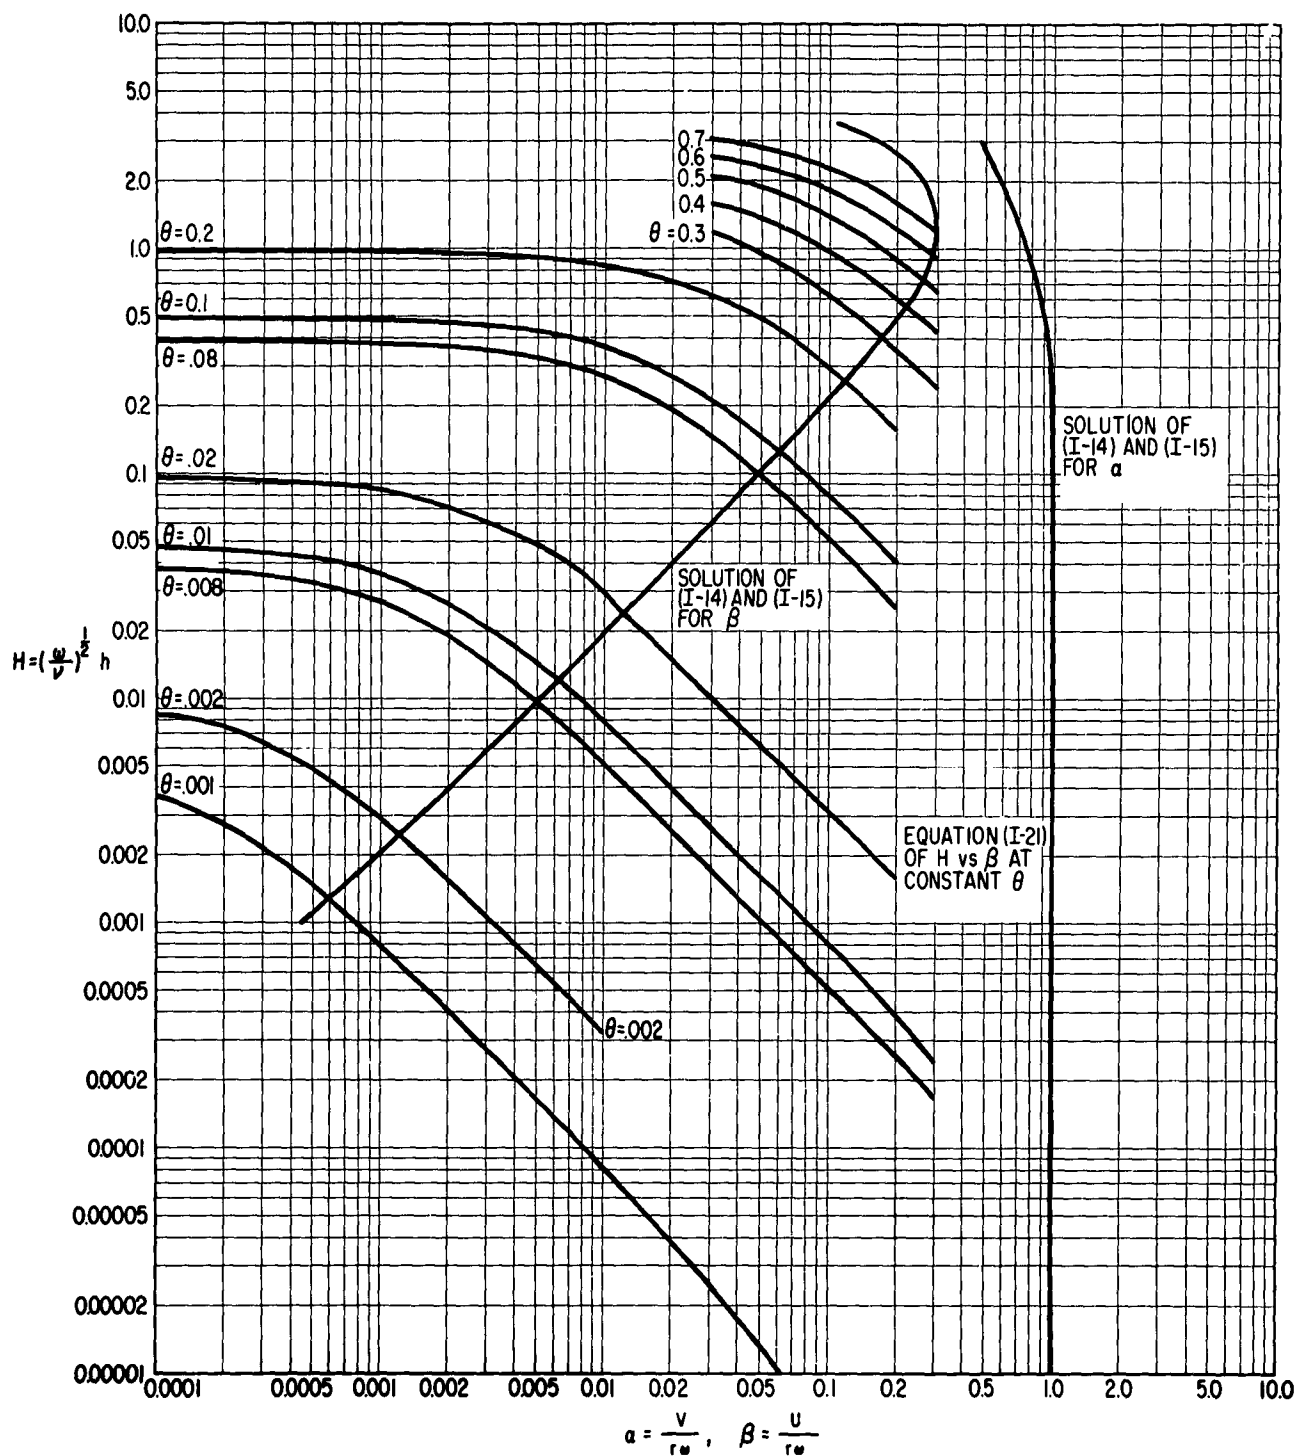


FIG. 2 NUMERICAL SOLUTION OF EQUATIONS (I-14, I-15) FOR α, β VERSUS H AND EQUATION (I-21)

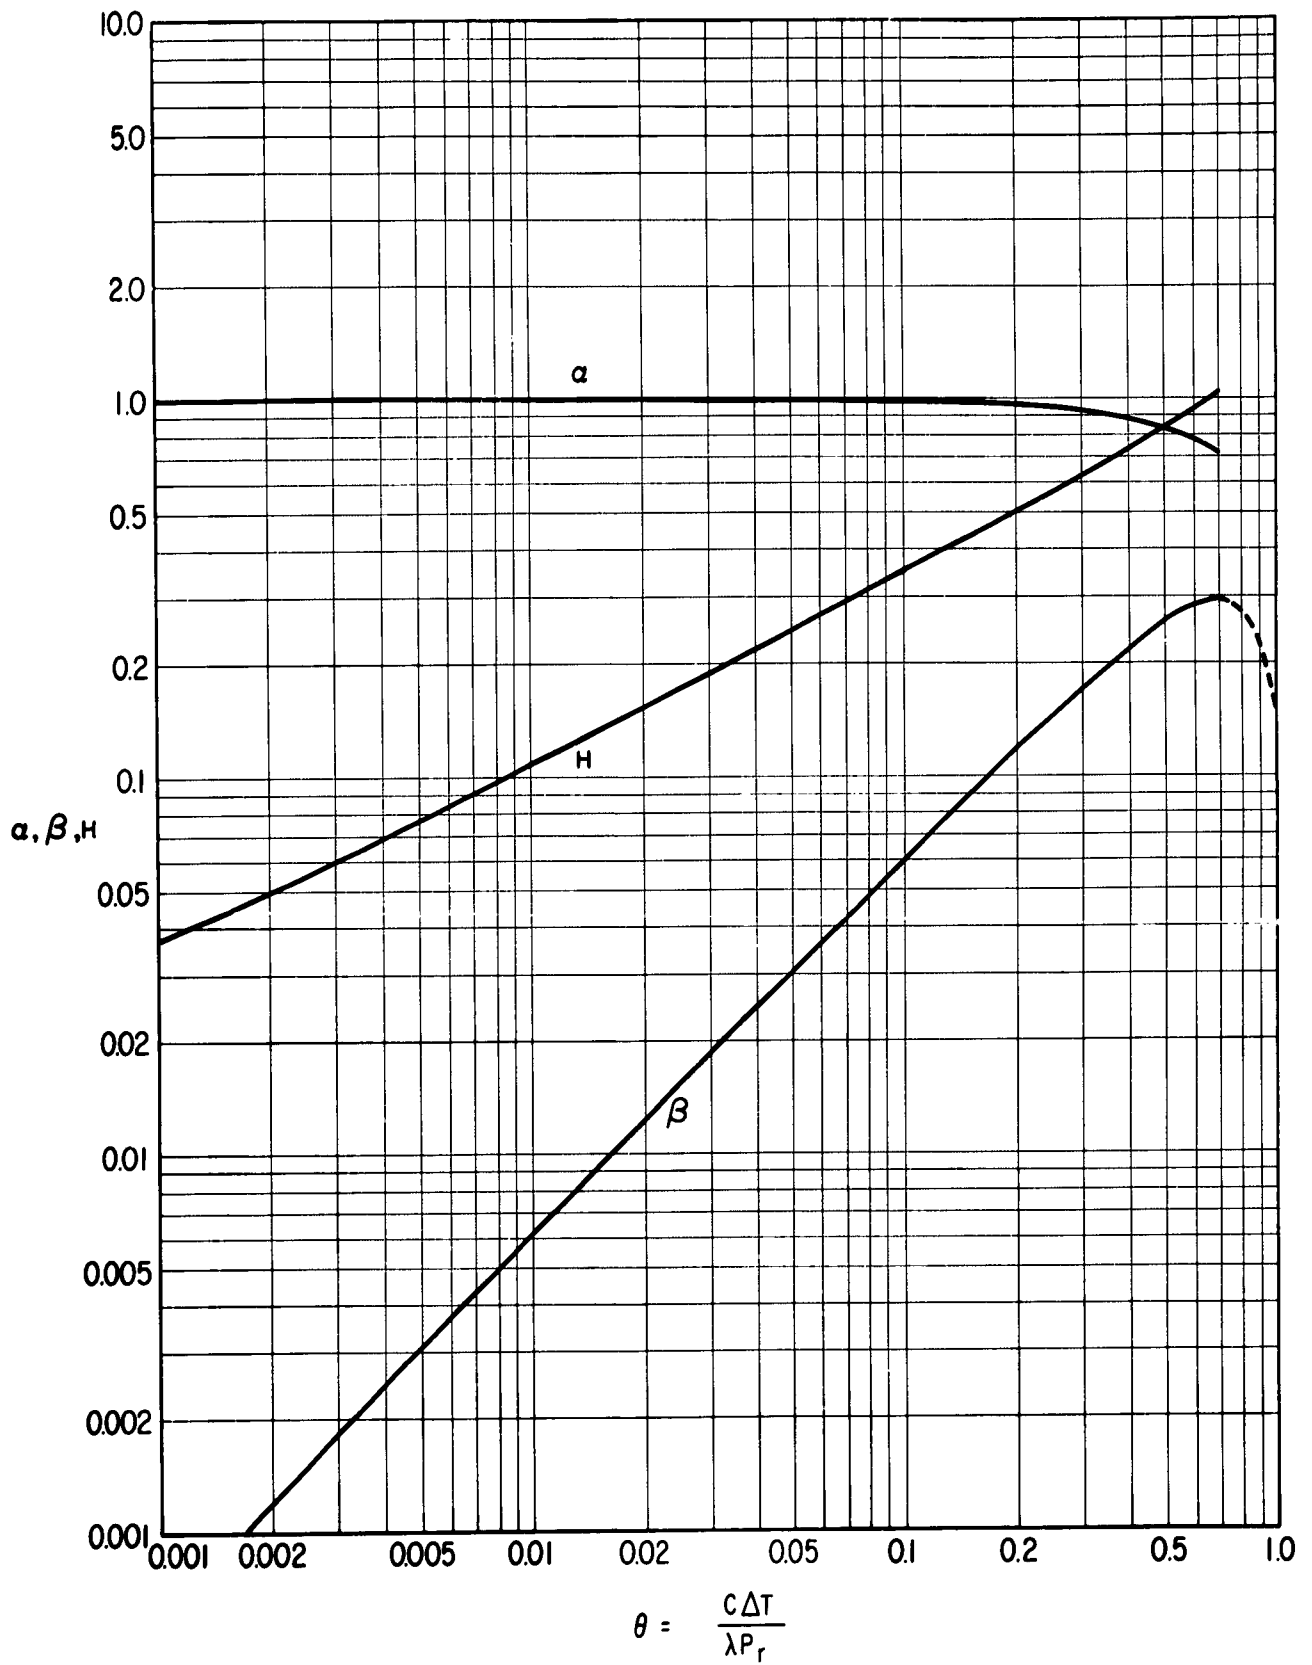


FIG. 3 DIMENSIONLESS RADIAL AND TANGENTIAL INTERFACE VELOCITIES AND CONDENSATE THICKNESS VERSUS HEAT TRANSFER PARAMETER θ

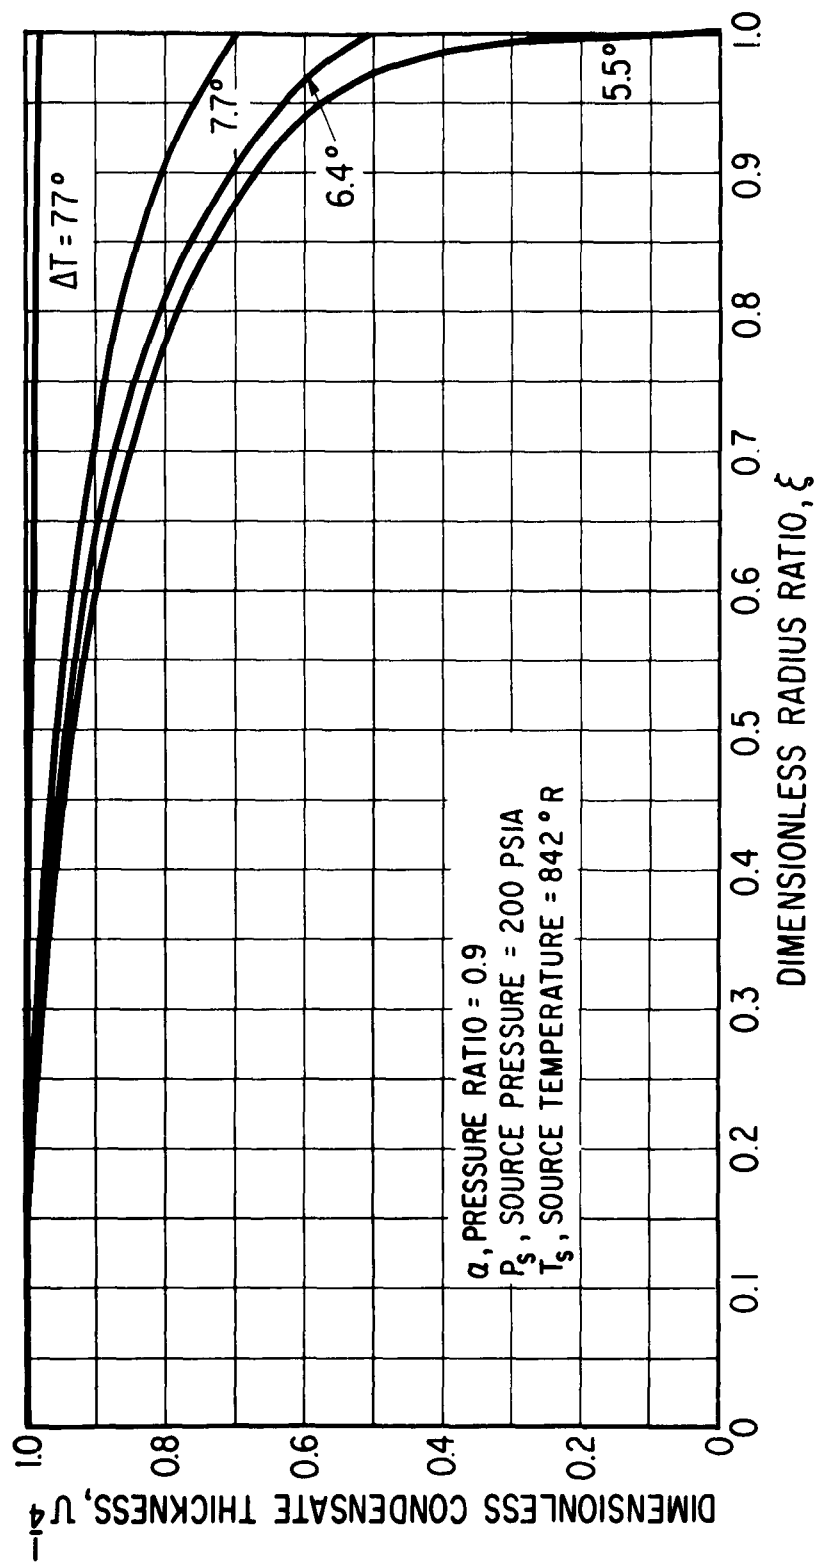


FIG. 4 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

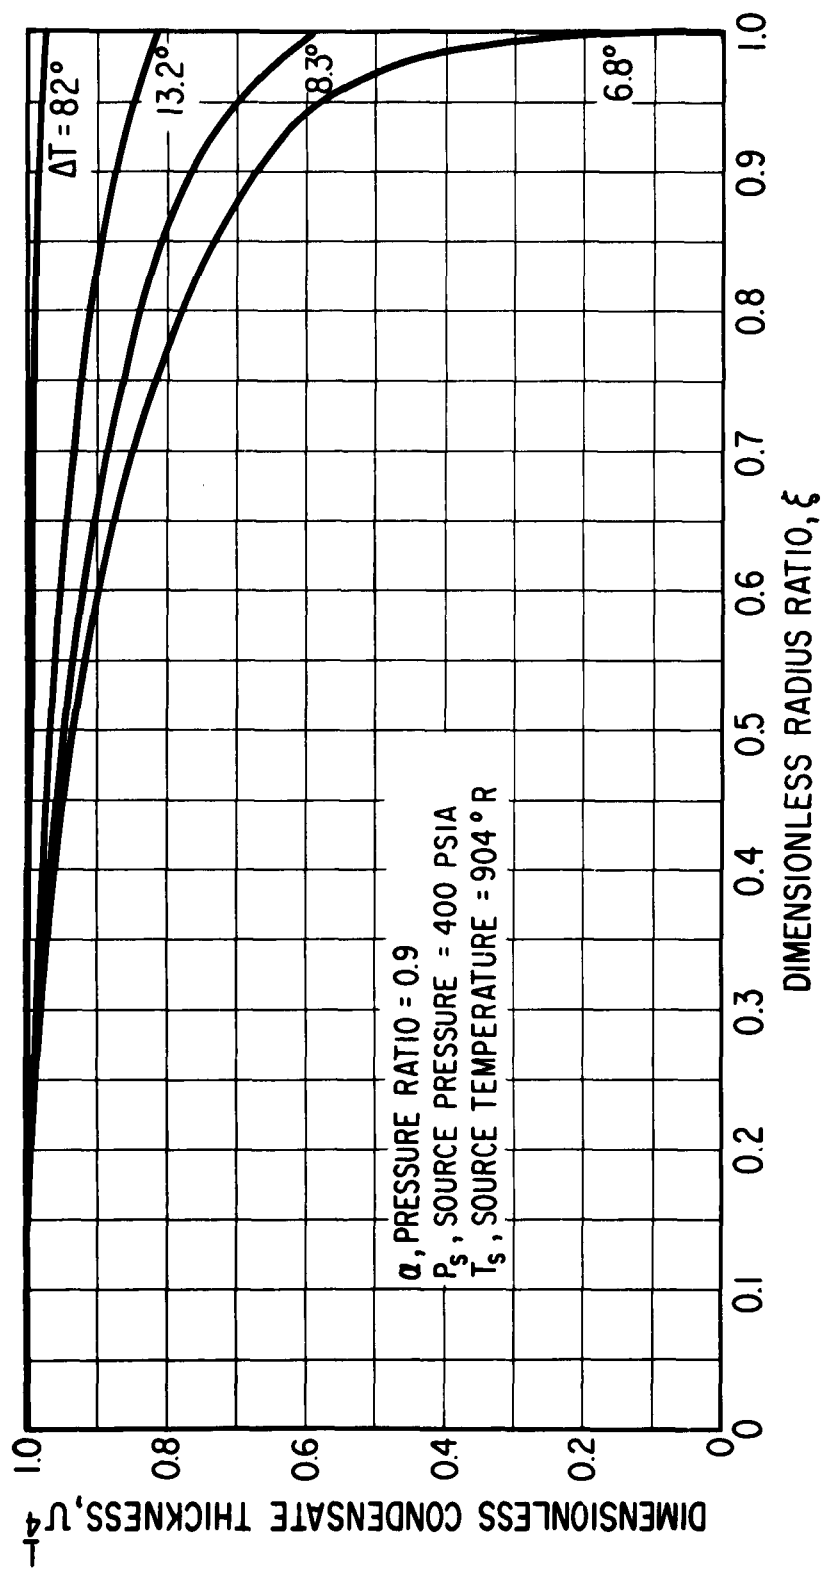


FIG. 5 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

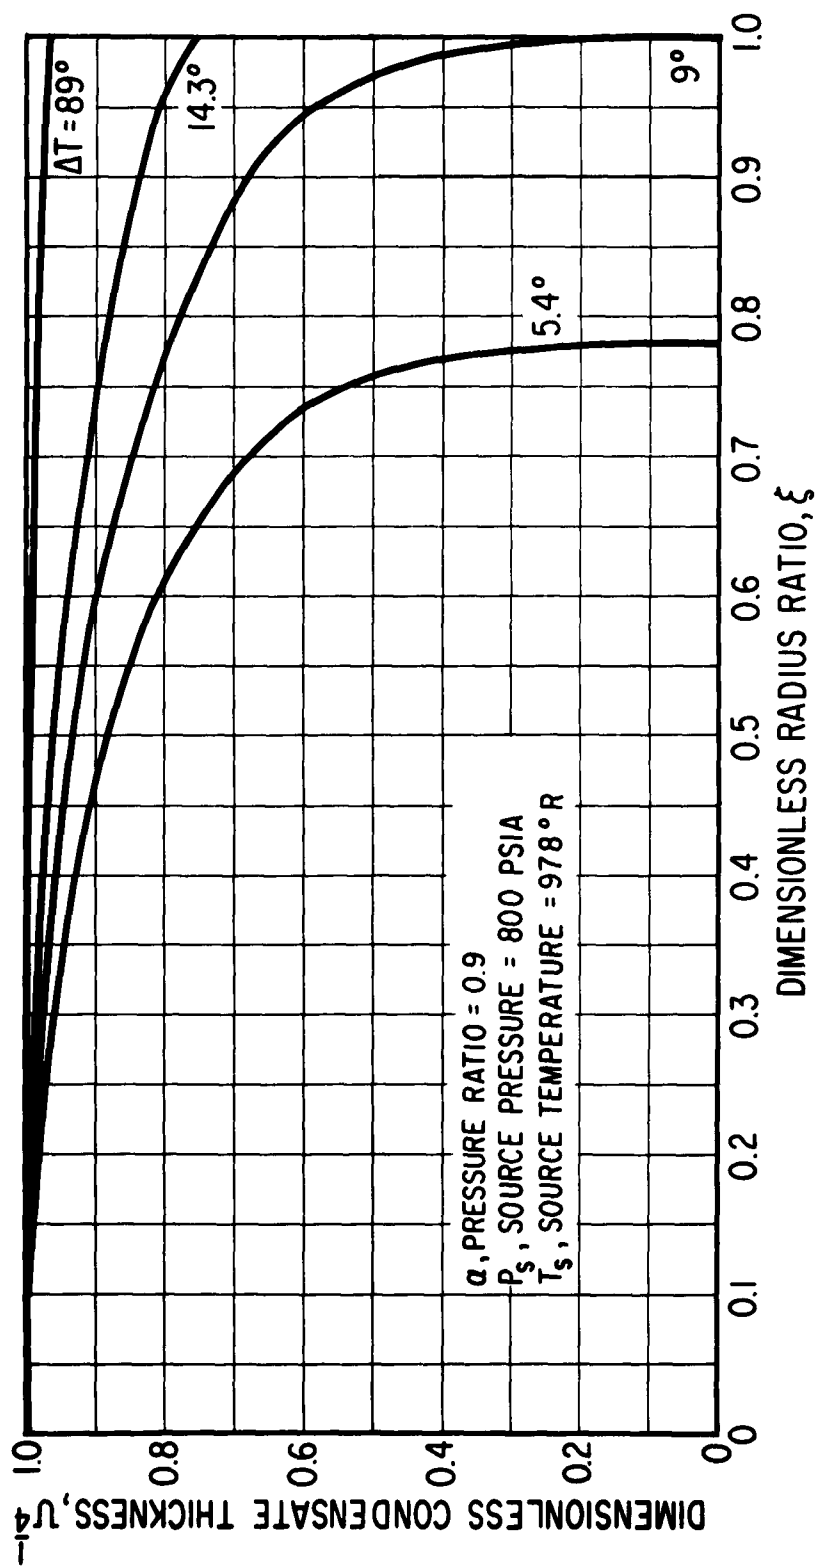


FIG. 6 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

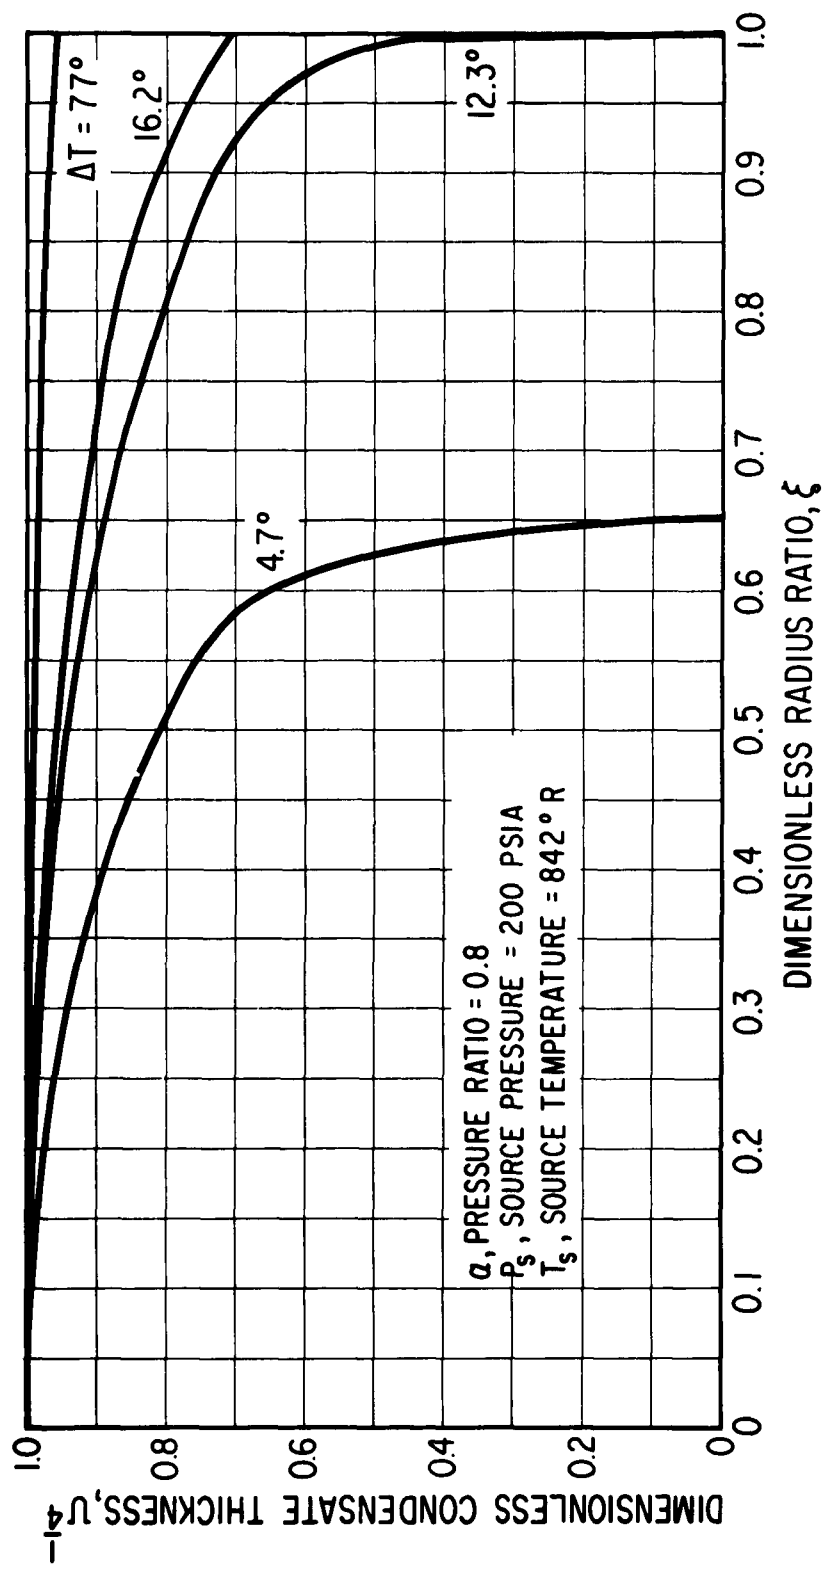


FIG. 7 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

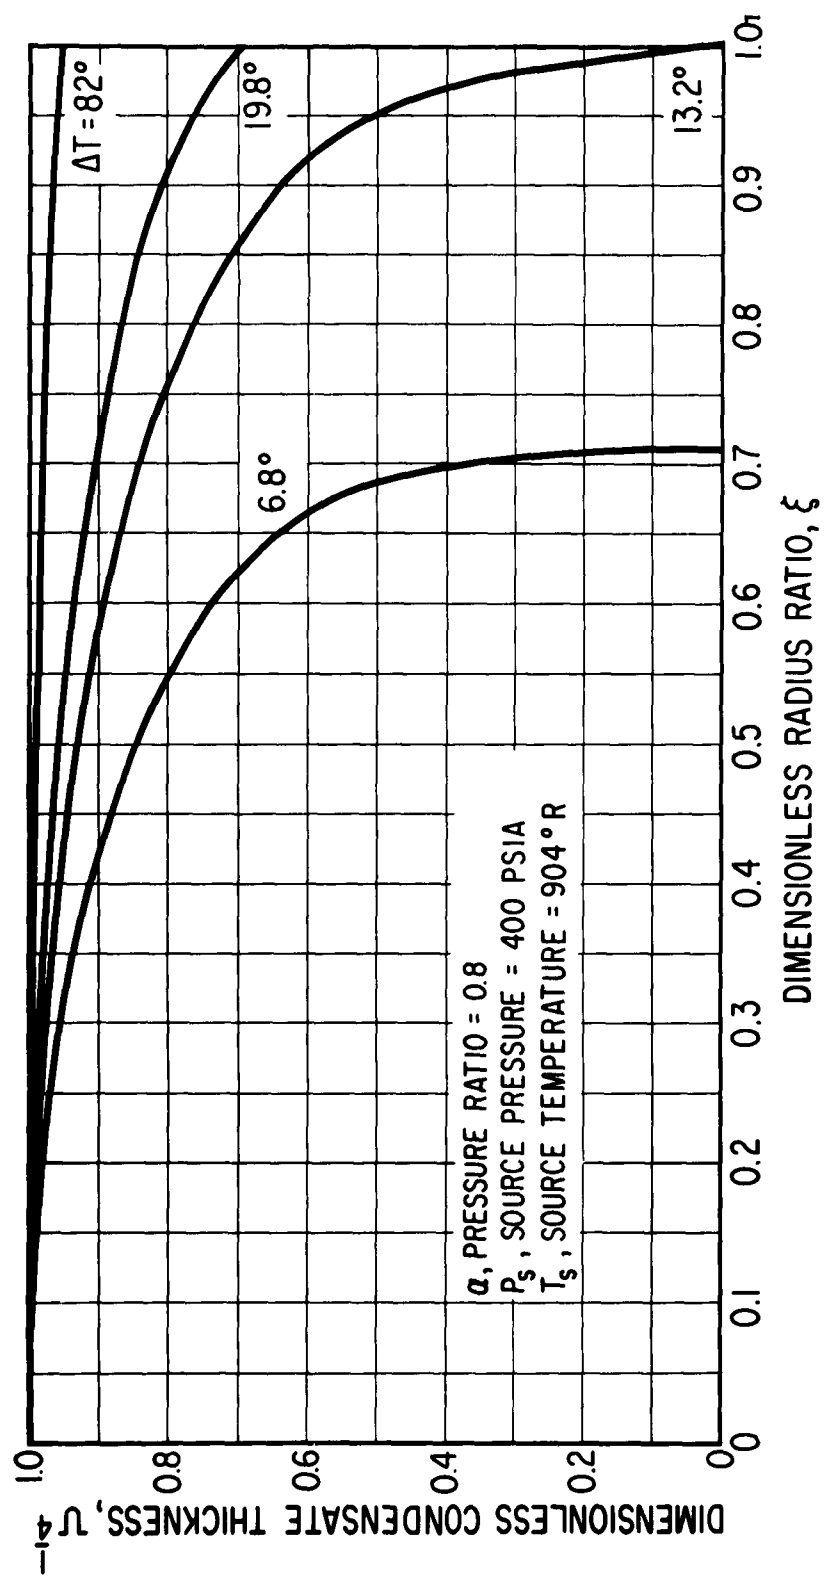


FIG. 8 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

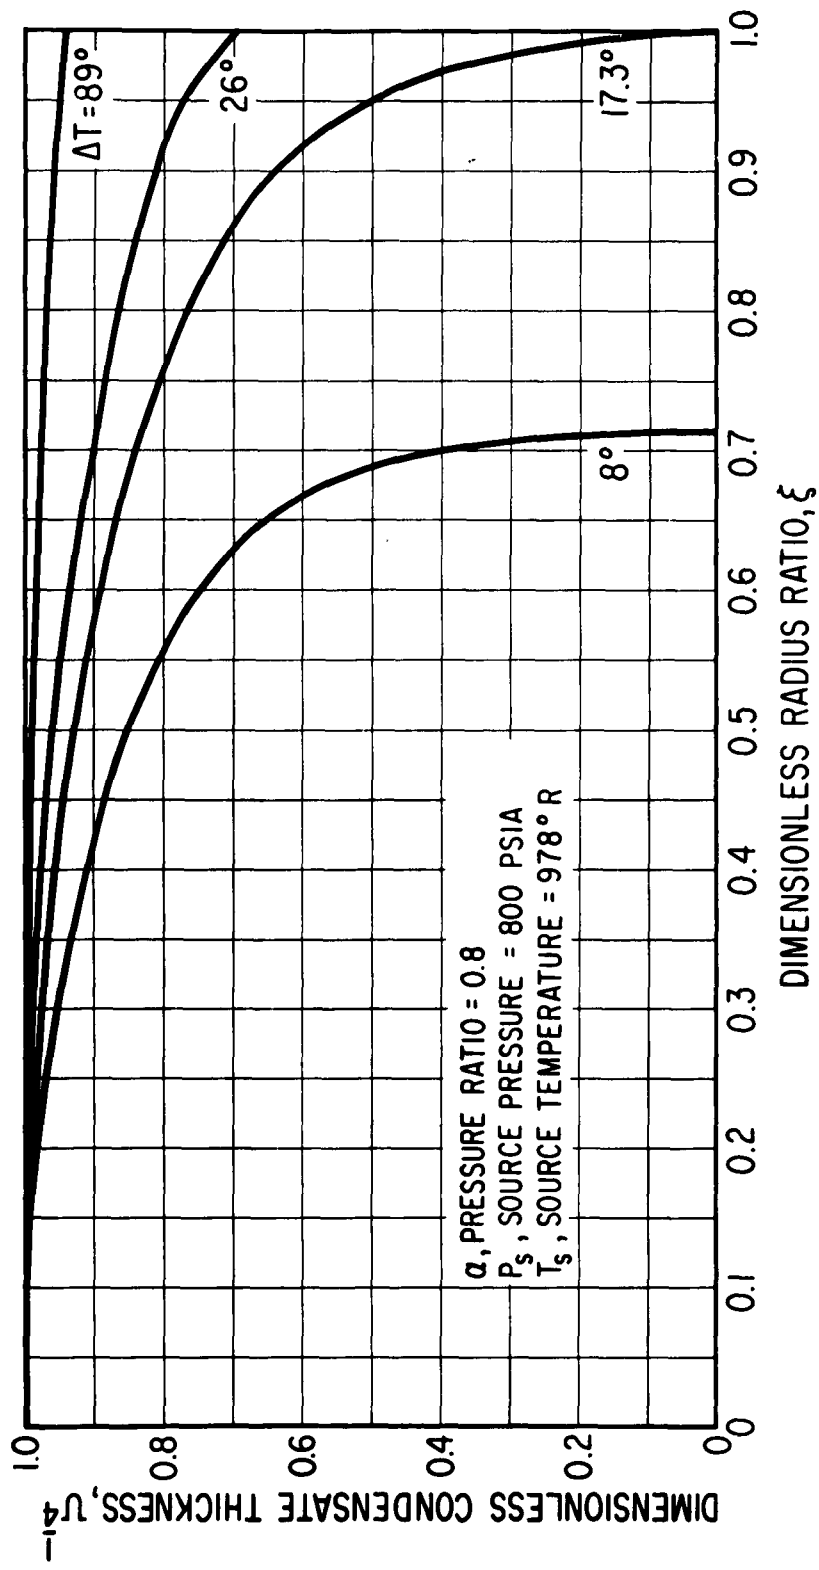


FIG. 9 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

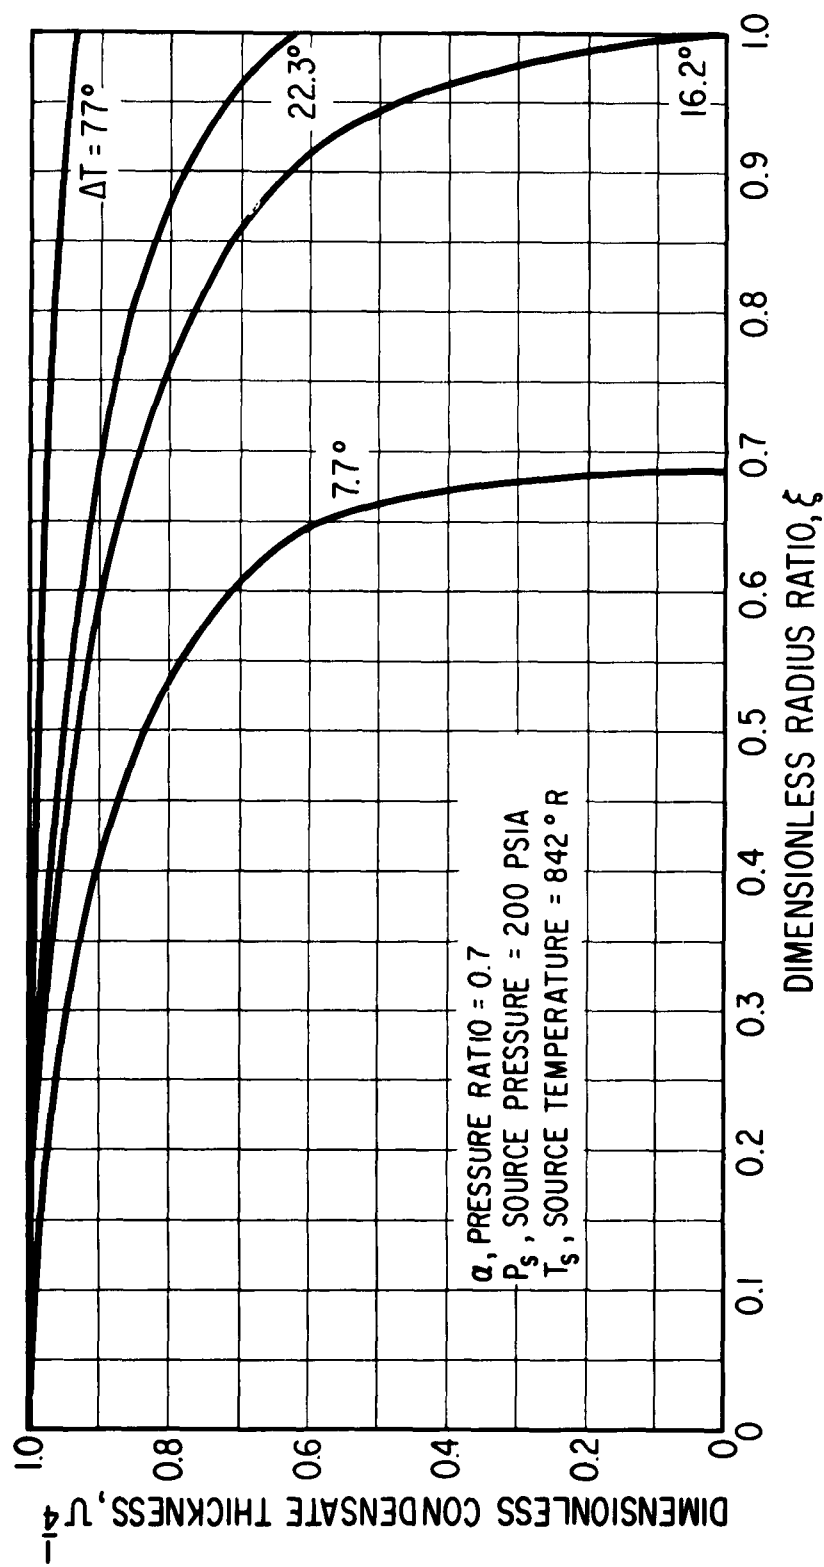


FIG.10 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

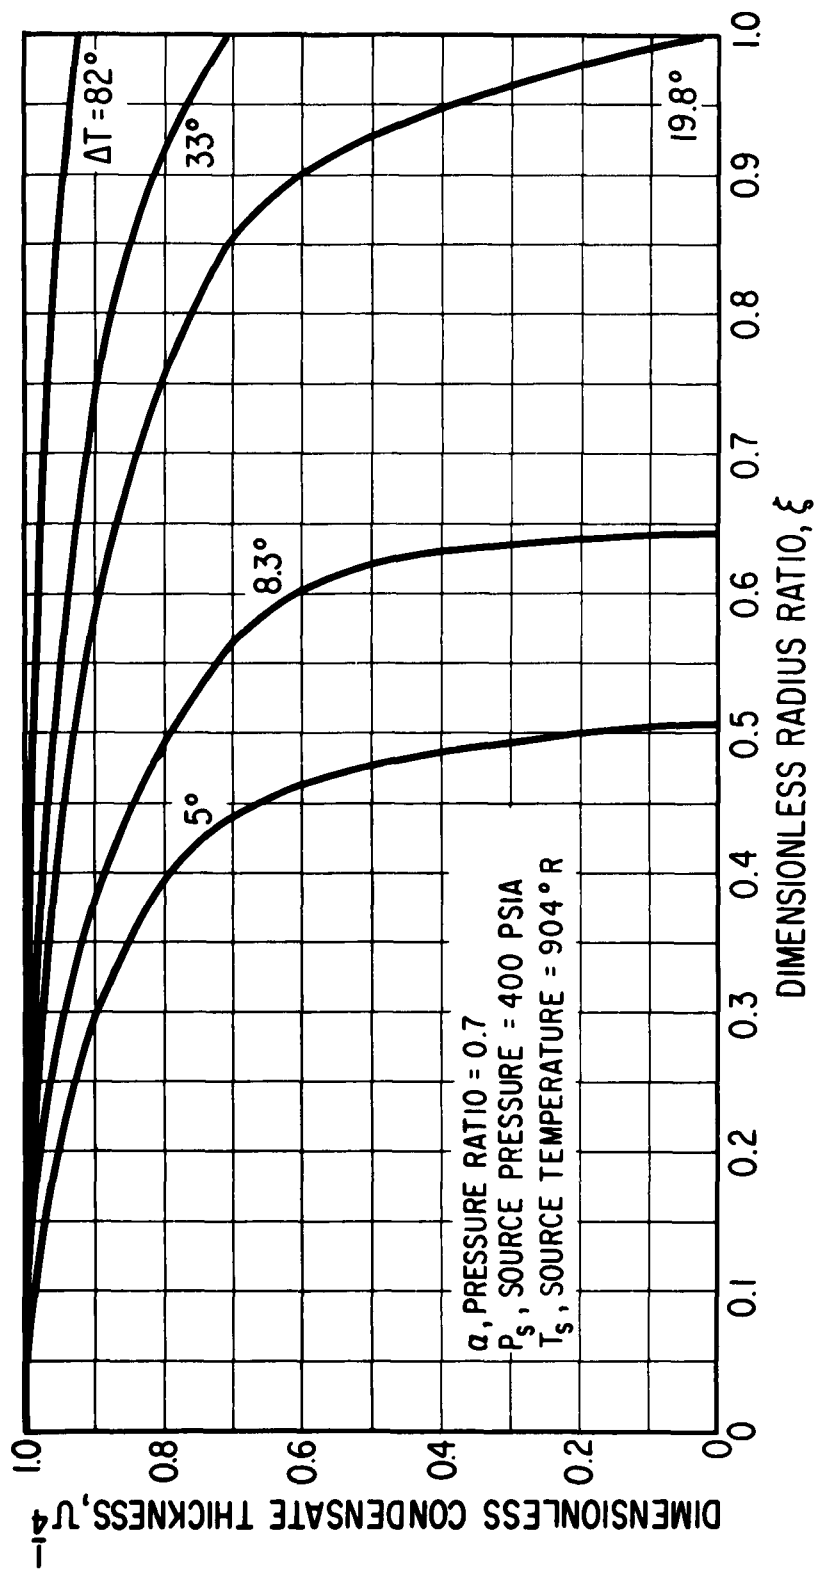


FIG. 11 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

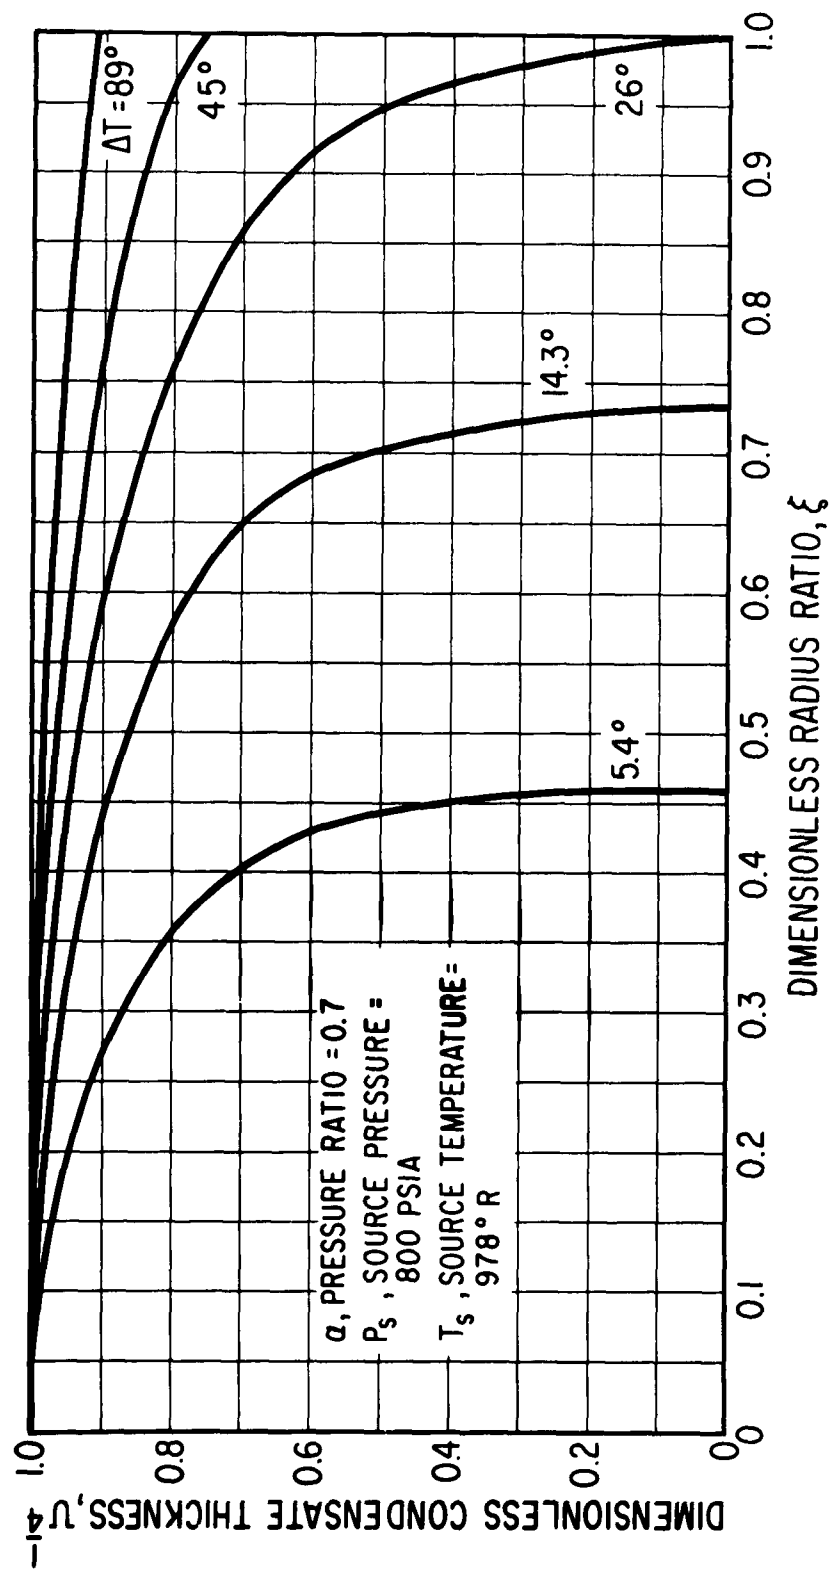


FIG.12 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

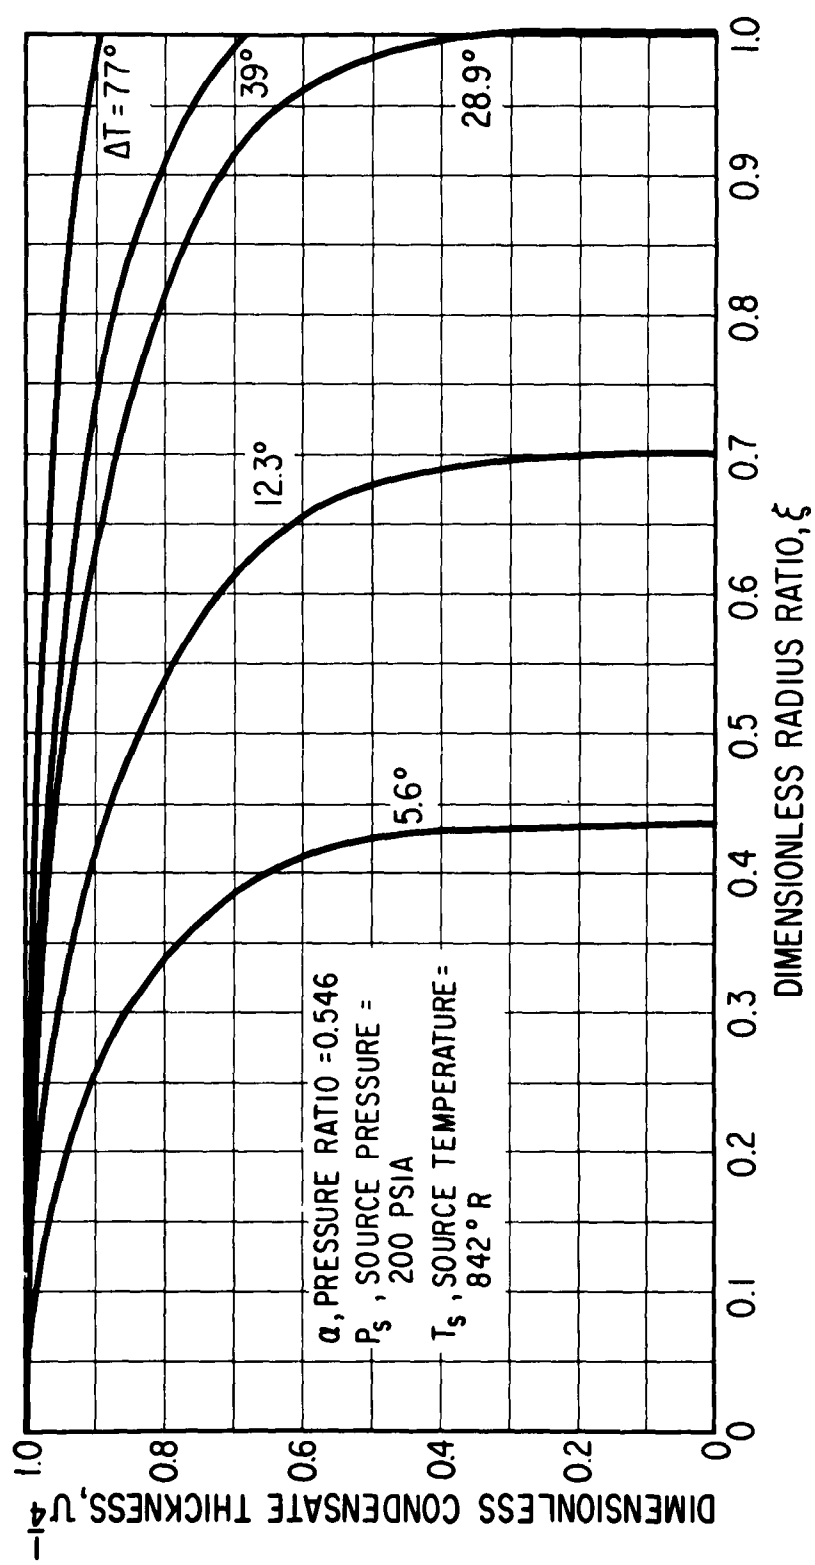


FIG.13 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

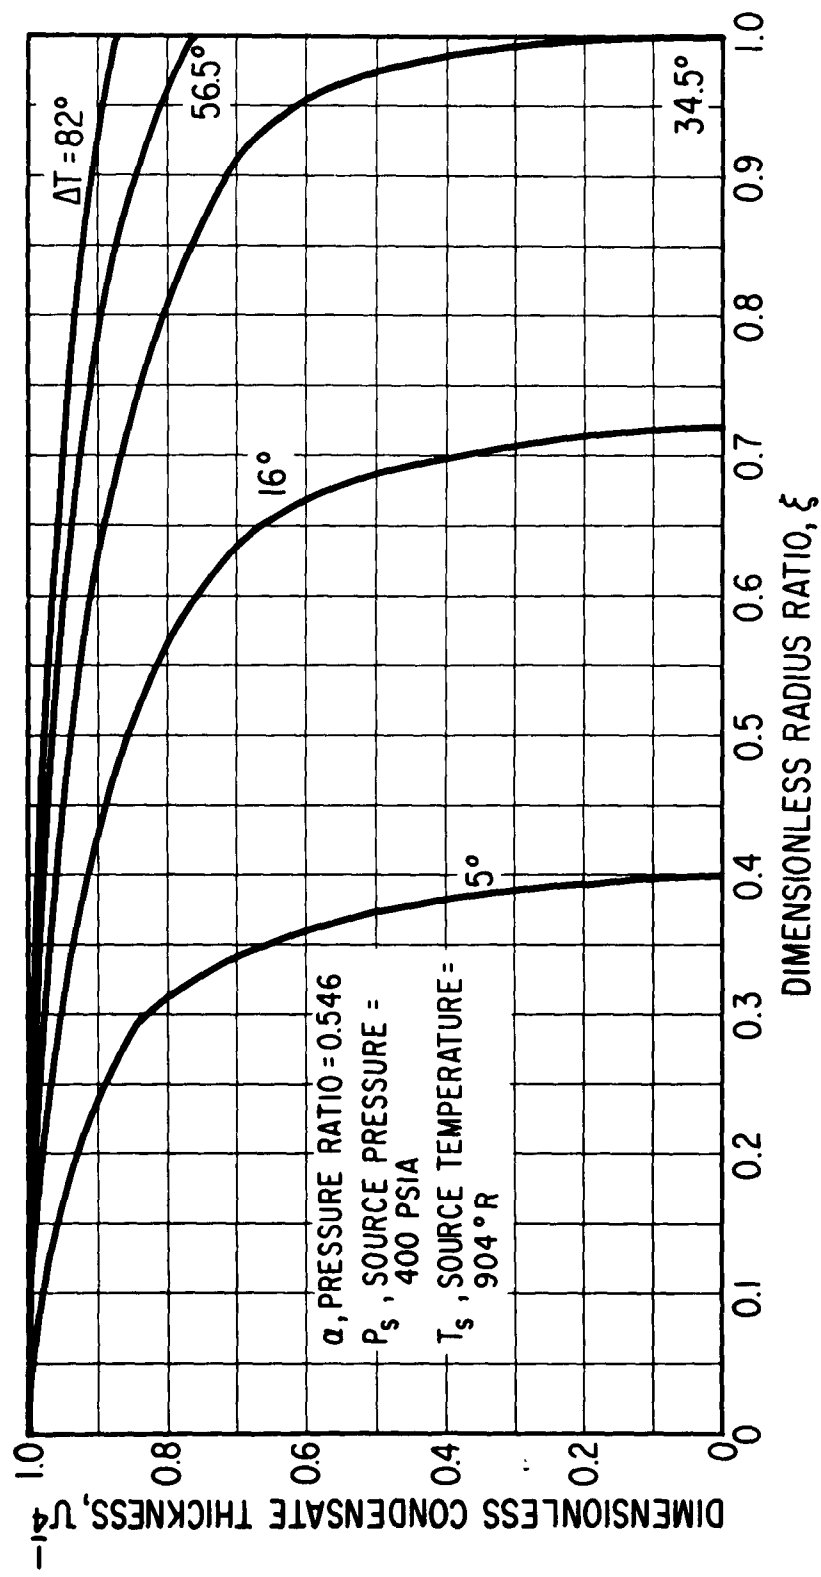


FIG.14 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

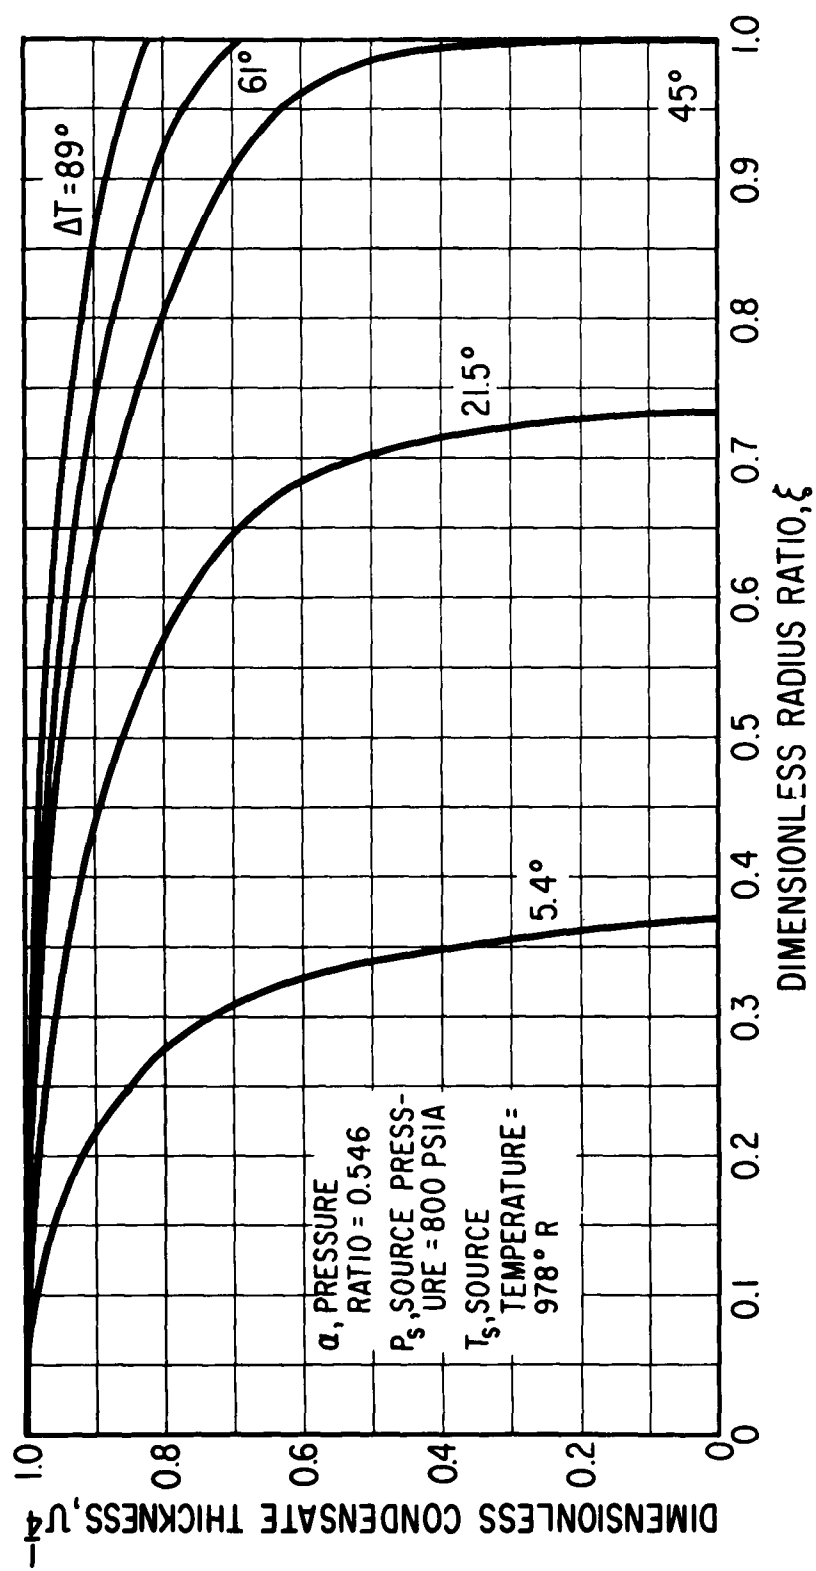


FIG.15 DIMENSIONLESS CONDENSATE THICKNESS vs DIMENSIONLESS RADIUS RATIO

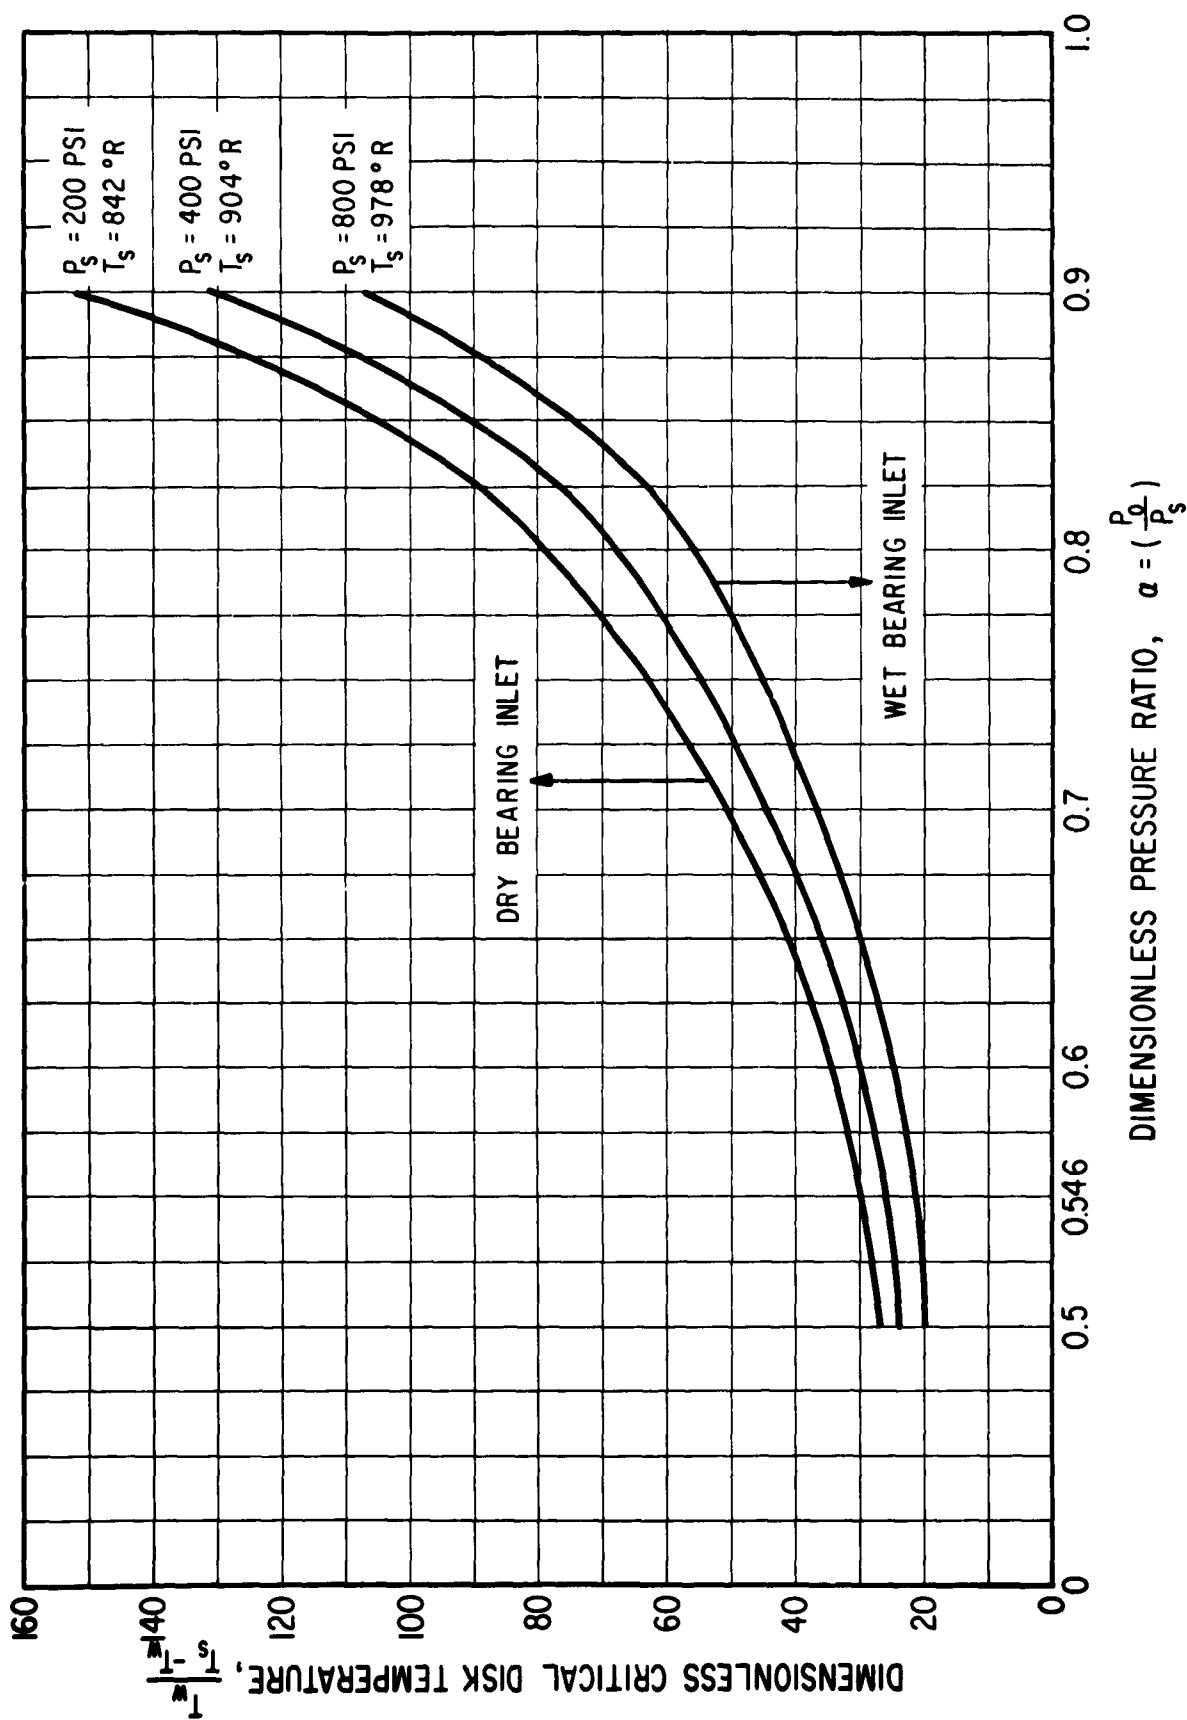


FIG. 16 DIMENSIONLESS CRITICAL DISK TEMPERATURE vs DIMENSIONLESS PRESSURE RATIO FOR VARIOUS SOURCE PRESSURES

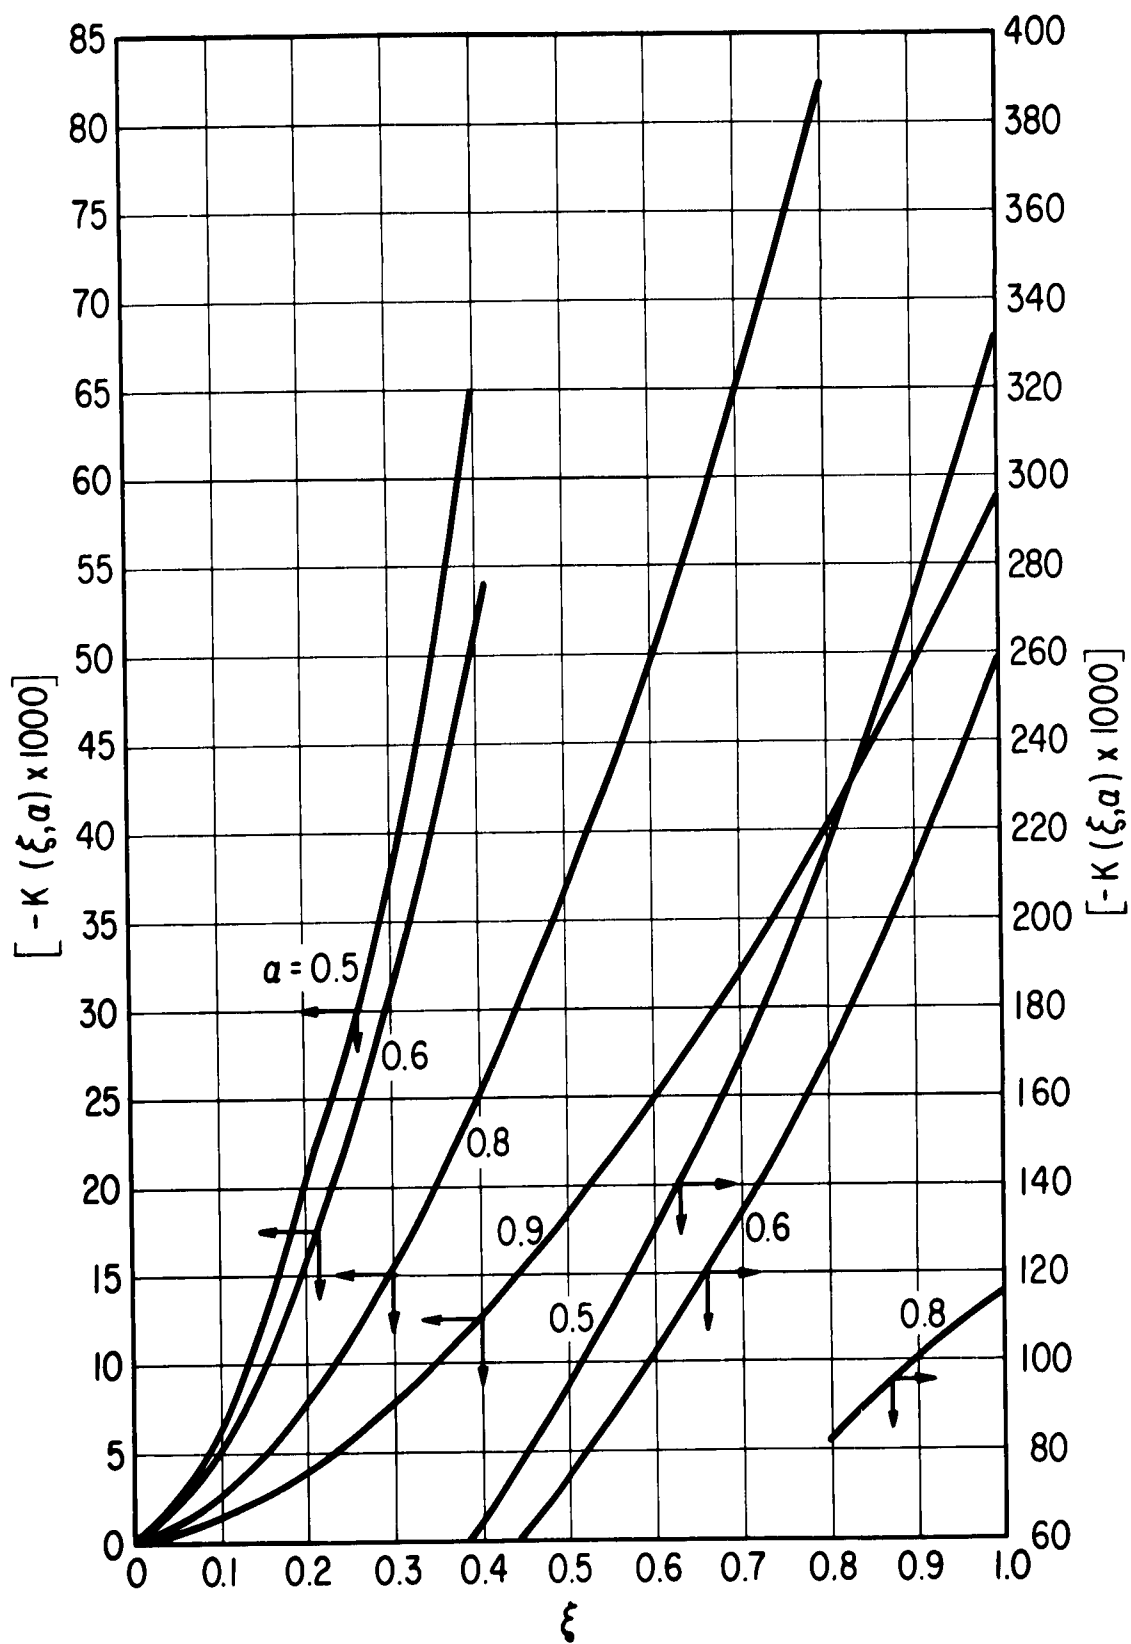


FIG. 17 $-K(\xi, \alpha)$ vs ξ FROM APPROXIMATE FORMULATION

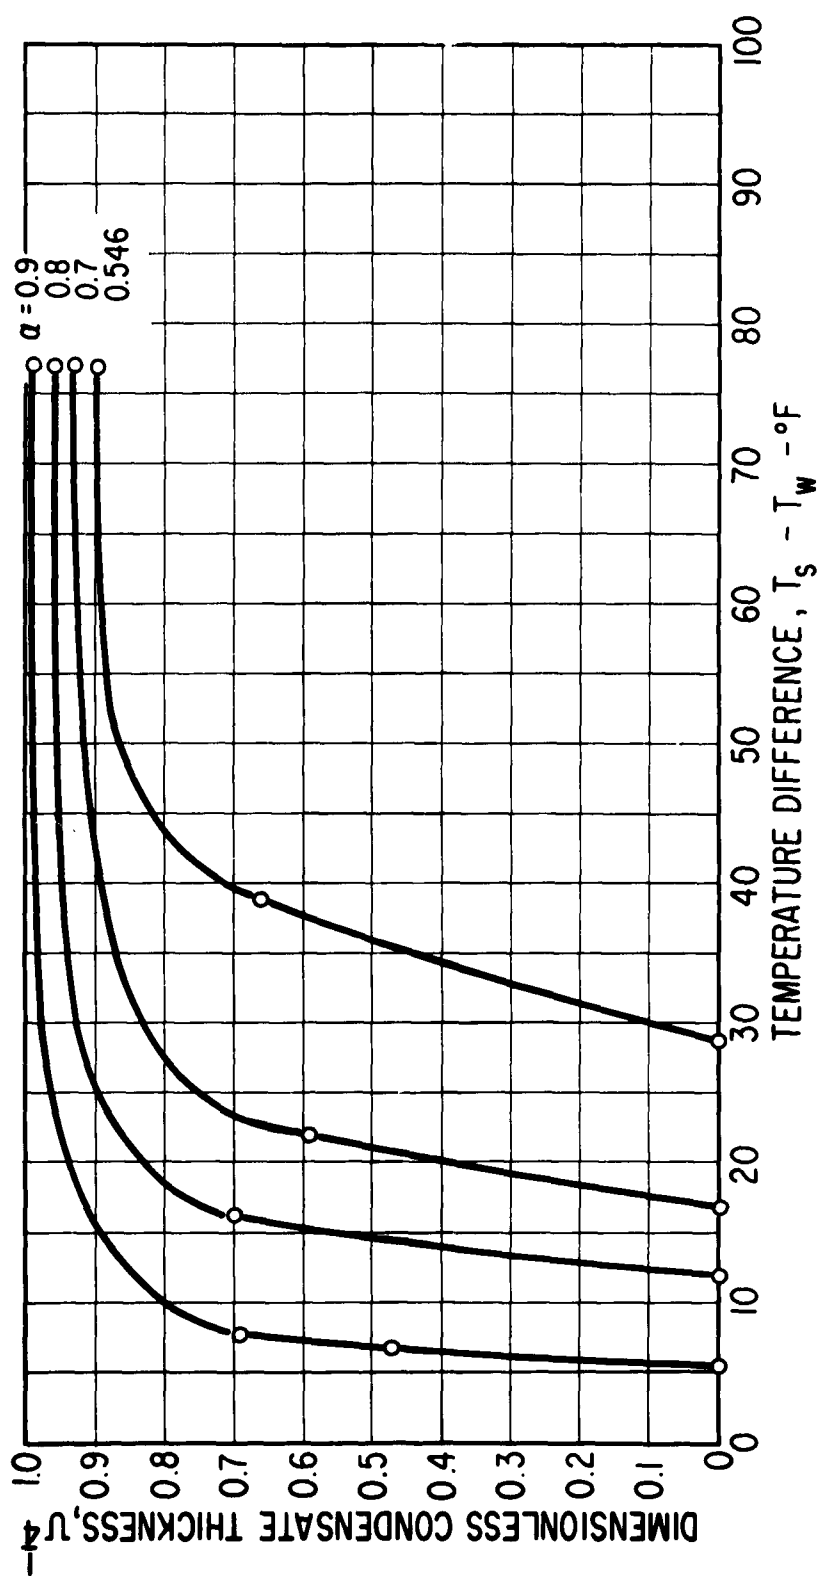


FIG. 18 DIMENSIONLESS CONDENSATE THICKNESS vs TEMPERATURE DIFFERENCE FOR VARIOUS PRESSURE RATIOS AT A CONSTANT SOURCE PRESSURE OF 200 PSI AND $\xi = 1.0$

**APPROVED DISTRIBUTION LISTS FOR UNCLASSIFIED TECHNICAL REPORTS
ISSUED UNDER
GAS LUBRICATED BEARINGS CONTRACTS**

Chief of Naval Research Department of the Navy Washington 25, D. C. Attn: Code 438 429 466	3 1 1	Director Naval Research Laboratory Washington 25, D. C. Attn: Code 2000 5230	6 1
Commanding Officer Office of Naval Research Branch Office Tenth Floor The John Crerar Library Bldg. 86 East Randolph Street Chicago, Illinois	1	Special Projects Office Department of the Navy Washington 25, D. C. Attn: Code SP23-A (D. Gold)	1
Commanding Officer Office of Naval Research Branch Office 346 Broadway New York 13, New York	1	Head, Bearings and Seals Branch U. S. Naval Engineering Experiment Station Annapolis, Maryland Attn: Code 851 (Watt V. Smith)	1
Commanding Officer Office of Naval Research Branch Office Box 39, Navy #100 Fleet Post Office New York, New York	1	Material Laboratory Library Building 291, Code 912B New York Naval Shipyard Brooklyn 1, New York	1
Commanding Officer Office of Naval Research Branch Office 1030 East Green Street Pasadena 1, California	1	Library Technical Reports Section U. S. Naval Postgraduate School Monterey, California	1
Commanding Officer Office of Naval Research Branch Office 1000 Geary Street San Francisco 9, California	1	Commanding Officer U. S. Naval Avionics Facility Indianapolis 18, Indiana Attn: J. G. Weir	1
Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Code 644B (James C. Reid, Jr.)	1	Director U. S. Naval Boiler and Turbine Lab. Naval Base Philadelphia 12, Pennsylvania	1
Chief, Bureau of Naval Weapons Department of the Navy Washington 25, D. C. Attn: Code RAAE-3431 (G. D. Norman)	1	Office of Chief of Ordnance Research and Development Division Department of the Army Washington 25, D. C. Attn: Norman L. Klein	1
		Fuels & Lubricants Section Research Branch Research & Development Division Office, Chief of Ordnance Attn: Mr. Ronald E. Streets 4th Floor, Pentagon Annex #2 Washington 25, D. C.	1

Page 3

Chief, Technical Information Service Extension P. O. Box 62 Oak Ridge, Tennessee Attn: Melvin S. Day	1	Engineering Projects Laboratory Massachusetts Institute of Technology Cambridge 39, Massachusetts Attn: Dr. R. W. Mann (Room 3-459 A)	1
Applied Physics Laboratory Johns Hopkins University Silver Spring, Maryland Attn: George L. Seelstad, Supr., Tech., Reports Group	1	Massachusetts Institute of Technology Instrumentation Laboratory 68 Albany Street Cambridge 39, Massachusetts Attn: Library, WI-109	1
Department of Chemical Engineering New York University New York 53, New York Attn: James J. Barker, Assoc., Prof. of Nuclear Engineering	1	Professor P. F. Martinuzzi Stevens Institute of Technology Hoboken, New Jersey	1
Professor A. Charnes The Technological Institute Northwestern University Evanston, Illinois	1	Battelle Memorial Institute 505 King Avenue Columbus 1, Ohio Attn: Dr. Russell Dayton	1
Resident Representative Office of Naval Research c/o University of Pennsylvania 3438 Walnut Street Philadelphia 4, Pennsylvania	1	Franklin Institute Laboratory for Research and Development Philadelphia, Pennsylvania Attn: Professor D. D. Fuller	3
Professor P. R. Trumpler Towne School of Civil and Mechanical Engineering University of Pennsylvania Philadelphia, Pennsylvania	1	Library Institute of Aerospace Sciences 2 East 64th Street New York, New York	1
Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Avenue Pasadena, California Attn: Library	1	Mr. G. B. Speen Sr. Member, Technical Staff ITT Federal Laboratories Division of International Telephone and Telegraph Corporation 15151 Bledsoe Street San Fernando, California	1
Illinois Institute of Technology Chicago 16, Illinois Attn: Professor L. N. Tao	1	Aerojet-General Nucleonics P. O. Box 86 San Ramon, California Attn: Barbara M. Probert	1
Professor M. C. Shaw, Head Department of Mechanical Engineering Carnegie Institute of Technology Pittsburgh 13, Pennsylvania	1	Aerospace Corporation P. O. Box 95085 Los Angeles 45, California Attn: Aerospace Library Technical Reports Group	1

Page 2

Chief of Research and Development Office, Chief of Staff Department of the Army Pentagon Building Washington 25, D. C.	1	Office of Assistant Director (Army Reactors) Division of Reactor Development U. S. Atomic Energy Commission Washington 25, D. C. Attn: Mr. Clarence E. Miller, Jr.	2
Commanding General U. S. Army Engineer R&D Laboratories Fort Belvoir, Virginia Attn: W. M. Crim, Nuclear Power Field Office	2	Chief Engineering Development Branch Reactor Development Division U. S. Atomic Energy Commission Washington 25, D. C.	1
Director U. S. Army Engineer Research and Development Laboratory Fort Belvoir, Virginia Attn: Technical Documents Center	1	Headquarters Library U. S. Atomic Energy Commission Washington, D. C.	1
Commander Army Rocket & Guided Missile Agency Redstone Arsenal, Alabama Attn: Technical Library	1	Chief, Division of Engineering Maritime Administration GAO Building Washington 25, D. C.	1
ESD - AROD Box CM, Duke Station Durham, North Carolina	1	Cryogenic Engineering Laboratory National Bureau of Standards Boulder, Colorado Attn: Library	1
Chief of Staff, U. S. Air Force The Pentagon Washington 25, D. C. Attn: AFDRD-AS/M	1	Mr. Harold Hensing National Aeronautics and Space Administration 1512 H. Street, N. W. Washington, D. C.	1
Commander Air Force Office of Scientific Research Washington 25, D. C. Attn: SRHM	1	Mr. Edmund E. Bisson Chief, Lubrication & Wear Branch Lewis Research Center National Aeronautics and Space Administration 2100 Brookpark Road Cleveland, Ohio	1
Commander Aeronautical Systems Division of the Air Force Systems Command Wright-Patterson AF Base, Ohio Attn: ASRONL-2, J. L. Morris ASRMDD, P. C. Hanlon ASRMFP-1, B. L. McFadden, Jr. ASRNGCO-1, R. W. McAdony	2 1 1 1	Mr. Rudolph E. Beyer George C. Marshall Space Flight Center National Aeronautics and Space Administration Guidance and Control Division Cyro-Stabilizer Branch Huntsville, Alabama	1
Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	10	Mr. H. W. Savage Oak Ridge National Laboratory Post Office Box Y Oak Ridge, Tennessee	

Page 4

Research Manufacturing Company Sky Harbor Airport 402 South 36th Street Phoenix, Arizona Attn: Mr. Vandewegen Librarian	1	Bendix Aviation Corporation Research Laboratories Division Bouthfield, Michigan Attn: Mr. Ralph H. Larson	1
Mr. William D. Stimmel Research Laboratories Library Allis-Chalmers Manufacturing Company Milwaukee 1, Wisconsin	1	Mr. C. R. Adams Physics Technology Department Aero-Space Division The Boeing Company Seattle 24, Washington	1
J. W. Fecker Division American Optical Company 4709 Baum Blvd. Pittsburgh 13, Pennsylvania	1	Bryant Chucking Grinder Company 60 Clinton Avenue Springfield, Vermont Attn: Mr. Roald Cann	1
American Society of Lubrication Engineers 5 North Wabash Avenue Chicago 2, Illinois	1	Cadillac Gage Company P. O. Box 3806 Detroit 5, Michigan Attn: Mr. J. Taylor, Project Engineer	1
Chairman Research Committee on Lubrication The American Society of Mechanical Engineers United Engineering Center 345 East 47th Street New York 17, New York	1	Dr. Dewey J. Sandell Director of Development Carrier Research and Development Co. Carrier Parkway Syracuse, New York	1
Mr. James R. Kerr, President Lycoming Division AVCO Stratford, Connecticut	1	Chance Vought Corporation P. O. Box 5907 Dallas, Texas Attn: Mr. R. C. Blaylock Vice President, (Engineering)	1
Research Precision Mechanisms Division of the Barden Corporation 4 Old Newtown Road Danbury, Connecticut Attn: B. L. Mims, Vice President - General Manager	1	Chrysler Corporation Defense Operations P. O. Box 757 Detroit 31, Michigan Attn: Mr. C. W. Snider	1
Beemer Engineering Company Industrial Park Fort Washington, Pennsylvania	1	J. D. Mamarchev & Associates Consulting Engineers 3908 Main Street Houston 2, Texas	1
Utica Division The Bendix Corporation 211 Seward Avenue Utica, New York Attn: Mr. Russell T. DeMuth Supervisory Engineer	1	Mr. B. W. Birmingham Cryogenic Engineering Laboratory National Bureau of Standards Boulder, Colorado	1
		Curtiss Wright Corporation Wright Aeronautical Division Department 8332 Wood Ridge, New Jersey Attn: V. J. Dwyer Chief Physical Engineering	1

Page 5

Daystrom Pacific
9320 Lincoln Boulevard
Los Angeles 45, California
Attn: Robert H. Smith
Special Project Engineer 1

Ford Instrument Company
31-10 Thomson Avenue
Long Island City 1, New York
Attn: Mr. Jarvis 1

Mr. Adolf Egli
Ford Motor Company
Engineering and Research Staff
P. O. Box 2053
Dearborn, Michigan 1

Dr. John E. Mayer, Jr.
Non-Metallics Section
Applied Science Department
Scientific Laboratory
Ford Motor Company
P. O. Box 2053
Dearborn, Michigan 1

AiResearch Manufacturing Division
The Garrett Corporation
9851 S. Sepulveda Boulevard
Los Angeles, California
Attn: Jerry Glaser, Supervisor
Mechanical Lab.-Dept. 93-17 1

General Atomics Division
General Dynamics Corporation
P. O. Box 608
San Diego 12, California
Attn: Mr. F. W. Simpson 1

Bearing and Lubricant Center
General Engineering Laboratory
General Electric Company
1 River Road
Schenectady, New York
Attn: G. R. Fox, Manager 1

Mr. L. W. Winn
General Electric Company
Aircraft Accessory Turbine Department
950 Western Avenue, Bldg. 3-74
Lynn, Massachusetts 1

Research Laboratories
General Motors Corporation
General Motors Technical Center
12 Mile and Mound Roads
Warren, Michigan
Attn: Mr. E. Roland Maki,
Mechanical Development Dept. 1

A. C. Spark Plug Division
General Motors Corporation
Milwaukee 1, Wisconsin
Attn: Allen Knudsen 1

Mr. Walter Carow
Kearfott Division
General Precision Inc.
1150 McBride Avenue
Little Falls, New Jersey 1

Grumman Aircraft Engineering Corp.
Bethpage, Long Island, New York
Attn: Mr. David W. Craig, Jr.
Mechanical Design Section
Engineering Department 1

Hydronautics, Incorporated
200 Monroe Street
Rockville, Maryland 1

International Business Machine Corp.
Research Laboratory
San Jose, California
Attn: Dr. W. E. Langlois 2

Mr. B. A. Napier, Engr. Div. Mgr.
Lear, Incorporated
110 Ionia Avenue NW
Grand Rapids, Michigan 1

Mr. L. R. Barr, V. P.
Lear-Romec Division
Abbe Road
Elyria, Ohio 1

Dr. Caius G. Goetzl, D/53-30
Bldg. 201, Plant 2, Palo Alto
Lockheed Missiles & Space Co.
P. O. Box 504
Sunnyvale, California 1

Page 6

Dr. J. S. Ausman
Litton Systems, Inc.
5500 Canoga Avenue
Woodland Hills, California 1

Mr. Don Moors
Litton Systems
5500 Canoga Avenue
Woodland Hills, California 1

Mr. A. N. Thomas
Astro Division
The Marquardt Corporation
16555 Satcoy Street
Van Nuys, California 1

Mr. Kendall Perkins
Vice President (Engr)
McDonnell Aircraft Corporation
Lambert St. - St. Louis
Municipal Airport
Box 516
St. Louis 3, Missouri 1

Dr. Beno Sternlicht
Mechanical Technology Incorporated
968 Albany-Shaker Road
Latham, New York 3

Mr. J. W. Lower
Chief, Engineer-Inertial Components
Honeywell Aero Division
2600 Ridgway Road
Minneapolis, Minnesota 1

Mr. Carl F. Grassesser, Jr.
Director of Research
New Hampshire Ball Bearings, Inc.
Peterborough, New Hampshire 1

Mrs. Alice Ward, Librarian
Norden Division of United Aircraft Corp.
Helen Street
Norwalk, Connecticut 1

Autonetics Division (Librarian)
North American Aviation Inc.
9150 East Imperial Highway
Downey, California 1

Northrop Corporation
Norair Division
1001 East Broadway
Hawthorne, California
Attn: Technical Information, 3125 1

Mr. N. L. Simmons
Nortronics
A Division of Northrop Corp.
500 East Orangethorpe Avenue
Anaheim, California 1

Nortronics
A Division of Northrop Corporation
100 Morse Street
Norwood, Massachusetts
Attn: Mr. E. L. Swainson, Tech. Asst.
Precision Products Department 1

Pratt & Whitney Aircraft
Division of UAC - CANEL
P. O. Box 611
Middletown, Connecticut
Attn: Librarian 1

Library, Bldg. 10-2-5
Radio Corporation of America
Camden 2, New Jersey 1

Mr. Robert S. Siegler
Rocketdyne
Nucleonics Subdivision
6633 Canoga Avenue
Canoga Park, California 2

Ryan Aeronautical Company
Attn: Engineering Library
Lindbergh Field
San Diego 12, California 1

Jack & Heintz, A Division of
The Siegler Corporation
1725 Eye Street, Suite 505
Washington 6, D. C. 1

Mr. Paul A. Pitt, Vice President
Engineering & Research
Solar Aircraft Company
2200 Pacific Highway
San Diego 12, California 1

Mr. W. G. Wing
Sperry Gyroscope Company
C-2
Great Neck, New York 1

E. A. Babley
Union Carbide Nuclear Company
Post Office Box P
Oak Ridge, Tennessee 1

Page 7

Mrs. Florence Turnbull
Engineering Librarian
Sperry Gyroscope Company
Great Neck, New York 1

Sundstrand Aviation-Denver
2480 West 70th Avenue
Denver 21, Colorado 1

Mr. James W. Salassi, President
Turbocraft, Inc.
1946 S. Myrtle Avenue
Montevia, California 1

Universal Match Corporation
Avionics Department Technical Library
4407 Cook Avenue
St. Louis 13, Missouri 1

Waukesha Bearings Corporation
P. O. Box 346
Waukesha, Wisconsin
Attn: Mr. J. M. Gruber, Ch. Engr. 1

Mr. John Boyd
Westinghouse Electric Corporation
Research Laboratories
East Pittsburgh, Pennsylvania 1

Mr. H. Walter
Director of Research
Worthington Corporation
Harrison, New Jersey 1

Dr. W. A. Gross
Ampex Corporation
934 Charter Blvd.
Redwood City, California 2

Professor J. Modrey
Department of Mechanical Engineering
Union College
Schenectady 8, New York 1