

DEVELOPMENT OF COMPACT VARIABLE-VOLTAGE, BI-DIRECTIONAL 100KW DC-DC CONVERTER

**Leonid Fursin¹, Maurice Weiner¹
Jason Lai², Wensong Yu², Junhong Zhang², Hao Qian²
Kuang Sheng³, Jian H. Zhao³,
Terence Burke⁴, and Ghassan Khalil⁴**

¹United Silicon Carbide, Inc., New Brunswick Technology Center, Building A, New Brunswick, NJ 08901, USA

²FEEC, ECE Department, Virginia Tech, Blacksburg, VA24060, USA

³SiCLAB, ECE Dept., Rutgers University, 94 Brett Road, Piscataway, NJ 08854, USA

⁴ U.S. Army TARDEC, Warren, MI 48397-5000, USA

for

AECV-2007

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 11 JUN 2007		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Development of Compact Variable-Voltage, Bi-Directional 100KW DC-DC Converter				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Leonid Fursin; Maurice Weiner; Jason Lai; Wensong Yu; Junhong Zhang; Hao Qian; Kuang Sheng; Jian H. Zhang; Terence Burke; Ghassan Khalil				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER 17101	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 17101	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the 7th AECV Conference, June 11-13, 2007, Stockholm, Sweden, The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 29	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Outline

- ◆ Project goals
- ◆ Power Stage Design
- ◆ DSP controller, interface circuit and gate driver implementation
- ◆ Power stage layout and packaging
- ◆ Converter testing
- ◆ Summary and Conclusions

Project Goals


Bidirectional dc-dc converter targets:

- ◆ Input voltage range: 200 - 300 VDC (battery pack voltage)
- ◆ Output voltage range: 300 - 600 VDC
- ◆ Bidirectional power flow Continuous Power: 100 kW, Peak: 150kW
- ◆ Power density: 4 to 8 kW/liter
- ◆ Specific power density: 4 to 6 kW/kg
- ◆ Total efficiency: $\geq 95\%$
- ◆ SVM frequency: $\sim 20\text{kHz}$
- ◆ Coolant Temperature: $\geq 90^\circ\text{C}$

- ◆ A novel yet simple zero-voltage soft-switching scheme
 - without adding any extra switch
 - making a 25KHz switching frequency possible
- ◆ High-end digital signal processor controller
 - allow fast and smooth mode transition
- ◆ An interleaving 3-phase design
 - substantially reducing the ripple current and filter capacitor size
- ◆ Nano-inductor design
 - High permeability, high saturation flux density lead to small inductor size
- ◆ SiC Schottky diode-Si IGBT power modules
 - Minimized thermal resistance
 - Robust diodes, zero-recovery charge

POWER STAGE DESIGN

Proposed Soft-switching Bi-directional DC/DC Converter with Lossless Snubbers

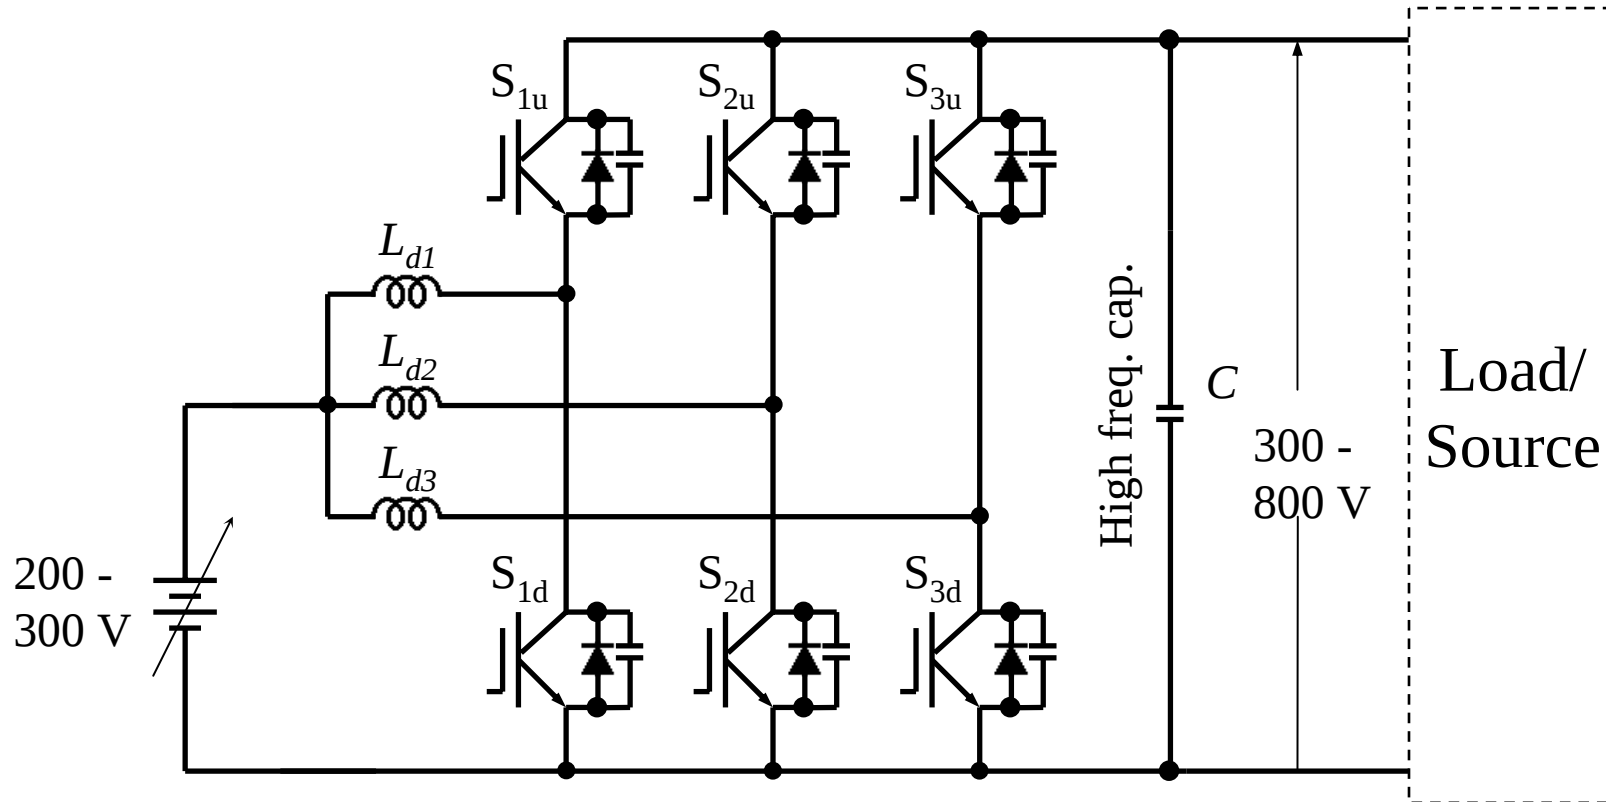



A special switching scheme that utilizes unused switches to perform soft switching:

The basic idea is to have the unused switch turned on while the active switch is turned off. This will allow current continuously flow in opposite direction, thus avoiding the discontinuous current and parasitic ringing. Now to reduce the turn-off loss, we can put the lossless snubber across the device to slow down the rate of switching.

Overall hardware system structure: power stage, gate driver and DSP controller

Power Stage in Bidirectional Soft-switched DC/DC Converter

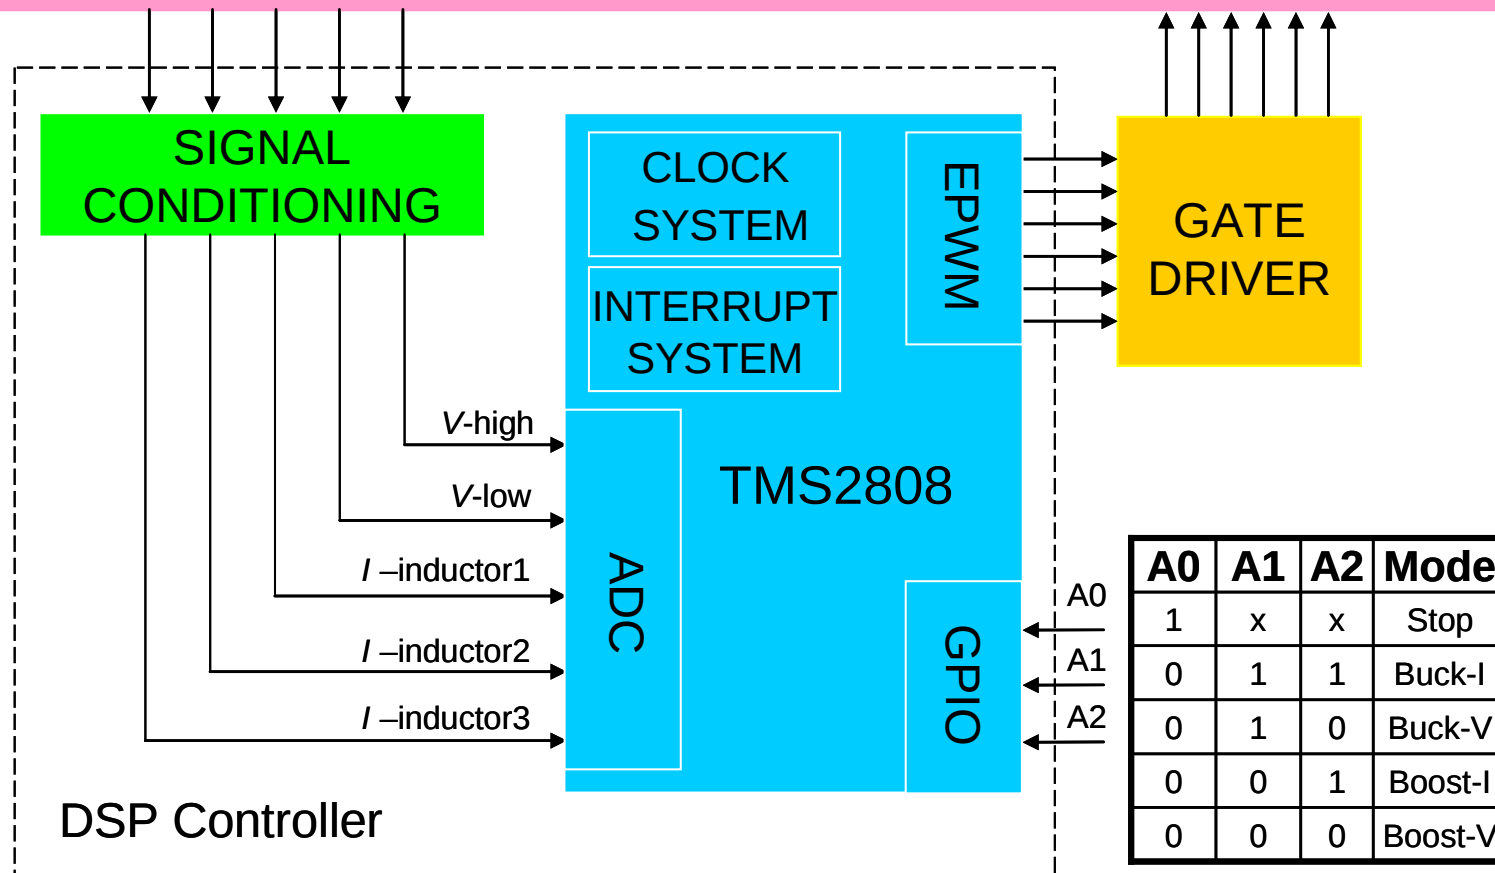

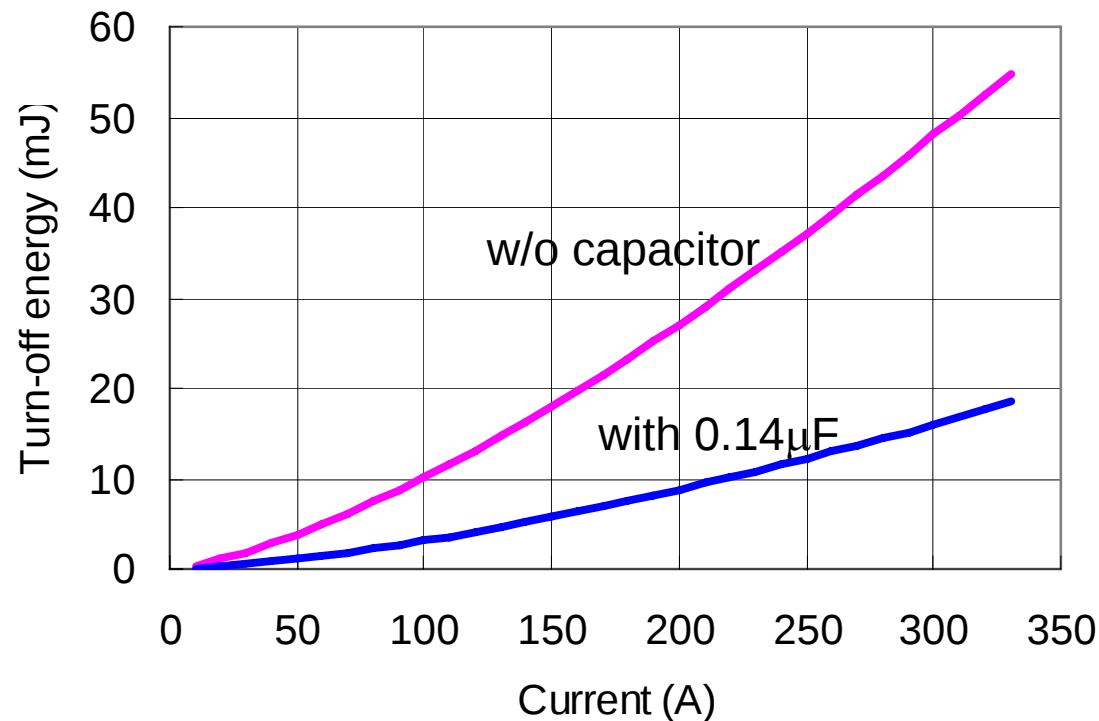


$V_{DC}=700V,$
 $C_{snub}=0.14\mu F$

×3 loss reduction
Achieved without extra switches/inductors

Inductor Design

Superior to Conventional Material


Relationship between relative permeability and saturation flux density of various soft magnetic materials

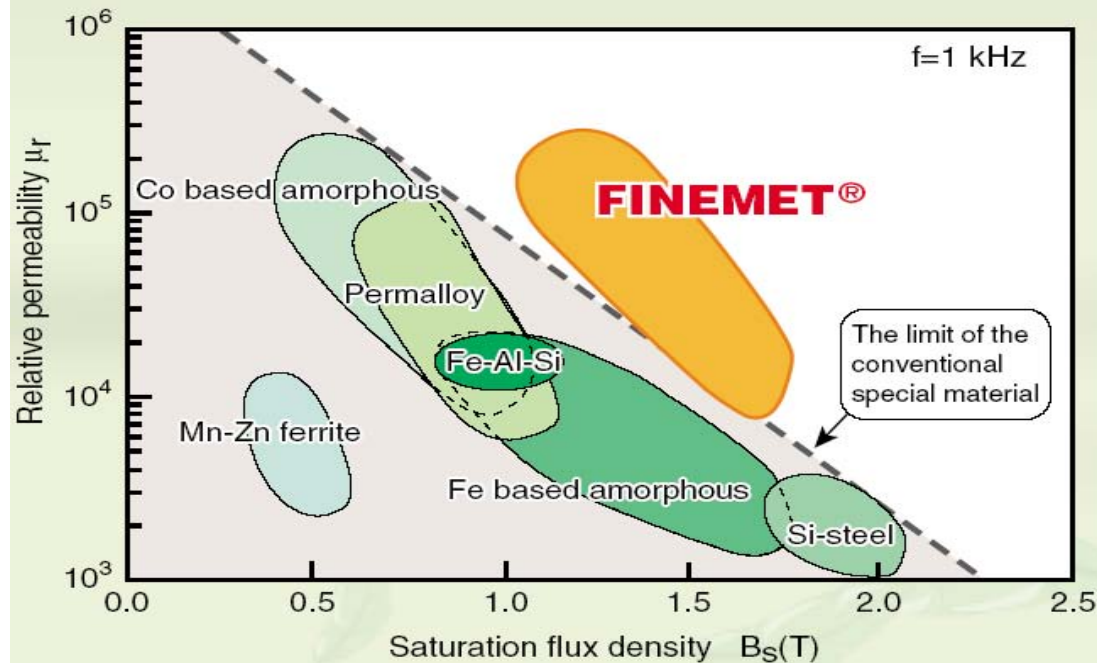

A superior core, FINEMET®, is used
High permeability, high flux density


Inductor Design Verification

$L=14.5\mu\text{H}$, $I_{\text{SAT}}=456\text{A}$, 20% design margin

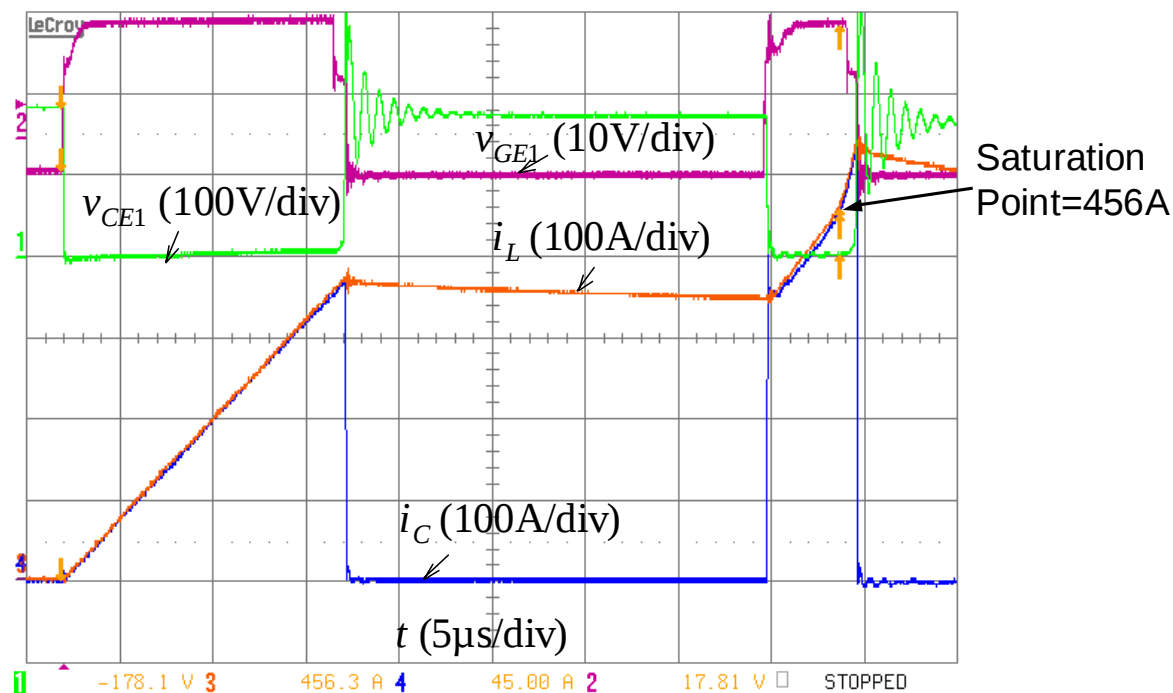


Each inductor core:
3.35kg, 0.47 liter

Liquid cooled heatsink design

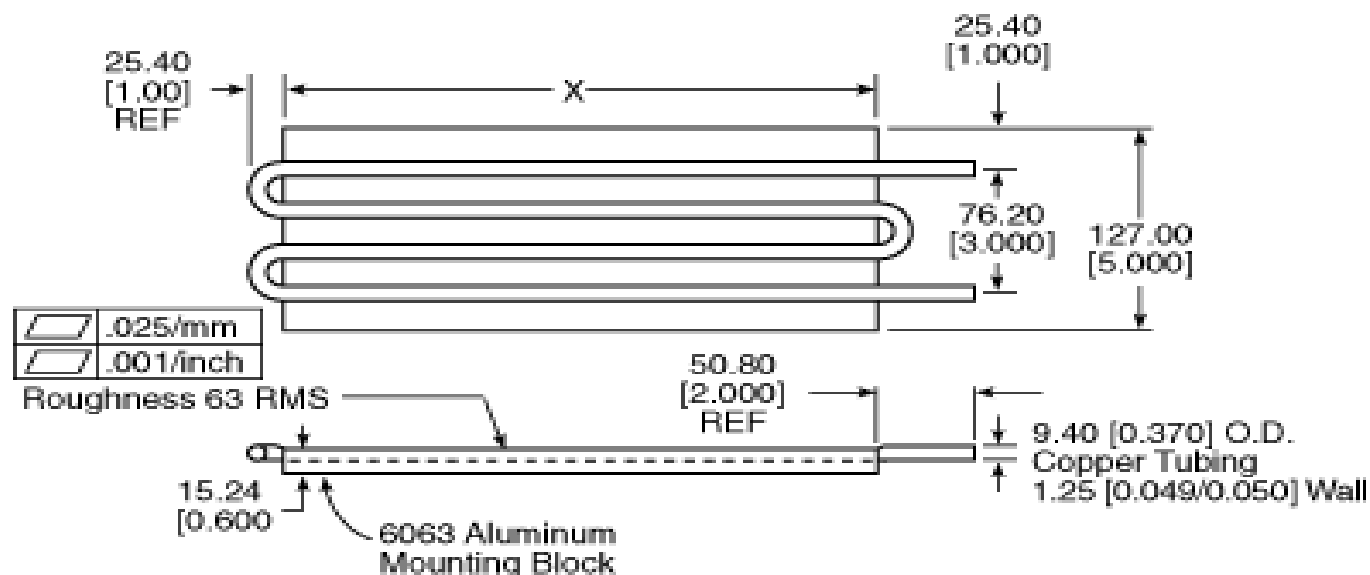


Liquid-cooled
 $\theta_{th} < 0.01^{\circ}\text{C/W}$

Physical Layout Dimensions of IGBTs

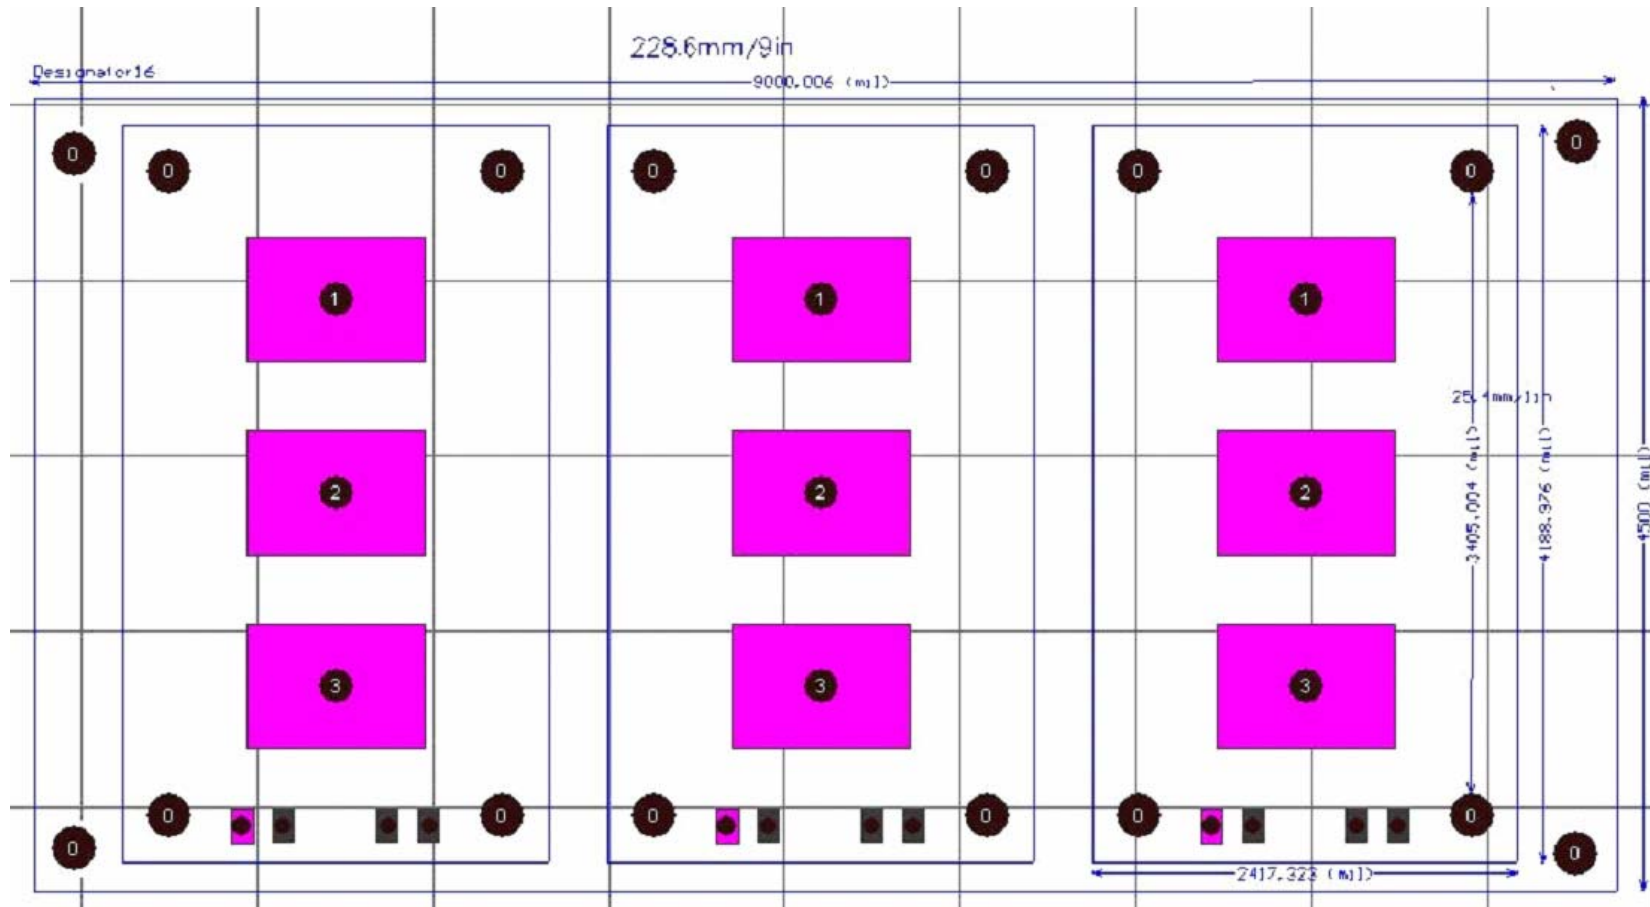

DSP controller, interface circuit and gate driver implementation


Auxiliary Gate Drive Power Supply

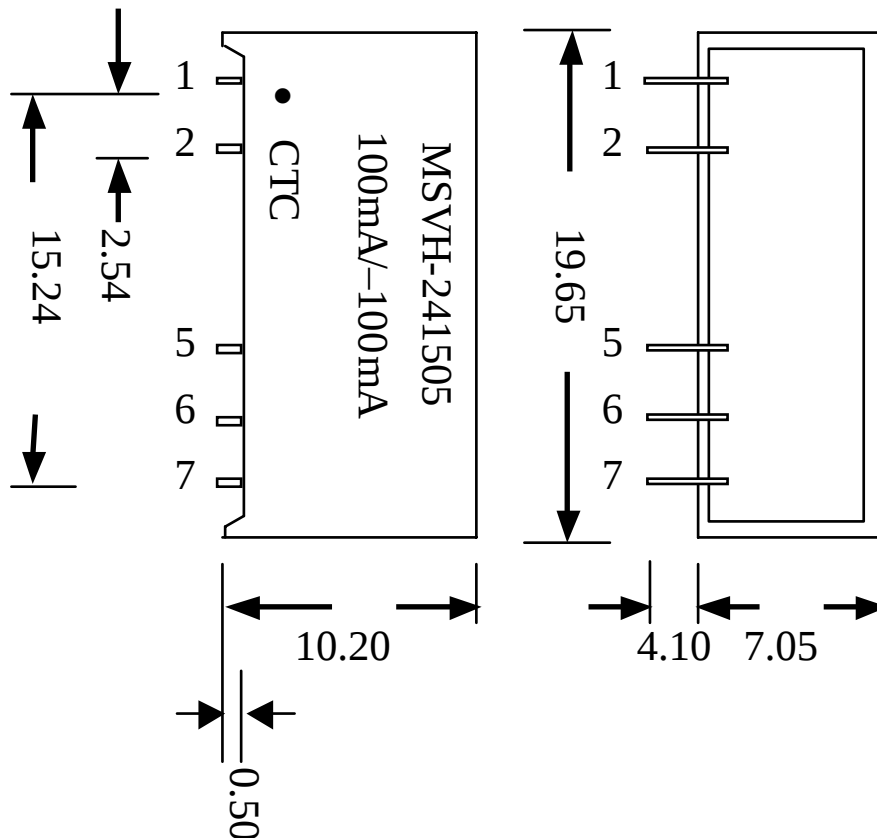


Pin no	Function
1	+Vin
2	-Vin
5	-Vout
6	COM
7	+Vout

The gate driver power supply module provides isolated outputs of +15V and -5V at $\geq 90^{\circ}\text{C}$.


DSP TMS320F2808 function blocks

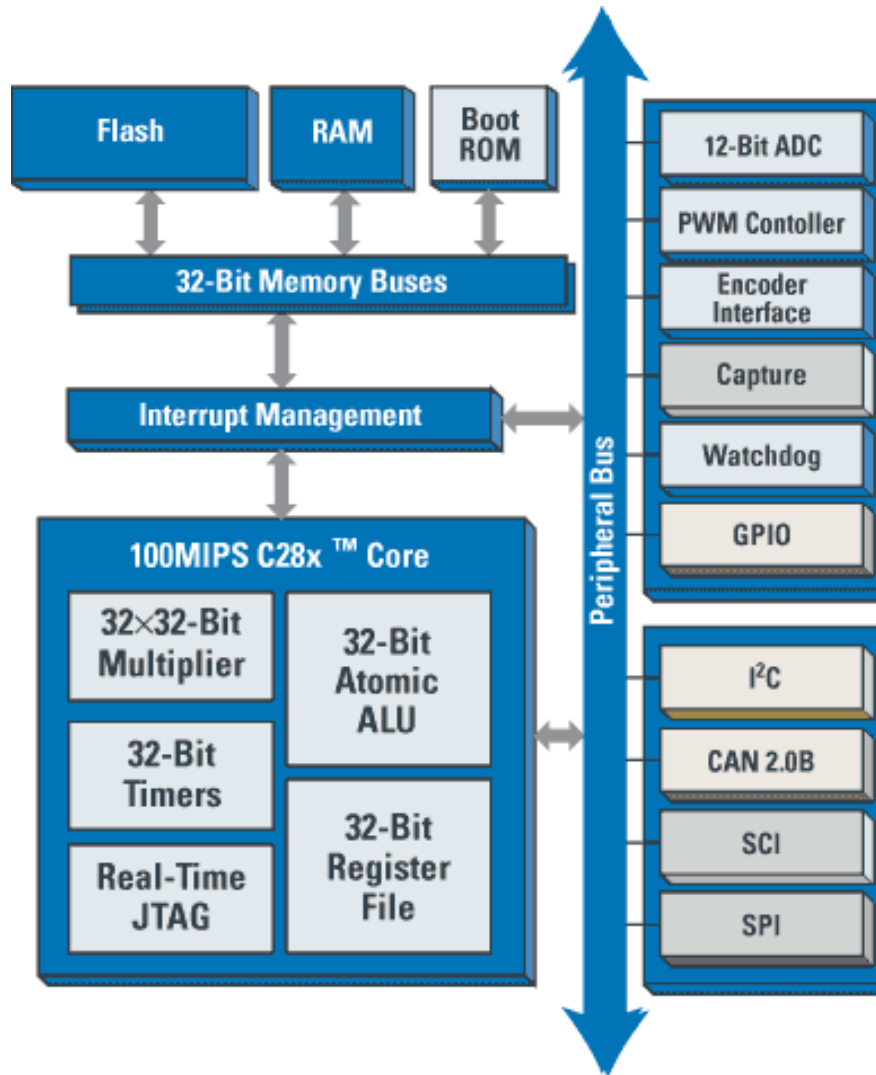

Simulation results for the efficiency of boost mode and buck mode

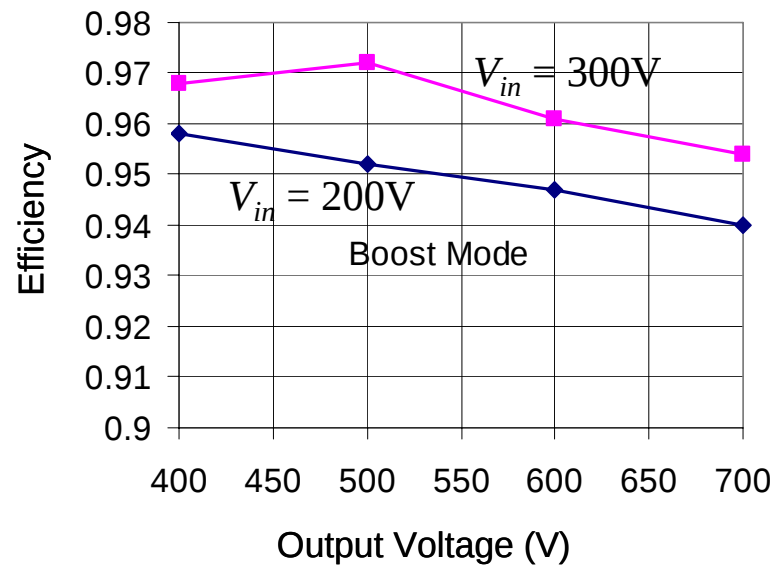

Boost mode efficiency

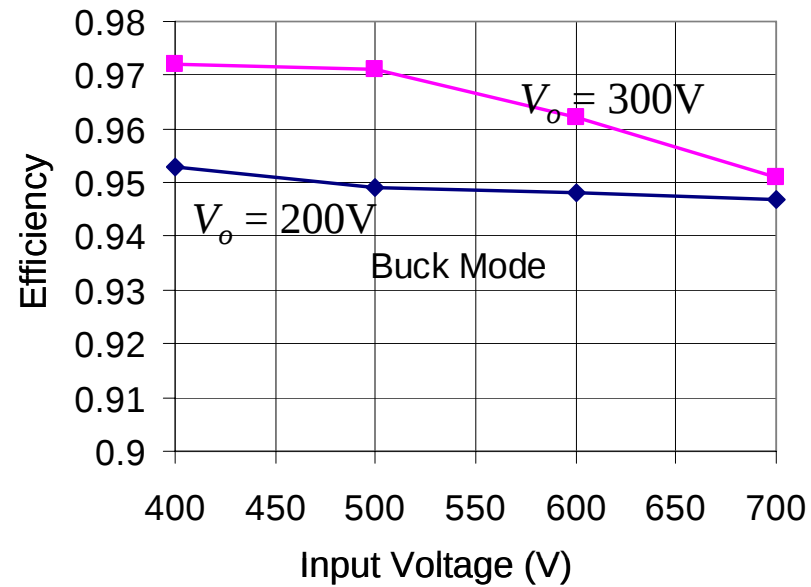


Buck mode efficiency

Power stage layout and packaging

Converter module

Inductors


Fiber-optical cables

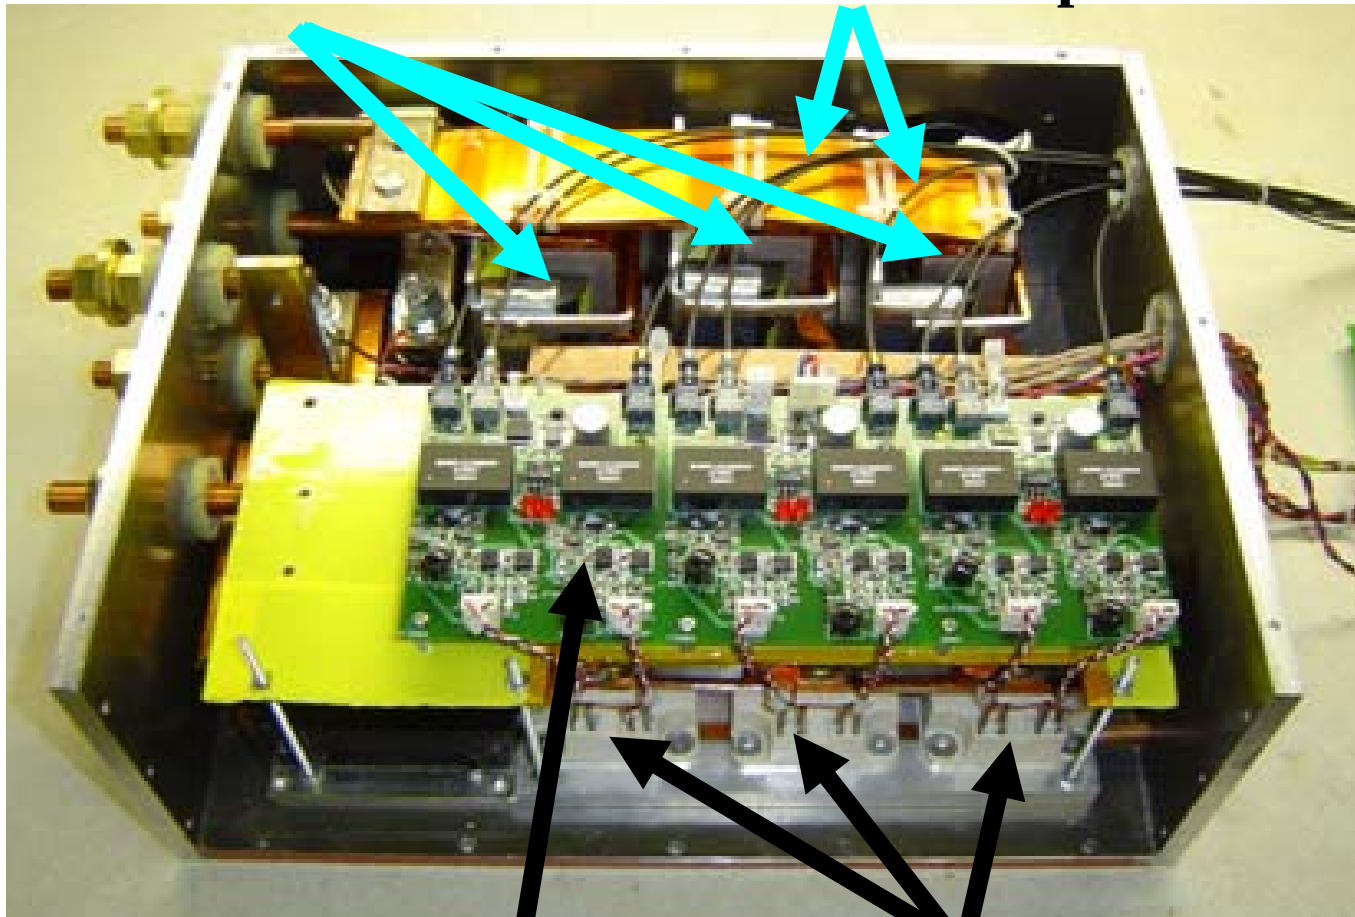

Gate driver board


IGBT modules

DSP controller with interface board

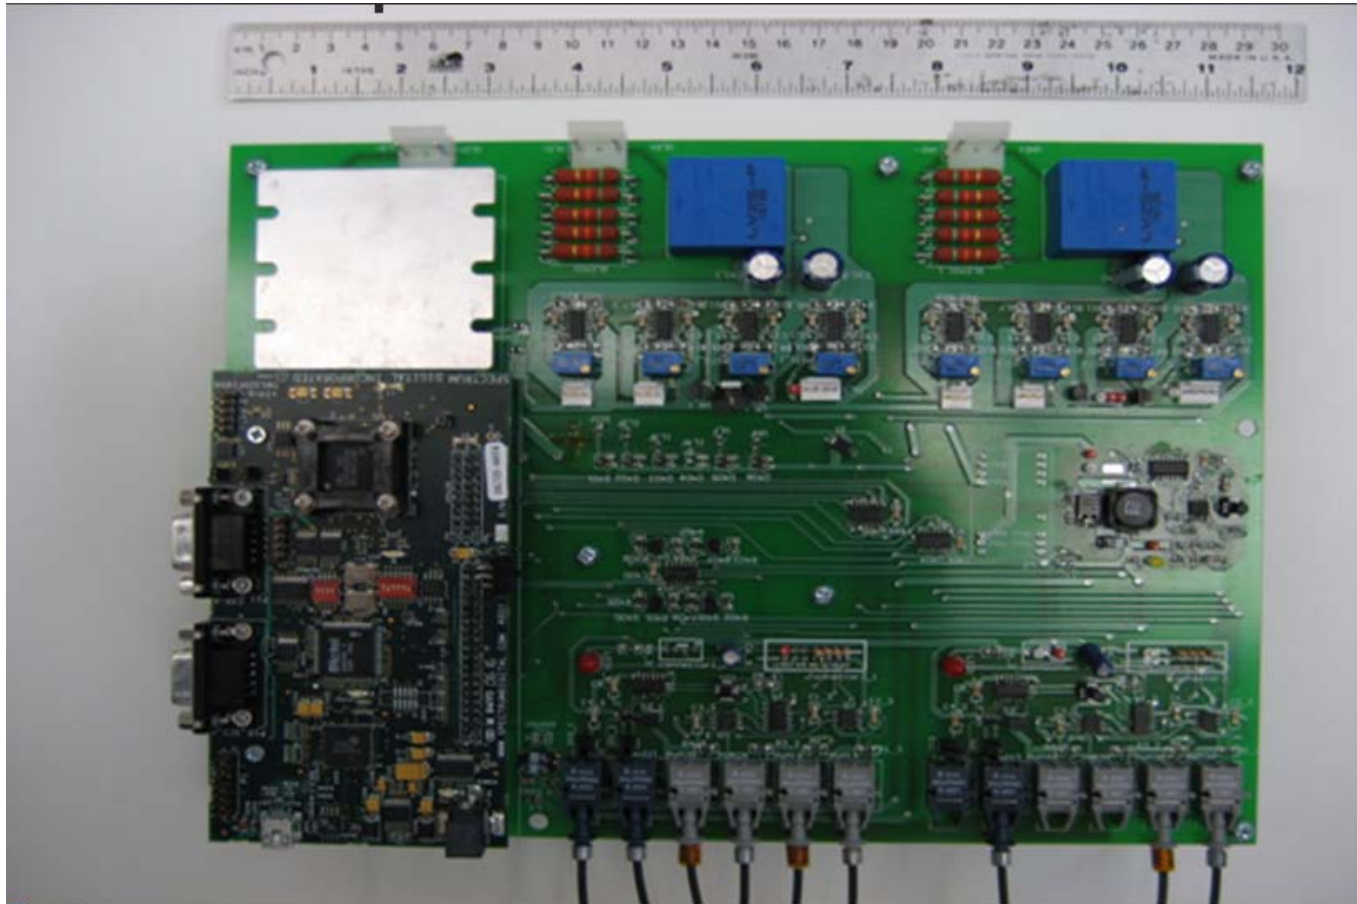


- The DSP controller includes signal conditioning circuit and TMS320F2808 digital signal processor.

The IGBT driver circuit

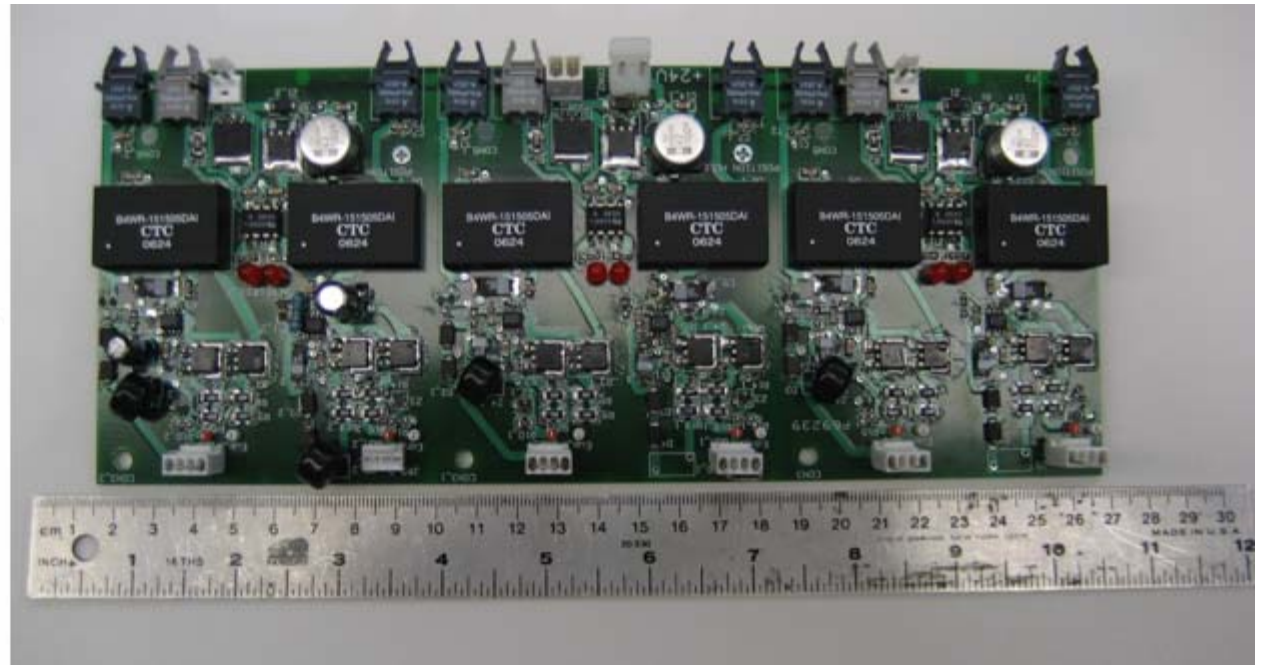

- Provides electrical isolation by optocouplers, fiber optics, and by transformers
- With overcurrent detection and pulse-by-pulse overcurrent protection function


The Power Stage Layout

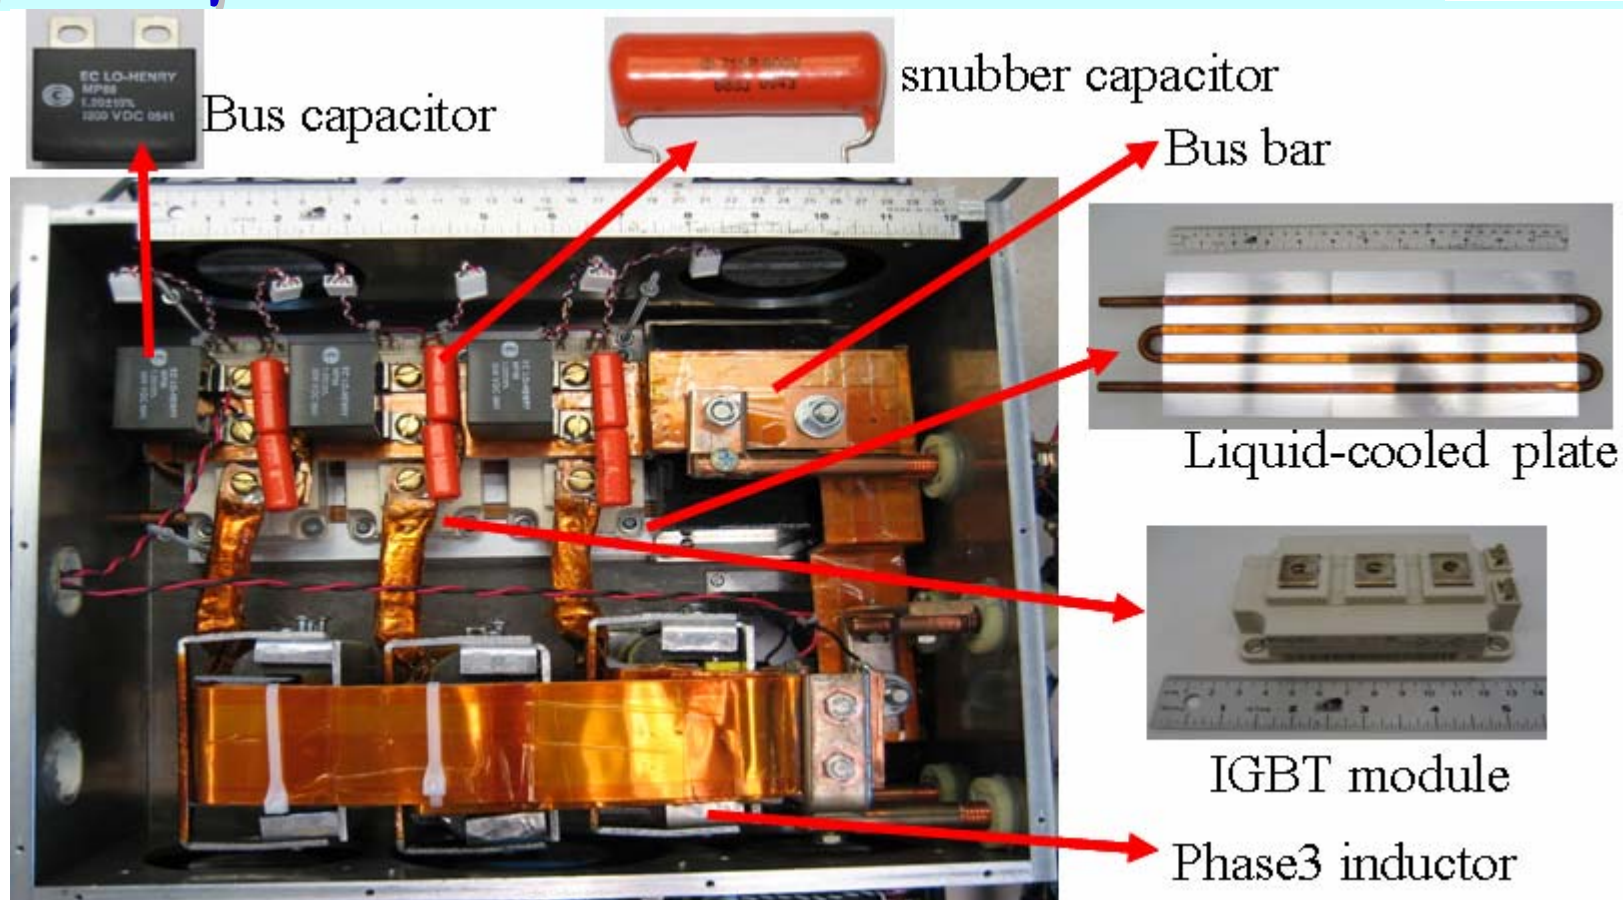

- With minimized size of the inductors for 100kW output power
- Zero-voltage switching on and zero-voltage switching off with capacitor
- Compact bus capacitor size with Interleaving ripple cancellation


Converter testing with Coolant at 90°C

Measured Current Waveforms

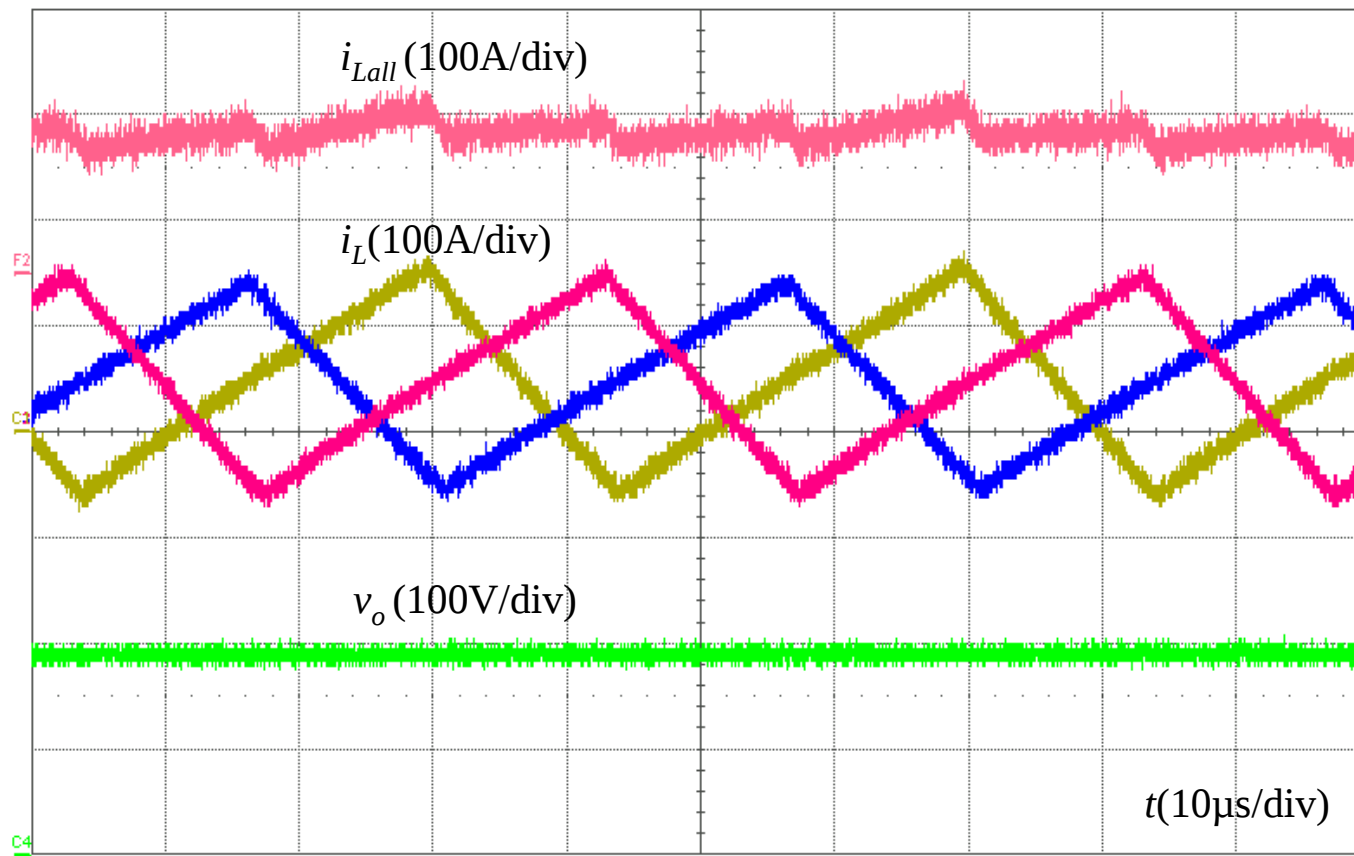


Inductor current ripple is greatly reduced by interleaving three phases

Detailed Measured Waveforms in 100kW Load

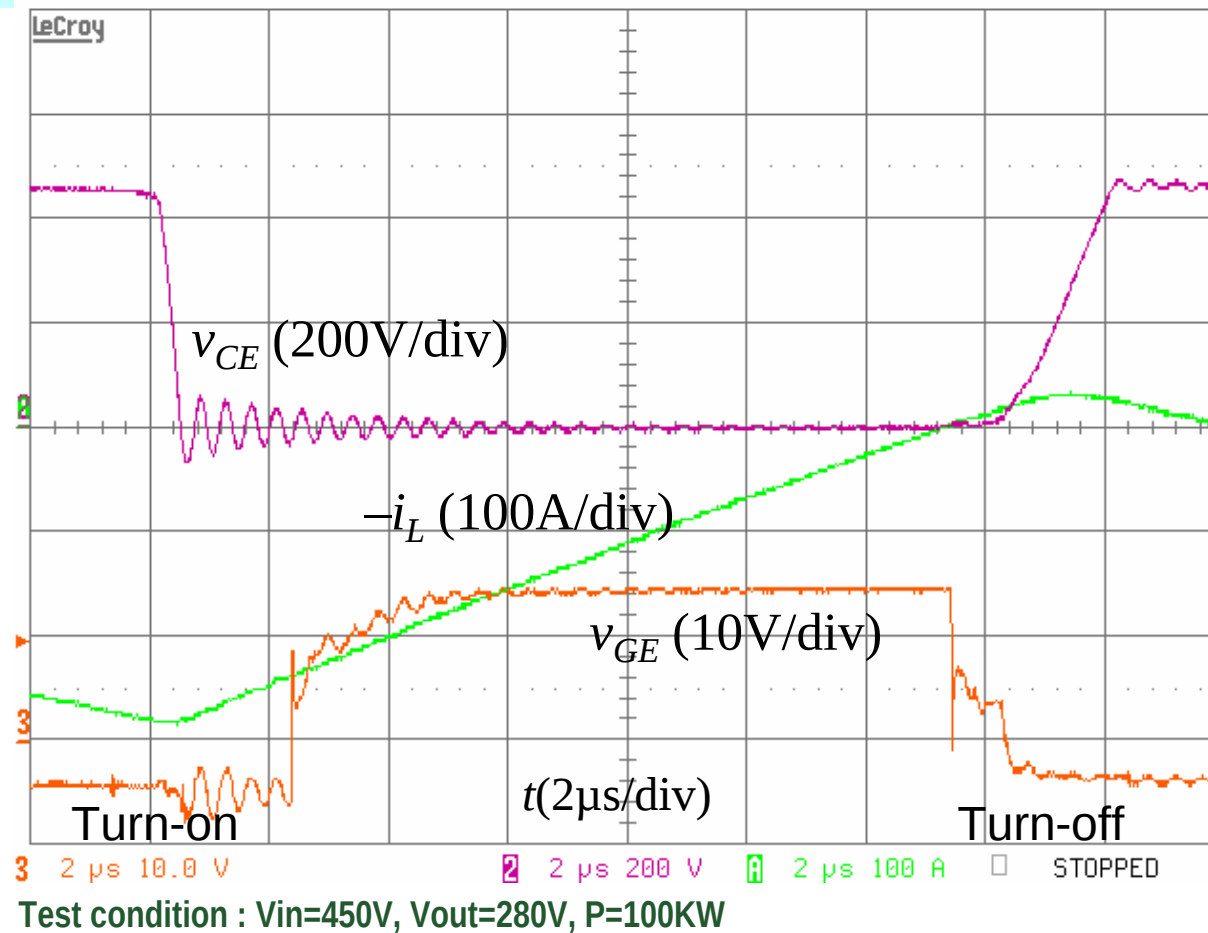


- Note that Inductor current negated.
- Switch is turned on under ZVS condition.


Start-up Voltage and Current Waveforms at 108-kW Operation in Boost Mode

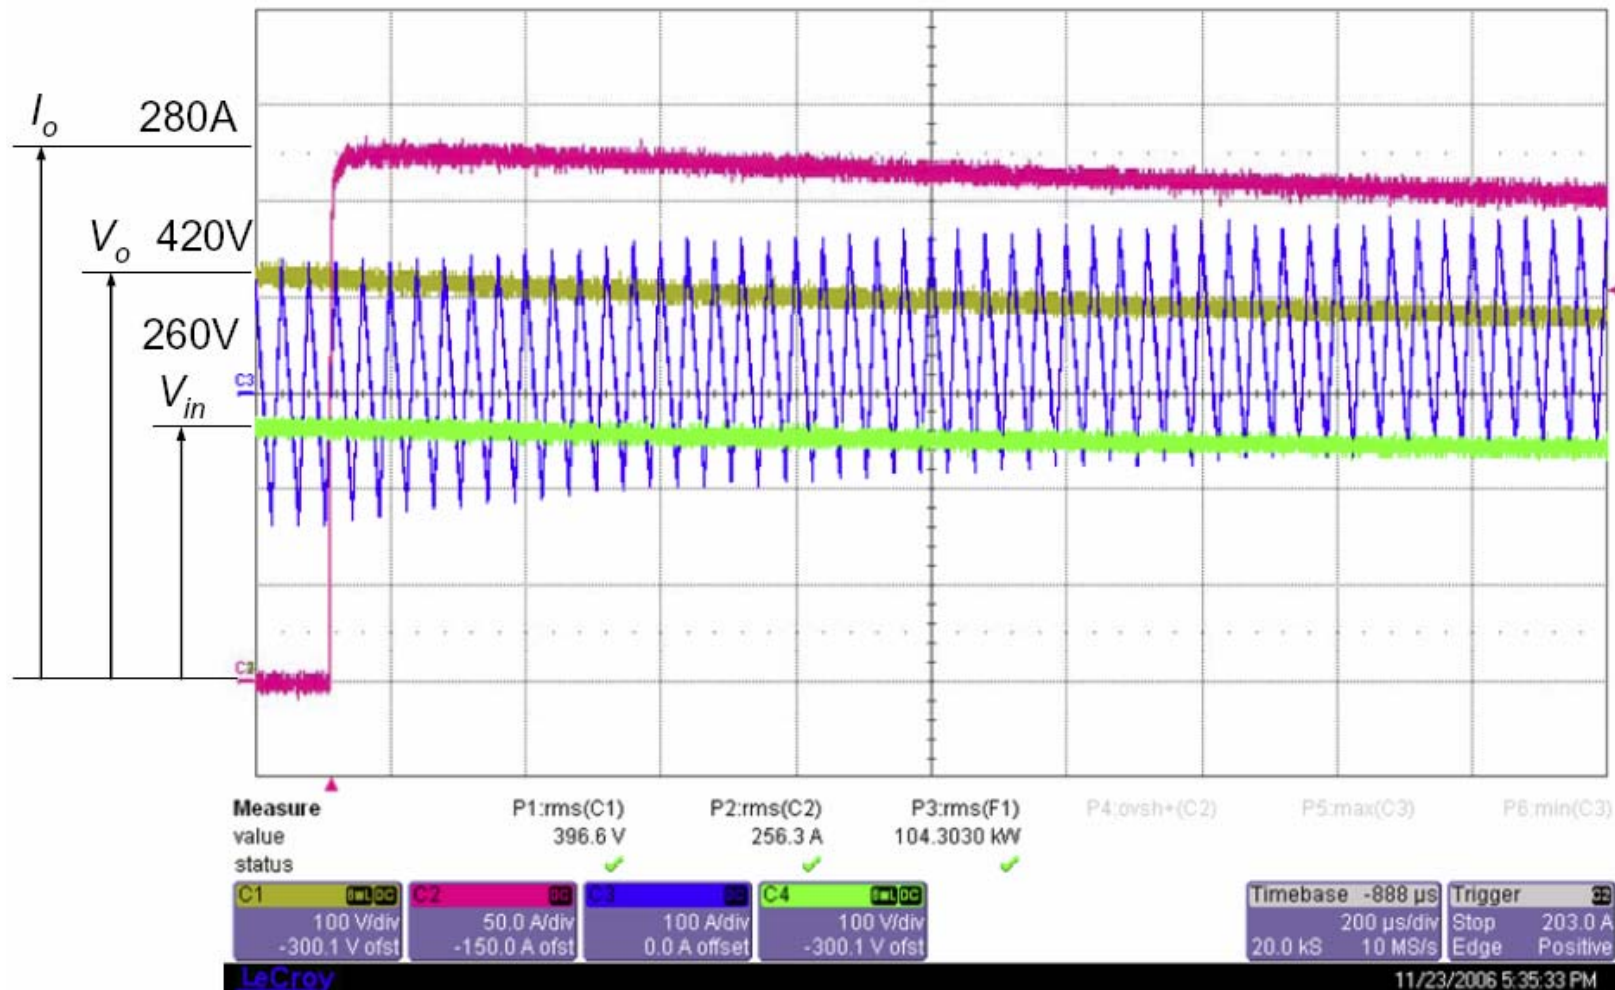

Transient response of the converter under boost mode operation with a step load change from no load to 80-kW

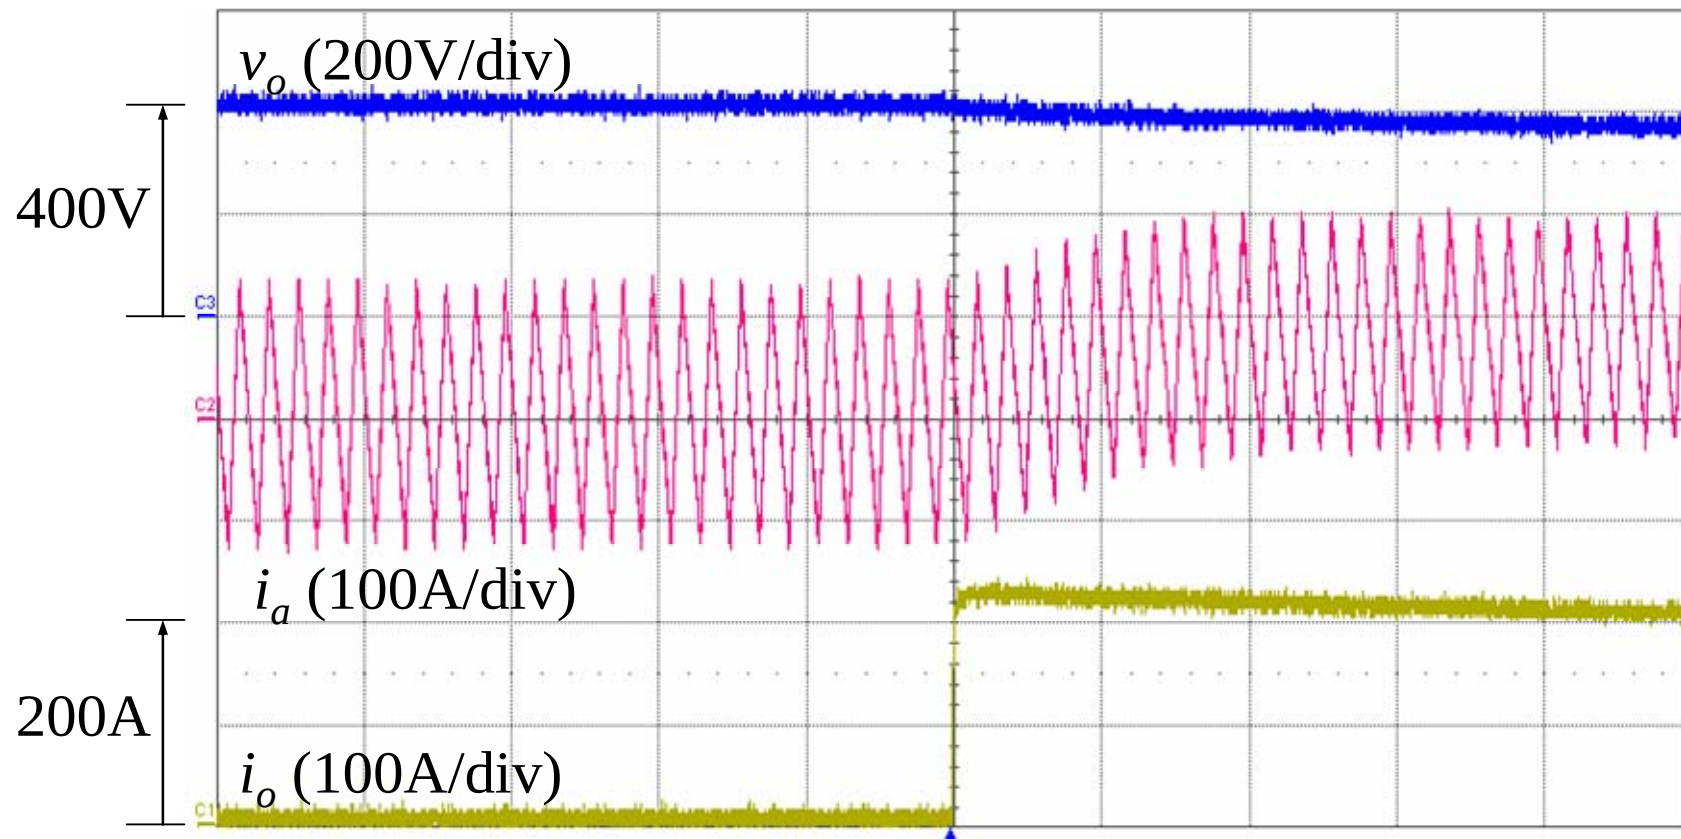


Experimental efficiencies in Buck Mode (450V input and 280V output)

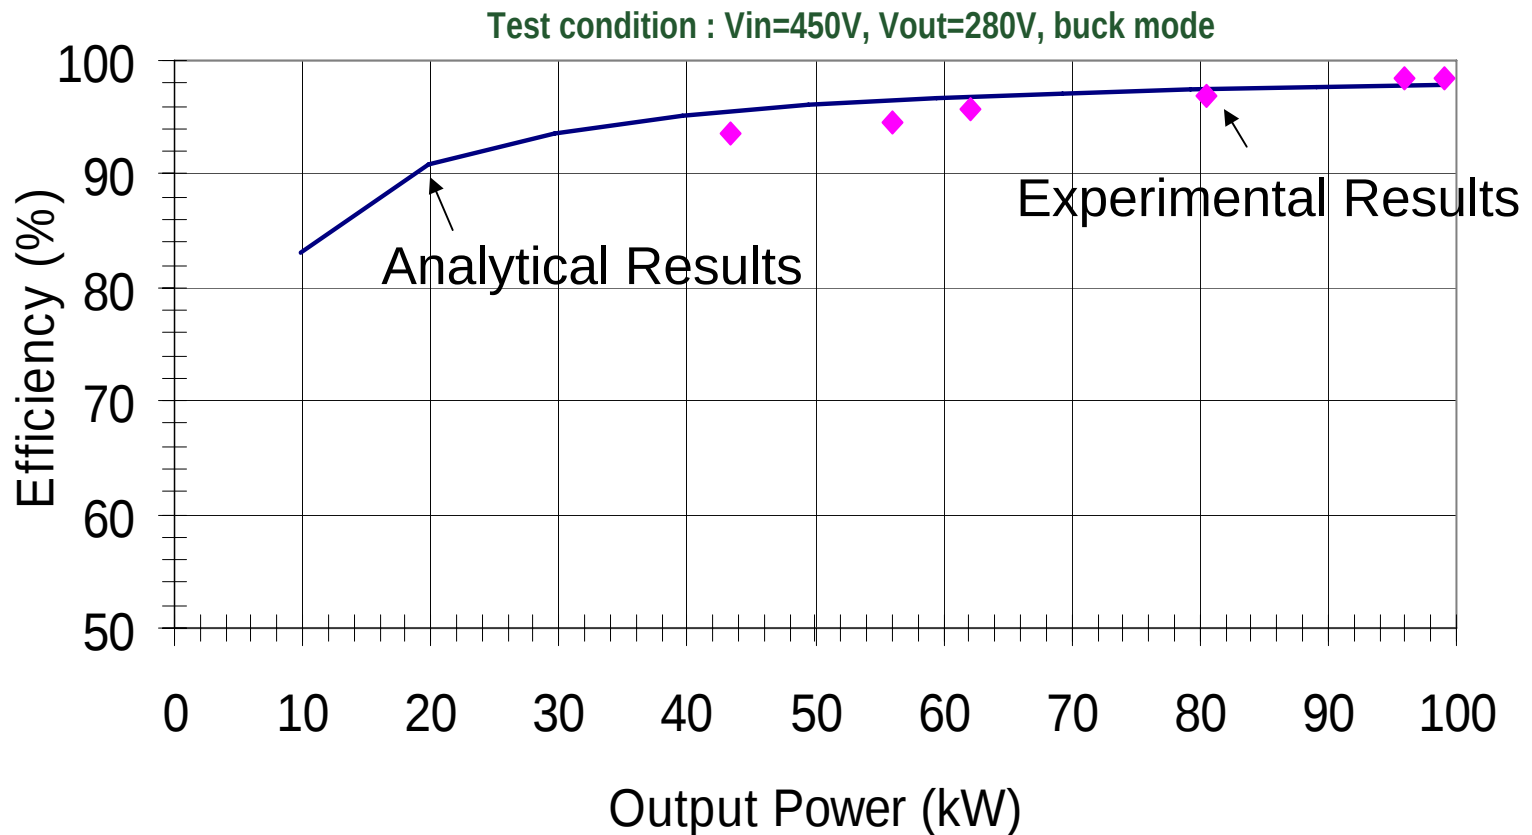

- Maximum efficiency is around 97%

Experimental efficiencies in Boost Mode (240V input and 360V output)

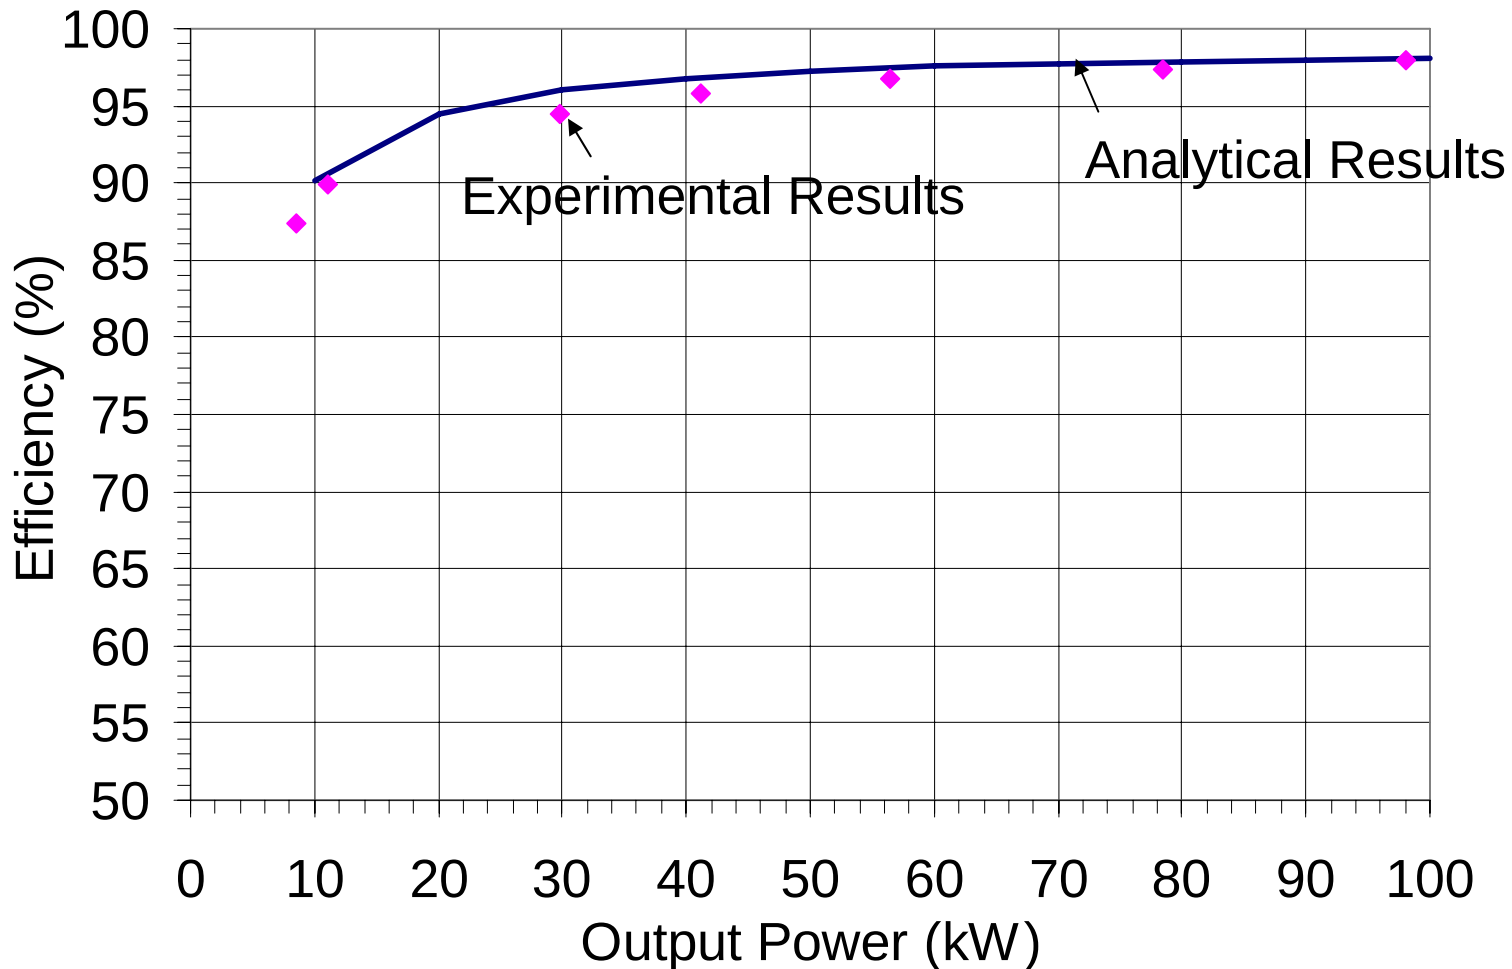

- Maximum efficiency is around 98%

Summary

- ◆ Si-based soft-switching bidirectional DC-DC converter has been successfully demonstrated
 - Novel soft-switching circuit without extra switch/inductor
 - DSP (TI-TMS320F2808), inductor, gate driver, optical fiber interface designed
- ◆ Successfully tested at 90°C temperature for 30-kW continuous and 108-kW.
- ◆ Efficiency of 97-98% achieved in both buck and boost modes
- ◆ Compact size (less than 25 liters) demonstrated
- ◆ SiC/Si hybrid power modules being packaged for DC-DC converter operating at high coolant temperature >90°C
- ◆ Six phase interleaved design will reduce stress to inductors for robust long-term reliable DC-DC converter for FCS