

UNCLASSIFIED

AD NUMBER	
AD309255	
CLASSIFICATION CHANGES	
TO:	UNCLASSIFIED
FROM:	CONFIDENTIAL
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 24 NOV 1958. Other requests shall be referred to Naval Ordnance Lab., White Oak, MD.	
AUTHORITY	
30 Nov 1970, DoDD 5200.10 ; NOL ltr 29 Aug 1974	

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



DECLASSIFIED
DOD DIR 5200.9

UNCLASSIFIED

~~CONFIDENTIAL~~
A 309255

Armed Services Technical Information Agency

ARLINGTON HALL STATION
ARLINGTON 12 VIRGINIA

FOR
MICRO-CARD
CONTROL ONLY

1 OF 1

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address:
Armed Services Technical Information Agency, Arlington Hall Station,
Arlington 12, Virginia

NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

**Best
Available
Copy**

CONFIDENTIAL

NAVORD REPORT

4491

AD No. **309 255**
ASTIA FILE COPY

STATIC AND DYNAMIC STABILITY TESTS OF A PROPOSED VERSION OF THE GIMLET ROCKET (U)

FILE COPY

Return to

ASTIA

ARLINGTON HALL STATION

ARLINGTON 12, VIRGINIA

Attn: TISS5

FC

24 NOVEMBER 1958



U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

CONFIDENTIAL



CONFIDENTIAL
NAVORD Report 4491

Aerodynamics Research Report 382

**STATIC AND DYNAMIC STABILITY TESTS OF A PROPOSED
VERSION OF THE GIMLET ROCKET**

Prepared by:

**I. Shantz
F. J. DeMeritte**

ABSTRACT: Presented in this report are the static stability and pitch damping results obtained in an investigation of a proposed version of the Gimlet Rocket. This investigation was performed at subsonic and supersonic speeds in the Aeroballistics Tunnel No. 1.

**U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND**

**1
CONFIDENTIAL**

CONFIDENTIAL

NAVORD Report 4491

24 November 1958

This is a report on an investigation to determine the static and dynamic stability of a proposed version of the Gimlet Rocket. The investigation was performed at the request of the Naval Ordnance Test Station (reference (a)) under task number 103-666/64016/03040.

MELL A PETERSON
Captain, USN
Commander

R. KENNETH LOBB
By direction

CONFIDENTIAL
NAVORD Report 4491

Table of Contents

	Page
Introduction.....	1
Symbols.....	1
Nomenclature.....	2
Models and Balances.....	2
Data and Data Reduction.....	2
References.....	4

Illustrations

Table I	Test section conditions for static test
Table II	Test section conditions for damping test
Figure 1	Photograph of the static model
Figure 2	Photograph of the static model body alone
Figure 3	Sketch of the Gimlet Model
Figures 4-10	Plotted static stability and drag data
Figure 11	Plotted damping data

CONFIDENTIAL
NAVORD Report 4491

STATIC AND DYNAMIC STABILITY TESTS OF A PROPOSED
VERSION OF THE GIMLET ROCKET

INTRODUCTION

1. The Gimlet Rocket is a two-inch diameter rocket fired from an airplane. The rocket is being developed by the Naval Ordnance Test Station for the Bureau of Ordnance.
2. The rocket is stored aboard the airplane in a tube. The four fins are folded aft of the rocket, upon launching the fins open and lock into place.

Symbols

A	model reference cross-sectional area
c.g.	center of gravity (see Figure 3)
C_A	axial force coefficient (F_A/qA)
C_N	normal force coefficient (F_N/qA)
C_O	pitching moment coefficient referred to base of model (M_O/qAd)
$C_{M_q} + C_{M_{\dot{\alpha}}}$	aerodynamic damping coefficient
d	model reference diameter: (0.75 in.) static model and (0.437 in.) damping model
F_A	axial force (lbs)
F_N	normal force (lbs)
I	transverse moment of inertia about the center of gravity (slugs-ft ²)
K_H	ballistic damping coefficient ($\frac{\mu}{\rho V d^4} = \pi/16(C_{M_q} + C_{M_{\dot{\alpha}}})$)
l	model length
M	Mach number
M_O	pitching moment referred to base of model (in.-lbs)
q	dynamic pressure (psia)
Re	Reynolds number based on model length
t	time (seconds)
V	velocity (ft/sec)

CONFIDENTIAL
NAVORD Report 4491

α	angle of attack in pitch plane (degrees)
ϕ	angle of roll (degrees)
ρ	air density (slugs/cu.ft.)
u	damping coefficient ($-2I(\ln \alpha/\alpha_0)/t$)

Nomenclature

B	Body alone
BF	Body fin

Models and Balances

3. The models were designed and manufactured at the Naval Ordnance Test Station. The static model was used with an NOL designed and manufactured internal strain-gage balance. The damping model was dynamically balanced about the full-scale center of gravity. The location of the center of gravity of the rocket is different for the "loaded" and the "burned out" condition. Damping models simulating each of the conditions were built. The damping model was too small for ball bearings so the shaft through the center of gravity slid on a teflon insert in the body. The model was free to rotate in the pitch plan about the center of gravity.

4. The damping data are obtained by having the model mounted in the wind tunnel, rotating the model slowly, and starting the wind tunnel. The resulting damping motion is photographed using a 16 mm movie camera.

5. Figure 1 is a photograph of the static model with fins, while Figure 2 is a photograph of the static model without fins. Figure 3 is a sketch of the Gimlet model showing pertinent dimensions.

Data and Data Reduction

6. The static stability data are presented in Figures 4 through 10. The data are plotted as C_N versus α and C_O versus α for Mach numbers of 0.78, 0.94, 2.15, 2.48 and 3.22. Axial force data were obtained at Mach number 2.15 and are plotted as C_A versus α . Pitching moment coefficients are referred to the base of the model.

CONFIDENTIAL
NAVORD Report 4491

7. The damping data are plotted as $C_{M_q} + C_{M_\alpha}$ versus M in Figure 11 for Mach numbers 0.93, 1.56, 1.75, 2.15, 2.48, 2.87 and 3.24. The damping data were determined for the center of gravity at loaded and burned out conditions of the rocket.
8. The techniques for the reducing of the damping data are described in reference (b). Briefly, the data reduction consists of two phases, reading the film and fitting a logarithmic envelope to the data obtained from the film. From the film the angle of attack of the model is obtained for each frame of film using a comparator. The time record is obtained from the camera speed (64 frames per second). The angular deflection plotted against time yields a damped sine motion. The envelope of the motion is fitted. In true harmonic damping, this envelope would be of the form $\alpha = \alpha_0 e^{-\mu t/2I}$.
9. The static data are recorded with the ADAPS (reference (c)) and the data are reduced using an IBM 650 machine. The strain-gage techniques are explained in reference (d) and the data reduction equations are listed in reference (e).

CONFIDENTIAL
NAVORD Report 4491

References

- (a) Okauchi, K., Wind-Tunnel Request (WTR 300 and WTR 325) (Unclass) 1956
- (b) Shantz, I., and Groves, R. T., "Subsonic Damping-in-Pitch Measurements of the EX-10, EX-30, and 6" Test Vehicle", NAVORD Report 4025, (Conf.) Unpublished AD-303075
- (c) Gilbert, B. D., "Automatic Data Processing System (ADAPS) for the Supersonic Wind Tunnels", NAVORD Report 2813, (Unclass) 1953 AD-123067
- (d) Shantz, I., Gilbert, B., and White, C., "NOL Wind-Tunnel Internal Strain-Gage Balance System", NAVORD Report 2972, (Unclass) 1955
- (e) DeMeritte, F. J., Gilbert, B. D., and White, C. E., "Contract Wind-Tunnel Testing", NAVORD Report 3562, (Unclass) Unpublished L=0

CONFIDENTIAL
NAVORD Report #491

TABLE I

Test Section Conditions for Static Test

M	Figure No.	Configuration	θ (degrees)	q (psia)	Re x 10 ⁻⁶
0.78	4	BF	0	4.00	5.8
0.78	4	B		4.02	5.9
0.94	5	BF	0	4.91	6.4
0.94	5	B		4.92	6.4
2.15	6	BF	0	4.63	5.2
2.15	7	BF	45	4.63	5.2
2.15	8	B		4.63	5.2
2.48	9	BF	0	3.75	4.4
2.48	9	B		3.75	4.4
3.22	10	BF	0	2.07	3.1
3.22	10	B		2.07	3.1

B - body alone (ℓ - 16.667 in.)

BF - finned body (ℓ - 16.657 in.)

CONFIDENTIAL
NAVORD Report 4491

TABLE II
Test Section Conditions for Damping Test

L'	q (psia)	$Re \times 10^{-6}$
0.93	4.73	3.7
1.56	6.1	3.7
1.75	5.8	3.5
2.15	4.76	2.9
2.48	3.78	2.6
2.92	2.70	2.1
3.24	2.03	1.8

Body length 9.716 in.

CONFIDENTIAL
NAVORD REPORT 4491

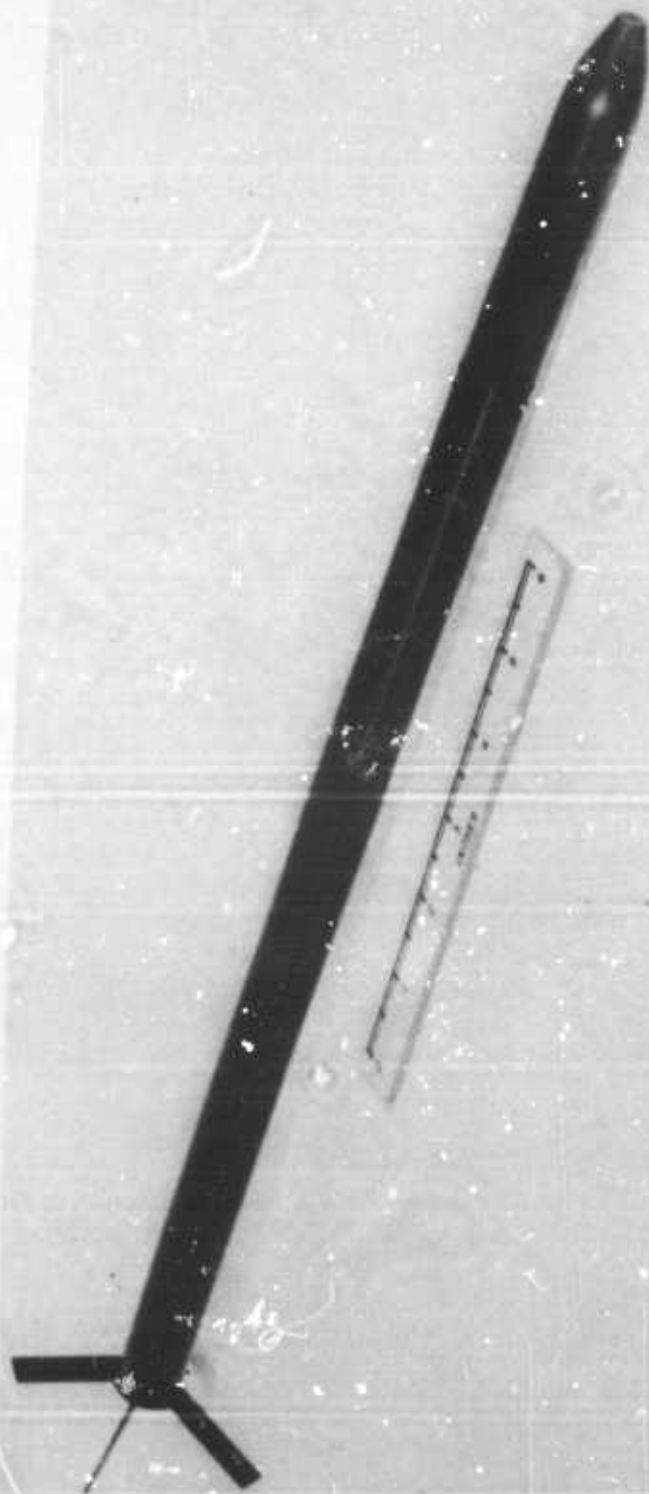


FIG. 1 STATIC MODEL

CONFIDENTIAL

CONFIDENTIAL
NAVORD REPORT 4491



FIG. 2 STATIC MODEL
BODY ALONE

CONFIDENTIAL

CONFIDENTIAL
NAVORD REPORT 4491



FIG. 3 GIMLET MODEL
(ALL DIMENSIONS IN CALIBERS)

CONFIDENTIAL

CONFIDENTIAL
NAVED REPORT 4438

CLIMATE
MICHIGAN 0478

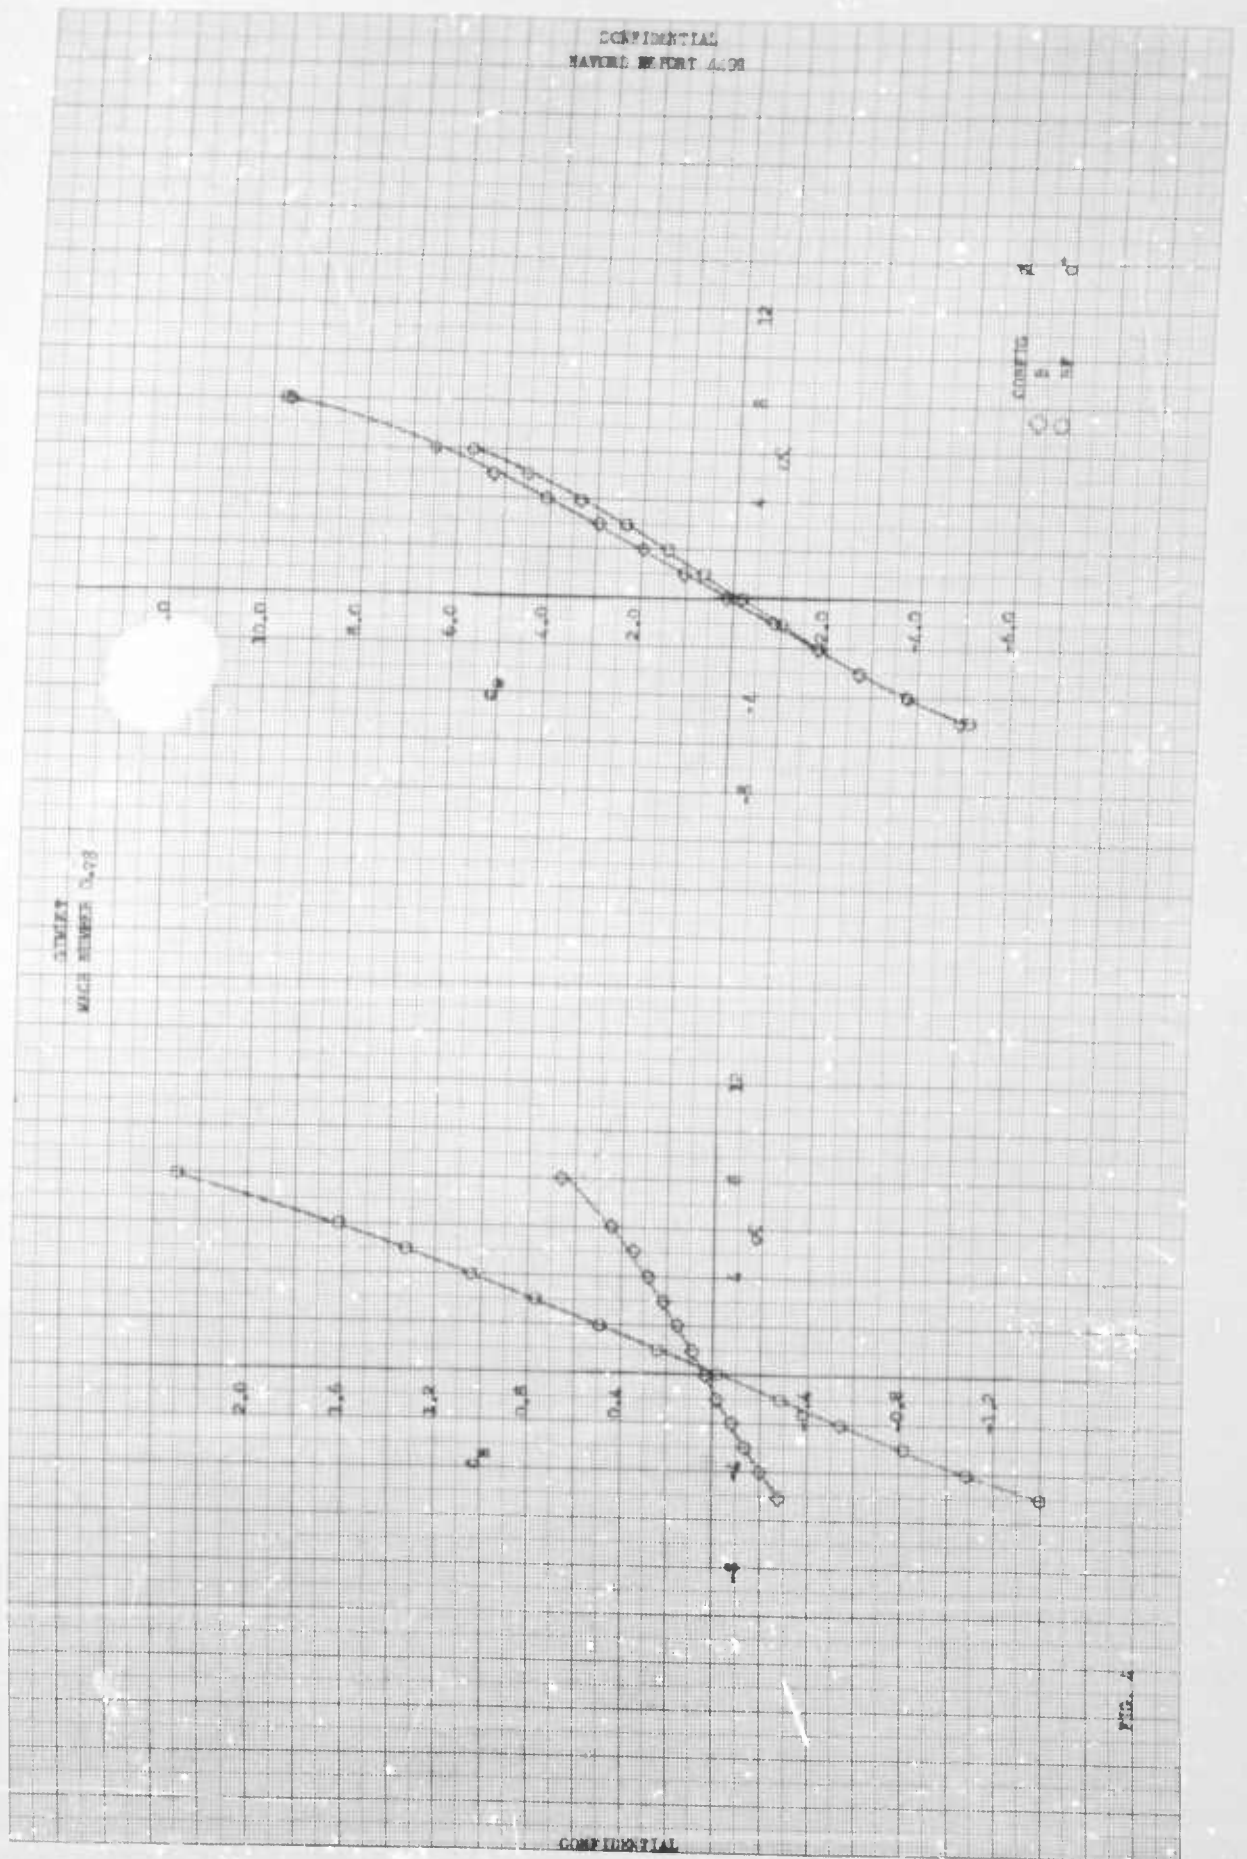


FIG. 4

CONFIDENTIAL

CONFIDENTIAL
 NAMED REPORT 4498

GIMLET
 NAME NUMBER C.94


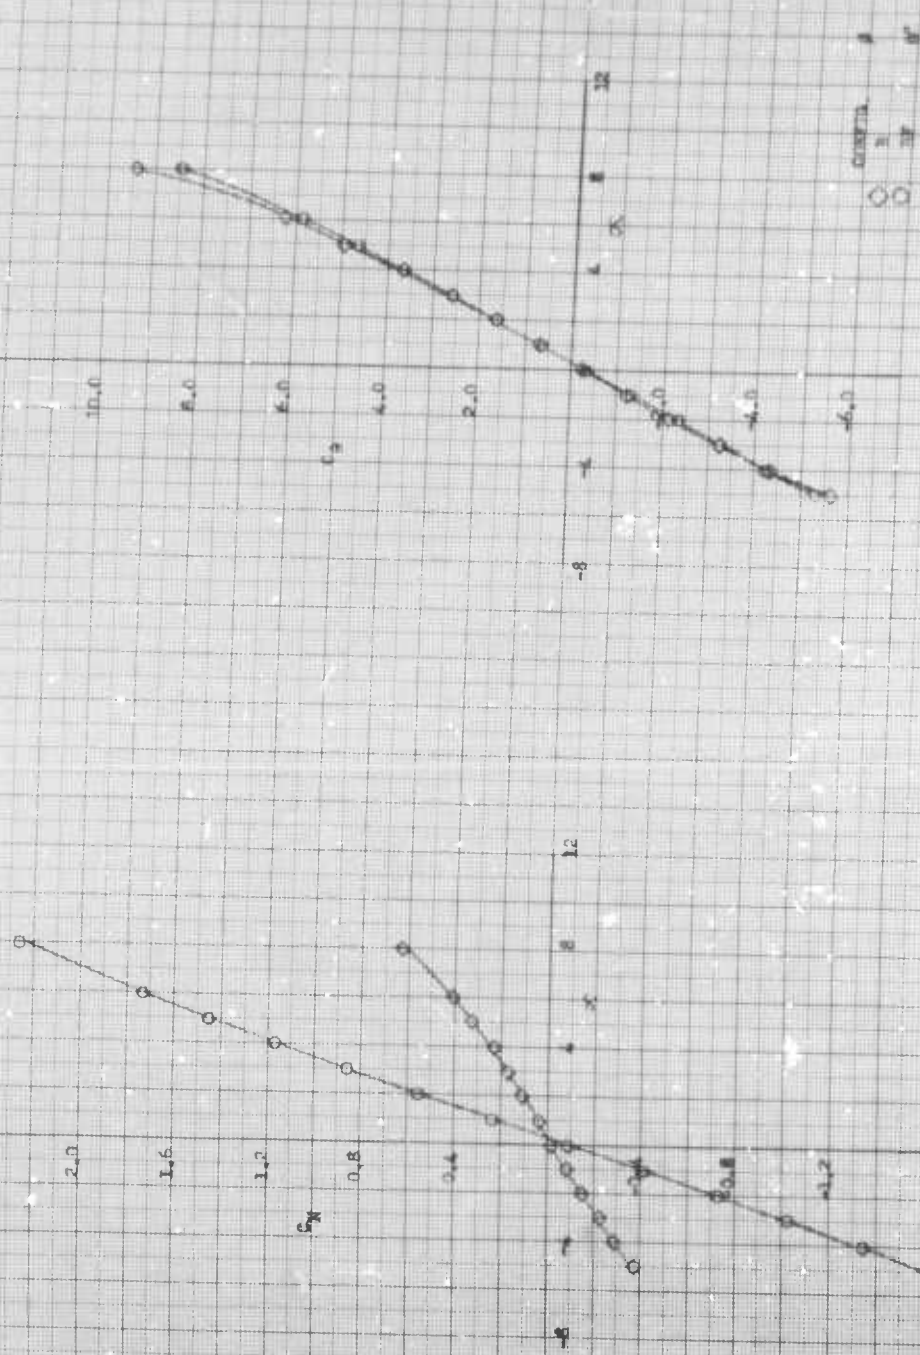


FIG. 1

CONFIDENTIAL


CONFIDENTIAL
NAVORD REPORT 4491

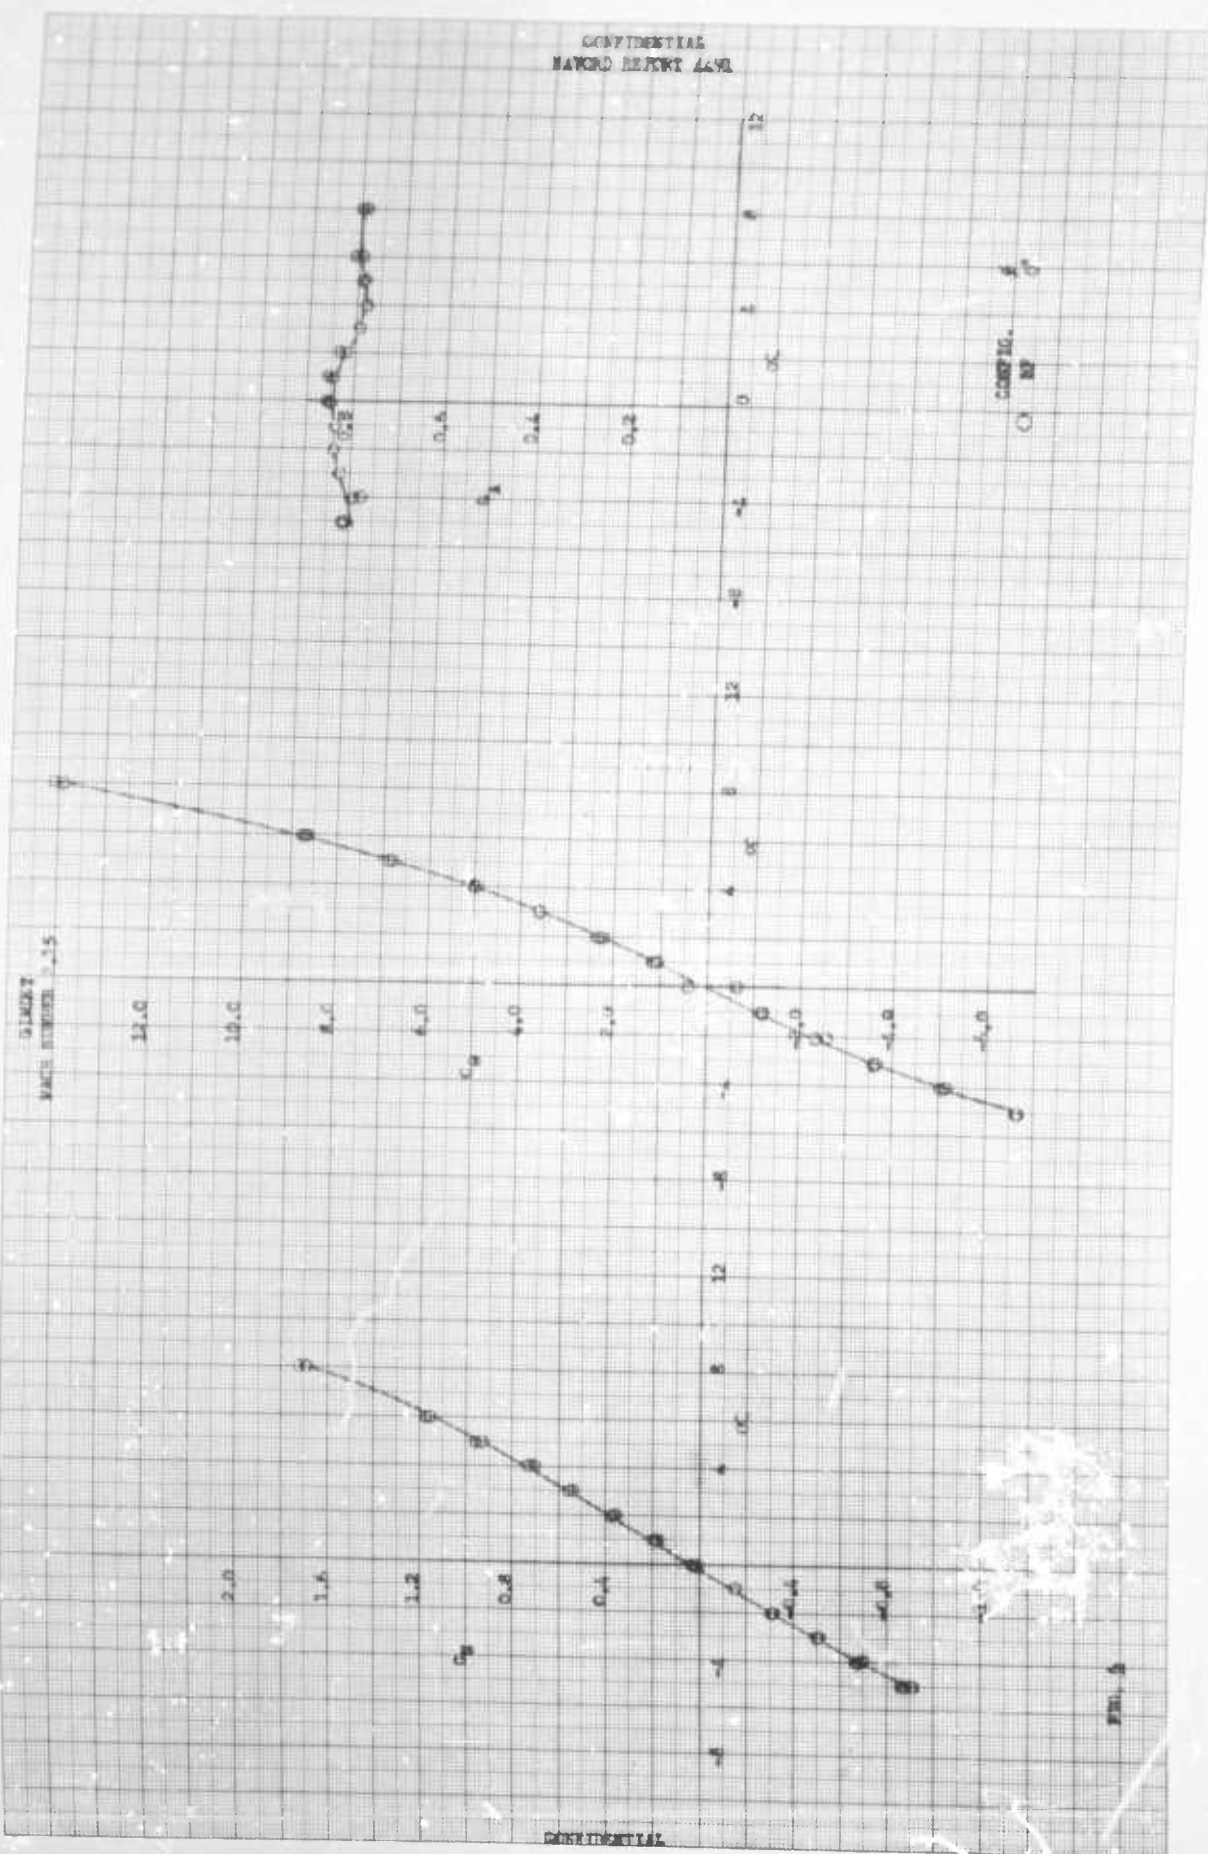

CONFIDENTIAL
NAVAL REPORT 4491




CONFIDENTIAL
NAVY REPORT 1101

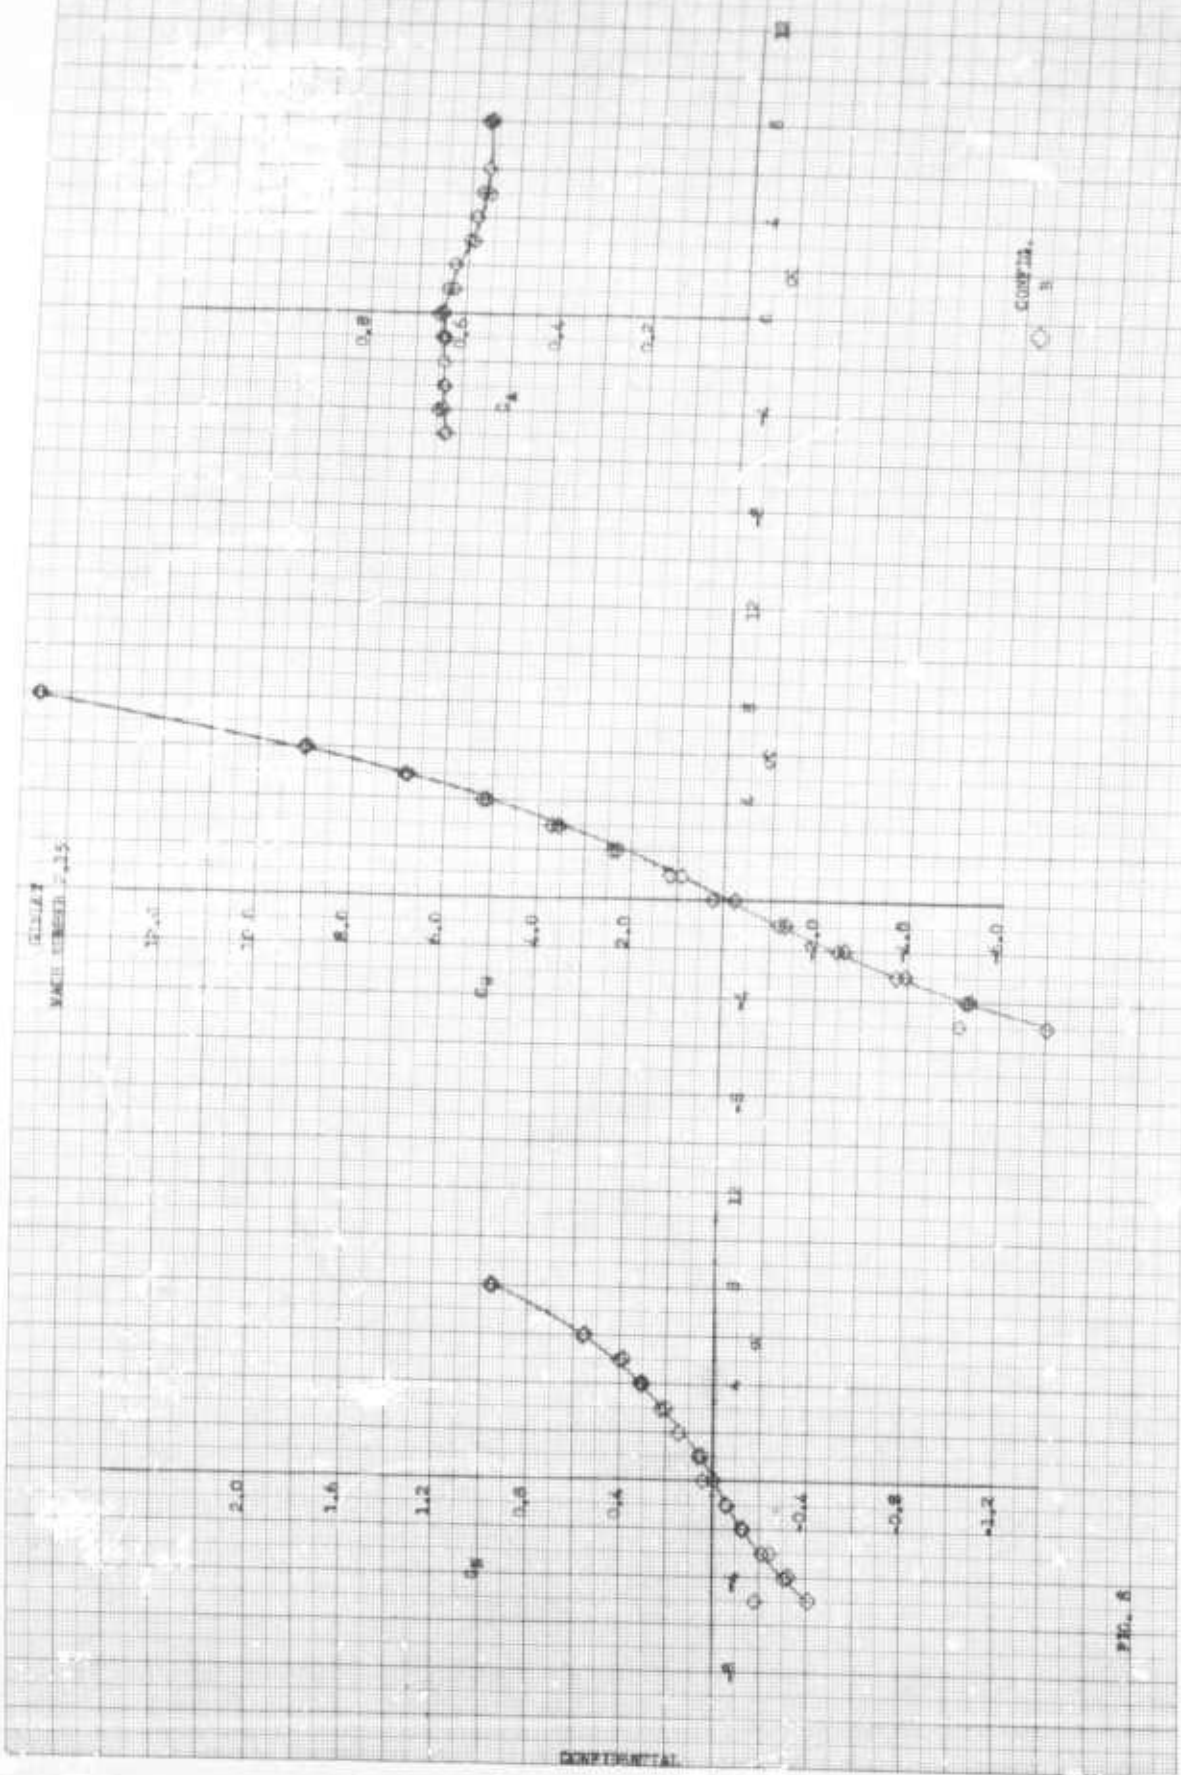


CLASS 1
MACH 1.5

FIG. 8

CONFIDENTIAL

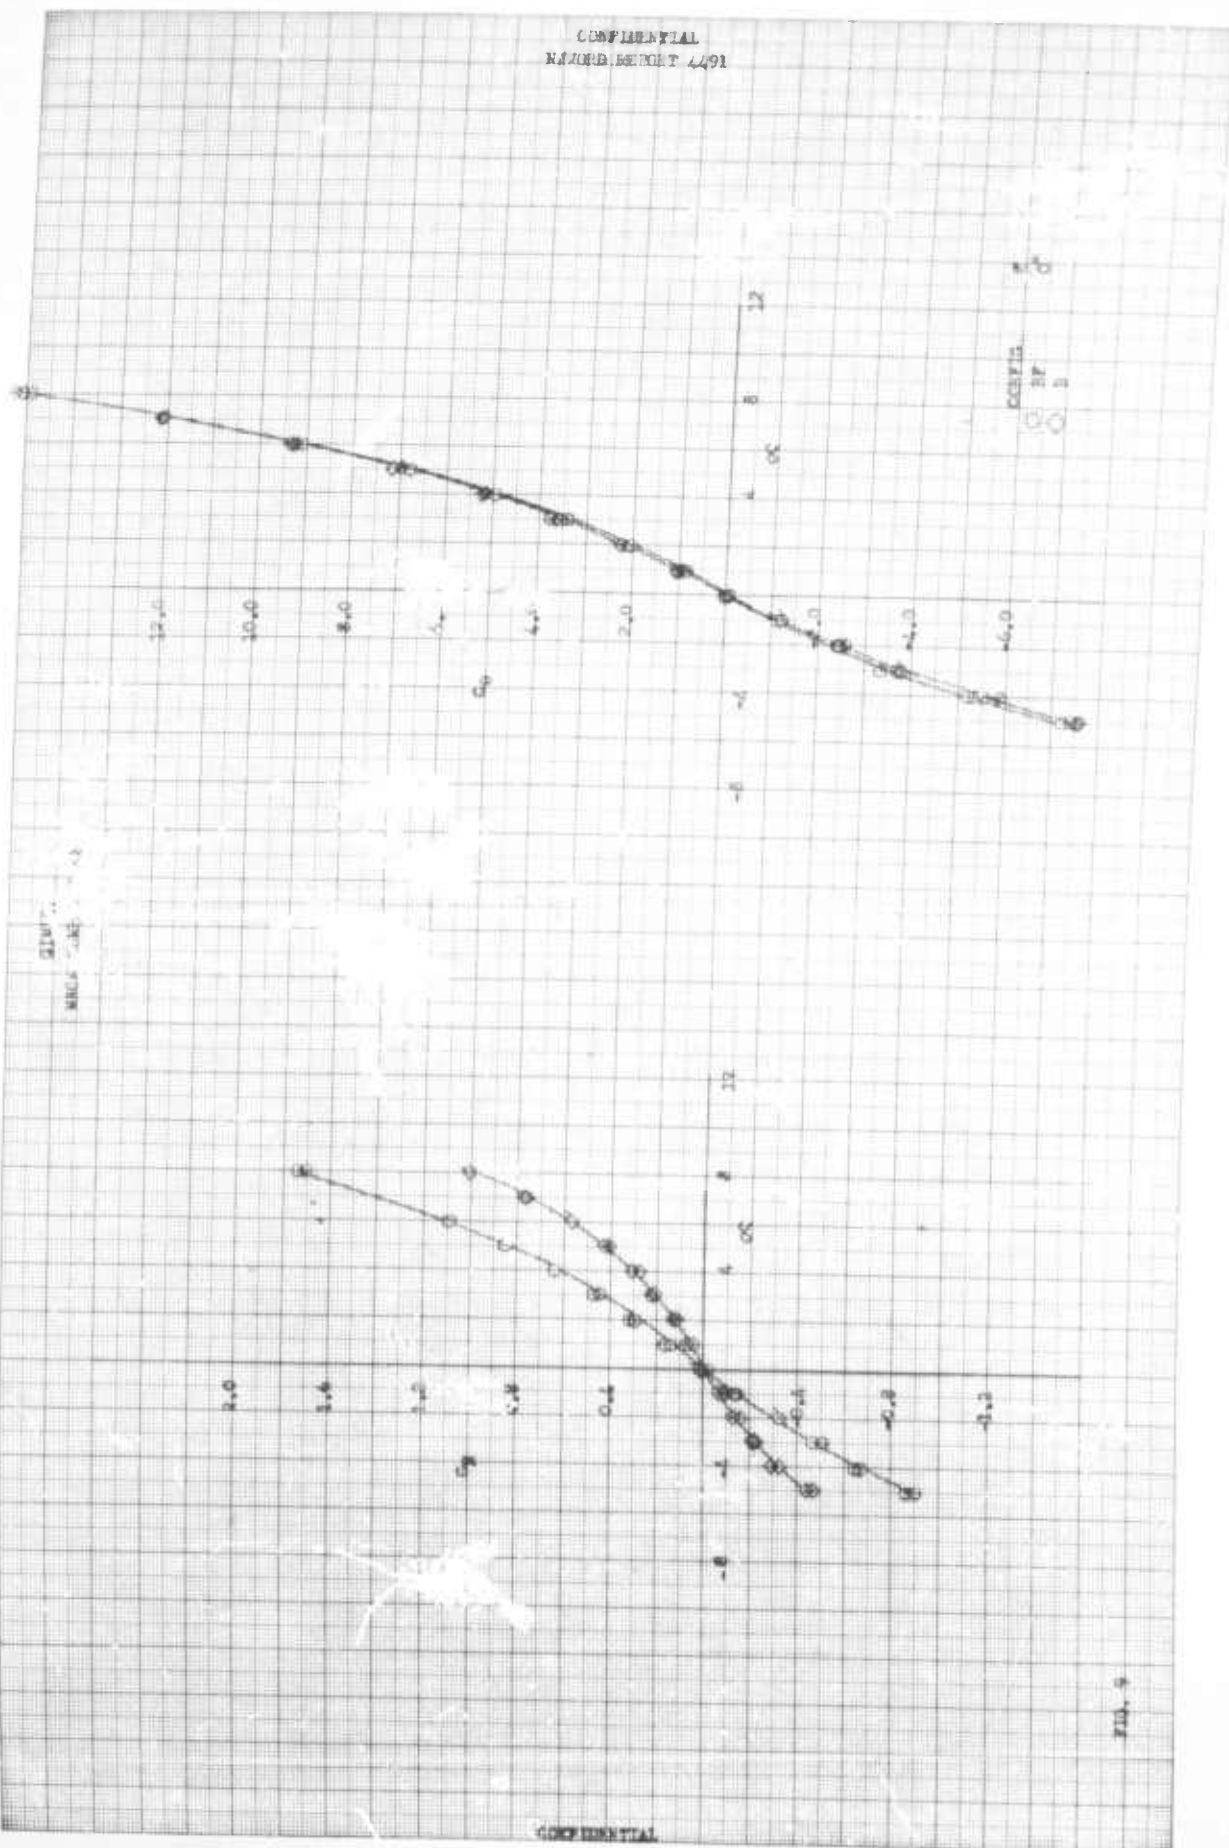


CONFIDENTIAL
NAVAL REPORT 4891

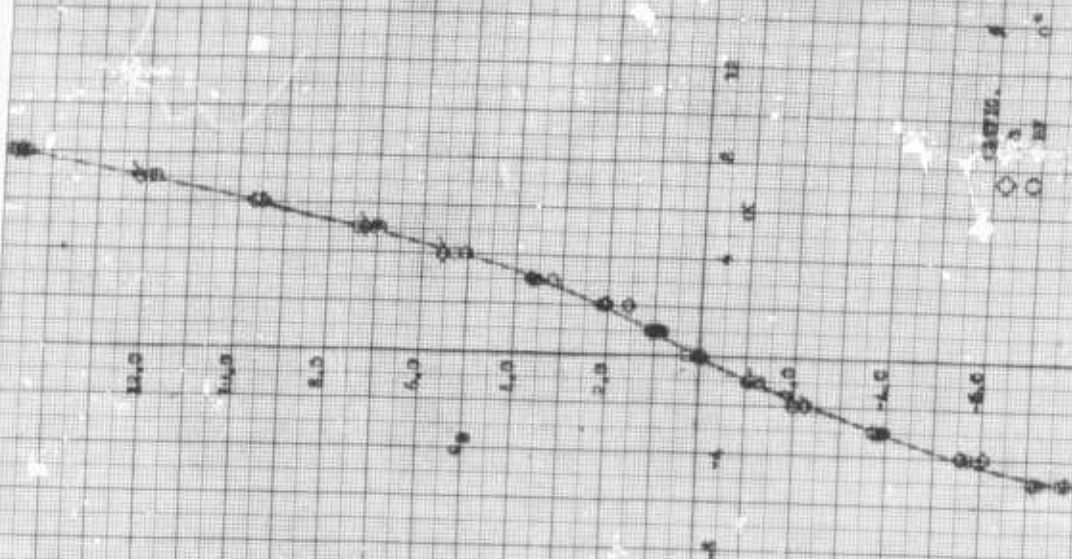

CONFIDENTIAL
NAVAL REPORT 4891

CONFIDENTIAL
NAVAL REPORT 4891

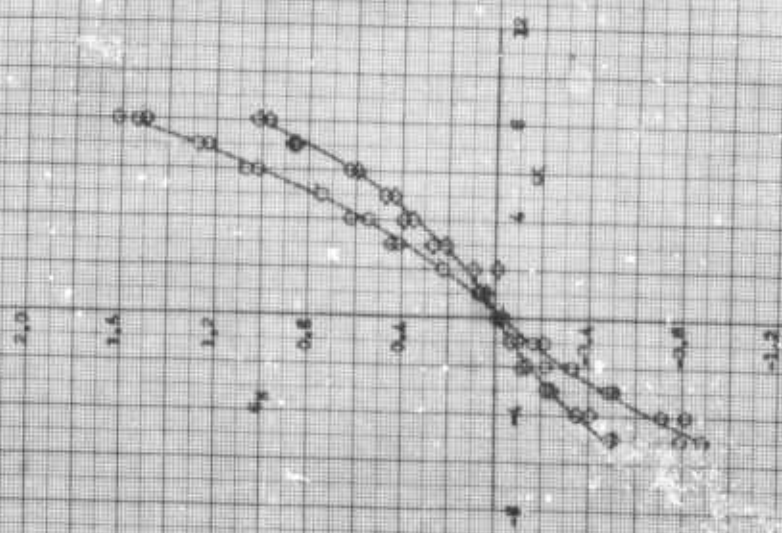


CONFIDENTIAL
NAVAL REPORT 4891


CONFIDENTIAL

CONFIDENTIAL
NAVORD Report 4491

GINLET

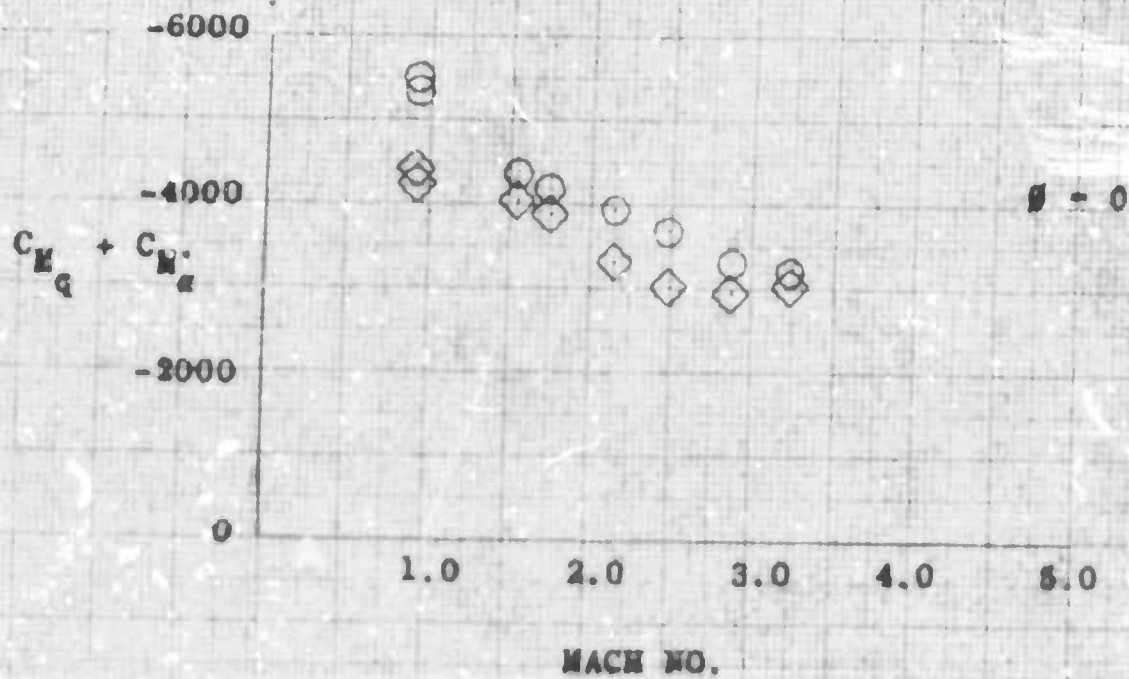

○ EMPTY (O) C.E.
◇ LOADED C.E.

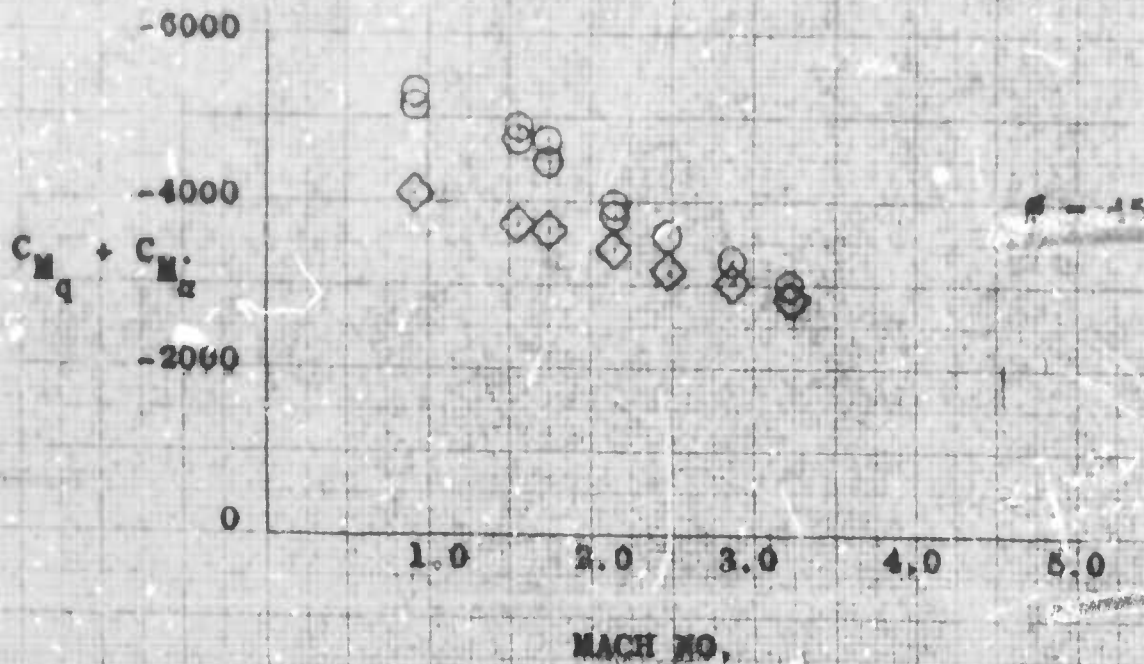

CONFIDENTIAL

Figure 11