

UNCLASSIFIED

AD NUMBER

AD316595

CLASSIFICATION CHANGES

TO: UNCLASSIFIED

FROM: CONFIDENTIAL

LIMITATION CHANGES

TO:
Approved for public release; distribution is unlimited.

FROM:
Controlling DoD Organization: Army Chemical Procurement Agency, Edgewood Arsenal, MD 21010.
21 Apr 1960.

AUTHORITY

OSD/WHS memo dtd 28 Jan 2013; OSD/WHS memo dtd 28 Jan 2013

THIS PAGE IS UNCLASSIFIED

#14

~~CONFIDENTIAL~~

AD

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 23 2013

316 595

Reproduced by

Armed Services Technical Information Agency

ARLINGTON HALL STATION; ARLINGTON 12 VIRGINIA

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITE / RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER. OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

~~CONFIDENTIAL~~

12-M-1575 R-1

DECLASSIFIED IN FULL
Authority: EO 13526
Chief, Records & Declass Div, WHS
Date: JAN 23 2013

Office of the Secretary of Defense 505.69554
Chief, RDD, ESD, WHS
Date: 23 JAN 2013 Authority: EO 13526
Declassify: X Deny in Full: _____
Declassify in Part: _____
Reason: _____
MDR: 12-M-1575

~~CONFIDENTIAL~~

NATIONAL BUREAU OF STANDARDS REPORT

6A238

FORCE AND MOMENT CHARACTERISTICS OF FULL SCALE MODELS
OF THE CHEMICAL CORPS CLUSTER MISSILE R42R1
AND THE FIRE ROCKET R42

by R. H. Heald and G. H. Adams

AD No. 3/6-595
ASTIA FILE COPY

FILE COPY
Return to
ASTIA
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA
Attn: TISS

XEROX

To
U. S. ARMY CHEMICAL CENTER
PROCUREMENT AGENCY



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

~~CONFIDENTIAL~~

~~www.nist.gov U.S. Copyright 1992 by the National Bureau of Standards~~

CONFIDENTIAL

NATIONAL BUREAU OF STANDARDS REPORT

6A238

FORCE AND MOMENT CHARACTERISTICS OF FULL SCALE MODELS
OF THE CHEMICAL CORPS CLUSTER MISSILE E42R1
AND THE FIRE ROCKET E42

by R. H. Heald and G. H. Adams

AD No. 316 595
ASTIA FILE COPY

FILE COPY
Return to
ASTIA
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA
Attn: YISS

XEROX

To
U. S. ARMY CHEMICAL CENTER
PROCUREMENT AGENCY



ASTIA
MAY 9 1968
TIPDR B

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. Research projects are also performed for other government agencies when the work relates to and supplements the basic program of the Bureau or when the Bureau's unique competence is required. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers. These papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three periodicals available from the Government Printing Office: The Journal of Research, published in four separate sections, presents complete scientific and technical papers; the Technical News Bulletin presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: Monographs, Applied Mathematics Series, Handbooks, Miscellaneous Publications, and Technical Notes.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$1.50), available from the Superintendent of Documents, Government Printing Office, Washington 25, D.C.

CONFIDENTIAL

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

0603-12-06434

April 21, 1960

6A238

**FORCE AND MOMENT CHARACTERISTICS OF FULL SCALE MODELS
OF THE CHEMICAL CORPS CLUSTER MISSILE E42R1
AND THE FIRE ROCKET E42**

by R. H. Heald and G. H. Adams

Fluid Mechanics Section
Mechanics Division

To

U. S. ARMY CHEMICAL CENTER
PROCUREMENT AGENCY

Delivery Order No. GP8-405-6468

IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS REPORTS are usually preliminary or progress accounting documents intended for use within the Government. Before material in the reports is formally published it is subjected to additional evaluation and review. For this reason, the publication, reprinting, reproduction, or open-literature listing of this Report, either in whole or in part, is not authorized unless permission is obtained in writing from the Office of the Director, National Bureau of Standards, Washington 25, D. C. Such permission is not needed, however, by the Government agency for which the Report has been specifically prepared if that agency wishes to reproduce additional copies for its own use.

NBS

**U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

FORCE AND MOMENT CHARACTERISTICS OF FULL SCALE MODELS

OF THE CHEMICAL CORPS CLUSTER MISSILE E42R1

AND THE FIRE ROCKET E42

by R. H. Heald and G. H. Adams

1. INTRODUCTION

In accordance with a request from the Army Chemical Center, Maryland, wind tunnel measurements have been made at the National Bureau of Standards to determine static stability, lift, and drag characteristics at various yaw presentations of twenty-one experimental configurations of the A.C.C. Cluster Missile E42R1 and the Fire Rocket E42. Full scale models, consisting of thick cardboard body sections, (cylindrical in shape) with attached support spindle, interchangeable wooden nose sections and metal tail sections were supplied for the tests by the Army Chemical Center. The maximum model diameter was 8.75 inches and the overall length approximately 60 inches. Two sets of measurements were made, at separate times, and the results were supplied in preliminary form to a representative of A.C.C. at the completion of each series of tests. The models were fitted with a round nose in all tests except one in which an ogive nose was used (table 2). The present report is a formal summary of the experiments. The work was conducted in the NBS 6-foot wind tunnel at an airspeed of 200 feet per second. All measurements were made with plane of one pair of opposite fins oriented 90 degrees to the plane of yaw.

2. PROCEDURE

The model under test was supported, by means of its attached side spindle, in the chuck of the flexure-plate aerodynamic balance. This balance is capable of indicating forces in the range of 0-100 pounds and moments in the 0-100 foot-pound range. An indexing head permits setting yaw angles in the horizontal plane.

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

-2-
CONFIDENTIAL

In the first set of measurements various combinations of nose, body and tail units, both with and without the afterbody fairing were used. These configurations were designated the E42R1 assemblies. One of the E42R1 assemblies, description and data for which are contained in table 11, is shown mounted for testing in the photograph of figure 1. In the second series of measurements a single nose and body combination was used and the principal modifications consisted of changes in fin length. The assemblies comprising this group were designated the E42 configurations. In all cases lift, drag and torque (restoring moment) measurements were made at 2 degree intervals for both positive and negative angles of yaw and the values given in the tables are the means of observed values at corresponding yaw angles. The measurements were made for yaw angles ranging from 0 to the neighborhood of ± 20 degrees in the cases of the E42R1 configurations. The test range for the E42 configurations was 0 to ± 12 degrees. For all the experiments on the E42R1 configurations the spindle was kept at its original point of attachment to the body. Likewise, the spindle location on the body of the E42 was not changed during the measurements on the latter configurations. The values of torque (restoring moment) and center of pressure position are given in the tables with regard to these two fixed spindle positions.

3. RESULTS

The results of the measurements on the various configurations of the E42R1 model are given in tables 1-14. The data obtained for the E42 assemblies are given in tables 15-21,

Comparison of the data of tables 1-14 shows that the largest center of pressure values, throughout the 2-20 degree test range of yaw angles of the E42R1 model, occurred when the model was equipped with the fins which were not cut out and the 26-inch fairing. As will be seen in table 14 center of pressure distances for this

CONFIDENTIAL

CONFIDENTIAL

configuration ranged from 1.17 feet aft of the support spindle at 2 degrees yaw to 1.62 feet aft of the spindle at 20 degrees yaw with a mean of 1.42 feet for the test range. The accompanying values of restoring moment (torque) about the spindle ranged from 3.4 pounds feet at 2 degrees yaw to 68.9 pounds feet at 20 degrees yaw. The drag values for this configuration ranged from 5.3 pounds at 0 degrees to 17.2 pounds at 20 degrees yaw.

The second largest set of center of pressure values for the test range of the E42R1 assemblies occurred in the case of the configuration of table 10. This configuration which was equipped with attached fins and 12-inch boat tail fairing gave center of pressure distances ranging between 1.07 feet at 4 degrees to 1.55 feet at 20 degrees yaw. The values of righting moment for the assembly varied between 3.4 pounds feet at 2 degrees and 65.0 pounds feet at 20 degrees yaw and drag values ranged between 5.5 pounds at 0 degrees and 16.6 pounds at 20 degrees. Other arrangements of the E42R1 group which exhibited relatively large values of center of pressure distance and restoring moment are those of tables 1, 6 (in the 2-10 degree yaw range), 11, 12 and 13.

The results of the measurements on the various arrangements of the Fire Rocket E42 are given in tables 15-21. In general, these arrangements show increasing center of pressure distance with increase of yaw angle in the test range of 2-12 degrees. Based on mean values in this range the largest center of pressure distance of the E42 series occurred when fin unit F and tail 3 (table 20) were used on the model. This arrangement gave rise to center of pressure distances ranging from 0.45 feet at 2 degrees to 0.75 feet at 12 degrees yaw and values of restoring moment ranging from 1.4 to 18.2 pounds feet. Drag values varied between 4.3 pounds at 0 degrees and 8.6 pounds at 12 degrees yaw.

CONFIDENTIAL

CONFIDENTIAL

Equipped with fin unit G and tail 4 (table 21) the E42 model exhibited center of pressure distances almost as large as those obtained using the fin F and tail 3 combination. Fitted with fin G and tail 4 the model showed center of pressure distances ranging between 0.45 feet at 2 degrees and 0.72 feet at 12 degrees yaw with corresponding values of restoring moment of 1.4 and 18.2 pounds feet. Drag at 0 degrees for this arrangement amounted to 4.3 pounds; drag at 12 degrees was 9.3 pounds. Other arrangements of the E41 giving relatively large values of center of pressure distance and restoring moment were those of tables 15 and 17.

In conclusion reference is made to NBS Confidential Report 6A237 to the Army Chemical Center in which attention is called to the possibility of large-angle oscillations of certain finned missiles known, on the basis of wind tunnel tests using models, to possess good static stability.

CONFIDENTIAL

-5-
CONFIDENTIAL

Table 1

ACC Missile E42R1 (Cardboard Model)
Equipped with Round Nose and Tail Assembly Consisting
of Unfinned Boattail 5 Inches Long and Cut Out Fins
of 10 7/8-Inch Chord and 13 3/8-Inch Span
One Pair of Fins 90° to Plane of Yaw
Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal* Force lb	Torque about Spindle lb-ft	Center of Pressure** Distance (Aft of Spindle) ft
0	-	4.2	-	-	-
2	2.9	4.5	3.1	+2.6	0.85
4	6.4	4.9	6.7	5.9	.88
6	9.3	5.8	9.9	10.1	1.02
8	14.3	7.3	15.2	16.7	1.10
10	19.6	9.3	20.9	25.8	1.23
12	24.6	11.4	26.4	34.5	1.31
14	29.5	13.7	31.9	42.5	1.33
16	34.4	15.3	37.3	50.5	1.35
18	39.2	19.4	43.3	58.7	1.35
20	44.1	22.2	49.1	66.8	1.36

* Computed from: $Lift \times \cos \alpha + Drag \times \sin \alpha = Normal\ Force.$

** Computed from: $\frac{Torque}{Normal\ Force}$

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

-6-
CONFIDENTIAL

Table 2
ACC B42R1 Missile
Equipped with Ogive Nose and 26-Inch Narrow Fins*
Fins 90°
Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	6.5	-	-	-
2	3.6	6.9	3.8	0.3	0.08
4	7.5	7.4	8.0	0.8	.10
6	11.4	8.3	12.2	2.1	.17
8	17.0	9.5	18.1	4.4	.24
10	23.0	11.1	24.6	7.9	.32
12	29.1	13.2	31.2	11.8	.38
14	35.6	15.7	38.3	16.7	.44
16	42.7	18.7	46.2	22.6	.49
18	50.6	22.6	55.1	29.7	.54
20	58.0	26.5	63.6	37.0	0.58

* Fins mounted on body, extending forward from base.

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

-7-
CONFIDENTIAL

Table 3
ACC E42R1 Missile
Equipped with Round Nose and 26-Inch Narrow Fins*

Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	6.6	-	-	-
2	3.6	6.9	3.8	0.6	0.16
4	7.4	7.4	7.9	1.1	.14
6	11.8	8.2	12.6	2.6	.21
8	16.7	9.4	17.8	4.9	.28
10	22.3	11.0	23.9	8.0	.33
12	28.5	13.3	30.6	12.5	.41
14	35.1	15.9	37.9	17.2	.45
16	42.2	18.8	45.8	23.2	.51
18	49.4	22.3	53.9	29.8	.55
20	57.3	26.5	63.0	37.0	0.59

* Fins mounted on body, extending forward from base.

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 4
AGC M42R1 Missile
Equipped with Round Nose and 10-Inch Narrow Fins*

Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	6.1	-	-	-
2	2.9	6.4	3.1	1.1	0.35
4	5.8	7.0	6.3	1.4	.22
6	9.0	7.6	9.8	2.7	.28
8	12.6	8.5	13.6	4.8	.36
10	17.3	9.6	18.8	7.3	.39
12	20.0	10.9	21.8	10.0	.46
14	23.6	12.1	25.8	12.7	.49
16	28.1	14.0	30.9	16.5	.53
18	32.3	16.3	35.7	20.0	.56
20	36.8	18.8	41.1	24.0	0.58

* Fins mounted on body, extending forward from base.

CONFIDENTIAL

CONFIDENTIAL

Table 5
AGC M42R1 Missile
Equipped with 10-Inch Narrow Fins and Finned Boattail*
Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	4.6	-	-	-
2	2.2	4.7	2.3	0.4	0.17
4	5.5	5.0	5.9	1.1	.19
6	8.9	5.4	9.4	3.1	.33
8	12.8	6.4	13.5	6.2	.46
10	17.8	7.9	18.9	11.6	.61
12	22.7	9.4	24.2	17.9	.74
14	28.1	11.5	30.0	24.5	.82
16	33.8	14.0	36.4	32.6	.89
18	38.8	16.4	42.0	39.6	.94
20	44.3	19.4	48.3	47.3	0.98

* Fins mounted on body, extending forward from base.

CONFIDENTIAL

CONFIDENTIAL

Table 6

ACC E42R1 Missile

Equipped with Extension Fins at Rear of Unfinned Boattail

Fins 90°

Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.1	-	-	-
2	3.7	5.1	3.8	4.5	1.18
4	7.1	5.6	7.5	9.0	1.20
6	10.9	6.3	11.5	13.6	1.18
8	14.3	7.0	15.1	17.3	1.15
10	17.0	8.3	18.2	19.7	1.08
12	19.7	10.0	21.3	20.5	0.96
14	21.5	11.5	23.6	19.0	.81
16	23.3	13.5	26.1	16.7	.64
18	25.4	15.3	28.9	15.6	.54
20	27.3	17.2	31.6	13.5	0.43

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 7

ACC E42R1 Missile

Equipped with Extension Fins Ahead of Unfinned Boattail

Fins 90°

Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.3	-	-	-
2	4.3	5.6	4.5	1.2	0.27
4	8.6	6.2	9.0	5.8	.64
6	13.1	6.9	13.8	11.3	.82
8	16.9	8.1	17.8	14.4	.81
10	19.9	9.7	21.3	15.3	.72
12	22.1	11.2	23.9	17.6	.74
14	24.5	12.9	26.8	16.1	.60
16	27.0	14.8	30.1	15.7	.52
18	29.8	16.9	34.1	16.3	.48
20	33.0	19.2	37.6	18.1	0.48

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 8

ACC M42R1 Missile

Equipped with Sub-Caliber Fins and 18-Inch Fairing

Fins 90°

Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	3.8	-	-	-
2	1.5	3.8	1.6	0.2	0.13
4	3.5	4.1	3.8	0.2	.05
6	5.9	4.6	6.4	1.1	.17
8	8.7	5.2	9.3	1.1	.12
10	11.7	6.0	12.6	6.2	.49
12	15.2	7.3	16.4	9.6	.59
14	18.9	8.6	20.4	13.7	.67
16	22.7	10.3	24.7	18.2	.74
18	26.6	12.1	29.0	23.0	.79
20	30.4	14.1	33.4	27.8	0.83

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 9
ACC M42R1 Missile
Equipped with Sub-Caliber Fins, Shroud and 18-Inch Fairing
Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.3	-	-	-
2	1.0	5.4	1.2	0.6	0.50
4	2.8	5.6	3.2	.4	.13
6	5.0	6.1	5.6	0.5	.09
8	7.6	6.6	8.4	1.1	.13
10	10.5	7.6	11.7	3.7	.32
12	13.5	8.6	15.0	6.7	.45
14	16.8	9.9	18.7	10.3	.55
16	20.5	11.4	22.9	15.0	.66
18	24.2	13.1	27.0	18.9	.70
20	27.9	15.0	31.4	23.6	0.75

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 10
AGC M42R1 Missile
Equipped with Boom-Attached Cut Out Fins and 12-Inch Fairing
Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.5	-	-	-
2	3.7	5.7	2.9	3.4	1.17
4	5.6	6.2	6.1	6.5	1.07
6	9.0	6.8	9.7	12.0	1.24
8	12.5	7.6	13.4	17.4	1.30
10	16.3	8.6	17.6	23.8	1.35
12	20.6	9.8	22.2	31.2	1.41
14	24.9	11.3	26.8	38.9	1.45
16	29.4	13.1	31.9	47.4	1.49
18	33.8	15.1	36.8	55.9	1.52
20	38.5	16.6	41.9	65.0	1.55

CONFIDENTIAL

-15-
CONFIDENTIAL

Table 11
ACC E42R1 Missile
With Attached Fins and 18-Inch Fairing
Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.4	-	-	-
2	3.1	5.6	3.3	2.8	0.85
4	6.4	6.0	6.8	7.6	1.12
6	9.8	6.8	10.5	12.7	1.21
8	13.6	7.7	14.5	18.7	1.29
10	17.4	8.6	18.6	25.5	1.37
12	20.9	9.8	22.5	31.3	1.39
14	23.4	10.6	25.3	36.2	1.43
16	25.5	11.7	27.7	41.3	1.49
18	29.5	12.9	32.0	47.1	1.47

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

-16-
CONFIDENTIAL

Table 12
ACC E42R1 Missile

Equipped with Boom-Attached Cut Out Fins and 18-Inch Fairing

Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.3	-	-	-
2	2.5	5.4	2.7	2.9	1.07
4	5.5	5.8	5.9	6.6	1.12
6	8.8	6.6	9.5	11.5	1.21
8	12.2	7.4	13.1	16.9	1.29
10	16.5	8.5	17.8	23.9	1.34
12	20.7	9.8	22.3	31.0	1.39
14	24.9	11.2	26.8	38.1	1.42
16	29.4	12.7	31.8	45.7	1.44
18	32.9	14.5	35.8	53.2	1.49
20	37.0	16.6	40.5	61.4	1.52

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the Espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

-17-
CONFIDENTIAL

Table 13
ACC E42R1 Missile
Equipped with Cut Out Fins and 25-Inch Fairing
Fins 90°
Airspeed 200 fps

<u>Angle of Yaw deg</u>	<u>Lift lb</u>	<u>Drag lb</u>	<u>Normal Force lb</u>	<u>Torque about Spindle lb-ft</u>	<u>Center of Pressure Distance (Aft of Spindle) ft</u>
0	-	5.1	-	-	-
2	2.7	5.2	2.8	2.8	1.00
4	5.7	5.7	6.1	6.4	1.05
6	9.3	6.3	9.9	10.9	1.10
8	12.8	7.2	13.6	16.2	1.19
10	16.8	8.3	18.0	22.5	1.25
12	21.3	9.5	22.8	29.5	1.29
14	25.6	11.1	27.5	37.2	1.35
16	30.2	13.0	32.6	45.2	1.39
18	34.9	15.1	37.8	53.9	1.43
20	40.1	17.6	43.8	62.3	1.42

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 14
 ACC E42R1 Missile
 Equipped with Fins Not Cut Out and 25-Inch Fairing
 Fins 90°
 Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	5.3	-	-	-
2	2.7	5.4	2.9	3.4	1.17
4	5.6	5.8	6.0	7.4	1.23
6	9.0	6.4	9.6	12.3	1.28
8	12.4	7.3	13.3	17.8	1.34
10	16.3	8.3	17.5	24.4	1.39
12	19.4	9.6	21.0	32.0	1.52
14	24.8	11.4	26.6	39.9	1.50
16	29.5	13.0	32.0	49.5	1.55
18	34.3	14.9	37.2	59.1	1.59
20	39.0	17.2	42.6	68.9	1.62

Table 15
 ACC Fire Rocket E 42
 Equipped with Fin A, Tail No. 1 (Length of
 Cuthoard Edges 9 1/2 Inches)
 One Pair of Fin Blades 90° to Plane of Yaw
 Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.3	-	-	-
2	2.5	4.4	2.7	0.5	0.19
4	5.8	4.8	6.1	1.9	.31
6	9.6	5.4	10.1	4.2	.42
8	13.7	6.3	14.4	8.1	.56
10	18.6	7.8	19.7	14.9	.76
12	24.0	9.6	25.5	22.4	0.88

CONFIDENTIAL

CONFIDENTIAL

Table 16

ACC Fire Rocket E 42

Equipped with Fin B, Tail No. 1 (Length of Outboard Edges Reduced to 8 1/2 Inches by Removing Strips One Inch Wide from Trailing Edges of the Fins of Table 15)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.3	-	-	-
2	2.9	4.5	3.0	0.5	0.17
4	6.2	4.8	6.6	2.0	.30
6	9.2	5.4	9.7	3.3	.34
8	13.7	6.4	14.4	7.5	.52
10	18.3	7.7	19.4	13.6	.70
12	23.1	9.4	24.6	20.4	0.83

Table 17

ACC Fire Rocket E 42

Equipped with Fin C, Tail No. 1 (Length of Outboard Edges Reduced to 7 1/2 Inches by Removing Strips One Inch Wide from Trailing Edges of Fins of Table 16)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.2	-	-	-
2	2.7	4.4	2.8	0.9	0.32
4	5.9	4.7	6.3	2.1	.33
6	9.2	5.2	9.7	4.0	.41
8	13.1	6.2	13.8	6.8	.49
10	17.3	7.5	18.4	12.4	.67
12	22.6	9.8	24.0	19.0	0.79

CONFIDENTIAL

CONFIDENTIAL

Table 18

ACC Fire Rocket E 42

Equipped with Fin D, Tail No. 1 (Length of Outboard Edges Reduced to 6 1/2 Inches by Removing Strips One Inch Wide from Trailing Edges of the Fins of Table 17)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.2	-	-	-
2	2.7	4.4	2.8	0.6	1.21
4	5.9	4.7	6.3	1.5	.24
6	9.0	5.2	9.5	2.7	.28
8	12.7	6.0	13.5	5.8	.43
10	17.1	7.3	18.2	11.3	.62
12	22.2	9.0	23.6	17.5	0.74

Table 19

ACC Fire Rocket E 42

Equipped with Fin E, Tail No. 2 (Length of Outboard Edges 7 1/8 Inches)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.6	-	-	-
2	2.9	4.7	3.0	0.5	0.17
4	6.0	5.0	6.4	2.0	.31
6	9.4	5.6	10.0	3.9	.39
8	13.2	6.5	13.9	6.6	.47
10	17.4	7.6	18.5	10.3	.56
12	21.8	9.0	23.2	15.9	0.69

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

CONFIDENTIAL

Table 20

ACC Fire Rocket E 42

Equipped with Fin F, Tail No. 3 (Length of Outboard Edges 8 1/8 Inches)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.3	-	-	-
2	3.0	4.5	3.1	1.4	0.45
4	6.4	4.8	6.8	3.1	.46
6	9.7	5.3	10.2	5.1	.50
8	13.5	6.3	14.2	7.5	.53
10	17.6	7.5	18.8	11.7	.62
12	22.9	8.6	24.2	18.2	0.75

Table 21

ACC Fire Rocket E 42

Equipped with Fin G, Tail No. 4 (Length of Outboard Edges 9 1/8 Inches)

Fins 90°

Airspeed 200 fps

Angle of Yaw deg	Lift lb	Drag lb	Normal Force lb	Torque about Spindle lb-ft	Center of Pressure Distance (Aft of Spindle) ft
0	-	4.3	-	-	-
2	3.0	4.5	3.1	1.4	0.45
4	6.3	4.8	6.8	3.0	.44
6	10.0	5.8	10.5	5.1	.49
8	14.0	6.3	14.7	7.6	.52
10	18.5	7.6	19.6	12.0	.61
12	23.8	9.3	25.2	18.2	0.72

CONFIDENTIAL

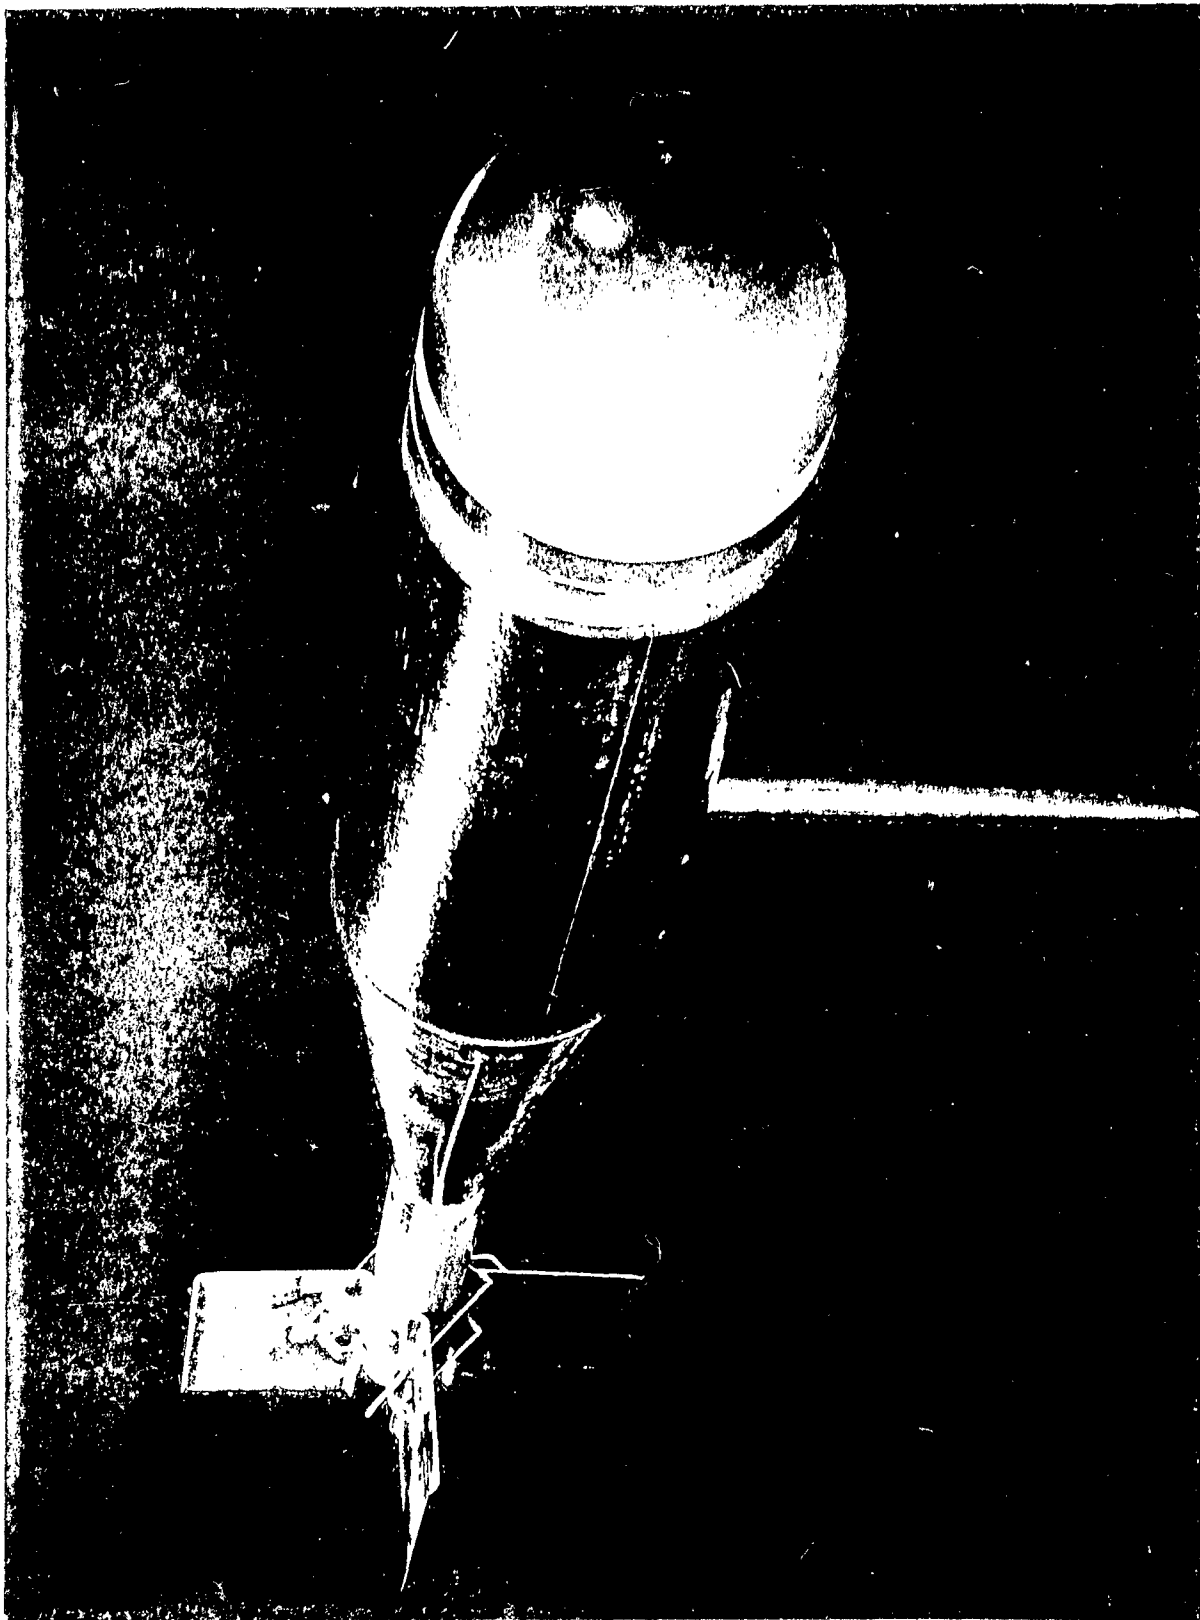


Fig. 1

CONFIDENTIAL

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, title, 18 U. S. C., 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

U.S. DEPARTMENT OF COMMERCE

Frederick H. Mueller, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astlin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its major laboratories in Washington, D.C., and Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications, appears on the inside of the front cover.

WASHINGTON, D.C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Molecular Kinetics. Free Radicals Research.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Radiation Theory. Radioactivity. X-rays. High Energy Radiation. Nucleonic Instrumentation. Radiological Equipment.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties of Gases. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer. Concreting Materials.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analog Systems. Application Engineering.

• Office of Basic Instrumentation.

• Office of Weights and Measures.

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Radio Warning Services. Airglow and Aurora. Radio Astronomy and Arctic Propagation.


Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Research. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Propagation Obstacles Engineering. Radio-Meteorology. Lower Atmosphere Physics.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

Radio Communication and Systems. Low Frequency and Very Low Frequency Research. High Frequency and Very High Frequency Research. Ultra High Frequency and Super High Frequency Research. Modulation Research. Antenna Research. Navigation Systems. Systems Analysis. Field Operations.



DEPARTMENT OF DEFENSE
WASHINGTON HEADQUARTERS SERVICES
1155 DEFENSE PENTAGON
WASHINGTON, DC 20301-1155



8 JAN 2013

Subject: OSD MDR Case 12-M-1575

Dear [REDACTED]:

We have reviewed the enclosed document in consultation with the Department of the Army and have declassified it in full. If you have any questions, contact me by e-mail at Records.Declassification@whs.mil or by phone at 571-372-0483.

Sincerely,

Robert Storer
Chief, Records and Declassification Division

Enclosures:

1. MDR request
2. Document 1





DEPARTMENT OF DEFENSE
WASHINGTON HEADQUARTERS SERVICES
1155 DEFENSE PENTAGON
WASHINGTON, DC 20301-1155



MEMORANDUM FOR DEFENSE TECHNICAL INFORMATION CENTER
(ATTN: WILLIAM B. BUSH)
8725 JOHN J. KINGMAN ROAD, STE 0944
FT. BELVIER, VA 22060-6218

8 JAN 2013

SUBJECT: OSD MDR Case 12-M-1575

At the request of [REDACTED], we have conducted a Mandatory Declassification Review of the attached document under the provisions of Executive Order 13526, section 3.5, for public release. We have declassified the document in full. We have attached a copy of our response to the requester on the attached Compact Disc (CD). If you have any questions, contact me by e-mail at storer.robert@whs.mil, robert.storer@whs.smil.mil, or robert.storer@osdj.ic.gov or by phone at 571-372-0483.

Robert Storer
Chief, Records and Declassification Division

Attachment:
CD

