

UNCLASSIFIED

AD NUMBER

AD337602

CLASSIFICATION CHANGES

TO: unclassified

FROM: confidential

LIMITATION CHANGES

TO:
Approved for public release, distribution unlimited

FROM:
Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 31 DEC 1962. Other requests shall be referred to Naval Ordnance Laboratory, White Oak, MD.

AUTHORITY

NOL ltr dtd 29 Aug 1974; NOL ltr dtd 29 Aug 1974

THIS PAGE IS UNCLASSIFIED

CONFIDENTIAL

AD

337 602

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



CONFIDENTIAL

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

**THIS DOCUMENT CONTAINS INFORMATION
AFFECTING THE NATIONAL DEFENSE OF
THE UNITED STATES WITHIN THE MEAN-
ING OF THE ESPIONAGE LAWS, TITLE 18,
U.S.C., SECTIONS 793 and 794. THE
TRANSMISSION OR THE REVELATION OF
ITS CONTENTS IN ANY MANNER TO AN
UNAUTHORIZED PERSON IS PROHIBITED
BY LAW.**

CONFIDENTIAL

NOLTR 62-6

CATALOGED BY DDC 337602

AS AD NO.

337 602

NOLTR 62-6

NOL

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

FREE-FLIGHT BALLISTICS RANGE TESTS
OF MODELS FOR THE GE PROGRAM I-62 (U)

- RELEASED TO ASTIA
BY THE NAVAL ORDNANCE LABORATORY
- Without restrictions
 - For Release to Military and Government Agencies ()
 - Approval () required for release to continue ()
 - Approval by () required for all subsequent release.

31 DECEMBER 1962

NOTICE: This material contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C. Sections 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

Downgraded at 3 Year Intervals
Declassified after 12 Years. DOD Dir 5200.10

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

Ballistics Research Report 60

FREE-FLIGHT BALLISTICS RANGE TESTS
OF MODELS FOR THE GE PROGRAM 1-62

Prepared by:

Jeanne B. Jusino

ABSTRACT: Data are presented for seven free-flight shots of models of the 1-62 program made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory. A drag curve was obtained for the Mach number range of 4 through 7. Stability coefficients were also obtained and are presented in both graphical and tabular form. The Reynolds numbers for these shots were 0.5 to 2.4 million. Shadowgraph pictures are also included for flow studies.

U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

i
CONFIDENTIAL

CONFIDENTIAL

NOLTR 62-6

31 December 1962

FREE-FLIGHT BALLISTICS RANGE TESTS OF MODELS FOR THE GE
PROGRAM 1-62

This report presents the results of model firings made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory at the request of the General Electric Company with funds provided by the Air Force Ballistic Missile Division. The work was performed under task number NOL-570.

This document may include technical data and other information which may be proprietary to parties other than the government and therefore the transmission by the Department of the Navy of this document is not to be regarded, by implication or otherwise, as licensing or conveying any rights or permission to the recipient or any other person or corporation gaining access to this document to use for commercial purposes, as distinguished from government purposes, the said technical data or information disclosed herein.

R. E. ODENING
Captain, USN
Commander

A. E. Seigel
A. E. SEIGEL
By direction

CONTENTS

	Page
List of Symbols.....	iv
Introduction.....	1
Model Details.....	1
Discussion and Results.....	1
Conclusions.....	2
References.....	3

ILLUSTRATIONS

Figure	
1	Sketch of Configuration XXX B
2	Configuration XXX B and Sabot
3	Drag Coefficient as a Function of Mach Number
4	Complex Yaw Plots for Round 4127
5	Stability Coefficients as a Function of Mach Number
6	Shadowgraph of Round 4126, Station 6V, M = 4.827
7	Shadowgraph of Round 4127, Station 23V, M = 4.099
8	Shadowgraph of Round 4128, Station 14V, M = 5.888
9	Shadowgraph of Round 4129, Station 22V, M = 6.522
10	Shadowgraph of Round 4131, Station 18V, M = 6.996
11	Shadowgraph of Round 4132, Station 5V, M = 7.215
12	Shadowgraph of Round 4133, Station 6V, M = 7.267

TABLES

Table	
I	Model Physical Measurements
II	Drag Data
III	Stability Coefficients

CONFIDENTIAL
NOLTR 62-6

SYMBOLS

A	axial moment of inertia
B	transverse moment of inertia
C_D	total drag coefficient based on maximum cross-sectional area
C_{D_0}	total drag coefficient corrected to zero-yaw
CG	center of gravity
C_{L_α}	slope of lift coefficient
C_{M_α}	slope of pitching moment coefficient
$C_{M_q} + C_{M_{\dot{\alpha}}}$	slope of yaw damping moment coefficient
C_{N_α}	slope of normal force coefficient
d	maximum diameter of model
k	parameter used to remove the effect of yaw from the drag coefficients
M	Mach number
P	range test pressure
P.E.	probable error of coefficients based on accuracy of data fitting
Re_d	Reynolds number, $\rho Vd/\mu$
V	velocity
δ^2	mean squared yaw
μ	coefficient of viscosity
ρ	air density

INTRODUCTION

1. Eight models were fired in the Pressurized Ballistics Range No. 3 using a 76-40 powder gun in order to obtain drag and stability data for GE Configuration XXX B. A sketch of this configuration can be found in Figure 1. A description of the Pressurized Ballistics Range No. 3 is given in reference (a). This report presents the drag and stability data obtained for Mach numbers 4 through 7 and Reynolds numbers 0.5 to 2.4 million.

MODEL DETAILS

2. The XXX B models were constructed with a hevimet nose and a hollow titanium afterbody. The forebody was held in place with EC-1294 Epoxy cement. This junction proved very successful in these high velocity powder-gun shots. A photograph of the model and its sabot is shown in Figure 2. Detailed model measurements are presented in Table I.

DISCUSSION AND RESULTS

3. Drag coefficients were obtained for all shots except one where the model hit the first baffle plate in the range. These drag coefficients were obtained for Mach numbers ranging from 4 through 7. Tests were conducted at atmospheric pressure for five of the shots and, for the other two shots, the range was evacuated to 0.2 atmospheres in order to vary the Reynolds number. The experimental drag points (Figure 3) fall very close to the theoretically predicted drag curve furnished by the General Electric Company. The data points where the mean squared yaw was over three degrees squared were corrected to zero yaw using the equation:

$$C_{D_0} = C_D - k\sigma^2$$

The drag reduction was carried out using the method of reference (b). The drag coefficients are listed in Table II.

4. The stability coefficients presented in Table III were also reduced according to the method described in reference (b). As a result of the firings the configuration was

CONFIDENTIAL
NOLTR 62-6

found to be statically and dynamically stable. A sample of the motion for these models is presented in Figure 4 for Round 4127. The stability coefficients are plotted in Figure 5 as a function of Mach number. For rounds 4132 and 4133 only an estimated C_M was obtained because of insufficient information

from these launchings. Sabot pieces entered the range and hit several stations causing the photographic plates to be broken or overexposed. To obtain stability coefficients data are needed from a minimum of thirteen stations.

5. For each round there is included a shadowgraph for flow studies (Figures 6 through 12). Where the model was near zero yaw, there appears to be laminar flow on the cylindrical portion of the body. From these shadowgraph photographs, it also appears that the boundary layer separated from the body slightly forward of the skirt for all shots except 4133.

CONCLUSIONS

6. Configuration XXX B was found to be statically and dynamically stable.

7. The drag coefficients fell close to the predicted curve. For the Mach number range tested, C_D varied from 0.2 to 0.1.


8. EC-1294 Epoxy cement proved to be a strong bonding material at the junction of two metals used in the construction of the models for firings up to Mach 7 using a powder gun.

CONFIDENTIAL
NOLTR 62-6

REFERENCES

- (a) May, A. and Williams, T. J., "Free-Flight Ranges at the Naval Ordnance Laboratory," NavOrd Report 4063 (1955)
- (b) Murphy, C. H., "Data Reduction for the Free-Flight Spark Ranges," BRL Report No. 900 (1954)

CONFIDENTIAL
NOLTR 62-6

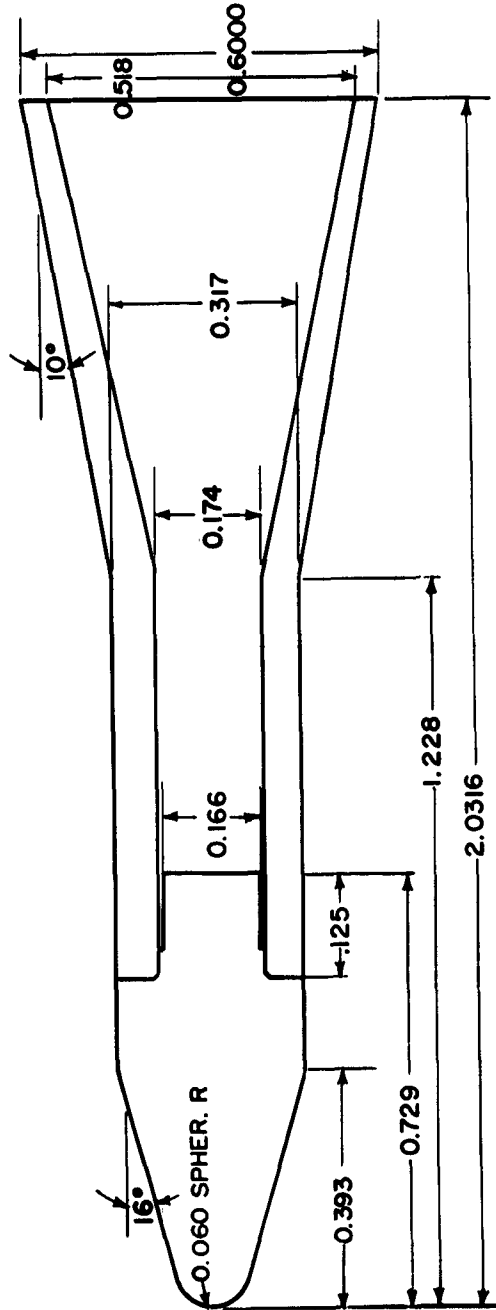

CONFIDENTIAL

FIG. 1 SKETCH OF CONFIGURATION XXX B

CONFIDENTIAL
NOLTR 62-6

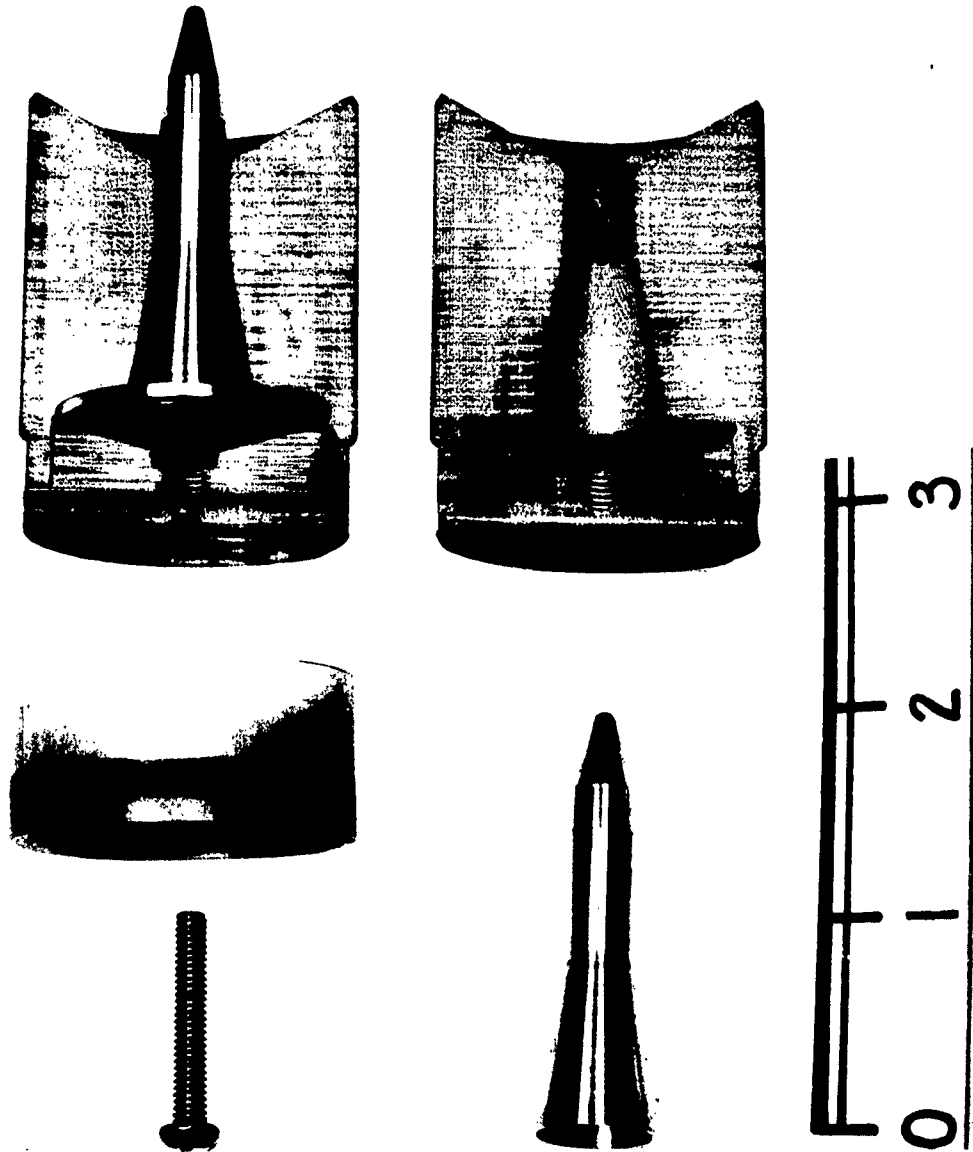


FIG. 2 CONFIGURATION XXX B AND SABOT

CONFIDENTIAL

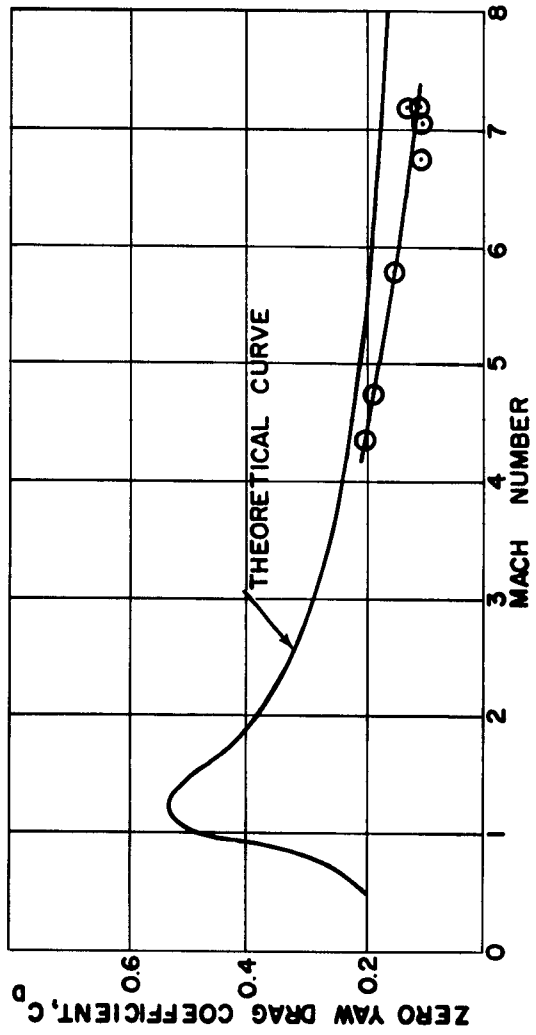


FIG.3 ZERO YAW DRAG COEFFICIENT AS A FUNCTION OF MACH NUMBER

CONFIDENTIAL
NOLTR 62-6

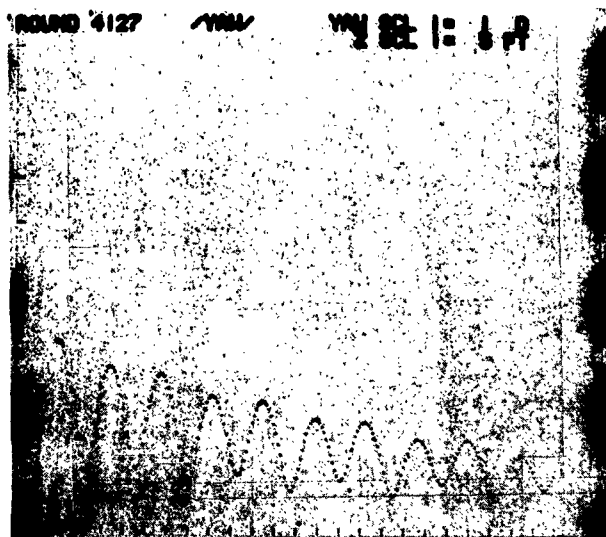
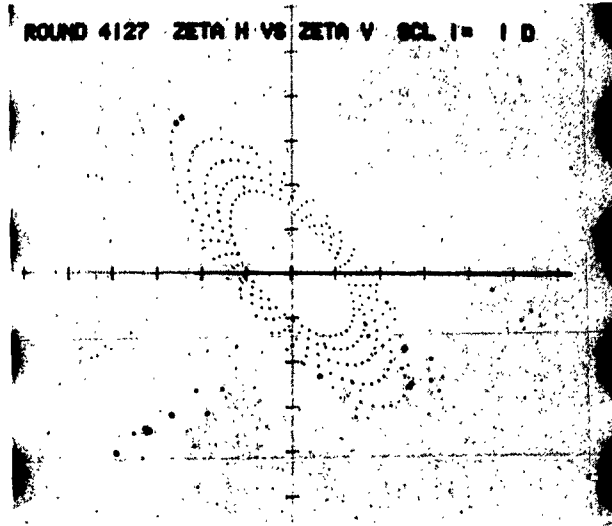


FIG. 4. COMPLEX YAW PLOTS FOR ROUND 4127

CONFIDENTIAL

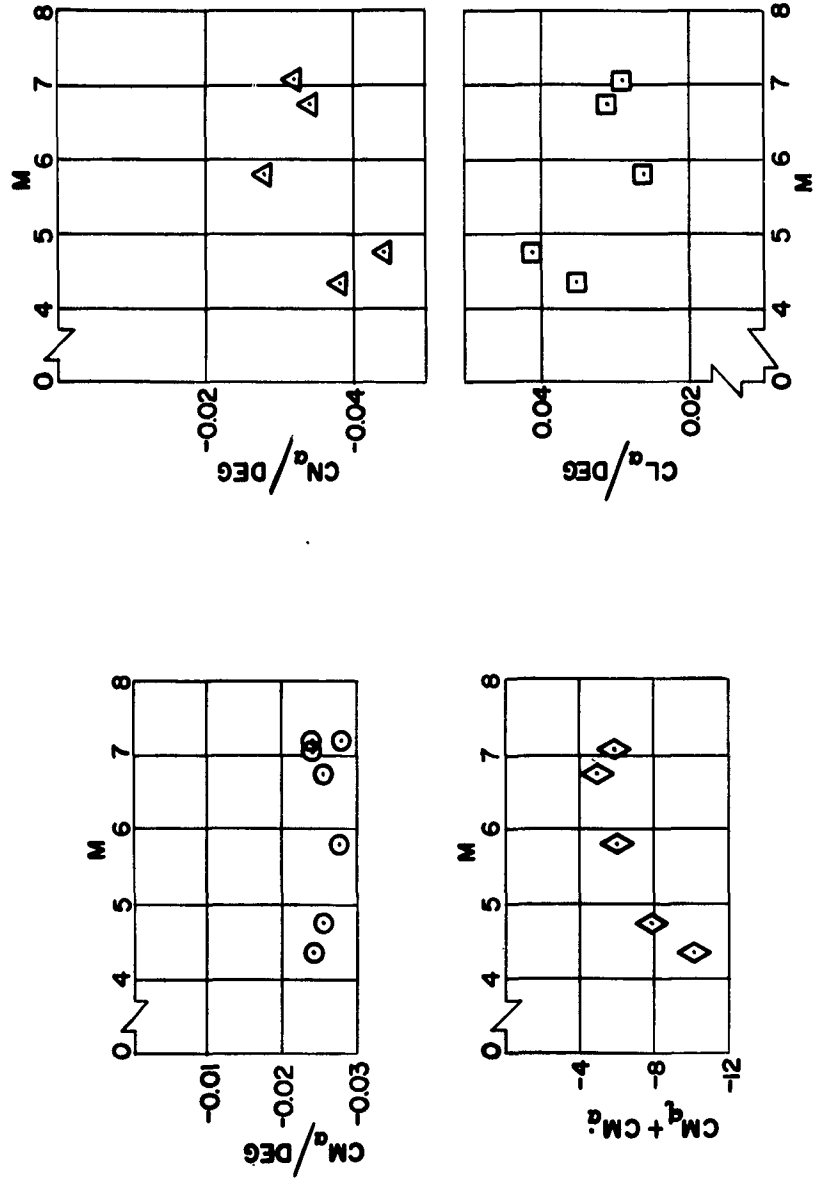


FIG. 5 STABILITY COEFFICIENTS AS A FUNCTION OF MACH NUMBER

CONFIDENTIAL
NOLTR 62-6

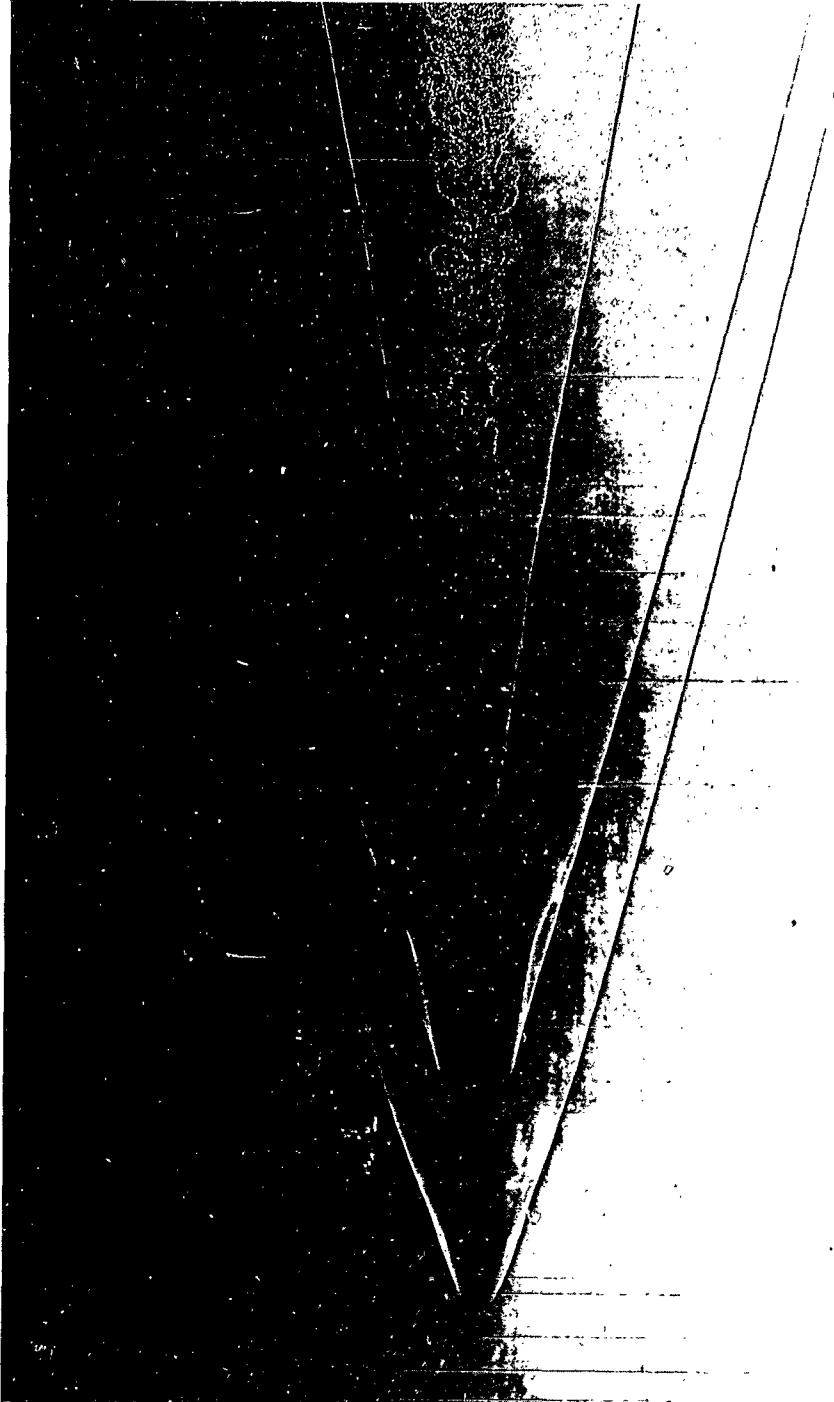


FIG. 6 SHADOWGRAPH OF ROUND 4126, STATION 6V, M = 4.827

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

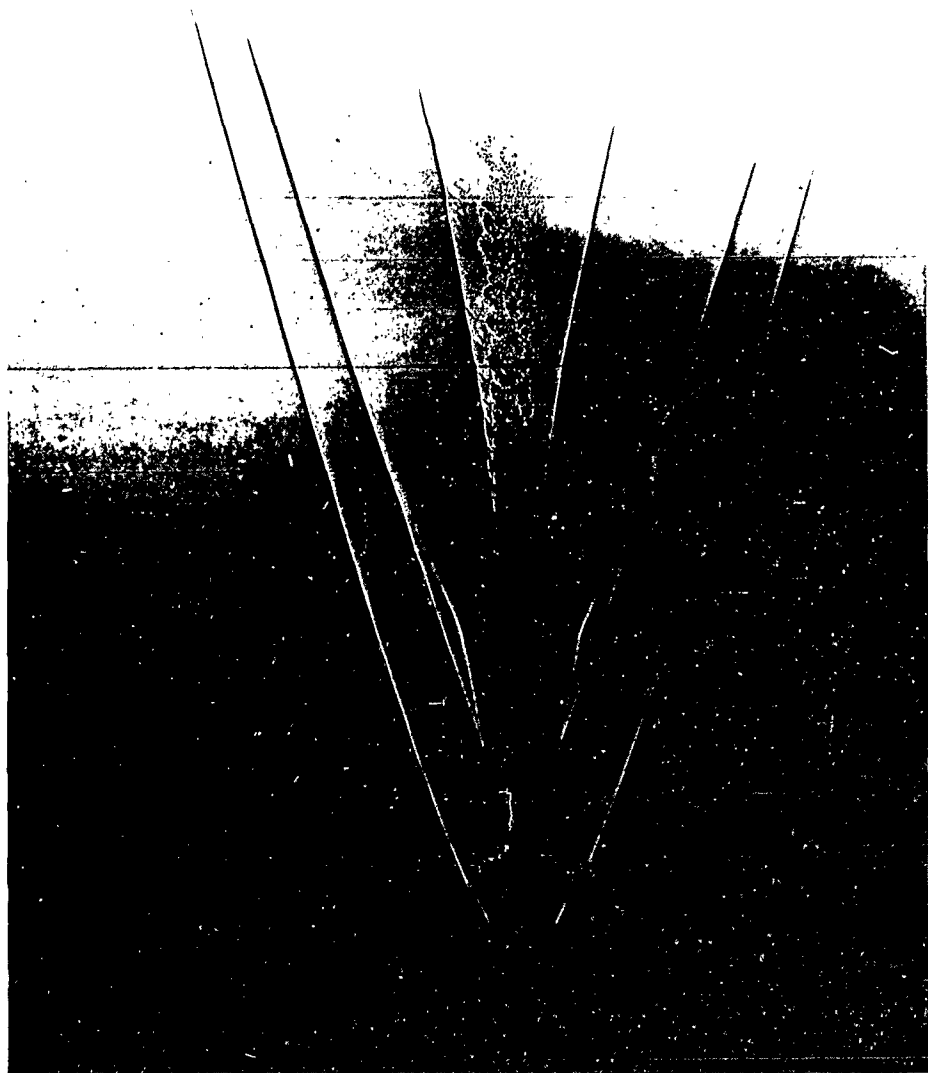


FIG. 7 SHADOWGRAPH OF ROUND 4127, STATION 23V, M = 4.099

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

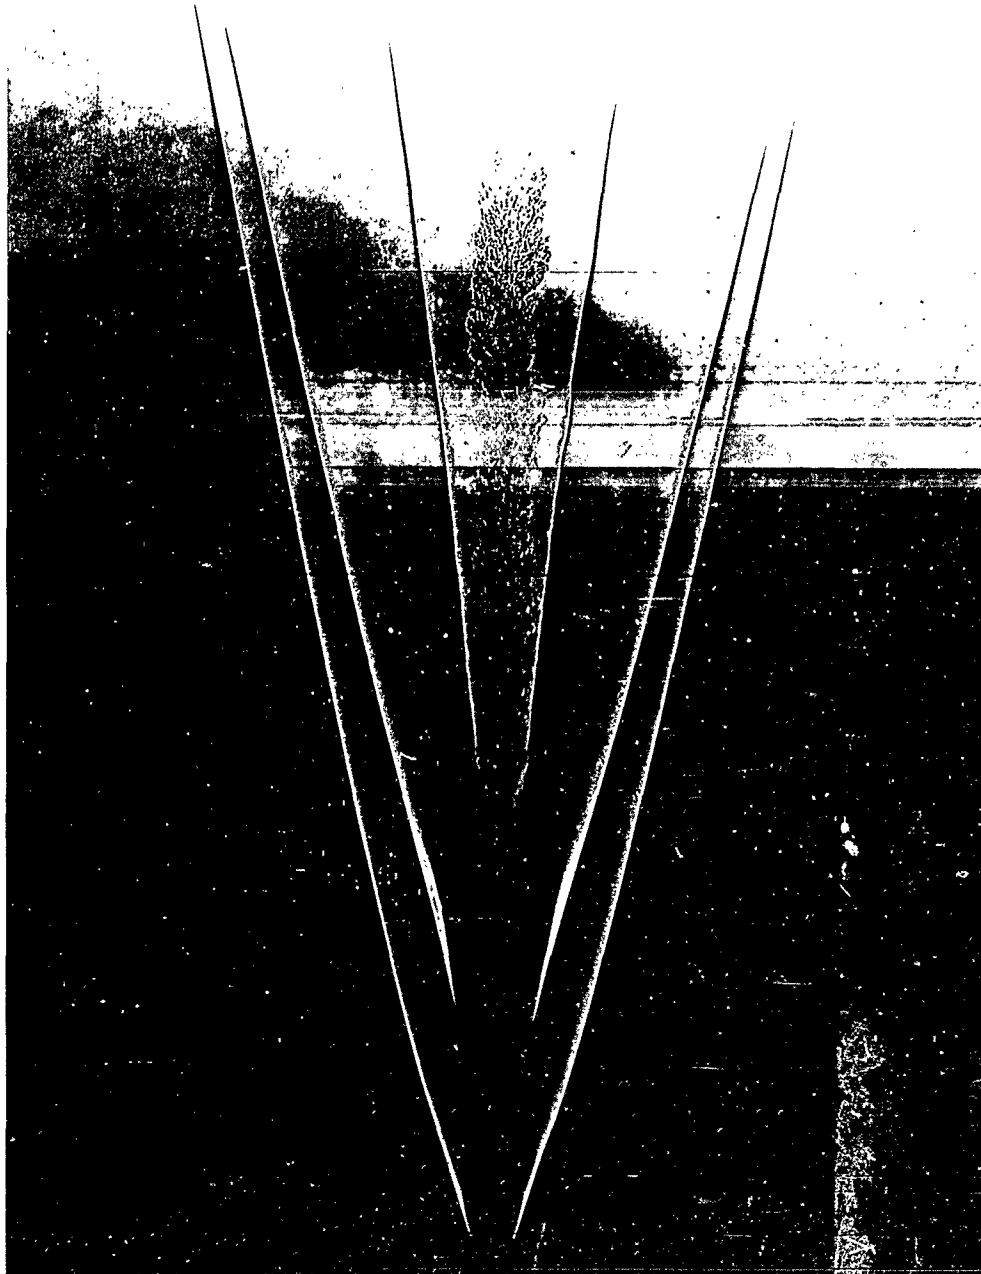


FIG. 8 SHADOWGRAPH OF ROUND 4128, STATION 14V, M = 5.688

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

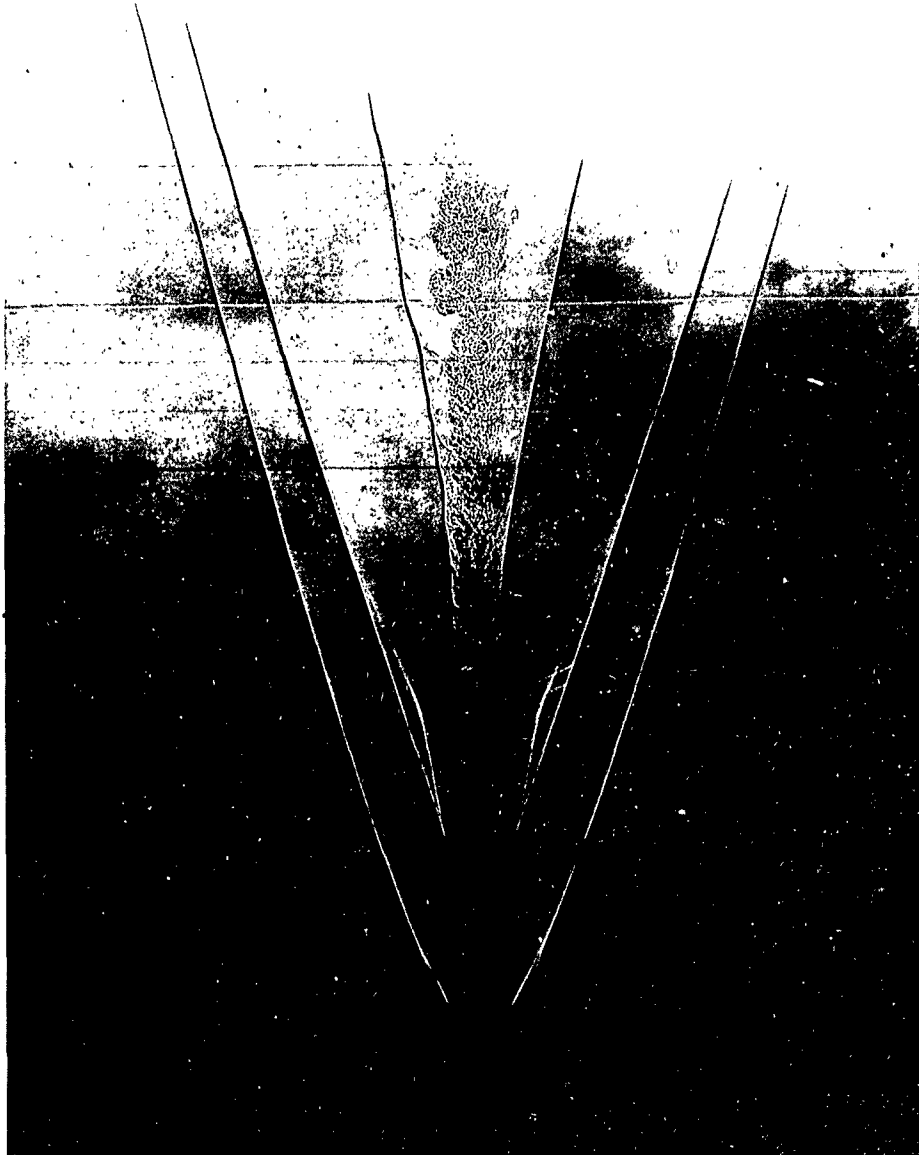


FIG. 9 SHADOWGRAPH OF ROUND 4129, STATION 22V, M = 6.522

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

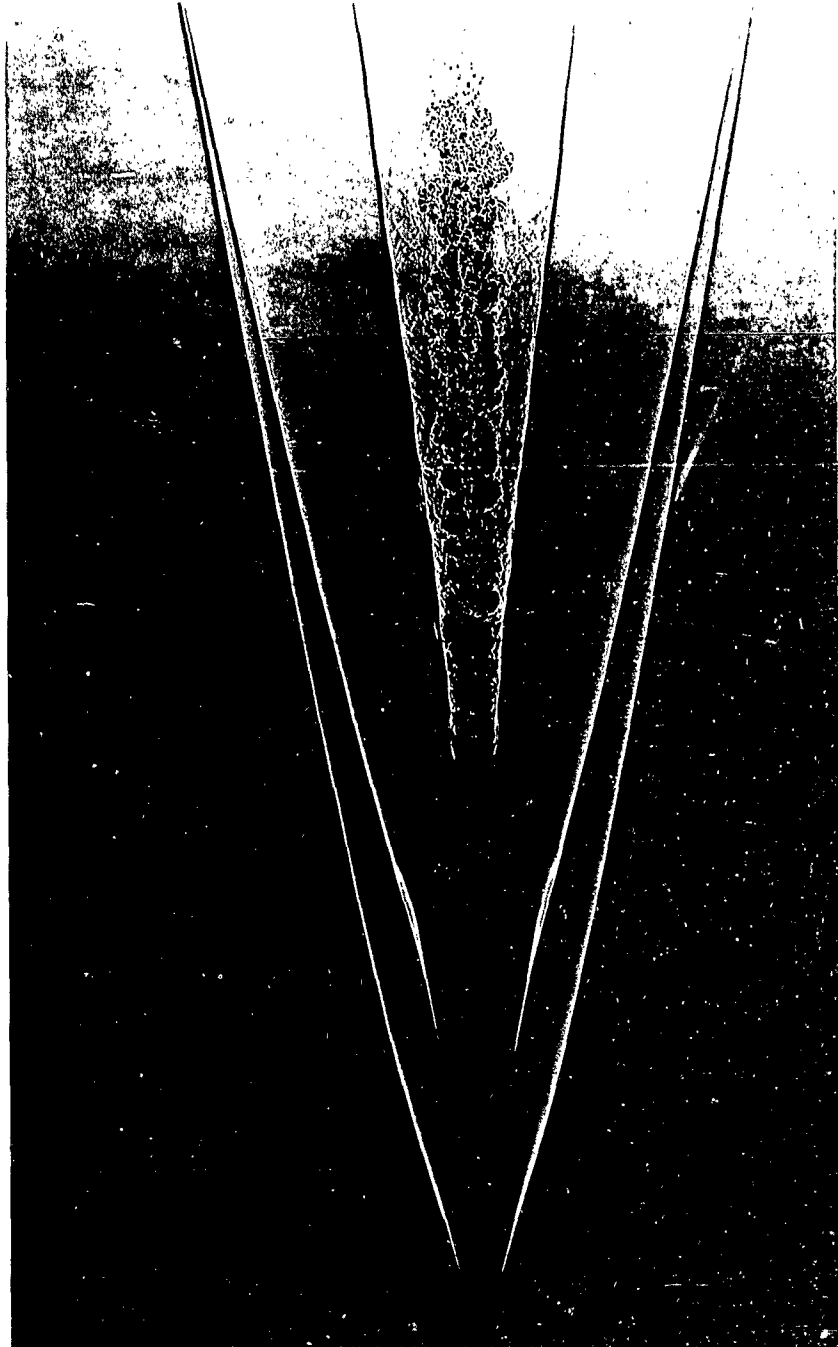


FIG.10 SHADOWGRAPH OF ROUND 4(3), STATION 16V, M=6.996

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

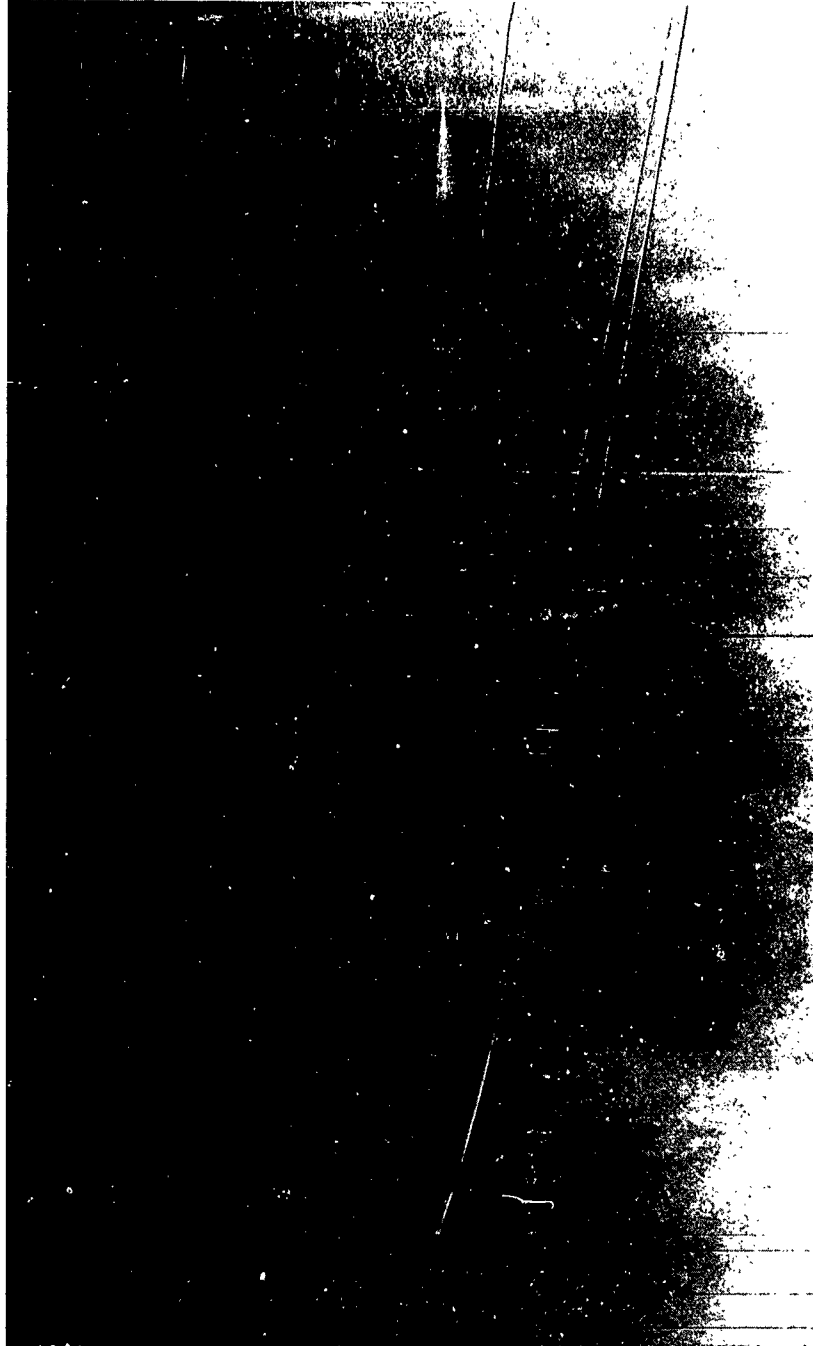


FIG. II SHADOWGRAPH OF ROUND 4132, STATION 5V, M= 7.215

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

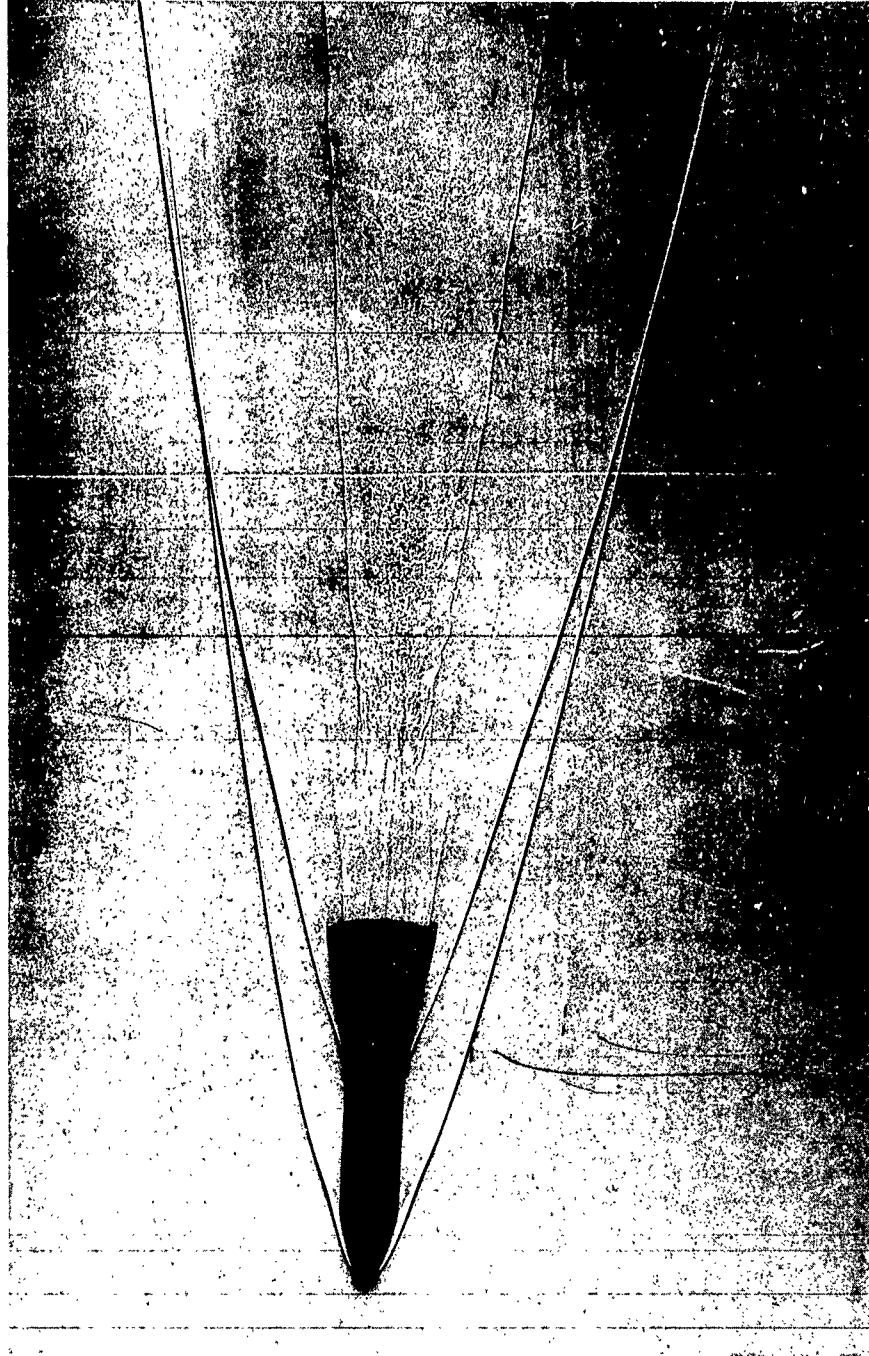


FIG. 12 SHADOWGRAPH OF ROUND 4133, STATION 6V, M = 7.267

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

TABLE I

MODEL PHYSICAL MEASUREMENTS

Shot	Body Dia. (In.)	Base Dia. (In.)	Length (In.)	Weight (Gm.)	CG from Nose (In.)	A (Gm.In. ²)	B (Gm.In. ²)
4126	0.317	0.600	2.032	14.8333	0.803	0.299	4.618
4127	0.317	0.599	2.032	14.7359	0.804	0.300	4.649
4128	0.317	0.600	2.032	14.9189	0.801	0.297	4.666
4129	0.317	0.600	2.031	14.8126	0.801	0.296	4.641
4131	0.317	0.599	2.032	15.0051	0.801	0.303	4.714
4132	0.317	0.600	2.031	15.0014	0.801	0.302	4.708
4133	0.317	0.600	2.032	14.9913	0.800	0.300	4.694

CONFIDENTIAL

CONFIDENTIAL
NOLTR 62-6

TABLE II

DRAG DATA

Round	M	Re x 10 ⁻⁶	δ^2	C _D	±P.E.	C _{D₀}	P (Atm.)
4126	4.754	1.612	2.2	0.1849	0.0007		1.0
4127	4.358	1.465	2.7	0.2001	0.0001		1.0
4128	5.812	1.955	1.5	0.1528	0.0001		1.0
4129	6.761	2.323	42.9	0.1826	0.0003	0.1097	1.0
4131	7.081	2.405	21.7	0.1445	0.0002	0.1077	1.0
4132	7.209	0.506	13.2	0.135	0.005	0.113	0.2
4133	7.213	0.484	36.1	0.1935	0.0005	0.1322	0.2

CONFIDENTIAL

NOLTR 62-6
TABLE III

Round	M	STABILITY COEFFICIENTS									
		$C_{M\alpha}/\text{Deg.}$ +P.E.	$C_{N\alpha}/\text{Deg.}$ +P.E.	$C_{L\alpha}/\text{Deg.}$ +P.E.	$C_{Mq} + C_{M\alpha}$ +P.E.	$C_{M\alpha} \propto \bar{Y}_{\alpha}$ (Deg.) +P.E.	\bar{S}_{weirve} (In.) +P.E.	CP - CG (Cal.)			
4126	4.754	-0.0254 0.0003	-0.044 0.009	0.041 0.009	-7.9 2.5	0.2	0.018	0.576			
4127	4.358	-0.0243 0.0001	-0.038 0.010	0.035 0.010	-10.2 1.3	0.1	0.013	0.634			
4128	5.812	-0.0279 0.0003	-0.028 0.022	0.026 0.022	-6.1 2.8	0.2	0.016	0.987			
4129	6.761	-0.0256 0.0002	-0.034 0.003	0.031 0.003	-5.0 2.0	0.6	0.021	0.756			
4131	7.081	-0.02401 0.00005	-0.032 0.003	0.029 0.003	-5.9 0.4	0.1	0.014	0.762			
4132	7.209	-0.024 (Est.)									
4133	7.213	-0.028 (Est.)									

CONFIDENTIAL
NOLTR 62-6

External Distribution List

No. of
Copies

1 Chief, Bureau of Naval Weapons
Washington 25, D. C.
Attn: RRMA

1 Attn: RMGA

1 Commander
Wright Air Development Division
Wright-Patterson Air Force Base, Ohio

1 National Aeronautics and
Space Administration
George C. Marshall Space Flight Center
Huntsville, Alabama
Attn: M-S&M-PT (Mr. H. A. Connell)

1 Attn: M-SFM-M (Dr. W. R. Lucas)

5 National Aeronautics and Space
Administration
1520 H Street, N. W.
Washington, D. C.

2 NASA, Lewis Research Center
21000 Brookford Road
Cleveland 35, Ohio
Attn: Mr. George Mandel
Chief, Library

2 Commander
Air Force Ballistic Systems Division
Air Research and Development Command
P. O. Box 262
Inglewood, California
Attn: WDTVR

1 Commander
Arnold Engineering Development Center
Tullahoma, Tennessee
Attn: Technical Library

CONFIDENTIAL
NOLTR 62-6

External Distribution List

No. of
Copies

1 Commander
U. S. Naval Ordnance Test Station
China Lake, California
Attn: Technical Library

1 General Electric Company
Missile and Space Vehicle Department
3198 Chestnut Street
Philadelphia 1, Pennsylvania
Attn: Mr. W. J. Oberjohn

1 Attn: Mr. E. P. Bruce

1 Director
Aberdeen Proving Ground
Aberdeen, Maryland
Attn: Technical Information Branch

1 Attn: Ballistics Research Laboratory

2 Chief, Bureau of Naval Weapons
Washington 25, D. C.
Attn: Library, DIS 3

10 Armed Services Technical Information Agency
Arlington Hall
Arlington, Virginia

CATALOGING INFORMATION FOR LIBRARY USE

BIBLIOGRAPHIC INFORMATION			
DESCRIPTORS	CODES	DESCRIPTORS	CODES
SOURCE	NOL technical report	NOI/TR	C036
REPORT NUMBER	62-6	620006	PPIN
REPORT DATE	31 December 1962	1262	
		SECURITY CLASSIFICATION AND CODE COUNT	Confidential-36
		CIRCULATION LIMITATION	Proprietary Information
		CIRCULATION LIMITATION OR BIBLIOGRAPHIC	
		BIBLIOGRAPHIC (SUPPL., VOL., ETC.)	

SUBJECT ANALYSIS OF REPORT

DESCRIPTORS	CODES	DESCRIPTORS	CODES
Free-flight	FREG	Mach	MACH
Ballistic range	BALR	4	4x00
Model (tests)	MODET	5	5x00
General Electric	GENL	6	6x00
Model	MODE	7	7x00
Test	TEST	Stability	STBI
Facilities	FACI	Coefficients	COEF
Firings	FIRI	Shadowgraphs	SHAD
Powder	POWD	Flow	FLOW
Gun	GUNS	Epoxy	EPOX
Drag	DRAG	Cement	CEME
Curve	CURV	Bond	BOND
		Metals	META
		Hollow	HOLL
		Titanium	TITN
		Afterbody	AFTE
		Body (tests)	BODYT
		Body	BODY
		Resins	RESI
		Configuration	COFI
		Configuration (tests)	COFIT
		Missiles	MISL
		Aerodynamics	AERD
		Missile (tests)	MISLT

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-6)

FREE-FLIGHT BALLISTICS RANGE TESTS OF MODELS FOR THE GE PROGRAM 1-62, by Jeanne B. Jusino. 31 Dec. 1962. 3p. illus., diagr., tables. (Ballistics research report 60)
Task NOL 570. CONFIDENTIAL

Data are presented for seven free-flight shots of models of the 1-62 program made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory. A drag curve was obtained for the Mach number range of 4 through 7. Stability coefficients were also obtained and are presented in both graphical and tabular form. The Reynolds numbers for these shots were 0.5 to 2.4 million. Shadowgraph pictures are also included for flow studies.

Abstract card is unclassified.

1. Missiles - Aerodynamics
- I. Title
- II. Jusino, Jeanne B.
- III. Series
- IV. Project

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-6)

FREE-FLIGHT BALLISTICS RANGE TESTS OF MODELS FOR THE GE PROGRAM 1-62, by Jeanne B. Jusino. 31 Dec. 1962. 3p. illus., diagr., tables. (Ballistics research report 60)
Task NOL 570. CONFIDENTIAL

Data are presented for seven free-flight shots of models of the 1-62 program made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory. A drag curve was obtained for the Mach number range of 4 through 7. Stability coefficients were also obtained and are presented in both graphical and tabular form. The Reynolds numbers for these shots were 0.5 to 2.4 million. Shadowgraph pictures are also included for flow studies.

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-6)

FREE-FLIGHT BALLISTICS RANGE TESTS OF MODELS FOR THE GE PROGRAM 1-62, by Jeanne B. Jusino. 31 Dec. 1962. 3p. illus., diagr., tables. (Ballistics research report 60)
Task NOL 570. CONFIDENTIAL

Data are presented for seven free-flight shots of models of the 1-62 program made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory. A drag curve was obtained for the Mach number range of 4 through 7. Stability coefficients were also obtained and are presented in both graphical and tabular form. The Reynolds numbers for these shots were 0.5 to 2.4 million. Shadowgraph pictures are also included for flow studies.

Abstract card is unclassified.

1. Missiles - Aerodynamics
- I. Title
- II. Jusino, Jeanne B.
- III. Series
- IV. Project

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-6)

FREE-FLIGHT BALLISTICS RANGE TESTS OF MODELS FOR THE GE PROGRAM 1-62, by Jeanne B. Jusino. 31 Dec. 1962. 3p. illus., diagr., tables. (Ballistics research report 60)
Task NOL 570. CONFIDENTIAL

Data are presented for seven free-flight shots of models of the 1-62 program made in the Pressurized Ballistics Range No. 3 at the Naval Ordnance Laboratory. A drag curve was obtained for the Mach number range of 4 through 7. Stability coefficients were also obtained and are presented in both graphical and tabular form. The Reynolds numbers for these shots were 0.5 to 2.4 million. Shadowgraph pictures are also included for flow studies.

Abstract card is unclassified.

1. Missiles - Aerodynamics
- I. Title
- II. Jusino, Jeanne B.
- III. Series
- IV. Project