

UNCLASSIFIED

AD NUMBER

AD343884

CLASSIFICATION CHANGES

TO: unclassified

FROM: confidential

LIMITATION CHANGES

TO:
Approved for public release, distribution
unlimited

FROM:
Distribution authorized to U.S. Gov't.
agencies and their contractors;
Administrative/Operational use; 9 Oct
1963. Other requests shall be referred to
Office of Naval Research, Arlington VA
22217-0000.

AUTHORITY

31 Dec 1972, GDS, DoD 5200.1-r per
document marking; ONR ltr 4 May 1977

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

GENERAL CLASSIFICATION SCHEDULE

**IN ACCORDANCE WITH
DOD 5200.1-R & EXECUTIVE ORDER 11652**

THIS DOCUMENT IS:

CLASSIFIED BY _____

**Subject to General Declassification Schedule of
Executive Order 11652-Automatically Downgraded at
Years Intervals- DECLASSIFIED ON DECEMBER 31, 72.**

BY

**Defense Documentation Center
Defense Supply Agency
Cameron Station
Alexandria, Virginia 22314**

UNCLASSIFIED

AD **343884**

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

THIS DOCUMENT CONTAINS INFORMATION
AFFECTING THE NATIONAL DEFENSE OF
THE UNITED STATES WITHIN THE MEAN-
ING OF THE ESPIONAGE LAWS, TITLE 18,
U.S.C., SECTIONS 793 and 794. THE
TRANSMISSION OR THE REVELATION OF
ITS CONTENTS IN ANY MANNER TO AN
UNAUTHORIZED PERSON IS PROHIBITED
BY LAW.

343884

DDC
CATAL

AS HL NO. 343884

DDC
NOV 13 1963
RECEIVED
TISIA A

National Research Corporation

CONFIDENTIAL

CONFIDENTIAL

Research Division
NATIONAL RESEARCH CORPORATION
70 Memorial Drive
Cambridge 42, Massachusetts

This document consists
of 20 pages and 2
figures. This is copy
25 of 165 copies.

NRC Project 54-1-0226

Nonr 3608(00)

Special Report

HEAT OF FORMATION OF
 Li_3AlH_6 (C)

DOWNGRADED AT 3 YEAR INTERVALS
DECLASSIFIED AFTER 12 YEARS
DOD DIR 5200.10

This document contains information
affecting the national defense of
the United States within the
meaning of the Espionage Laws,
Title 18, U.S.C., Sections 793 and
794. The transmission or the
revelation of its contents in any
manner to an unauthorized person
is prohibited by law.

Prepared by:

Ludwig G. Fasolino
Ludwig G. Fasolino
Project Manager

Approved by:

Allen L. Klibanoff
Allen L. Klibanoff
Program Director

Reviewed by:

Frank J. Salomone
for John V. E. Hansen, Director
Marketing and Contracts

Submitted to:

Department of the Navy
Office of Naval Research
Washington 25, D. C.

9 October 1963

TABLE OF CONTENTS

	<u>Page</u>
LIST OF ILLUSTRATIONS	11
LIST OF TABLES	111
ABSTRACT	1v
INTRODUCTION	1
APPARATUS	1
MATERIALS	2
EXPERIMENTAL	2
RESULTS	3
DISCUSSION	4
 APPENDIX I	 I-1
APPARATUS	I-1.1
APPENDIX II	II-1
MATERIALS	II-1.1
Lithium	II-1.1
Aluminum	II-1.1
Li-Al-H	II-1.2
Results	II-1.2

CONFIDENTIAL

- 11 -

LIST OF ILLUSTRATIONS

Figure 1 - CALORIMETER

Figure 2 - REACTION BOMB

CONFIDENTIAL

CONFIDENTIAL

- iii -

LIST OF TABLES

- TABLE I - Electrical Calibrations
- TABLE II - Heat of Solution of Aluminum and Lithium
- TABLE III - Heat of Solution of Lithium Aluminum Hydride
- TABLE IV - Heat of Solution of Runs 1 - 4 Li_3AlH_6

CONFIDENTIAL

CONFIDENTIAL

- iv -

ABSTRACT

The heat of formation of a material, Li_3AlH_6 , (synthesized at Reaction Motors) has been determined in this laboratory by measuring the heats of reaction of aluminum, lithium, and Li_3AlH_6 in 4 N HCl at 25°C in a closed bomb.

The heats of solution were found to be:

	<u>ΔH_{298° kcal/mole</u>
Aluminum	-128.14 ± 0.39
Lithium	-67.05 ± 0.53
Li_3AlH_6	-249.90 ± 1.47

From this data, the heat of formation of Li_3AlH_6 was calculated to be:

$$\Delta H_{298^\circ}^\circ \text{Li}_3\text{AlH}_6 = -79.4 \pm 3.4 \text{ kcal/mole}$$

CONFIDENTIAL

CONFIDENTIAL

- 1 -

INTRODUCTION

Recently, Reaction Motors Division of Thiokol Chemical Corporation has successfully synthesized a compound which, upon analysis, appears to be Li_3AlH_6 . A sample of this material was received from Reaction Motors for thermochemical study in an attempt to determine its heat of formation.

The method employed was that of measuring the heats of solution of aluminum, lithium, and Li_3AlH_6 in 4 N HCl, from which the heat of formation of the compound was calculated.

Although the aluminum and lithium data, and a description of the apparatus were reported in an earlier report¹, they are repeated here for the convenience of the reader.

APPARATUS

The calorimeter is described in detail in Appendix I. It consists essentially of an adiabatically-operated Parr combustion calorimeter, modified to increase its sensitivity. The temperature sensing element is a thermistor in a Wheatstone bridge network with a sensitivity of $6.8 \times 10^{-5}^\circ\text{C}$ or 0.17 calories. Under adiabatic conditions the thermal leak rate is 7×10^{-5} deg. min.⁻¹. The reaction was carried out in a bomb in which the liberated hydrogen was confined.

¹Special Report, "Heat of Formation of LiAlH_4 ," National Research Corporation, April 1963, Nonr - 3608(00)

CONFIDENTIAL

CONFIDENTIAL

- 2 -

MATERIALS

The following materials were used in this work:

<u>Material</u>	<u>Source</u>	<u>Purity</u>
Aluminum	Mallinkrodt Chemicals	99.9%
Lithium	Lithium Corporation of America	99.9%
Li_3AlH_6	Reaction Motors Division, Thiokol Chemical	92.87%

The analyses of these materials are shown in Appendix II.

EXPERIMENTAL

One-hundred fifty ml of 4 N HCl was added to the bomb. To this was added 4 drops (0.17 gm) of 10% platinum chloride solution as a catalyst to hasten the reaction rates.

The samples were sealed under argon in glass ampoules. A dry box was used for preparation of the lithium and the Li_3AlH_6 samples. The sample-containing ampoule was placed in the bomb, the lid put in place, and the air exhausted from the bomb. Argon was allowed to replace the air. This procedure prevented the possible ignition of the hydrogen-oxygen mixture which would be present during and after a run. The omission of this step resulted in a hydrogen-oxygen combustion in an early run.

The bomb was placed in the calorimeter bucket and 2000 ml of distilled water added. The bucket and jacket temperatures were adjusted to 24.85°C to 25.00°C. Upon reaching equilibrium

CONFIDENTIAL




CONFIDENTIAL

- 3 -

conditions the reaction was initiated by turning down the central shaft which lowered the baffle plates and crushed the glass ampoule. All runs were performed adiabatically. The evolved hydrogen was confined within the bomb during each of the runs.

RESULTS

From the amounts of materials used, the following equations represent the reactions studied:



Heats of reaction at constant volume, ΔE , were converted to their corresponding constant pressure values by the equation:

$$\Delta H = \Delta E + \Delta nRT$$

Tables II and III present the experimental data. Run Li-9 shows no measurable effect by doubling the sample weight. Runs Al-10 and Al-11 were made in 4 N HCl containing lithium ions at a concentration equal to that following a lithium run. No significant difference is noted when compared with aluminum runs made in the absence of the lithium ions. The possibility of interaction at these dilutions is shown to be negligible.

CONFIDENTIAL

CONFIDENTIAL

- 4 -

From the measurements of the heats of solution, the heat of formation of Li_3AlH_6 was calculated:

	<u>$\Delta H_{\text{reac.}}$ kcal/mole</u>
$\Delta H_1: 1x[\text{Al} + 3\text{HCl}(\text{aq}) \text{ ---> } \text{AlCl}_3(\text{soln}) + 3/2\text{H}_2]$	$-128.14 \pm .39$
$\Delta H_2: 3x[\text{Li} + \text{HCl}(\text{aq}) \text{ ---> } \text{LiCl}(\text{soln}) + 1/2\text{H}_2]$	$(3x) - 67.05 \pm 0.53 = -201.15 \pm 1.6$
$\Delta H_3: 1x[\text{Li}_3\text{AlH}_6 + 6\text{HCl}(\text{aq}) \text{ ---> } (\text{AlCl}_3 + \text{LiCl})(\text{soln}) + 6\text{H}_2]$	-249.89 ± 1.47
$3\text{Li} + \text{Al} + 3\text{H}_2 \text{ ---> } \text{Li}_3\text{AlH}_6$	
$\Delta H_{298}^\circ \text{Li}_3\text{AlH}_6 = \Delta H_1 + \Delta H_2 - \Delta H_3$	
	$= -79.39 \pm 3.45 \text{ kcal/mole}$

All uncertainties listed in this work are twice the standard deviation, or 2σ , according to Rossini².

DISCUSSION

Upon receiving the Li_3AlH_6 from Reaction Motors, four samples were prepared in our vacuum dry box for preliminary calorimetric runs. No samples were taken at this time for concurrent chemical analysis. The heats of reaction of these four runs as shown in Table IV were higher than the second batch of samples used in runs 5 to 11. During the preparation of this second batch of samples, material was also prepared for the analytical

²F.D.Rossini, Chemical Reviews 18, 233 (1936)

CONFIDENTIAL

CONFIDENTIAL

- 5 -

work, the results of which were utilized in this work. It appears that the material was in a higher purity state at the first sampling, but that either with time, or accidental sampling contamination, the purity of the second sampling was lessened.

CONFIDENTIAL

APPENDIX I

APPARATUS

The heats of solution were measured in a modified Parr combustion calorimeter operated adiabatically (see Figure 1). The bomb (see Figure 2) consisted of a nickel alloy body, the inner wall of which was gold-plated. A special lid was constructed through which passed a centered, gas-tight, moveable shaft. Two baffle plates were attached to the bottom section of the shaft which allowed the sample (contained in a glass vial) to be crushed while submerged in the acid. The plates further prevented splattering resulting from violent reactions. A thin tantalum sheet was placed on the bottom of the bomb. The bottom plate was constructed of tantalum, also. The lid bottom, shaft, and upper baffle were also gold-plated for protection against attack by the acid. A relief valve was also built into the lid to exhaust the bomb prior to a run and to release hydrogen following the run.

The lid to the calorimeter jacket was modified to allow the crushing shaft, thermistor tube, and heater tube to pass through to the calorimeter bucket contained within. Beckmann thermometers were used to monitor the bucket and jacket water temperatures. Improvements in water circulation were made by increasing the rate of stirring (small pulley used) and by placing a tube around the stirrer blades.


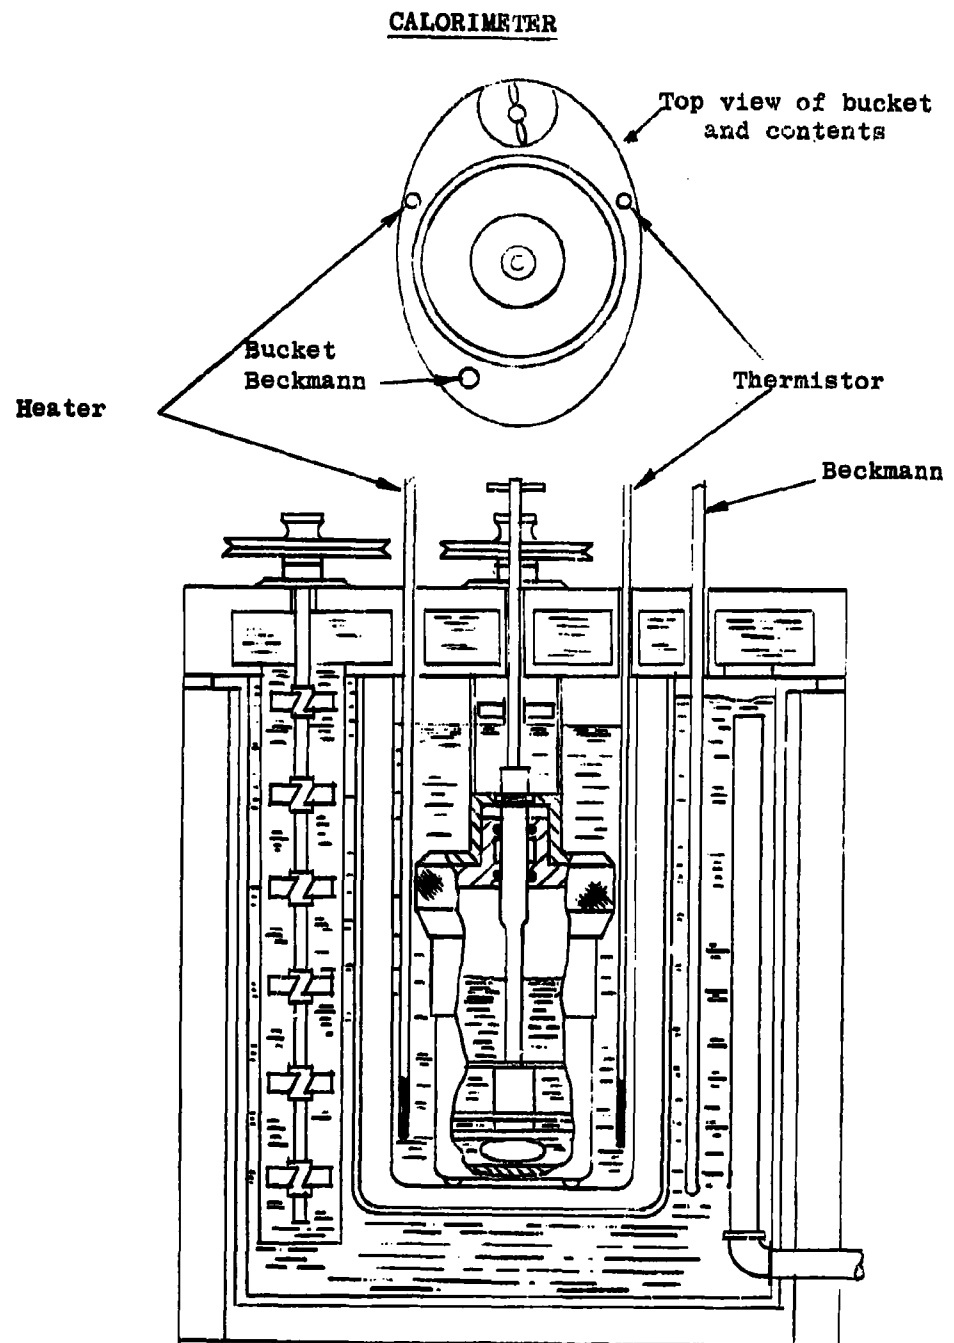


FIGURE I

FIGURE II
REACTION BOMB

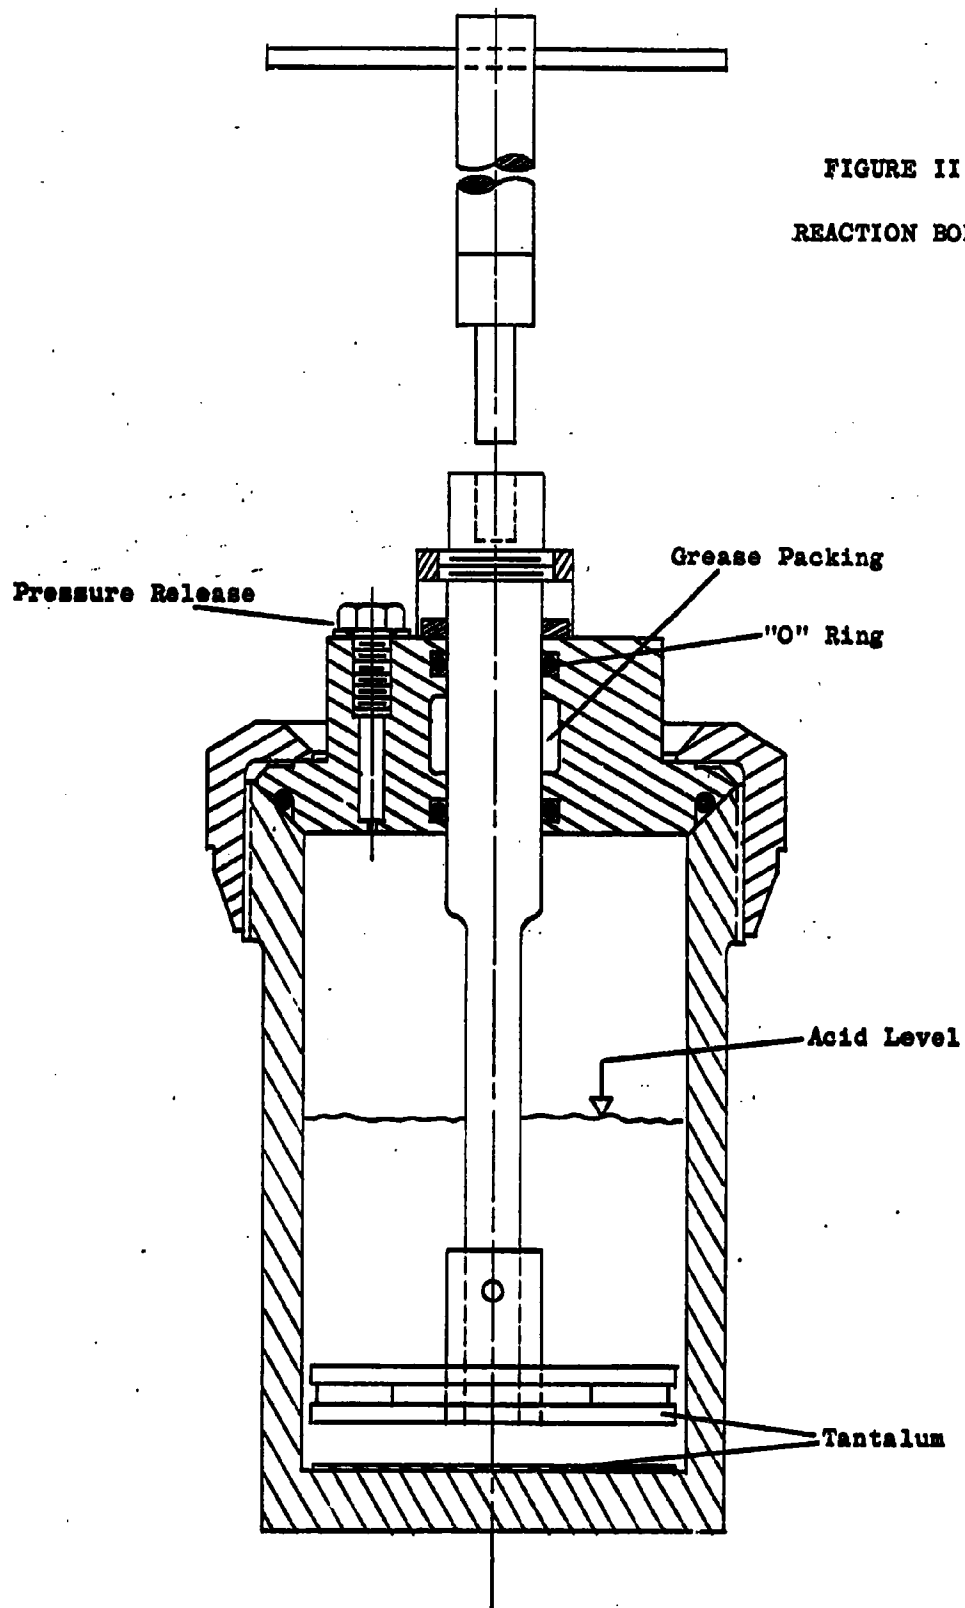

APPENDIX II

MATERIALSLithium --

The lithium metal was obtained from Lithium Corporation of America as 99.9% lithium.

Spectrographic Analysis of Lithium

<u>Element sought</u>	<u>Found (ppm)</u>
Fe	1
Ni	<1
Cr	<1
Al	<10
Ti	ND<1
Cu	<5
Ca	10
Mg	10
V	ND<1
Pb	ND<5
Sn	ND<1
Mn	<1
Co	ND<10

Aluminum --

The aluminum wire was obtained from Mallinkrodt Chemicals.

<u>Element sought</u>	<u>Found (ppm)</u>
Ni	0<10
Ti	0<10
Fe	10
Cr	<10
Mg	<10
Mn	ND<5
Si	10
B	ND<10
V	ND<10
Cu	<10

CONFIDENTIAL

II-1.2

Li-Al-H

The sample was obtained from Reaction Motors Division of Thiokol Chemical Corporation. The material was analysed as follows:

aluminum - EDTA
lithium - flame photometer
hydrogen - evolution by reaction with HCl
chlorine - volumetric

Results

<u>% Al</u>	<u>% Li</u>	<u>%LiCl</u>	<u>% H</u>	
45.70	37.39	--	--	
45.60	37.72	--	--	
45.59	37.51	--	--	
45.45	37.84	--	--	
45.77	38.01	--	9.82	
45.77	37.67	1.79 (0.29% Li)	9.84	
45.65	37.68	1.79 (0.29% Li)	9.83	Averages

The % Li as LiCl, when subtracted from total lithium yields 37.39% lithium in the Li-Al-H compound.

CONFIDENTIAL

CONFIDENTIAL

II-1.3

The purity of the compound Li-Al-H equals 92.87%. The stoichiometry was determined as follows:

			Molar ratio based on			Average
			Li	Al	H ₂	
Li	37.39	5.39	3.00	3.19	3.31	3.17
Al	45.65	1.69	0.94	1.00	1.03	0.99
H	9.83	9.75	5.45	5.77	6.00	5.74

The material was, therefore, assigned the formula:



CONFIDENTIAL

TABLE I
ELECTRICAL CALIBRATIONS

q, cal.	ΔR , ohms	$E = \frac{q}{\Delta R}$, cal/ohm
529.68	16.438	32.22
577.54	17.972	32.14
554.80	17.093	32.46
563.09	17.384	32.39
568.91	17.562	32.39

32.32 ± .119* Average

*Uncertainty calculated as twice the
standard deviation = 2σ

TABLE II

HEAT OF REACTION OF ALUMINUM WITH 4N HCl

Run No.	m, gm	$\Delta R, \Omega$	E, cal/ Ω	E ΔR $^{\circ}$ pt*	$-\Delta E_{298}$ cal/mole	$-\Delta H_{298}$ cal/mole
Al-4	0.2404	31.909	36.03	1147.2	128757	127869
Al-5	0.2398	31.812	36.03	1143.7	128685	127797
Al-6	0.2696	36.010	36.03	1294.9	129593	128705
Al-7	0.2700	36.067	36.03	1297.0	129611	128723
Al-9	0.2701	35.971	36.03	1293.5	129213	128325
Al-10	0.2719	363.04	36.03	1305.5	129549	128661
Al-11	0.2707	36.034	36.03	1295.8	129156	128268
Al-12	0.2703	36.111	36.03	1296.1	129377	128489

Mean
Mean - C_{break}
Uncertainty
%

128230
128140
266
0.21

HEAT OF REACTION OF LITHIUM WITH 4N HCl

Run No.	m, gm	$\Delta R, \Omega$	E, cal/ Ω	E ΔR $^{\circ}$ pt	$-\Delta E_{298}$ cal/mole	$-\Delta H_{298}$ cal/mole
Li-1	0.0696	18.764	35.97	674.9**	67286	66990
Li-2	0.0777	20.935	35.97	753.0**	67247	66951
Li-3	0.0768	20.758	35.97	746.7**	67465	67169
Li-7	0.0835	22.911	35.97	824.1**	68484	68188
Li-8	0.0954	25.446	35.97	915.3**	66575	66279
Li-9	0.1395	37.701	36.03	1358.4**	67569	67273

Mean
Mean - C_{break}
Uncertainty
%

67142
67052
516
0.77

* c_{pt} = Catalyst Correction - 2.5 cal/0.17 gm H_2PtCl_6 (10% solution)

**No catalyst used.

CONFIDENTIAL

II-1.6

TABLE III

HEAT OF SOLUTION OF Li_3AlH_6

Run	m, gms	$\mathcal{E}\Delta_R^*$ cal	$\frac{-\Delta_E}{\mathcal{E}\Delta_R M}$ kcal/mole	$-\Delta_H$ kcal/mole Unc**	$-\Delta_H$ kcal/mole corr.
8B	0.1270	556.03	235.765	232.195	250.021
9B	0.0906	399.53	237.469	233.899	251.855
10B	0.1028	449.24	235.326	231.756	249.548
11B	0.1033	455.77	237.592	234.022	251.988
12B	0.1095	475.78	233.879	230.409	248.098
13B	0.1073	467.53	234.636	231.066	248.805
14B	0.1099	479.14	234.774	231.204	248.954
				Average	248.896 + 1.47***

*Corrected for heat of breaking glass capsules = 0.9 cals,
4 drops of 10% solution of $\text{H}_2\text{Pt} + \text{Cl}_6$ catalyst = 2.5 cals

**Uncorrected in respect to purity

***Uncertainty calculated as twice the standard deviation = 2.0

$$\mathcal{E} = 32.32 \text{ cal/ohm}$$

$$M = 53.850$$

$$\Delta_H = \Delta_E + \Delta_{nRT}, \text{ where } \Delta_{nRT} = 3.57 \text{ kcal}$$

CONFIDENTIAL

TABLE IV
HEAT OF SOLUTION OF Li_3AlH_6 (FIRST SAMPLING)

Run	m, gms	$\mathcal{E}\Delta_R^*$ cal	$\frac{-\Delta E}{\mathcal{E}\Delta_R M}$ kcal/mole	$-\Delta H$ kcal/mole Purity unknown
2B	0.1025	459.10	241.195	237.625
3B	0.0961	430.53	241.249	237.679
4B	0.1039	467.57	242.335	238.765
6B	0.0865	386.77	240.781	237.211

Average 237.820 + 0.664**

*Corrected for heat of breaking glass capsule = 0.9 cals,

4 drops of 10% solution of $\text{H}_2\text{Pt} + \text{Cl}_6$ catalyst = 2.5 cals

**Uncertainty calculated as twice the standard deviation = 2.0

$$\mathcal{E} = 32.32 \text{ cal/ohm}$$

$$M = 53.850$$

$$\Delta H = \Delta E + \Delta nRT, \text{ where } \Delta nRT = 3.57 \text{ kcal}$$

UNCLASSIFIED

UNCLASSIFIED