

UNCLASSIFIED

AD NUMBER
AD349268
CLASSIFICATION CHANGES
TO: unclassified
FROM: confidential
LIMITATION CHANGES
TO: Approved for public release, distribution unlimited
FROM: Controlling DoD Organization: Director, Naval Research Laboratory, Washington, DC.
AUTHORITY
NRL ltr, dtd 17 Sep 2007; NRL ltr dtd 17 Sep 2007

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER
AD349268
CLASSIFICATION CHANGES
TO
confidential
FROM
secret
AUTHORITY
31 Mar 1976, per document marking, DoDD 5200.10

THIS PAGE IS UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

THIS DOCUMENT CONTAINS INFORMATION
AFFECTING THE NATIONAL DEFENSE OF
THE UNITED STATES WITHIN THE MEAN-
ING OF THE ESPIONAGE LAWS, TITLE 18,
U.S.C., SECTIONS 793 and 794. THE
TRANSMISSION OR THE REVELATION OF
ITS CONTENTS IN ANY MANNER TO AN
UNAUTHORIZED PERSON IS PROHIBITED
BY LAW.

349268

SECRET

NRL Report 6079

Copy No. 100

A Method of Separating Approach and Recede Pulse Doppler Radar Echoes

[UNCLASSIFIED TITLE]

E. W. WARD, J. M. HEADRICK, AND E. N. ZETTLER

*Radar Techniques Branch
Radar Division*

CATALOGED BY DDC
AS AD No. _____

349268

March 24, 1964

SECRET

CONFIDENTIAL

UNCLASSIFIED



U.S. NAVAL RESEARCH LABORATORY
Washington, D.C.

SECRET

APR 21 1964

W. B. Brown
By d. section

SECRET

SECURITY

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or revelation of its contents in any manner to an unauthorized person is prohibited by law.

DDC AVAILABILITY NOTICE

1. "Qualified requesters may obtain copies of this report from DDC."

SECRET

SECRET

CONTENTS

Abstract	ii
Problem Status	ii
Authorization	ii
INTRODUCTION	1
Statement of The Problem	1
Proposed Solution	1
DESCRIPTION OF DEVELOPED EQUIPMENT	2
RESULTS	5
Target Separation	5
Signal Processing Gain	6
Equipment Illustrations	6
CONCLUSION	6
REFERENCES	8

SECRET

ABSTRACT
[Confidential]

A doppler-sense separation technique, applicable to the Madre radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter return, (b) simple i-f bandwidth control, and (c) the availability of range-gated and essentially continuous-wave signals. The separation technique has a theoretical signal-to-noise ratio improvement of 3 db.

PROBLEM STATUS

This is an interim report on one phase of an Air Force (RADAR) sponsored problem; work on this and other phases is continuing.

AUTHORIZATION

NRL Problem R02-23
AF MIPR (30-602) 63-2928, 2929, 2995
Project RF 001-02-41-4007

Manuscript submitted February 18, 1964.

SECRET

A METHOD OF SEPARATING APPROACH AND
RECEDE PULSE DOPPLER RADAR ECHOES
[Unclassified Title]

INTRODUCTION

Statement of the Problem

The work described in this report has been an effort at extracting all of the doppler frequency information possible from the Madre radar (1,2). In brief, this radar is an i-f coherent pulse doppler system requiring suppression of the earth backscatter returns and employing a signal processor with storage times of from 20 seconds to 7 minutes, a time compression of about 83,000 to 1, and a variety of signal analysis methods.

In coherent pulse doppler radar systems it is common to convert received signals to a zero intermediate frequency (bipolar video). With such a system, unambiguous doppler can be indicated for frequencies up to one-half of the pulse repetition frequency (sampling rate); however, approach or recede information is lost. If an i-f placed at one-quarter of the pulse repetition rate (PRR) is used, approach or recede targets can be identified by displacement above or below the i-f frequency, but the available unambiguous doppler extract is one-eighth of the pulse repetition rate.

In this report the application of a doppler-sense separation technique that effectively separates Madre radar system targets into approaching and receding targets will be discussed.

Proposed Solution

After considering several possible solutions to the problem of separating approach and recede targets, it was decided to choose a pair of filters, each having a bandpass of one-half the pulse repetition frequency (Prf) of 180 pps for Madre, with the crossover point at the i-f carrier selected (100 kc/s). Although approach and recede doppler can be separated, all range resolution will be lost. To preserve range information, the sideband filters can be gated "on" for a short part of the interpulse period. A workable system that would retain essentially the range resolution of the Madre primary system would require a bank of 22 pairs of filters sequentially gated on for 240 μ sec. The outputs of low and high sideband (LSB and HSB) filters would require separate data processing and display channels.

Sideband filters having the characteristics shown in Fig. 2, with a 12-db notch at the carrier frequency, will give some rejection to the lower doppler frequencies. Since earth backscatter returns appear within a few cycles of the carrier frequency, an improvement in earth backscatter suppression can be realized. In theory all near-zero doppler return rejection could be accomplished by sideband filters with appropriate skirt design. It will be noted that the gate width determines the frequency bandpass since the doppler separation filters are relatively narrow. The 240- μ sec gate example is compatible with the normal 1-kc/s system bandwidth. When a more restricted bandwidth is desirable (due to co-channel interference, for example), it may be secured by using a wider gate with, of course, a sacrifice in range resolution. By providing an adjustable gate-width facility, the radar i-f bandwidth is easily controlled.

SECRET

Another collateral result of nominal 80-cps bandwidth filtering of a range-gated segment of the i-f is that this achieves the correct format for doppler-time-history analysis and display, that is, an essentially cw signal is available for processing. Without such a capability it is necessary to range-gate and "boxcar" prior to processing.

Some preliminary work on mechanical filters at NRL demonstrated that a ten-element torsion-mode filter could produce the desired bandpass characteristics.

DESCRIPTION OF DEVELOPED EQUIPMENT

The block diagram of Fig. 1 indicates the equipment that was developed for this problem. One pair of magnetostriction filters, with the bandpass characteristics shown in Fig. 2, was developed on contract with RCA, Camden, N.J.

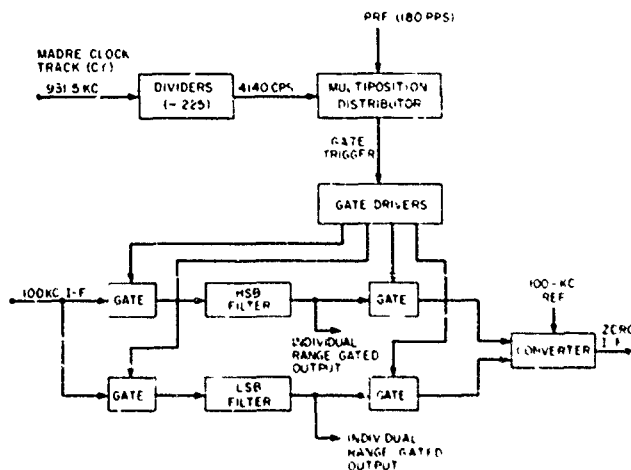


Fig. 1 - Experimental equipment and circuits used to separate approach and recede radar targets by the use of doppler information in the Madre radar system

The counting and commutating circuits necessary to make the filter gating compatible with the Madre system were developed at NRL.

The gate-switching rate required for a 23-range segment system at a 180-cps prf is 4140 cps. This was obtained by dividing the Madre clock track (931.5 kc/s) by 225.

A multi-position distributor using three Barroughs BX-1000 beam switching tubes as shown in Fig. 3. The initial position was set by the system sync and driven by the divided clock track. This distribution provided appropriate trigger pulses for the filter gates.

Gating was accomplished with a dual transistor chopping unit. The Solid State Electronics Model 50P. In the "on" condition this unit has a maximum signal level of 10v peak to peak and near unity gain. In the "off" condition the gain is down approximately 40 db.

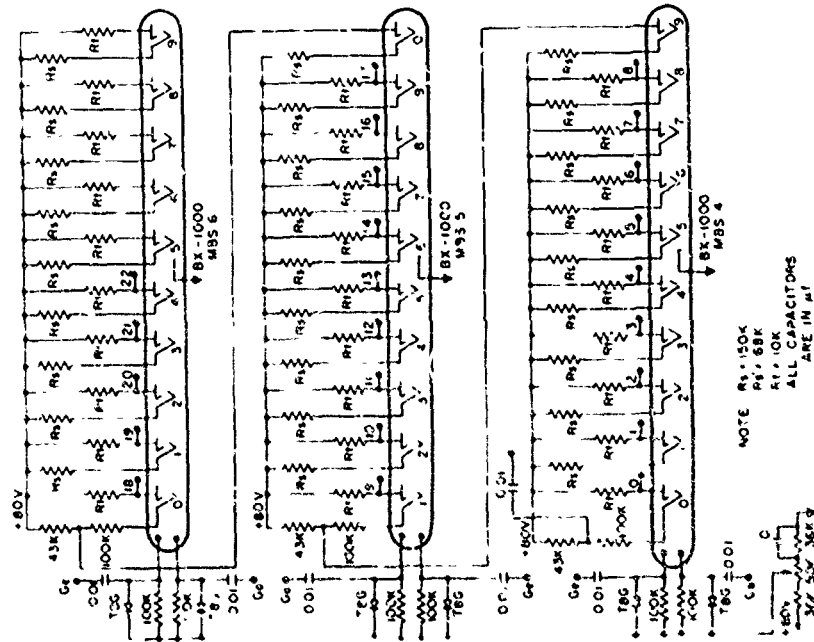


Fig. 3 - Multiposition distributor using three Burroughs BX-1000 beam switching tubes



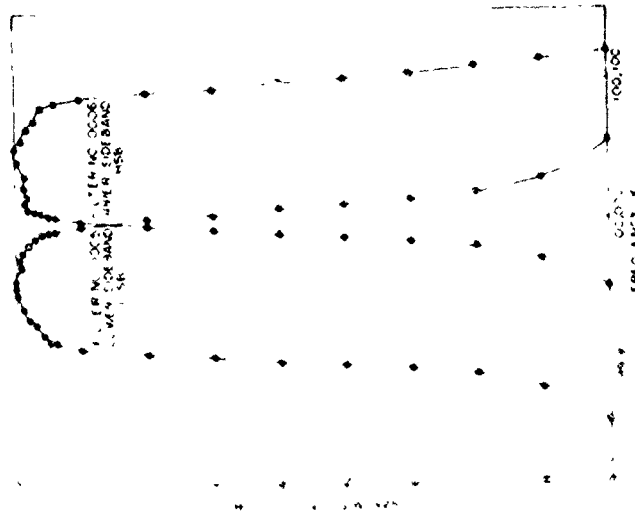


Fig. 4 - Bandpass characteristics of the lower sideband (LSB) and the upper sideband (USB) filters developed for the circuit shown in Fig. 1



divide-by-5 steps, Fig. 5, utilize all ten sections of the tubes with the grids driven directly by separate targets of the preceding tube.

RESULTS

Target Separation

Figure 6 shows the results of a simulated receding doppler of approximately 40 cps. The signal levels were set just below the system saturation point.

In Fig. 7 the same test procedure was followed as in Fig. 6 but with a simulated approach doppler as the input signal.

The input and output circuits of the magnetostriction filters were gated on for a longer time than the actual width of the simulated target, thus accounting for the longer range spread from the filtered channels (Figs. 6(b) and 7(c)).

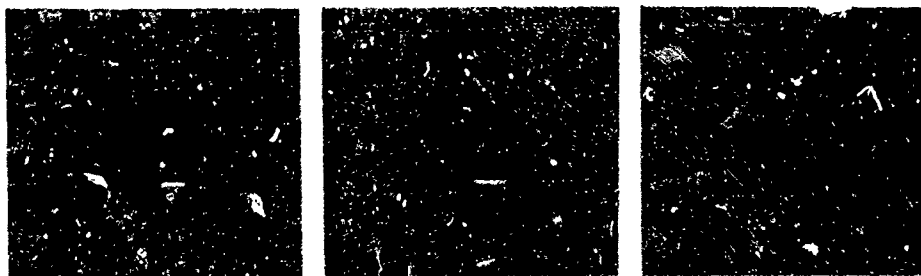


Fig. 6 - Simulated target receding with a doppler frequency of about 40 cps. (a) Conventional Madre radar system primary display, (b) the same receiver, converter, data processing, and display channel with the LSB magnetostriction filter inserted before the synchronous detector, (c) the HSB filter replaces the LSB filter. Horizontal scales represent the range (mi), right-hand scales represent the doppler frequency (cps), and the left-hand scales are not applicable.



Fig. 7 - Simulated target approaching with a doppler frequency of about 40 cps. (a) Conventional Madre radar system primary display, (b) the same receiver, converter, data processing, and display channel with the LSB magnetostriction filter inserted before the synchronous detector, (c) the HSB filter replaces the LSB filter. Horizontal scales represent the range (mi), right-hand scales represent the doppler frequency (cps), and the left-hand scales are not applicable.

Signal Processing Gain

Using the doppler separation filters reduces each channel input bandwidth by one-half and could provide a 3-db improvement in the signal to white-noise ratio presented to the signal processor. A precise comparison of relative sensitivity of the doppler-separated and ambiguous doppler methods was not accomplished. However, observers experienced in the operation of the Madre radar believed that separated channels allowed detection of smaller signals.

Equipment Illustrations

Figure 8 shows the chassis mounting of the magnetostriction filters with the cover removed from one filter.

Figure 9 shows the magnetostriction filter element in some detail.

Figures 10(a) and 10(b) show, respectively, a top and bottom view of the chassis containing the dividing and multiposition distributor circuits.

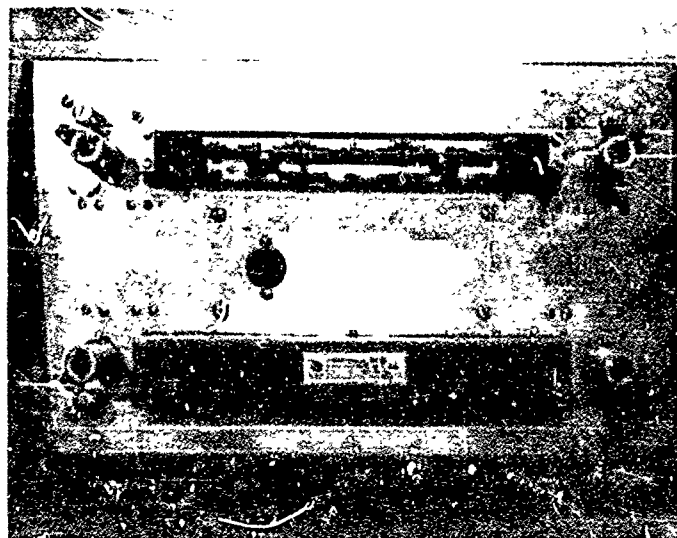


Fig. 8 - Chassis mounting of the magnetostriction filters with cover removed from one filter

CONCLUSION

The performance of the experimental magnetostriction filters showed the feasibility of a doppler sense separation system based on their use. The single pair of filters developed has been useful in target cross-section echoing studies. The use of such a system for



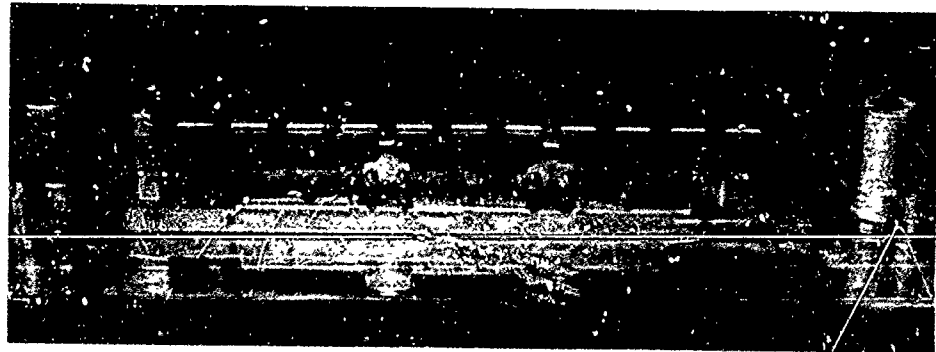


Fig. 9 - Close-up of magnetostriction filter element

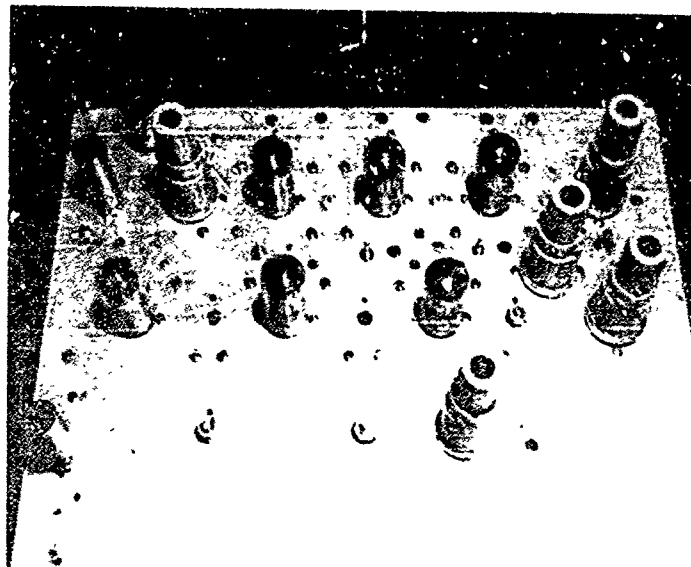

(a) top view

Fig. 10 - Chassis mounting of the dividing and disposition distributor circuits

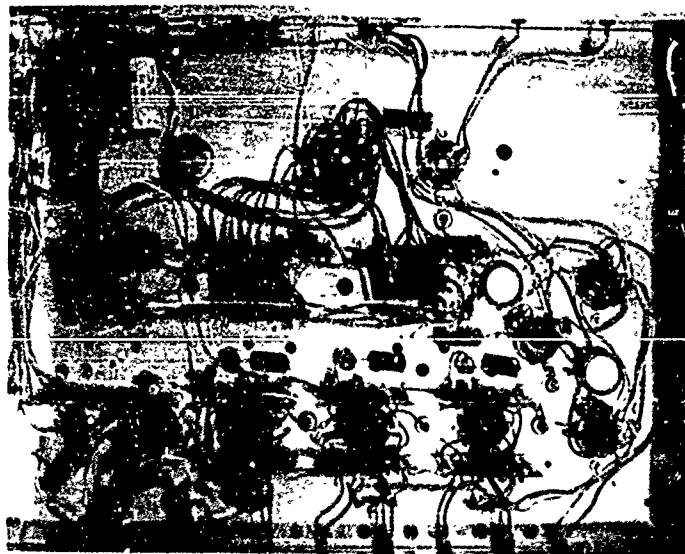

(b) bottom view

Fig. 10 (continued) - Chassis mounting of the dividing and multiposition distributor circuits

target separation permits the presentation of unambiguous doppler frequencies up to one-half the target sampling rate. In addition, three desired collateral features can be obtained. These are (a) some suppression of earth backscatter returns, (b) simple i-f bandwidth control, and (c) the availability of range-gated and essentially continuous-wave signals.

The construction of magnetostriction filters with the characteristics necessary for this purpose proved to be a tedious procedure and efforts to acquire a sufficient number for a complete set were abandoned. A contract has been let for the construction of 25 pairs of crystal filters having the same characteristics as the experimental pair. Future plans are to install these as a part of the Madre research system at CBA.

REFERENCES

1. Page, R.M., and George, S.F., "Magnetic Drum Storage Applied to Surveillance Radar," NRL Report 4878 (Confidential Report, Unclassified Title) Jan. 1957
2. Wyman, F.E., and Zettle, E.N., "Magnetic Drum Storage Cross Correlation Radar," NRL Report 5023 (Secret Report, Unclassified Title) Nov. 1957

SECRET

DISTRIBUTION

	<u>Copy No.</u>
Director, Advanced Research Projects Agency, Wash. 25, D.C. Attn: Mr. A. Van Every	1-4
Dir., Weapons Systems Evaluation Group, Rm. 1E880, Pentagon Attn: Mrs. Sjoiven	5-6
National Bureau of Standards, US Dept. of Commerce, Wash. 25, D.C. Attn: Mr. L. E. Tveten	7
Dir., National Security Agency, Fort Geo. G. Meade, Md. Attn: C3/TDL	8
CO, U.S. Naval Ordnance Test Unit, Patuxent AFB, Fla. Attn: CDR A. L. Jacobson	9
Dir., USNEL, San Diego 52, Calif.	10
Chief of Naval Research, Dept. of the Navy, Wash. 25, D.C. Attn: Code 427	11
463	12
418	13
Chief of Naval Operations, Dept. of the Navy, Wash. 25, D.C. Attn: Op-92 (4 cys.)	14-17
Op-30	18
Op-70	19
Op-07T	20
Op-03EG (2 cys.)	21-22
Op-723	23
Research & Technical Div. Hdqrs., Air Force Systems Command, Bolling AFB, Wash. 25, D.C. Attn: LTCOL R.M. Cosel	24
Chief, BuShips, Dept. of the Navy, Wash. 25, D.C.	25
Dir., Special Projects Div., Dept. of the Navy, Wash. 25, D.C.	26
Dir., Defense Research & Engr., Dept. of Defense, Wash. 25, D.C. Attn: Air Defense (4 cys.)	27-28
CO, USNATC, Patuxent River NAS, Patuxent River, Md. Attn: Mr. D. Decker	29
CO, USNOL, Corona, Calif. Attn: Mr. V. Hildabrand	30
CDR, Naval Missile Center, Point Mugu, Calif. Attn: Tech. Library, Code NO3022	31
CG, US Army Signal Radio Propagation Agency, Ft. Monmouth, N.J. Attn: SIGRP-A	32
CG, Picatinny Arsenal, Tech. Res. Serv., AAWL, Dover, N.J. Attn: Dr. Davis	33

SECRET

DISTRIBUTION (Cont'd.)

	<u>Copy No.</u>
Hdqs., US Army Liaison Group, Project Michigan, Univ. of Michigan, P.O. Box 618, Ann Arbor, Mich. Attn: Chief, Administration (BAMBRAC)	34
Office, Dir. of Defense Research & Engr., Office of Electronics, Rm. 301033, Pentagon Attn: Mr. J.J. Donovan	35
CO, US Army Signal Electronic Research Unit, P.O. Box 205, Mountain View, Calif.	36
Hdqs., USAF, Office Asst. Chief of Staff Intelligence, Wash. 25, D.C. Attn: MAJ A.T. Miller	37
Hdqs., USAFCRC, Hanscom Field, Bedford, Mass. Attn: CRRK, Dr. Philip Newman	38
CRRRI, Mr. Wm. F. Ring	39
MAJ Scott Sterling	40
CDP, RADC, Griffiss AFB, Rome, N.Y. Attn: RALTT, Mr. F. Bradley	41
RCLTS, Mr. T. Maggio	42
CDR, Air Technical Intelligence Center, USAF, Wright-Patterson AFB, Ohio Attn: Dr. P.J. Overbo	43
Mr. Goff	44
Hdqs., USAF, Dept. of the Air Force, Office for Atomic Energy, DCS/O, Wash. 25, D.C.	45
Hdqs., USAF, Wash. 25, D.C. Attn: LTCOL K. Baker, AFRDP-A	46
CDR, Air Force Office of Scientific Research, Wash. 25, D.C. Attn: Code SRY	47
Hdqs., Offutt AFB, Nebraska Attn: Strategic Air Command	48
CDR, Air Force Ballistic Missile Div., Air Force Unit Post Office, Los Angeles 45, Calif.	49
Hdqs., North American Air Defense Command, Ent AFB, Colorado Springs, Colo. Attn: NELC (Advanced Projects Group)	50
Electro-Physics Labs., ACF Electronics Div., 3355 - 52nd Ave., Hyattsville, Md. Attn: Mr. W.T. Whelan	51
Stanford Electronics Lab. Stanford Univ., Stanford, Calif. Attn: Dr. O.G. Villard	52
Raytheon Mfg. Co., Wayland Lab., Waltham, Mass. Attn: Mr. D.A. Hedlund	53
General Electric Co., Court St., Syracuse, New York Attn: Dr. G.H. Millman	54
Lockheed Aircraft Corp., California Div., Burbank, Calif. Attn: Mr. R.A. Bailey	55

DISTRIBUTION (Cont'd.)

	<u>Copy No.</u>
Pilotless Aircraft Div., Boeing Airplane Co., Seattle 24, Wash. Attn: Mr. F.S. Holman	56
The Martin Marietta Co., Baltimore 3, Md. Attn: Dr. D.M. Suknia	57
RCA Aerospace Communications and Controls Div., Burlington, Mass. Attn: Mr. J. Robinovitz	58
MIT, Lincoln Labs., Box 73, Lexington 73, Mass. Attn: Dr. J.H. Chisholm Mr. Melvin Stone	59 60
The Penna. State Univ., University Park, Pa. Attn: Mr. H.D. Rix	61
The Rand Corp., 1700 Main St., Santa Monica, Calif. Attn: Dr. Cullen Cram	62
Bendix Systems Div., The Bendix Corp., 3300 Plymouth Rd., Ann Arbor, Mich. Attn: Mr. C.M. Shaar, Associate Dir. of Engineering	63
Smyth Research Associates, 3555 Aero Court, San Diego 11, Calif. Attn: Mr. Steven Weisbrod	64
CDR, Electronic Systems Div., Hanscom Field, Bedford, Mass. Attn: Mr. Harry Byram, ESRDT	65
Convair Div. of General Dynamics, 3165 Pacific Coast Highway, San Diego 12, Calif. Attn: Dr. Bond	66
Stanford Research Institute, Menlo Park, Calif. Attn: Mr. E. Leadabrand Mr. L.T. Dolphin, Jr.	67 68
Thompson Ramo-Wooldridge, Inc., Box 90534, Airport Station, Los Angeles, Calif. Attn: Technical Information Services	69
APL/JHU, 8621 Georgia Ave., Silver Spring, Md. Attn: Mr. G.L. Seielstad (NavOrd 7386)	70
Chief, Army Security Agency, Arlington Hall Station, Arlington 12, Va.	71
Aircraft Instruments Lab., Melville, L.I., New York Attn: Mr. Scott Hall	72
CDR, Ent AFB, Colorado Springs, Colo. Attn: LTCOL M.R. Cripe, Hq. NORAD, NPSD-R ADLAN Section	73 74
US Army Ordnance Missile Command Redstone Arsenal, Ala. Attn: Mr. James E. Norman	75
Diamond Ordnance Fuze Labs., Ordnance Corps, Wash. 25, D.C. Attn: Mr. Perry Criffen	76

DISTRIBUTION (Cont'd.)

	<u>Copy No.</u>
Institute for Defense Analyses, 1666 Conn. Ave., N.W., Wash., D.C. Attn: Dr. Mils L. Muench	77
Westinghouse Electric Corp., Defense Center - Baltimore, Technical Information Center, P.O. Box 1693, Baltimore 3, Md.	78
Systems Branch, US Army Scientific Liaison and Advisory Group, P.O. Box 7157, Apex Station, Wash. 4, D.C. Attn: Mr. Richard A. Krueger	79
Aero Geo Astro Corp., P.O. Box 1083, Edsall & Lincolnia Rds., Alexandria, Va. Attn: Technical Library	80
Dir., DASA Data Center, P.O. Drawer QQ, Santa Barbara, Calif.	81
DDC, Alexandria, Va. Attn: TIPDR	82-101

CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)
CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)	CONFIDENTIAL Naval Research Laboratory. Report 6079 (SECRET Grp.-3). A METHOD OF SEPARATING APPROACH AND RECEDE PULSE DOPPLER RADAR ECHOES (Unclassified Title), by E.W. Ward, J.M. Headrick, and E.N. Zettie. 12 pp. and figs., March 24, 1964. A doppler-sense separation technique, applicable to the MADRE radar system, separates radar targets into approaching and receding targets. The presentation of unambiguous doppler frequencies of up to one-half the radar sampling rate is made possible. In addition, three desirable collateral features can be obtained: (a) some suppression of earth backscatter returns, (b) simple 1-f band width control, and (c) the availability of range-gated and essentially continuous- CONFIDENTIAL (over)

CONFIDENTIAL

wave signals. The separation technique has a theoretical signal-to-noise ratio improvement of 3 db. [Confidential Abstract]

CONFIDENTIAL

wave signals. The separation technique has a theoretical signal-to-noise ratio improvement of 3 db. [Confidential Abstract]

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

wave signals. The separation technique has a theoretical signal-to-noise ratio improvement of 3 db. [Confidential Abstract]

CONFIDENTIAL

wave signals. The separation technique has a theoretical signal-to-noise ratio improvement of 3 db. [Confidential Abstract]

CONFIDENTIAL

CONFIDENTIAL

Naval Research Laboratory

Technical Library


Research Reports & Bibliography Unit

To: Larry Downing, DTIC
From: Darlene DeMarr, Code 5596.3
Date: 9/17/2007
Subject: Change in Classification & Distribution Statement

Please change the classifications & distribution statement on the following documents to Unclassified/Unlimited Distribution:

ADC954564 (NRL-3703-PT-1)	Declassified with no restrictions 9/11/1996
AD0348828 (NRL-6066)	Declassified with no restrictions 9/30/1996
AD0348901 (NRL-6037)	Declassified with no restrictions 12/3/1996
AD0352827 (NRL-6117)	Declassified with no restrictions 1/25/1996
AD0361630 (NRL-6247)	Declassified with no restrictions 1/7/1997
AD0377010 (NRL-6476)	Declassified with no restrictions 1/29/1997
AD0377011 (NRL-6485)	Declassified with no restrictions 1/29/1997
AD0377242 (NRL-6479)	Declassified with no restrictions 1/29/1997
AD0379058 (NRL-6508)	Declassified with no restrictions 1/29/1997
AD0379893 (NRL-6507)	Declassified with no restrictions 1/29/1997
AD0346383 (NRL-6015)	Declassified with no restrictions 1/29/1997
AD0349268 (NRL-6079)	Declassified with no restrictions 1/29/1997
AD0355651 (NRL-6198)	Declassified with no restrictions 1/29/1997
AD0368068 (NRL-6371)	Declassified with no restrictions 1/29/1997

Thank you,



Darlene DeMarr
(202) 767-7381
demarr@nrl.navy.mil