

UNCLASSIFIED

AD NUMBER

AD358863

CLASSIFICATION CHANGES

TO: unclassified

FROM: confidential

LIMITATION CHANGES

TO:  
Approved for public release, distribution  
unlimited

FROM:  
Controlling DoD organization.

AUTHORITY

Jan 1977 per Group-4 document markings;  
AFRPL ltr dtd 17 Jan 1986

THIS PAGE IS UNCLASSIFIED

**AD 358863**

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**NOTICE:** When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

**NOTICE:**

THIS DOCUMENT CONTAINS INFORMATION  
AFFECTING THE NATIONAL DEFENSE OF  
THE UNITED STATES WITHIN THE MEAN-  
ING OF THE ESPIONAGE LAWS, TITLE 18,  
U.S.C., SECTIONS 793 and 794. THE  
TRANSMISSION OR THE REVELATION OF  
ITS CONTENTS IN ANY MANNER TO AN  
UNAUTHORIZED PERSON IS PROHIBITED  
BY LAW.

**CONFIDENTIAL**

AFRPL-TR-65-14

358863

**(U) EXPERIMENTAL EVALUATION OF HYBALINE B<sub>3</sub>**

**BY**

**V. A. MOSELEY**

**K. E. NIDIFFER**

**J. P. FRANKLIN**

CATALOGED BY: UUU

AS AD. No. \_\_\_\_\_

358863

**A PAPER PRESENTED TO  
THE SIXTH LIQUID PROPULSION SYMPOSIUM,  
LOS ANGELES, CALIFORNIA,  
25 SEPTEMBER 1964**

**TECHNICAL REPORT NUMBER AFRPL-TR-65-14**

**JANUARY 1965**

**AIR FORCE ROCKET PROPULSION LABORATORY  
RESEARCH AND TECHNOLOGY DIVISION  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE  
EDWARDS, CALIFORNIA**

**DDC**  
**APR 12 1965**  
**RESERVED**  
**ISIA R**

**DOWNGRADED AT 3 YEAR INTERVALS;  
DECLASSIFIED AFTER 12 YEARS.  
DOD DIR 8200.10**

**CONFIDENTIAL**

## NOTICES

Qualified requesters may obtain copies from DDC.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished or in any way supplied said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

**CONFIDENTIAL**

**AFRPL-TR-65-14**

**(U) EXPERIMENTAL EVALUATION OF HYBALINE B<sub>3</sub>**

**BY**

**V.A. MOSELEY**

**K.E. NIDIFFER**

**J.P. FRANKLIN**

**A PAPER PRESENTED TO  
THE SIXTH LIQUID PROPULSION SYMPOSIUM,  
LOS ANGELES, CALIFORNIA**

**TECHNICAL REPORT NUMBER AFRPL-TR-65-14**

**JANUARY 1965**

**AIR FORCE ROCKET PROPULSION LABORATORY  
RESEARCH AND TECHNOLOGY DIVISION  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE  
EDWARDS, CALIFORNIA**

**DOWNGRADED AT 3 YEAR INTERVALS;  
DECLASSIFIED AFTER 12 YEARS.  
DOD OIR 8888.10**

**CONFIDENTIAL**

## FOREWORD

This report covers certain experiments conducted for the evaluation of Hybaline B<sub>3</sub>. It was presented as a paper to the Sixth Liquid Propulsion Symposium, Los Angeles, California, 25 September 1964. It represents work done under Project 314803301, at the Air Force Rocket Propulsion Laboratory, from February 1964 through 15 September 1964. The test work on Hybaline B<sub>3</sub> is continuing, and additional reports will be published by AFRPL.

This report has been reviewed and approved.



J.M. SILK  
Colonel, USAF  
Director, AF Rocket  
Propulsion Laboratory

**CONFIDENTIAL**

**ABSTRACT**

(C) Methylamine beryllium borohydride, produced by Union Carbide Chemicals Company and code-named "Hybaline B<sub>3</sub>", has been subjected to 28 test firings in a nominal 100-pound-thrust uncooled rocket engine. Eleven tests were made with N<sub>2</sub>O<sub>4</sub>, and the remainder were conducted with 90 wt. % H<sub>2</sub>O<sub>2</sub>. Delivered performance with both oxidizers has been low, 82 to 84 percent of theoretical specific impulse. Thermal instability of Hybaline B<sub>3</sub> has been observed; however, changes in composition over a year period are negligible. Hybaline B<sub>3</sub> is compatible with standard materials, and although it is pyrophoric, it presents few handling problems other than toxicity.

(Confidential Abstract)

**CONFIDENTIAL**

## TABLE OF CONTENTS

	<u>Page</u>
FOREWORD . . . . .	iii
ABSTRACT . . . . .	v
INTRODUCTION . . . . .	1
DISCUSSION . . . . .	2
Engine Test System . . . . .	2
Instrumentation . . . . .	4
Data Analysis and Correction . . . . .	4
Ignition . . . . .	4
Performance with $N_2O_4$ . . . . .	8
Performance with 90% $H_2O_2$ . . . . .	8
Thermal Stability . . . . .	12
Handling and Compatibility . . . . .	15
SUMM RY . . . . .	15
CONCLUSIONS . . . . .	16
REFERENCES . . . . .	18
DISTRIBUTION . . . . .	1

# CONFIDENTIAL

## EXPERIMENTAL EVALUATION OF HYBALINE B<sub>3</sub>

### INTRODUCTION.

(C) An experimental program to determine the performance and physical characteristics of Hybaline B<sub>3</sub> is being conducted at the Air Force Rocket Propulsion Laboratory (AFRPL). Hybaline B<sub>3</sub>, made by Union Carbide Chemicals Company under Contract AF 04(611)-8164, is methylamine beryllium borohydride. Table I outlines the physical properties of B<sub>3</sub> as reported by Union Carbide (1). The interest in this new fuel is emphasized by its attractive theoretical performance: 338.4 seconds with N<sub>2</sub>O<sub>4</sub> and 329.5 seconds with H<sub>2</sub>O<sub>2</sub> (1000 psi chamber pressure expanding to sea level;  $\Delta h_f = 0.9$  kcal/mol for B<sub>3</sub>).

(C) Three major factors influence the ultimate use of Hybaline B<sub>3</sub>. These are its toxicity (13 per cent beryllium), its storability, and its dependence on the BN reaction for high performance with N<sub>2</sub>O<sub>4</sub>. This paper presents experimental work on the last two factors and test results with 90% H<sub>2</sub>O<sub>2</sub>.

TABLE I

### (C) PHYSICAL PROPERTIES OF HYBALINE B<sub>3</sub> LIQUID ROCKET FUEL

Name	Methylamine Beryllium Borohydride
Structural Formula	CH <sub>3</sub> NH <sub>2</sub> :Be(BH <sub>4</sub> ) <sub>2</sub>
Empirical Formula	BeB <sub>2</sub> CH <sub>3</sub> N
Molecular Weight	69.75
Density, gm/cc at 20°C (a)	0.641, 0.650
Vapor Pressure, mm Hg at 25.8°C (b)	1.5
Freezing Point, °C (a)	-11.5, -14

(a) High and low results for fuel shipped from Blue Creek Production Facility.

CONFIDENTIAL

# CONFIDENTIAL

Table I (Cont'd)

Viscosity, cp 20°C	3.4
Flash Point, °F (b)	68
Auto Ignition Temperature, °F (b)	284
Surface Tension, dynes/cm (b)	28.6
Specific Heat, cal/gm 20°C (b)	0.6246
Boiling Point, °C	270
Critical Temperature, °C	500
Air Sensitivity	Oxidizes slowly in dry air without ignition
Shock Sensitivity (c)	120.0

## DISCUSSION.

(U) Engine Test System. The basic test article for this propellant is an uncooled rocket engine designed for 100 pounds thrust at 300 psi chamber pressure, three engine configurations have been used. These assemblies are described in Table II. Hardware is interchangeable between these configurations. Figure 1 pictures the 198P engine.

TABLE II

### (U) ENGINE CONFIGURATIONS


<u>No.</u>	<u>Chamber</u>	<u>L<sub>c</sub>, in.</u>	<u>Nozzle</u>
198S	2.5 x 10 in. Stainless Steel	198	
198P	2.5 x 10 in. Acrylic Resin	198	Copper D <sub>t</sub> = .56, e = 4.2
297S	2.5 x 15 in. Stainless Steel	297	

(b) These tests were made on samples prepared in the laboratory and the values will be redetermined for fuel produced in the Pilot Plant.

(c) Limit of detection by Olin Mathieson drop weight tester, LFIA Test Method No. 4, LFIA, December, 1959.

# CONFIDENTIAL

**CONFIDENTIAL**

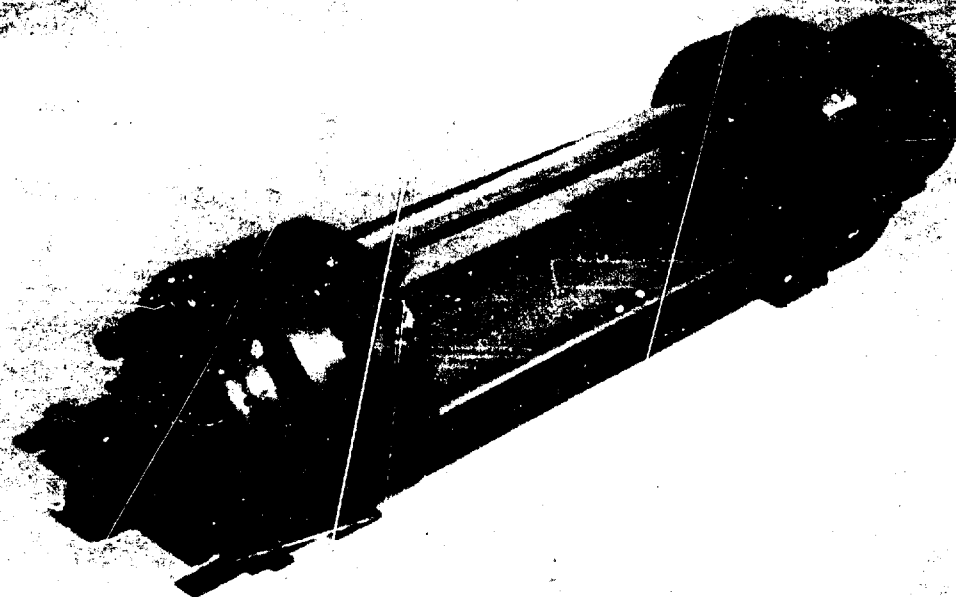

(U) Figure 1. 198P Engine

**CONFIDENTIAL**

(This page is Unclassified)

# CONFIDENTIAL

Two types of injectors have been tried to date: a "splash plate" design shown in Figure 2, and a conventional  $60^\circ$  included-angle triplet shown in Figure 3. All of the data presented here is from the splash-plate type. Data from the triplet is not available at this time.

The test system was of simple pressure-fed design. It is shown schematically in Figure 4.

(U) Instrumentation. Chamber pressure, thrust, and set-up pressures were measured with strain gage type transducers, and primary data were recorded on FM tape. Turbine flowmeters were used. All primary data channels, with the exception of the flows, were calibrated end-to-end prior to each day of testing. Although no precision or accuracy program was done on this system, an accuracy of  $\pm 2\%$  is postulated based on studies of a similar system (2). The major source of instrumentation error is the flow measurement. The flexured parallelogram thrust stand is shown in Figure 5 with a 198S engine firing  $B_3/90\% H_2O_2$ .


(U) Data Analysis and Correction. Data presented represents average values obtained from time slices taken from 2 to 5-second test firings during steady-state operation. These averages are taken for each test, but no averaging of data from different tests is done.

(U) In order to minimize data corrections, all values are reported normalized to a chamber pressure of 300 psia expanded to 13.2 psia. These conditions were chosen because they are very near the actual test case and they limit the  $I_{sp}$  correction to less than 1%. No corrections for heat loss or the  $15^\circ$  nozzle divergence are included.


(C) Ignition. Hybaline  $B_3$  is hypergolic with both  $N_2O_4$  and  $90\% H_2O_2$ . As a precaution, however, initial  $H_2O_2$  tests were run with the 198P engine using the cast acrylic resin chamber to minimize the hazard of a hard start. No overpressures were observed on start. But one point of interest is the "chugging" observed during the first 250 milliseconds of the  $B_3/H_2O_2$  tests. Cavitating venturis used for flow control isolated this phenomenon to the



(U) Figure 2. Splash-Plate Injector

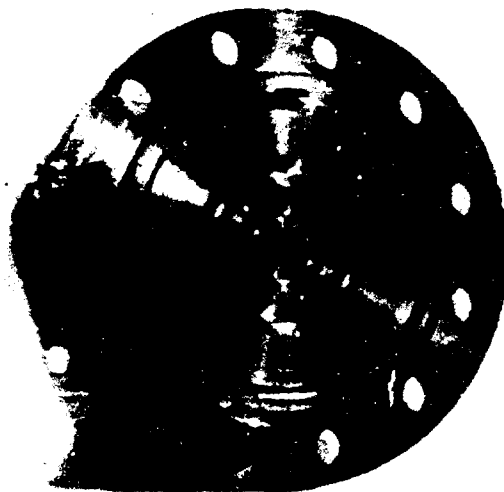


(U) Figure 3. Triplet Injector

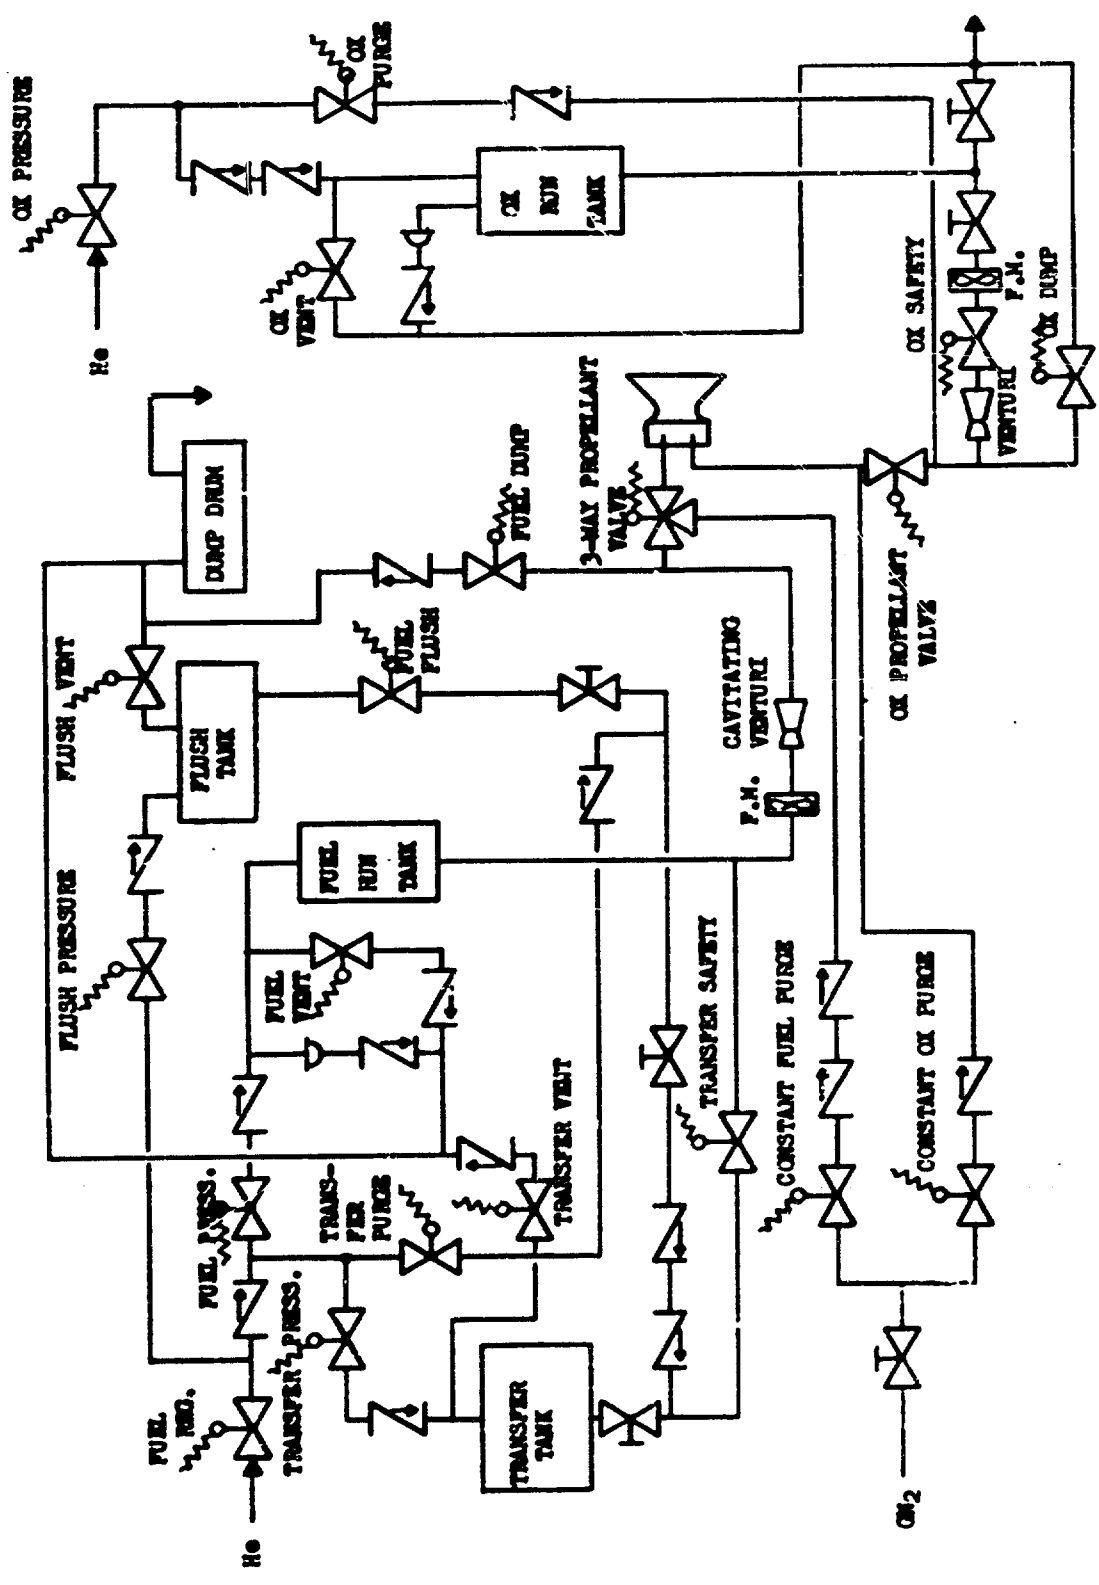

(U) Figure 4. Propellant Engine System

**CONFIDENTIAL**

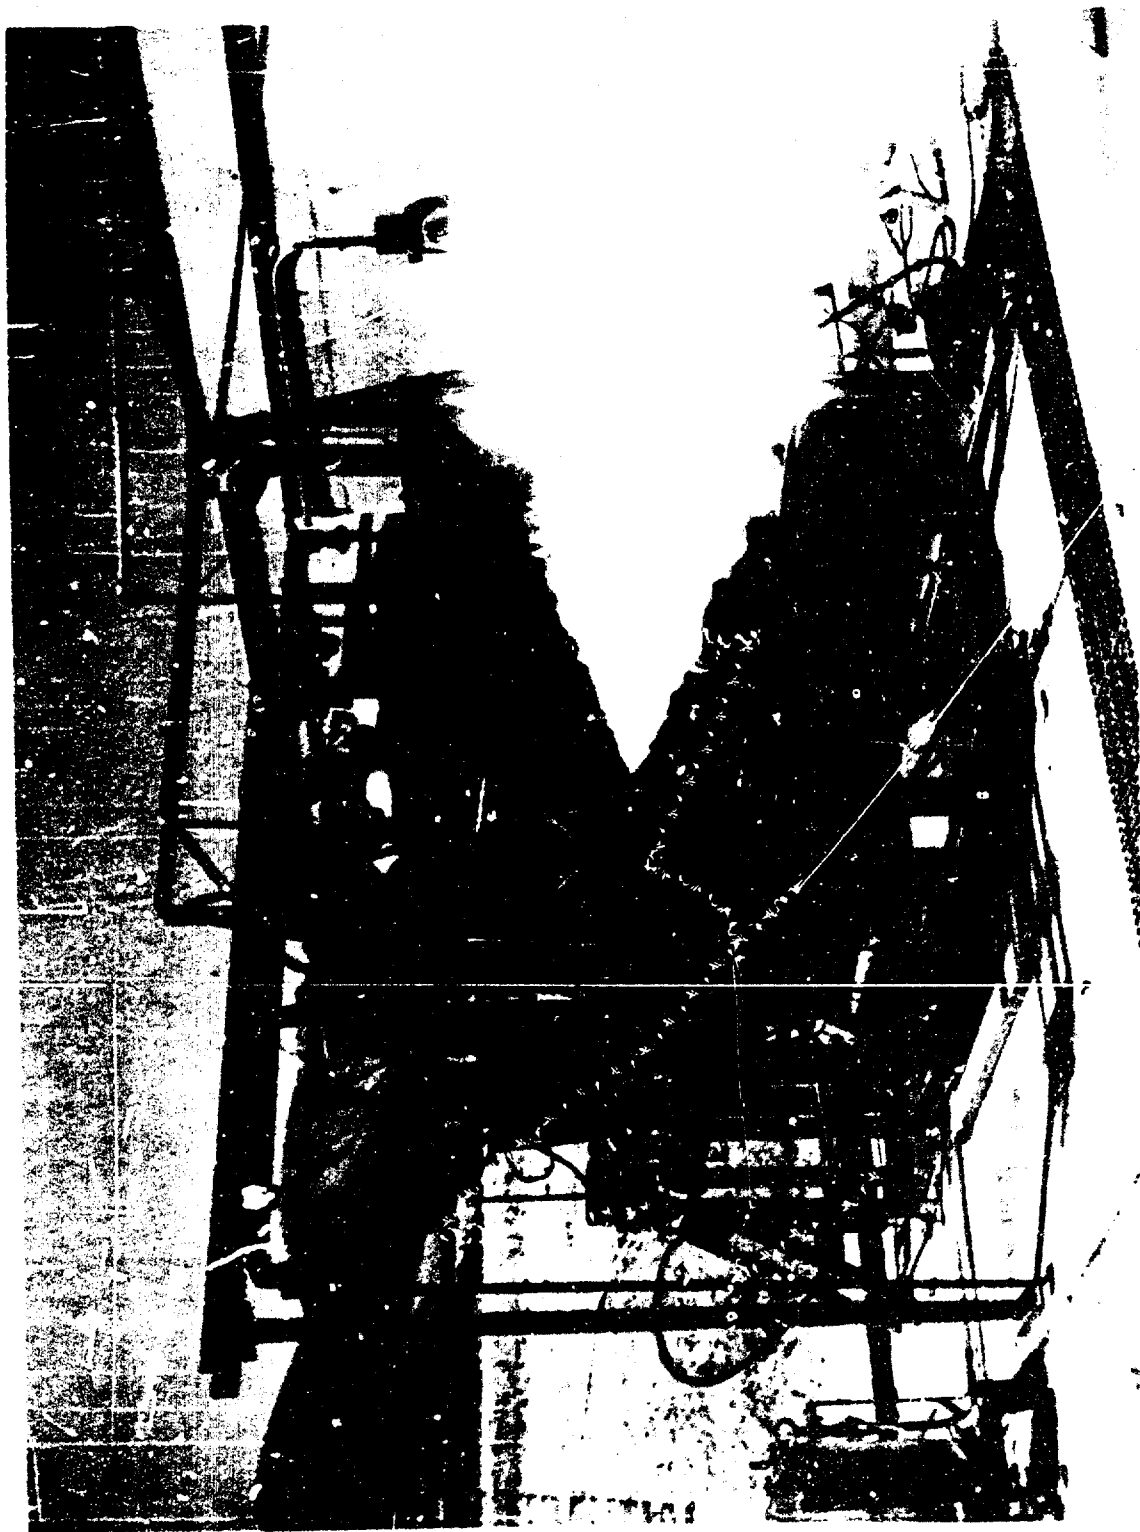

(U) Figure 5. Hybaline B<sub>3</sub> Test System

**CONFIDENTIAL**

(This page is Unclassified)

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Section 793, and Title 18, U.S.C., Section 794, and the transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

# CONFIDENTIAL

thrust chamber and injector. This should be of academic interest only to all except those who require unusually short start transients.

(C) Performance with  $N_2O_4$ . Eleven test firings were made with Hybaline  $B_3/N_2O_4$  during March 1964. This testing was limited by the small quantity, 9.8 pounds, of Hybaline  $B_3$  available then. The splash-plate injection technique was selected on the basis of its relatively good performance with other Hybalines (3, 4).

(C) Six tests were made with the 198S engine. The measured  $I_{sp}$  performance peaked at 237 seconds at an O/F ratio of 1.0. A second splash-plate injector was designed adjusting the injection velocities in an attempt to shift the performance peak to an O/F of 0.5 to 0.6, the theoretical BN reaction region. No difference in the performance of these two injectors could be measured.


(C) A second attempt to get the BN reaction by increasing characteristic chamber length also proved unsuccessful. Two tests with the 297S engine and the splash-plate injector produced data identical to the 198S configuration.

(U) Reduced  $I_{sp}$  data for the  $B_3/N_2O_4$  tests are plotted and compared to theoretical predictions in Figure 6.

(C) Performance with 90%  $H_2O_2$ . Fourteen test firings were conducted for performance data with Hybaline  $B_3/H_2O_2$  (90 wt. %) during August 1964. The total weight of Hybaline  $B_3$  expended was 8.9 pounds. A splash-plate injection technique was used with a 198S engine. Performance was consistently low in the region of maximum theoretical  $I_{sp}$  and was still increasing at a mixture ratio of 2.3. Table III is a tabulation of the reduced performance data, and Figure 7 is a plot of the  $I_{sp}$  data.

(C) Splash-plate injectors with this engine have normally not been sensitive to design changes such as injection velocity. Therefore, to check for injector effects, the triplet injector was tested. Unfortunately, plugging in the fuel system negated the usefulness of the data from the three tests run. Tests with the triplet will be repeated in October.


CONFIDENTIAL

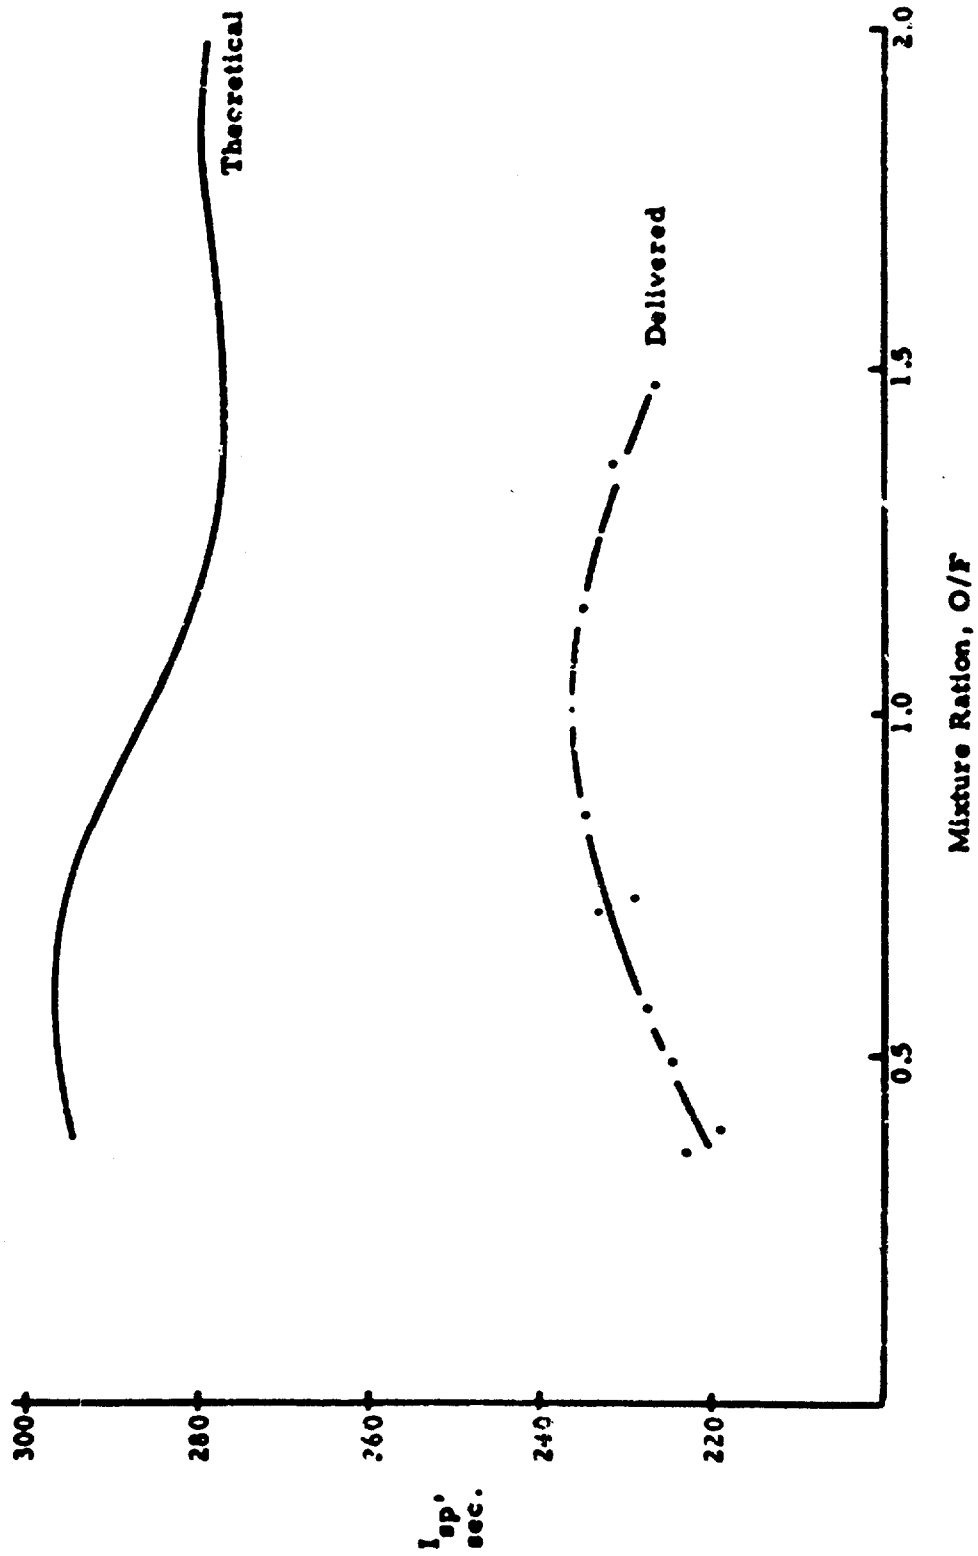

(C) Figure 6. Performance of Hybaline B<sub>3</sub>/N<sub>2</sub>O<sub>4</sub>, 300/13.2 psia

CONFIDENTIAL

CONFIDENTIAL

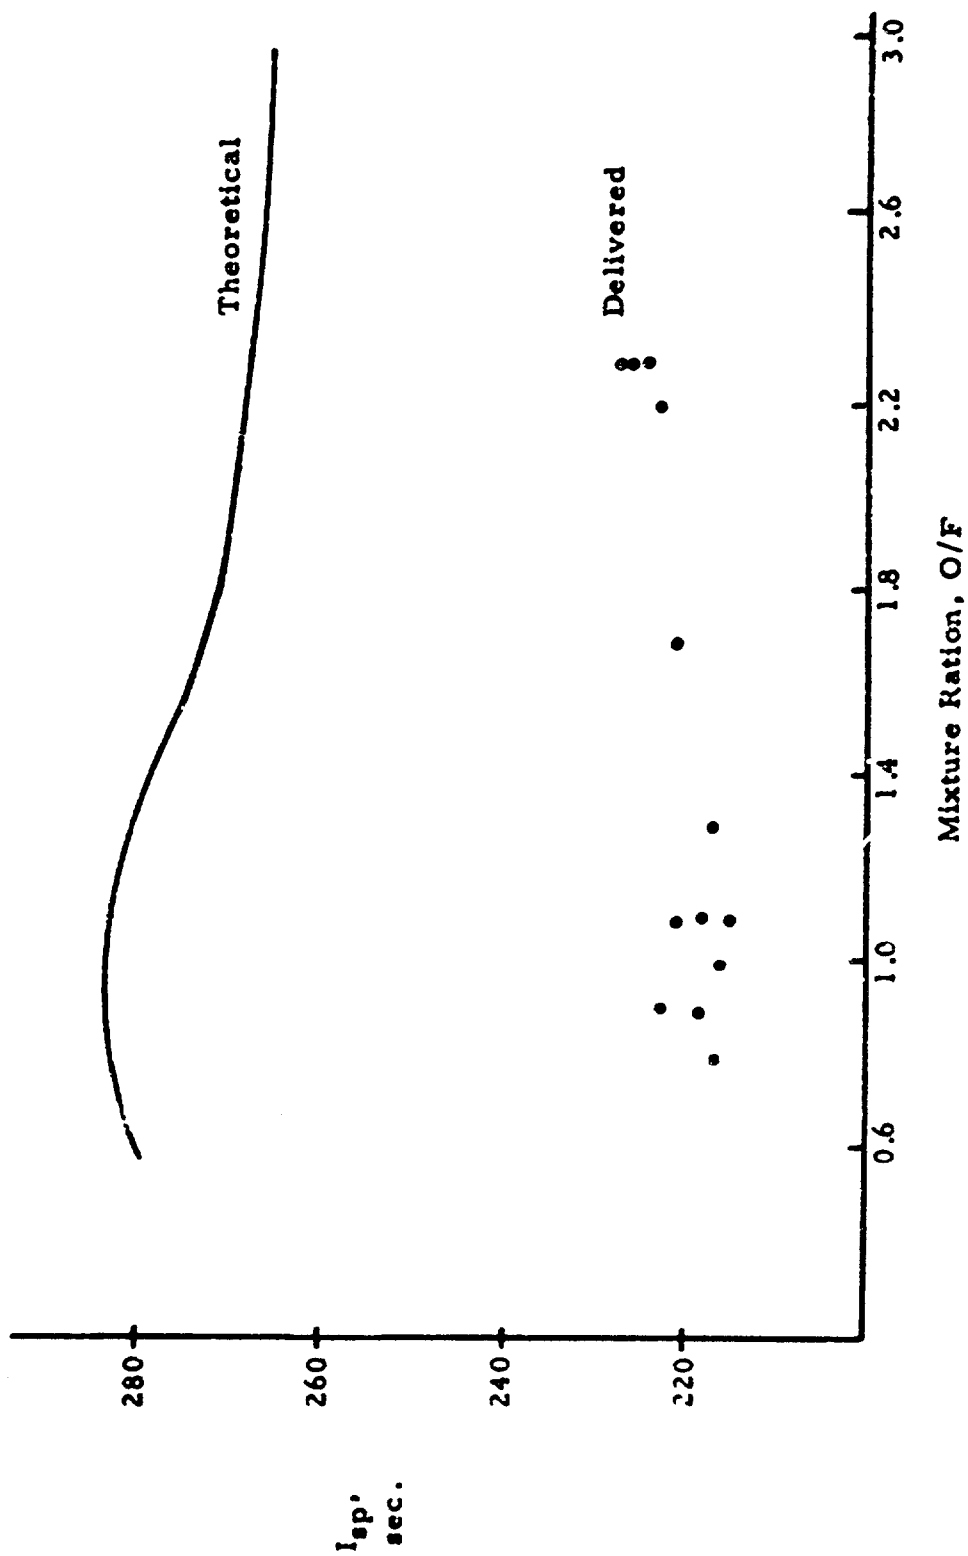

(C) Figure 7. Performance of Hybaline B<sub>3</sub>/90% H<sub>2</sub>O<sub>2</sub>, 300/13.2 psia

CONFIDENTIAL

CONFIDENTIAL

(C) Table III. Reduced B<sub>3</sub>/H<sub>2</sub>O<sub>2</sub> Data

Run No.	O/r	I <sub>sp</sub> lb/lb/sec	I <sub>sp</sub> Corr. lb/lb/sec	C*	F	P <sub>c</sub> psia	% I <sub>sp</sub>	% C*
B-34	2.0	222	222	5280	95	293	83	85
B-35	2.3	224	225	5287	96	297	84	86
B-36	2.3	224	224	5278	97	300	84	86
B-37	2.3	225	226	5130	98	300	84	84
B-38	1.7	217	220	5000	90	280	79	82
B-39	0.9	220	222	5460	89	277	78	88
B-40	1.1	214	214	5550	87	297	76	83
B-41	1.0	214	215	5200	86	284	76	85
B-42	NO DATA							
B-43	0.6	212	215	5100	87	265	76	82
B-44	0.9	217	217	5280	93	293	77	85
B-45	1.0	219	220	4948	95	289	78	79
B-46	1.1	217	218	4808	94	290	77	78
B-47	1.3	214	216	4725	91	283	77	77

NOTE: The average buildup of a 0.009-inch oxide crust on the throat of the nozzle complicated throat area measurements and hence C\* calculations.

CONFIDENTIAL

The document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Section 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

# CONFIDENTIAL

(C) Thermal Stability. Union Carbide Company personnel, who are studying the stability of Hybaline B<sub>3</sub>, provided the preliminary stability information presented here <sup>(5)</sup>. Their data, which correlates well with pressure samplings at AFRPL, indicates an inherent instability which produces a pressure rise of 0.06 psi per hour at 122°F and 75% ullage. Tables IV and V show results from one year of storage of Hybaline B<sub>3</sub>.

TABLE IV

(C) THERMAL STABILITY OF HYBALINE B<sub>3</sub>,  
CYLINDER 2, AFTER 1 YEAR OF STORAGE

Ullage	75%	25%	10%
Temp., °F	122	100	100
psi/day	1.2	1.7	8.4

TABLE V


(C) ANALYSIS OF HYBALINE B<sub>3</sub>,  
CYLINDER 2, AFTER 1 YEAR OF STORAGE

	Theory	As Made	After 1 Year
% B <sub>e</sub>	12.92	12.75	12.74
% N <sub>2</sub>	20.08	19.81	19.64

(C) Variations from batch to batch have been observed. Pressure rises from 3.12 to 12.0 psi/day (100°F, 25% ullage) have been measured. Union Carbide attributes accelerated decomposition to an excess of amine or an incomplete equilibrium reaction. They have been successful in minimizing this variation, and it does not appear to be a serious problem.

(C) Stability of Hybaline B<sub>3</sub> improves markedly below 90°F. Figure 8 shows the effect of temperature on pressure buildup. Figure 9 compares Hybaline B<sub>3</sub> stability to various Hybaline A fuels.


**CONFIDENTIAL**

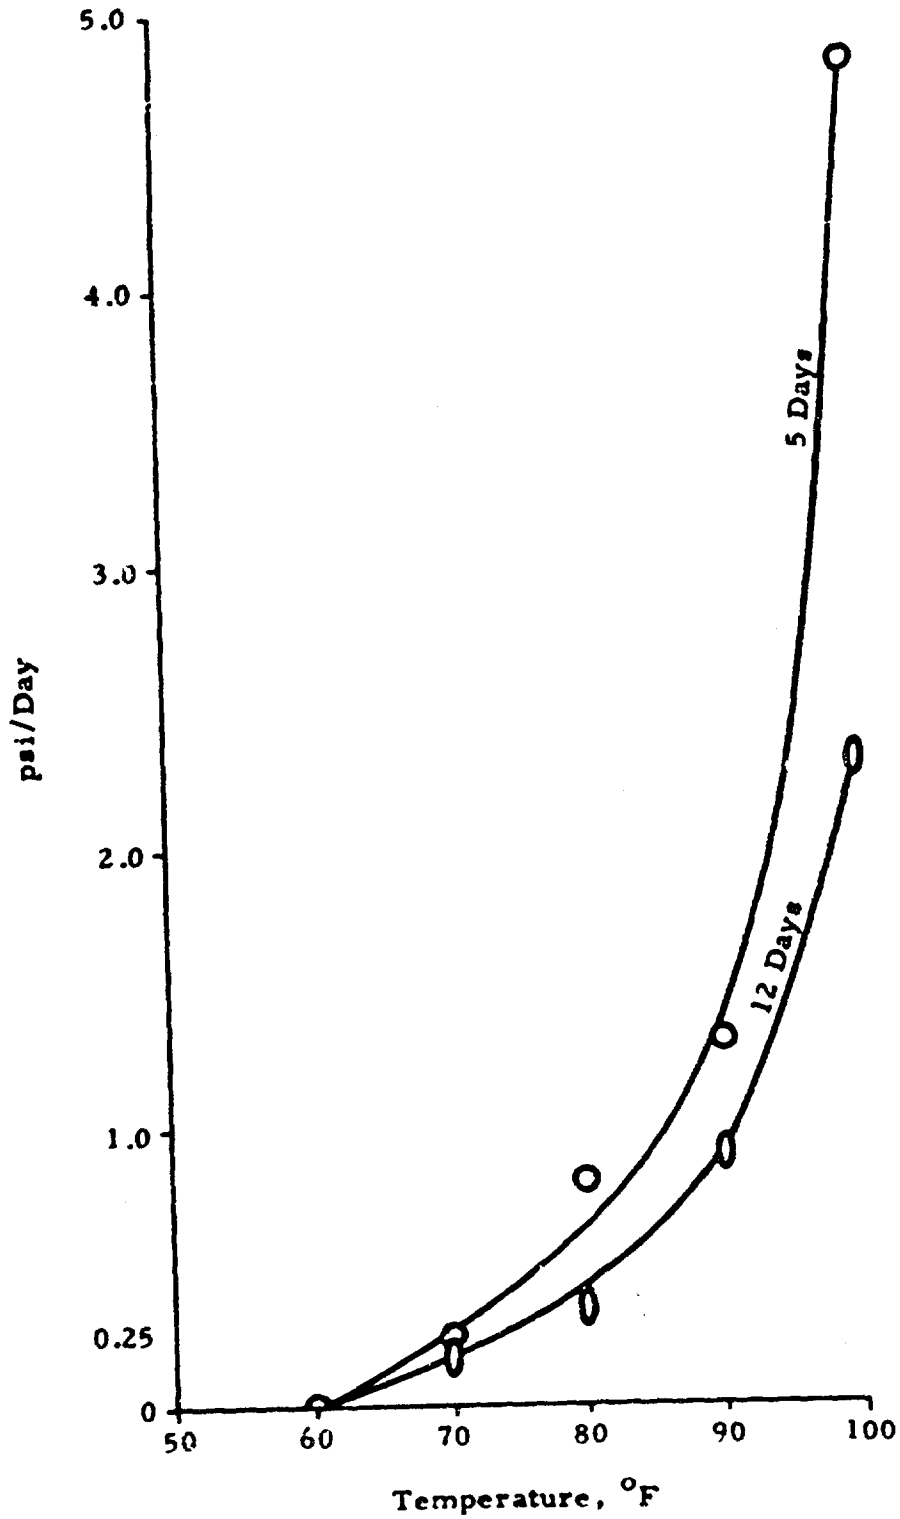

(C) Figure 8. Storage Stability of Hybaline B<sub>3</sub>, 25% Ullage

**CONFIDENTIAL**

CONFIDENTIAL

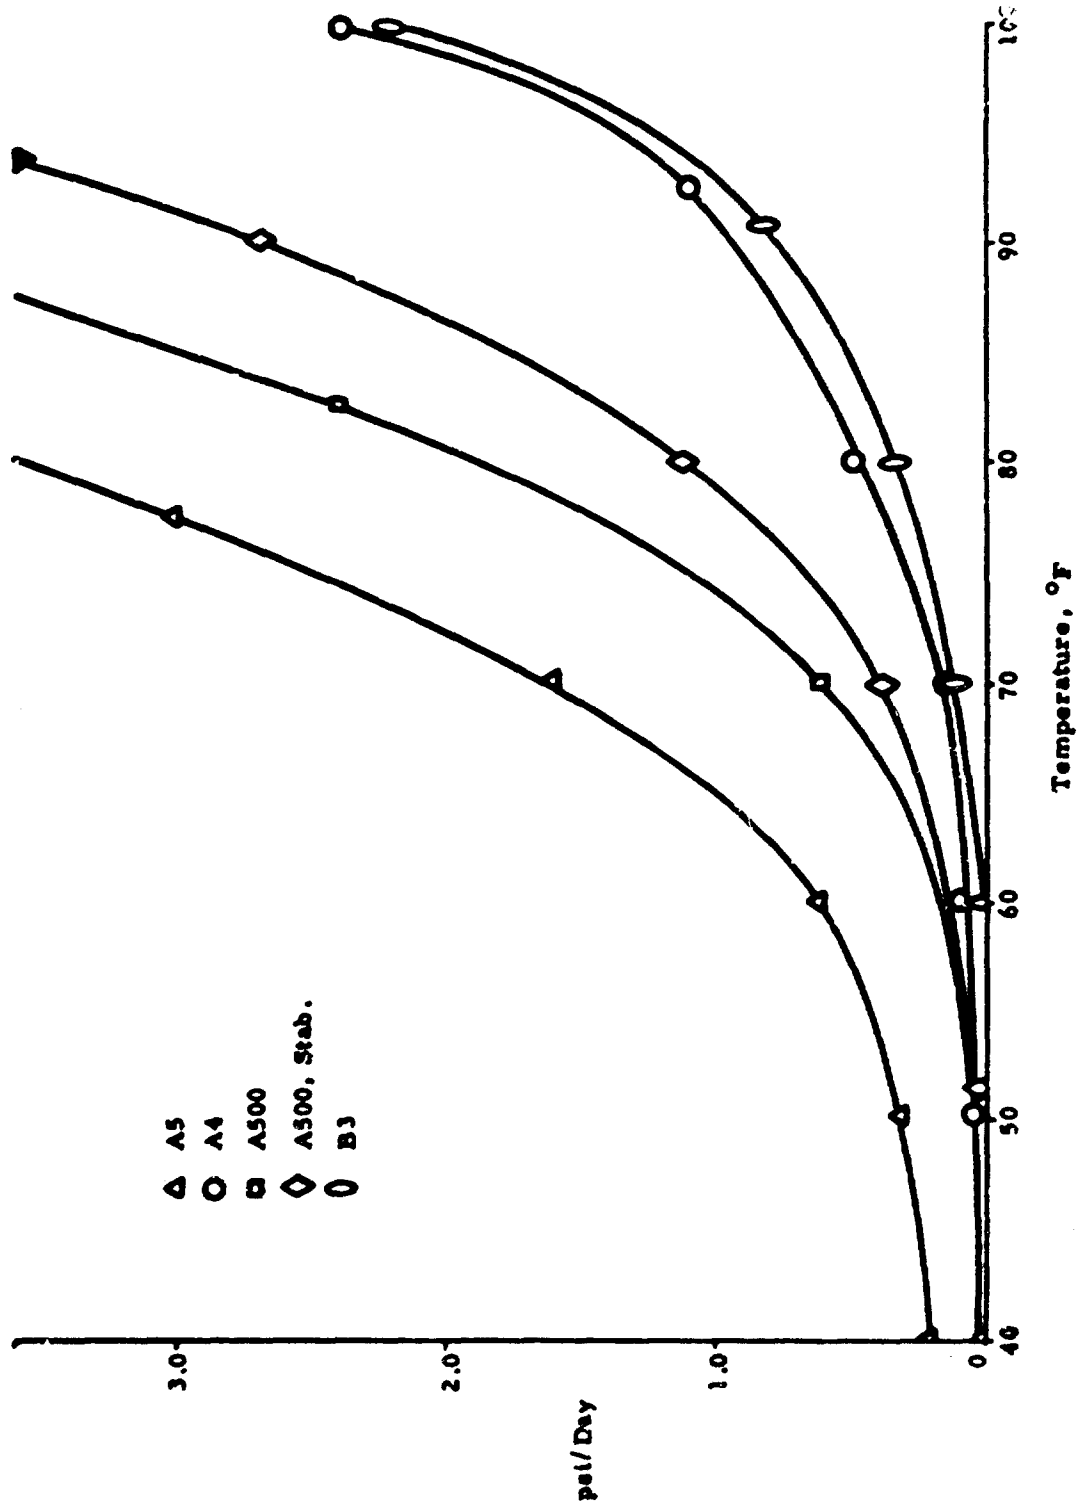

(C) Figure 9. Storage Stability, 25% Ullage

CONFIDENTIAL

# CONFIDENTIAL

(C) Handling and Compatibility. We have made 28 test firings with Hybaline B<sub>3</sub> without containment or scrubbing of the exhaust. After each day of testing, the test stand was thoroughly washed with water. The maximum beryllium concentration we have detected after this water wash is 0.2 µg per cubic meter, an order of magnitude below our established in-plant maximum allowable.

(U) Although Union Carbide reports that Hybaline B<sub>3</sub> "oxidizes slowly in dry air" (1), we have found it to be pyrophoric even with the relatively low-humidity air at AFRPL. The exclusion of air and moisture in the test system is essential to prevent formation of hard oxides which can plug valves and lines and bind flowmeters.

(C) We have used benzene as a solvent and system flush for B<sub>3</sub>. Toluene was used also but formed a buttermilk-like substance which adhered to the lines and tank and was extremely difficult to remove. We have not identified this substance yet, but intend to investigate this and the possibility of the formation of soluble beryllium compounds. The soluble compounds are believed to be most toxic, although no official delineation between toxicity of beryllium compounds has been accepted.

(U) We have not undertaken a materials compatibility program, per se, with Hybaline B<sub>3</sub>. Compatibility with stainless steel and Teflon, the materials of construction for our test system, is excellent. We do not anticipate compatibility problems with standard materials with the exception of copper and brass.

## SUMMARY.

(C) Preliminary data from test firings of Hybaline B<sub>3</sub> with N<sub>2</sub>O<sub>4</sub> and with 90% H<sub>2</sub>O<sub>2</sub> shows relatively low delivered performance. Table VI compares delivered I<sub>sp</sub> for various propellants tested in similar engines. This comparison is presented with reservations because the numerous details varied from program to program. It does provide, however, a rational relationship.

CONFIDENTIAL

15

# CONFIDENTIAL

TABLE VI

(C) COMPARISON OF MAXIMUM %  $I_{sp}$  DELIVERED IN SIMILAR ENGINES

<u>Propellants</u>	<u>Max. % <math>I_{sp}</math> Delivered</u>	<u>Reference</u>
RP-1/Liquid Oxygen	92	1
$N_2O_4$ /UDMH	91	4
Hybaline $A_5$ /Liquid Oxygen	85	1
Hybaline $A_5$ / $N_2O_4$	85	4
Hybaline $B_3$ / $N_2O_4$	82	—
Hybaline $A_5$ /90% $H_2O_2$	86	6
Hybaline $B_3$ /90% $H_2O_2$	84	—
$B_5H_9$ / $N_2H_4$	75	7

(C) Hybaline  $B_3$  possesses an inherent instability at temperatures above 60°F. This instability produces negligible changes in composition over a one-year period. Pressure buildup is significant, however, and must be considered in system design.

(U) Hybaline  $B_3$  is compatible with most standard materials used in missile construction. Benzene is a satisfactory solvent for  $B_3$ . Air and moisture must be excluded. Hybaline  $B_3$  is pyrophoric with air of relatively low humidity, and appropriate precautions are necessary.

## CONCLUSIONS.

The conclusions derived from the test program thus far have been:

(C) 1. Delivered performance from both the Hybaline  $B_3$ / $N_2O_4$  and the Hybaline  $B_3$ / $N_2O_2$  (90 wt. %) propellant combinations was low. However, all reported fixings were made using only one type of injection technique. The BN reaction theoretically predicted for the Hybaline  $B_3$ / $N_2O_4$  was not achieved.

# CONFIDENTIAL

(U) 2. Hybaline B<sub>3</sub> is storable for a period of at least a year. Venting will be necessary for certain applications.

(U) 3. No problems are anticipated in using Hybaline B<sub>3</sub> with the standard materials used in missile construction.

# CONFIDENTIAL

# CONFIDENTIAL

## REFERENCES

1. V.E. Matthews, unpublished letter dated 3 September 1964, Union Carbide Chemicals Company to AFRPL.
2. P.H. McNamara, Experimental Evaluation of Hybaline A<sub>5</sub> Liquid Oxygen Performance, Air Force Rocket Propulsion Laboratory, Report Number RPL-TDR-64-136, September 1964.
3. E.R. Boller, "Performance Evaluation of Hybaline Fuels," Experimental Evaluation of Advanced Propellants, Progress Summary Number 1, Rocket Research Laboratories, Report Number SSD-TDR-62-187, November 1962.
4. J.D. Willard, Jr., "Performance and Combustion Studies with Hybaline Fuels," Experimental Evaluation of Advanced Propellants, Progress Summary Number 2, Air Force Rocket Propulsion Laboratory, Report Number RPL-TDR-63-1114, November 1963.
5. K.O. Graves, unpublished letter dated 14 September 1964, Union Carbide Chemicals Company to AFRPL.
6. J.P. Franklin, "Evaluation of Hybaline A<sub>5</sub> with Hydrogen Peroxide," Experimental Evaluation of Advanced Propellants, Progress Summary Number 3, Air Force Rocket Propulsion Laboratory, Report Number RPL-TDR-64-62, May 1964.
7. J.R. Holt, "BN Combustion Studies," Experimental Evaluation of Advanced Propellants, Progress Summary Number 1, Rocket Research Laboratories, Report Number SSD-TDR-62-187, November 1962.

**CONFIDENTIAL**  
(This page is Unclassified)

## DISTRIBUTION

<p>U.S. Department of the Interior 1            Bureau of Mines            4800 Forbes Avenue            Pittsburgh, Pennsylvania 15213            Attn: M.M. Dolinar, Repts Librarian            Explosives Research Center</p>	<p>AFETR (ETLIG-) 1            Patrick AFB, Fla. 32925</p>
<p>Central Intelligence Agency 1            2430 E Street, N.W.            Washington, D.C. 20505            Attn: OCD, Standard Dist.</p>	<p>Nat'l Aeronautics &amp; Space Admin. 1            Washington, D.C. 20546            Attn: Oic. of Tech. Info. &amp;            Educational Programs, Code ETL</p>
<p>Office of the Director of Defense 1            Research and Engineering            Washington, D.C. 20301            Attn: W.E. Sheehan, Office of Asst.            Dir. (Chemical Technology)</p>	<p>Scientific &amp; Tech. Info. Facility 2            P.O. Box 5700            Bethesda, Maryland 20014            Attn: NASA Representative</p>
<p>Nat'l Aeronautics &amp; Space Admin. 1            Lewis Research Center            21000 Brookpark Road            Cleveland, Ohio 44135            Attn: Library</p>	<p>Nat'l Aeronautics &amp; Space Admin. 1            Washington, D.C. 20546            Attn: R.W. Ziem (RPS)</p>
<p>Nat'l Aeronautics &amp; Space Admin. 1            Launch Operations Center            Cocoa Beach, Florida 32931            Attn: Library</p>	<p>Nat'l Aeronautics &amp; Space Admin. 1            Goddard Space Flight Center            Greenbelt, Maryland 20771            Attn: Library</p>
<p>Nat'l Aeronautics &amp; Space Admin. 1            Manned Spacecraft Center            P.O. Box 1537            Houston, Texas 77001            Attn: Library</p>	<p>Defense Documentation Center 20            Cameron Station            Alexandria, Virginia 22314</p>
<p>Nat'l Aeronautics &amp; Space Admin. 1            George C. Marshall Space Flt. Ctr.            Huntsville, Alabama 35800            Attn: Library</p>	<p>Air Force Systems Command 1            Andrews AFB            Washington, D.C. 20331            Attn: SCTAP</p>
<p>Nat'l Aeronautics &amp; Space Admin. 1            Langley Research Center            Langley Air Force Base            Virginia 23365            Attn: Library</p>	<p>Arnold Eng. Development Ctr. 1            Air Force Systems Command            Tullahoma, Tennessee 37389            Attn: AEOIM</p>
	<p>AFRPL (RPR) 1            Edwards, California 93523</p>
	<p>AFRPL (RPM) 1            Edwards, California 93523</p>
	<p>AFFTC (FTBAT-2) 1            Edwards AFB, Calif. 93523</p>

Distribution (Cont'd) p 2

Office of Research Analysis Holloman AFB, New Mexico 88330 Attn: RRRT	1	Commanding Officer Picatinny Arsenal Dover, New Jersey 07801 Attn: Library	2
Wright-Patterson AFB, Ohio 45433 Attn: AFML (MAAE)	1	Commanding Officer Picatinny Arsenal Liquid Rocket Propulsion Lab. Dover, New Jersey 07801 Attn: Technical Library	2
Wright-Patterson AFB, Ohio 45433 Attn: AFML (MAAM)	1	U.S. Army Missile Command Redstone Scientific Info. Ctr. Redstone Arsenal, Alabama 35808 Attn: Chief, Document Section	4
Commander AFSC Foreign Technology Division Wright-Patterson AFB, Ohio, 45433 Attn: RTD (TD-E3b)	1	Commanding General White Sands Missile Range New Mexico 88002 Attn: Technical Library	2
Commanding Officer Ballistic Research Laboratories Aberdeen Proving Ground, Md. 21005 Attn: AMXPR-1	2	Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: DLI-3	2
Department of the Army U.S. Army Materiel Command Washington, D.C. 20315 Attn: AMGRD-RC	1	Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: RMMP-2	2
Commanding Officer Harry Diamond Laboratories Washington, D.C. 20438 Attn: AMXDO-TIB	1	Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: RMMP-3	1
Commanding Officer U.S. Research Ofc. (Durham) Box CM, Duke Station Durham, North Carolina 27706	1	Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: RMMP-4	1
Commanding Officer U.S. Army Chemical Research & Development Laboratories Edgewood Arsenal, Maryland 21010 Attn: Chief, Physicochemical Research Division	1	Bureau of Naval Weapons Department of the Navy Washington, D.C. 20360 Attn: RRRE-6	1
Commanding Officer Frankford Arsenal Philadelphia, Pa. 19137 Attn: Propellant and Explosives Section, 1331	1	Commander U.S. Naval Ordnance Lab. White Oak Silver Spring, Maryland 20910 Attn: Library	2

Distribution (Cont'd) p 3

Commander U.S. Naval Ordnance Test Stn. China Lake, California 93557 Attn: Code 45	5	Aerojet-General Corporation P.O. Box 296 Azusa, California 91703 Attn: Librarian	1
Commander (Code 753) U.S. Naval Ordnance Test Stn. China Lake, California 93557 Attn: Technical Library	2	Aerojet-General Corporation 11711 South Woodruff Avenue Downey, California 90241 Attn: Florence Walsh, Librarian	1
Superintendent U.S. Naval Postgraduate School Naval Academy Monterey, California 93900	1	Aerojet-General Corporation P.O. Box 1947 Sacramento, California 95809 Attn: Technical Information Office	3
Commanding Officer U.S. Naval Propellant Plant Indian Head, Maryland 20640 Attn: Technical Library	2	Aeronutronic Div. Philco Corp. Ford Road Newport Beach, Calif. 92600 Attn: Dr. L.H. Linder, Manager Technical Information Dept.	1
Commanding Officer Office of Naval Research 1030 E. Green Street Pasadena, California 91101	1	Aeroprojects, Inc. 310 East Rosedale Avenue West Chester, Pa. 19380 Attn: C.D. McKenney	1
Department of the Navy Office of Naval Research Washington, D.C. 20360 Attn: Code 429	1	Aerospace Corporation P.O. Box 95085 Los Angeles, Calif. 90045 Attn: Library-Documents	2
Director (Code 6180) U.S. Naval Research Lab. Washington, D.C. 20390 Attn: H.W. Carhart	1	Allied Chemical Corporation General Chemical Division Research Lab., P.O. Box 405 Morristown, New Jersey 07960 Attn: L.J. Wiltrakis, Security Off.	1
Director Special Projects Office Department of the Navy Washington, D.C. 20360	1	Ancel Propulsion Company Box 3049 Asheville, North Carolina	1
Commanding Officer U.S. Naval Underwater Ord. Stn. Newport, Rhode Island 02844 Attn: W.W. Bartlett	1	American Cyanamid Company 1937 W. Main Street Stamford, Connecticut 06902 Attn: Security Officer	1
Commander U.S. Naval Weapons Laboratory Dahlgren, Virginia 22448 Attn: Technical Library	1	IIT Research Institute Technology Center Chicago, Illinois 60616 Attn: C.K. Hersh, Chemistry Div.	1

Distribution (Cont'd) p 4

ARO, Inc. Arnold Engrg. Dev. Center Arnold AF Station, Tenn. 37389 Attn: Dr. B.F. Goethert Director of Engrg.	1	The Dow Chemical Company Security Section Box 31 Midland, Michigan 48641 Attn: Dr. R.S. Karpiuk, 1710 Bldg.	1
Atlantic Research Corporation Shirley Highway and Edsall Rd. Alexandria, Virginia 22314 Attn: Library	2	E.I. DuPont deNemours & Co. Eastern Laboratory Gibbstown, New Jersey 08027 Attn: Mrs. Alice R. Steward	1
Atlantic Research Corporation Western Division 209 Easy Street El Monte, California 91731 Attn: H. Niederman	1	Esso Research & Engineering Co. Special Projects Unit P.O. Box 8 Linden, New Jersey -7-36 Attn: Mr. D.L. Baeder	1
Battelle Memorial Institute 505 King Avenue Columbus, Ohio 43201 Attn: Report Library, Room 6A	1	General Electric Company Cincinnati, Ohio 45215 Attn: Technical Info. Center	1
Bell Aerosystems Box 1 Buffalo, New York 14205 Attn: T. Reinhardt	1	Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena, California 91103 Attn: Library (TDS) Mr. N.E. Devereux	1
The Boeing Company Aero Space Division P.O. Box 3707 Seattle, Washington 98124 Attn: R.R. Barber, Lib, Ut. Ch.	1	Minnesota Mining & Mfg. Co. 900 Bush Avenue St. Paul, Minnesota 55106 Attn: J.D. Ross VIA: H.C. Zeman, Scty. Off.	2
Chemical Prpln. Info. Agency Applied Physics Laboratory 8621 Georgia Avenue Silver Spring, Maryland 20910	10	Monsanto Research Corp. Boston Labs., Everett Station Boston, Massachusetts 02149 Attn: Library	1
Defense Metals Info. Center Battelle Memorial Institute 505 King Avenue Columbus, Ohio 43201	1	New York University Dept. of Chemical Engrg. New York, New York 10053 Attn: P.F. Winternitz	1
Douglas Aircraft Co., Inc. Santa Monica Division Santa Monica, Calif. 90405 Attn: Mr. J.L. Waisman	1	North American Aviation, Inc. Space & Info. Systems Div. 12214 Lakewood Boulevard Downey, California 90242 Attn: W.H. Morita	1
Commander U.S. Naval Missile Center Point Mugu, California 93401 Attn: Technical Library	2		

Distribution (Cont'd) p 5

Rocketdync 6633 Canoga Avenue Canoga Park, California 91304 Attn: Library, Dept 596-306	3	United Technology Center P.O. Box 358 Sunnyvale, California 94088 Attn: Librarian	1
Rohm and Haas Company Redstone Arsenal Research Div. Huntsville, Alabama 35808 Attn: Library	1	British Defence Staff British Embassy 3100 Massachusetts Avenue Washington, D.C. 20008 Attn: Scientific Info. Officer	
Space Technology Lab., Inc. 1 Space Park Redondo Beach, California 90200 Attn: STL Tech Lib. Doc. Acquisitions	2	VIA: Headquarters Air Force Systems Command Andrews Air Force Base Washington, D.C. 20331 Attn: SCS-41(3-1833)	4
Texaco Experiment Incorporated P.O. Box 1-T Richmond, Virginia 23202 Attn: Librarian	1	Defence Research Member Canadian Joint Staff (W) 2450 Massachusetts Avenue Washington, D.C. 20008	
Thiokol Chemical Corporation Reaction Motors Division Denville, New Jersey 07834 Attn: Librarian	1	VIA: Headquarters Air Force Systems Command Andrews Air Force Base Washington, D.C. 20331 Attn: SCS-41(301833)	4
Thiokol Chemical Corporation Rocket Operations Center P.O. Box 1640 Ogden, Utah 84401 Attn: Librarian	1	Commanding Officer Ammunition Procurement & Supply Agency Joliet, Illinois 60400 Attn: Engr. Library	1
Union Carbide Chemicals Co. P.O. Box 8584 (Technical Center) S. Charleston, West Virginia 25303 Attn: Dr. H.W. Schulz	1	Commanding Officer Radford Arsenal Radford, Virginia 24141	1
United Aircraft Corporation Corporation Library 400 Main Street East Hartford, Connecticut 06118 Attn: Dr. David Rix	1	Headquarters, U.S. Air Force Washington, D.C. 20330 Attn: AFRSTD	1
United Aircraft Corporation Pratt & Whitney Fla. Res. & Dev. Ctr. P.O. Box 2691 W. Palm Beach, Florida 33402 Attn: Library	1	AFRPL (RPCL) Edwards, California 93523	1
		AFRPL (RPCS) Edwards, California 93523	1
		AFRPL (RPCE) Edwards, California 93523	10

Distribution (Cont'd) p 6

American Machine & Foundry Co. Mechanics Research Department 7501 North Natchez Avenue Niles, Illinois 60648 Attn: Phil Rosenberg	1	Olin Mathieson Chemical Corp. Research Library 1-K-3 275 Winchester Avenue New Haven, Connecticut 06511 Attn: Mail Control Room Miss Laura M. Kajuti	1
Callery Chemical Company Research and Development Callery, Pennsylvania 16024 Attn: Document Control	1	Purdue University Lafayette, Indiana 47907 Attn: M. J. Zucrow	1
Chem. Research & Dev. Center FMC Corporation P.O. Box 8 Princeton, New Jersey 08540 Attn: Security Officer	1	Rocketdyne, A Division of North American Aviation, Inc. Solid Propulsion Operations P.O. Box 548 McGregor, Texas 76657 Attn: Library	1
Dow Chemical Company Western Division 2800 Mitchell Drive Walnut Creek, Calif. 94598 Attn: P.D. Cja	1	Shell Development Company 1400 53rd Street Emeryville, California 94608	1
Ethyl Corporation P.O. Box 3091 Istrouma Branch Baton Rouge, Louisiana 70805	1	Southwest Research Institute Department of Structural Research 8500 Culebra Road San Antonio, Texas 78228 Attn: Dr. Robert C. DeHart, Dir.	1
Hercules Powder Company Bacchus Works Magna, Utah 84044 Attn: Librarian	1	Texaco, Inc. P.O. Box 509 Beacon, New York 12508 Attn: Dr. R.E. Conary, Manager	1
Hynes Research Corp. 308 Bon Air Avenue Durham, North Carolina 27704	1	Los Alamos Scientific Lab. University of California P.O. Box 1663 Los Alamos, New Mexico 87544	1
Walter Kidde Company 675 Main Street Belleville, New Jersey 07109 Attn: Security Librarian	1	Aerojet-General Nucleonics San Ramon, California 94583 Attn: Dr. Carpenter	1
Olin Mathieson Chemical Corp. Marion, Illinois 62959 Attn: Research Library Box 508	1	Purdue University Lafayette, Indiana 47907 Attn: Henry Feuer	1
Pennsalt Chemicals Corp. Technological Center 900 First Avenue King of Prussia, Pa. 19406	1	Union Carbide Corporation P.O. Box 278 Tarrytown, New York 10592 Attn: Dr. R.G. Breckenridge, Dir.	1

Confidential

Security Classification

DOCUMENT CONTROL DATA - R&D		
<i>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</i>		
1. ORIGINATING ACTIVITY (Corporate author) Dept. of the Air Force AFSC, RTD AF Rocket Propulsion Laboratory, Edwards, Calif.		2a. REPORT SECURITY CLASSIFICATION Confidential
		2b. GROUP Gp. 4
3. REPORT TITLE  Experimental Evaluation of Hybaline B <sub>3</sub>		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)		
5. AUTHOR(S) (Last name, first name, initial)  V. A. Moseley, K. E. Nidiffer, J. P. Franklin		
6. REPORT DATE January 1965	7a. TOTAL NO. OF PAGES 18	7b. NO. OF REFS 7
8a. CONTRACT OR GRANT NO.  A. PROJECT NO. 3148  c. d.	8b. ORIGINATOR'S REPORT NUMBER(S)  AFRPL-TR-65-14	
		8c. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)  N/A
10. AVAILABILITY/LIMITATION NOTICES  Qualified requesters may obtain copies from DDC.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY  see Block 1	
13. ABSTRACT  (C) Methylamine beryllium borohydride, produced by Union Carbide Chemicals Company and code-named "Hybaline B <sub>3</sub> ", has been subjected to 28 test firings in a nominal 100-pound-thrust uncooled rocket engine. Eleven tests were made with N <sub>2</sub> O <sub>4</sub> , and the remainder were conducted with 90 wt. % H <sub>2</sub> O <sub>2</sub> . Delivered performance with both oxidizers has been low, 82 to 84 percent of theoretical specific impulse. Thermal instability of Hybaline B <sub>3</sub> has been observed; however, changes in composition over a year period are negligible. Hybaline B <sub>3</sub> is compatible with standard materials, and although it is pyrophoric, it presents few handling problems other than toxicity.		

DD FORM 1473  
1 JAN 66

Confidential  
Security Classification

**Confidential**  
Security Classification

1a. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Methylamine beryllium borohydride						
Hybaline B <sub>3</sub> storability and dependence on BN reaction.						
Uncooled rocket engine.						
Liquid rocket fuel.						

**INSTRUCTIONS**

**1. ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

**2a. REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

**2b. GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

**3. REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

**4. DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

**5. AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

**6. REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

**7a. TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

**7b. NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

**8a. CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

**8b, 8c, & 8d. PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

**9a. ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

**9b. OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

**13. AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using appropriate markings such as:

- (1) "Qualified requesters may obtain a copy of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain a copy of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain a copy of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

**11. SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

**12. SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory (positioning reporting for) the research and development. Include address.

**13. ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of its content. Wherever it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (S), (C), or (R).

There is no limitation on the length of an abstract. However, the suggested length is from 150 to 250 words.

**14. KEY WORDS:** Key words are technically meaningful words or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words shall be selected so that no security classification is assigned. Identifiers, such as equipment model designation, (e.g., X-15), military project code name, geographic location, etc., shall be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.