

UNCLASSIFIED

AD NUMBER

AD378635

CLASSIFICATION CHANGES

TO: unclassified

FROM: confidential

LIMITATION CHANGES

TO:

Approved for public release, distribution unlimited

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 15 NOV 1965. Other requests shall be referred to Director of Supersonic Transport Development, Federal Aviation Agency, Washington, DC 20553.

AUTHORITY

FAA ltr, 23 Feb 1972; FAA ltr, 23 Feb 1972

THIS PAGE IS UNCLASSIFIED

Unclassified

AD

378-635

AD 378 635

CLASSIFICATION CHANGED

TO: Unclassified

FROM: Confidential

AUTHORITY:

FAA ltr, 23 Feb 72

Unclassified

UNCLASSIFIED

328635

BAC

CLASSIFICATION CHANGED
TO UNCLASSIFIED
FROM CONFIDENTIAL

ER AUTHORITY LISTED IN

TAB NO. 72-8

FAA 1tr,
23 Feb 72

DATE 15 April 1972

UNCLASSIFIED

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


All distribution of this document is controlled. In addition to security requirements which apply to this document and must be met, it may be further distributed by the holder only with specific prior approval of:

Director of Supersonic Transport Development
Federal Aviation Agency
Washington, D. C. 20553

The distribution of this report is limited because it contains technology identifiable with items excluded from export by the Department of State (U. S., Export Control Act of 1949, as amended).

UNCLASSIFIED

~~UNCLASSIFIED~~



PROPULSION SYSTEM
PERFORMANCE SPECIFICATION
PRATT & WHITNEY AIRCRAFT
JTF 17A-20B ENGINE INSTALLATION

COMMERCIAL
SUPERSONIC TRANSPORT
PROGRAM

PHASE II-C
INTERIM AIRCRAFT PERFORMANCE
ASSESSMENT REPORT

NOVEMBER 15, 1965
CONTRACT -FA-55-66-5

THE **BOEING** COMPANY
RENTON, WASHINGTON, U.S.A.

D6-19906-2

DDC
RECORDED
JAN 31 1967
D

FAA SECURITY CONTROL
NO. 67729 4-2

ISSUE No. 8

PROPRIETARY NOTICE
THIS DOCUMENT CONTAINS INFORMATION RELATING TO THE DESIGN, DEVELOPMENT AND THE TESTING OF THE JTF 17A-20B ENGINE AND THE AIRCRAFT IN WHICH IT IS INSTALLED. IT IS THE PROPERTY OF THE BOEING COMPANY AND IS TO BE KEPT SECRET BY THE RECIPIENT.

~~UNCLASSIFIED~~

GROUP 1
EXCLUDED FROM AUTOMATIC DOWNGRADING AND DECLASSIFICATION
DATE 06-01-2000

EXEMPTION CLAUSE
THIS DOCUMENT IS EXEMPT FROM AUTOMATIC DOWNGRADING AND DECLASSIFICATION UNDER EXECUTIVE ORDER 11652, WHICH APPLIES TO INFORMATION THAT IS NECESSARY TO THE NATIONAL DEFENSE. IT IS THE PROPERTY OF THE BOEING COMPANY AND IS TO BE KEPT SECRET BY THE RECIPIENT.

"PRECEDING PAGE BLANK-NOT FILMED".

UNCLASSIFIED

CONTENTS

	Page
1.0 SCOPE	1
2.0 APPLICABLE DOCUMENTS	3
3.0 PROPULSION SYSTEM DESCRIPTION	5
3.1 ENGINE	5
3.2 PROPULSION POD	5
3.3 CONTROL	5
4.0 INSTALLED ENGINE PERFORMANCE	7
4.1 CALCULATION PROCEDURE	7
4.2 ENGINE PERFORMANCE CURVES (1900°F)	10
5.0 PROPULSION SYSTEM DRAG	25
5.1 INLET DRAG	25
5.2 NOZZLE DRAG	25
APPENDIX JTF17A-20B (2200°F)	27

UNCLASSIFIED

PRECEDING PAGE BLANK NOT FILMED.

ILLUSTRATIONS

Fig. No.		Page
1	Installed Inlet Drag Coefficients and Inlet Ram Recovery	8
2	Thrust Coefficient	9
3	Engine Operating Envelope	11
4	Takeoff Net Thrust and SFC - Standard Day	12
5	Takeoff Net Thrust and SFC - Standard Day +27°F	13
6	Takeoff Net Thrust and SFC - Standard Day +40°F	14
7	Climb and Acceleration Net Thrust and SFC - Standard Day	15
8	Climb and Acceleration Net Thrust and SFC - Standard Day +15°F	16
9	Cruise Net Thrust and SFC - Standard Day	17
10	Cruise Net Thrust and SFC - Standard Day +15°F	18
11	SFC versus Thrust Standard Day, Sea Level	19
12	SFC versus Thrust Standard Day, 15,000 Feet	20
13	SFC versus Thrust Standard Day, 25,000 Feet	21
14	SFC versus Thrust Standard Day, 36,150 Feet	22
15	SFC versus Thrust Standard Day, 45,000 Feet	23
16	Normal and Emergency Descent Thrust and Fuel Flow - Standard Day	24
17	Installed Inlet Drag Coefficients - Idle Descent	26
A-1	Takeoff Net Thrust and SFC - Standard Day	28
A-2	Takeoff Net Thrust and SFC - Standard Day +27°F	29
A-3	Takeoff Net Thrust and SFC - Standard Day +40°F	30
A-4	Climb and Acceleration Net Thrust and SFC - Standard Day	31

ILLUSTRATIONS (Cont.)

Fig. No.		Page
A-5	Climb and Acceleration Net Thrust and SFC - Standard Day +15°F	32
A-6	Cruise Net Thrust and SFC - Standard Day	33
A-7	Cruise Net Thrust and SFC - Standard Day +15°F	34
A-8	SFC versus Thrust Standard Day, Sea Level	35
A-9	SFC versus Thrust Standard Day, 15,000 Feet	36
A-10	SFC versus Thrust Standard Day, 25,000 Feet	37
A-11	SFC versus Thrust Standard Day, 36,150 Feet	38
A-12	SFC versus Thrust Standard Day, 45,000 Feet	39
Table		Page
A	Horsepower and Bleed Air Extractions	10

1.0 SCOPE

This specification defines the installed performance of the 650-pound-per-second Pratt & Whitney JTF17A-20B engine in the Boeing Model 733-39⁴ airplane. Performance data are presented for the initial service (1900°F) engine and the basic (2200°F) engine. The estimated inlet drag values used for the determination of airplane performance characteristics are also specified.

System performance requirements established herein are design objectives to be applied to the prototype airplanes. Application of these requirements to production airplane design will be established after prototype flight testing.

2.0 APPLICABLE DOCUMENTS

The following documents are to be used in conjunction with this specification:

Pratt & Whitney Specification 2681 -
Engine Model JTF17A-20B, October 30, 1964,
Revised November 1, 1965

Pratt & Whitney Engine Performance Data
Decks 5173 Low TIT and 5172 High TIT,
September 15, 1965

The documents listed below are Boeing publications:

- | | |
|----------|--|
| D6-19907 | Power Plant Installation Performance Specification |
| D6-19909 | Air Induction System Performance Specification |
| D6-19905 | Air Induction System Performance Specification |
| D6-19908 | Propulsion Control System Performance Specification. |

3.0 PROPULSION SYSTEM DESCRIPTION

3.1 ENGINE

The P&W JTF17A-20B engine is a twin-spool, axial-flow, turbo-fan engine incorporating a full-length fan duct with duct heater, a variable-geometry nozzle for the fan duct, a blow-in-door, convergent-divergent ejector nozzle, and a thrust reverser. A detailed engine description with special features required for installation is contained in the Pratt & Whitney Model Specification. The airplane engine installation is described in Boeing Document D6-19907, Power Plant Installation Performance Specification.

3.2 PROPULSION POD

The propulsion pod incorporates a variable centerbody air induction system, an unpressurized nacelle, remotely mounted aircraft accessories, and an exhaust nozzle system with thrust reverser. The air induction system is described in Boeing Document D6-19909, Air Induction System Performance Specification.

3.3 CONTROL

Installed performance is based on air induction control system and engine control system described in Boeing Documents D6-19905, Air Induction Control System Performance Specification and D6-19908, Propulsion Control System Performance Specification, respectively.

4.0 INSTALLED ENGINE PERFORMANCE

4.1 CALCULATION PROCEDURE

The installed engine performance is calculated by the use of Pratt & Whitney Performance Data Deck (see Section 2.0). The data deck is capable of accurate calculation of engine performance, including the installed effects of inlet recover, nozzle coefficient, and bleed and power extraction, within engine limits. For the performance calculations the low airflow schedule was used.

a. Performance Assumptions

The engine performance determination was made under the following assumptions:

- Atmosphere: Performance is based on U.S. Standard Atmosphere, 1962 - Geometric Altitude.
- Fuel: Performance is based on fuel specification ASTM D1655 Jet A or A-1 Type Aviation kerosene, conforming to Pratt & Whitney Fuel Specification PWA 533, with a lower heating value of 18,500 Btu per pound.

b. Inlet Total Pressure Recovery

The inlet total pressure recovery used to calculate installed engine performance is shown in Fig. 1.

c. Nozzle Coefficient

The nozzle thrust coefficient used to calculate installed engine performance is shown in Fig. 2. External boattail drag is included in this thrust coefficient. The nozzle thrust coefficients

are based on a secondary corrected cooling flow $\left(\frac{W_s}{W_p} \sqrt{\frac{T_s}{T_p}} \right)$

equal to 3 percent for duct-heater temperatures above 2750°R and a secondary corrected cooling flow of 2 percent for duct heater temperatures below 2750°R. The ram drag of the secondary air is included in the thrust coefficients shown on Fig. 2.

d. Horsepower Extraction

Table A lists the horsepower extracted from the engine for various flight conditions to supply power for aircraft systems.

e. Engine Airbleed

Table A lists the airbleed extracted from the high-pressure compressor for various flight conditions to supply high-pressure air for aircraft systems.

JTF17A-208-1900°F/2000°F RATING

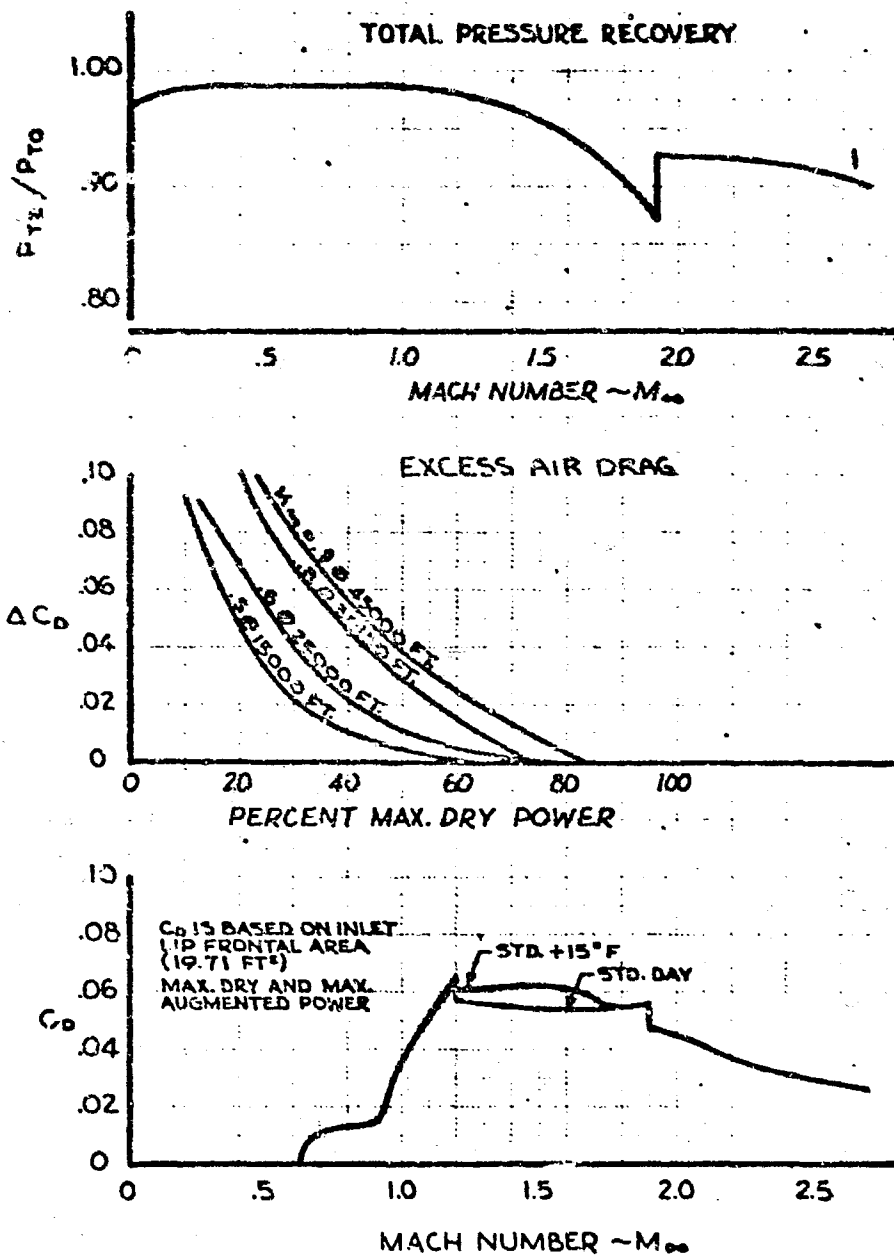


Fig. 1 Installed Inlet Drag Coefficients and Inlet Ram Recovery

CONFIDENTIAL

JTF 17A-20B ~ 1900°F / 2000°F RATING

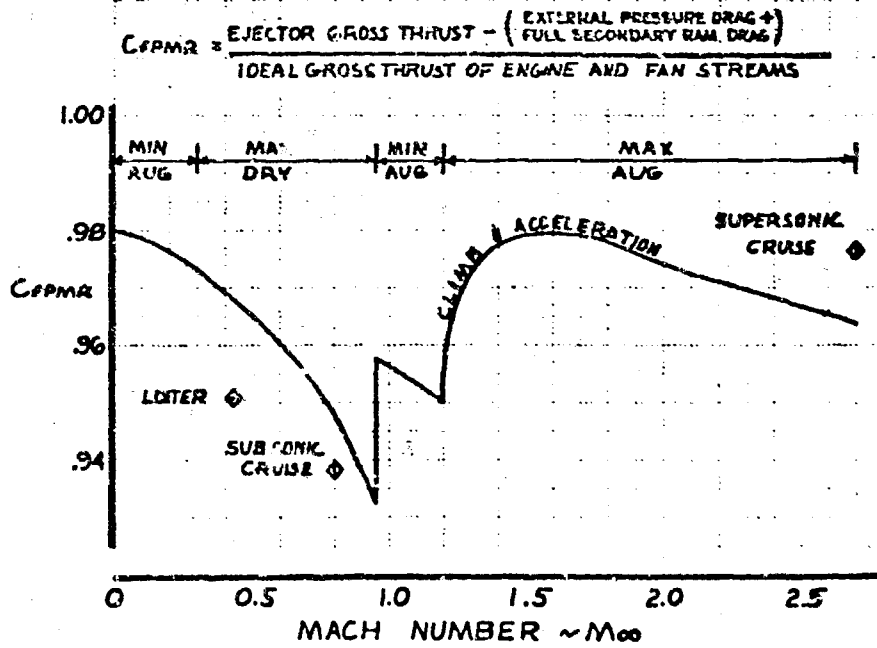


Fig. 2 Thrust Coefficient

DS-19908-2

CONFIDENTIAL

Table A Horsepower and Bleed Air Extractions

Airplane Operating Condition	Horsepower Extraction per Engine	Bleed Air	
		(pounds per second per engine) Compressor	Inlet
Takeoff	325	--	1.6
Climb and Acceleration	350	--	1.6
Supersonic Cruise	300	--	1.3
Holding at Mach 0.4, 15,000 feet	300	--	2.8
Cruise to Alternate at Mach 0.8, 36,150 feet	300	--	2.8
Descent	250	1.4	1.2

f. Engine Operating Envelope

The standard-day operating envelope for the engine is shown in Fig. 3.

4.2 ENGINE PERFORMANCE CURVES (1900°F)

Installed-engine performance curves for the initial service (1900°F) engine for standard and nonstandard day are shown on Figs. 4 through 16.

JTF 17A-20B

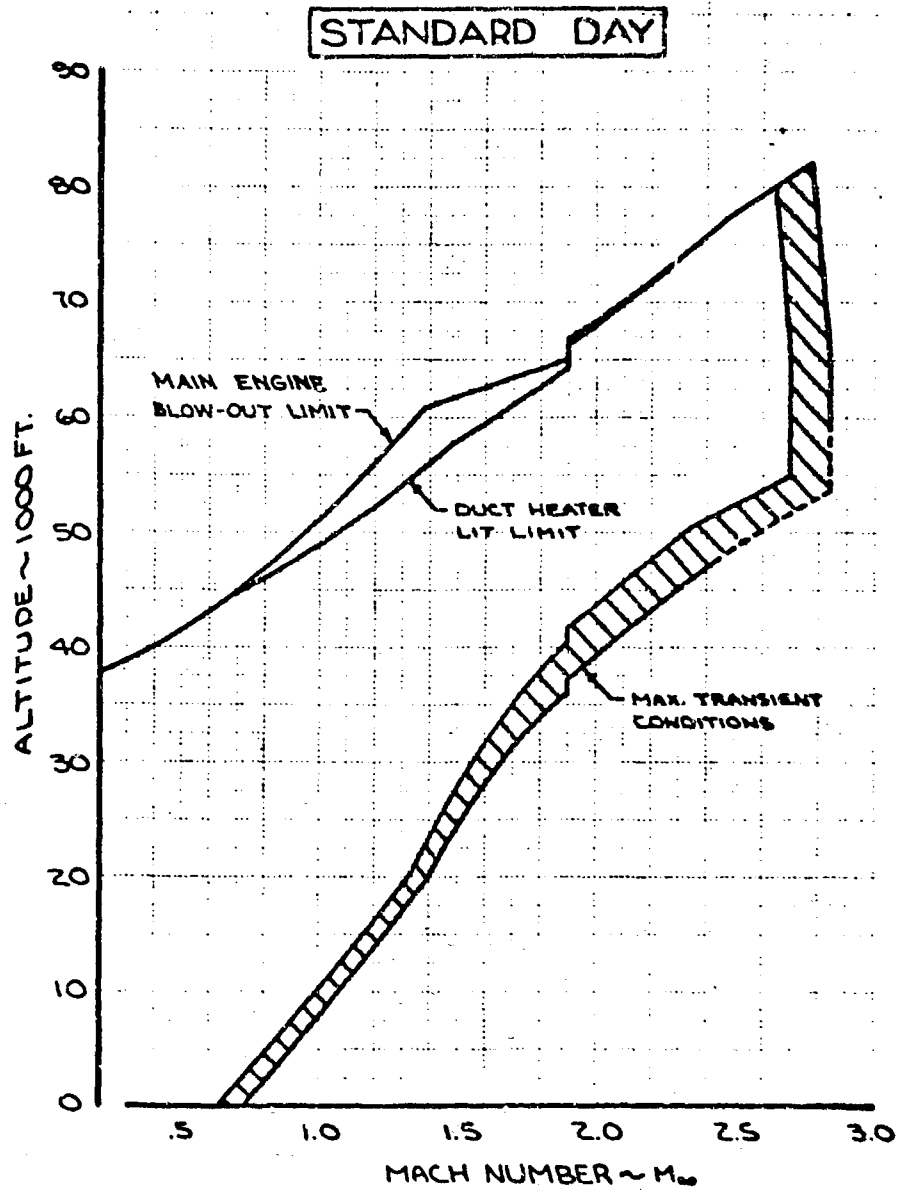


Fig. 3 Engine Operating Envelope

DS-19908-2

CONFIDENTIAL
JTF 17A-20B ~ 1900°F/2000°F RATING

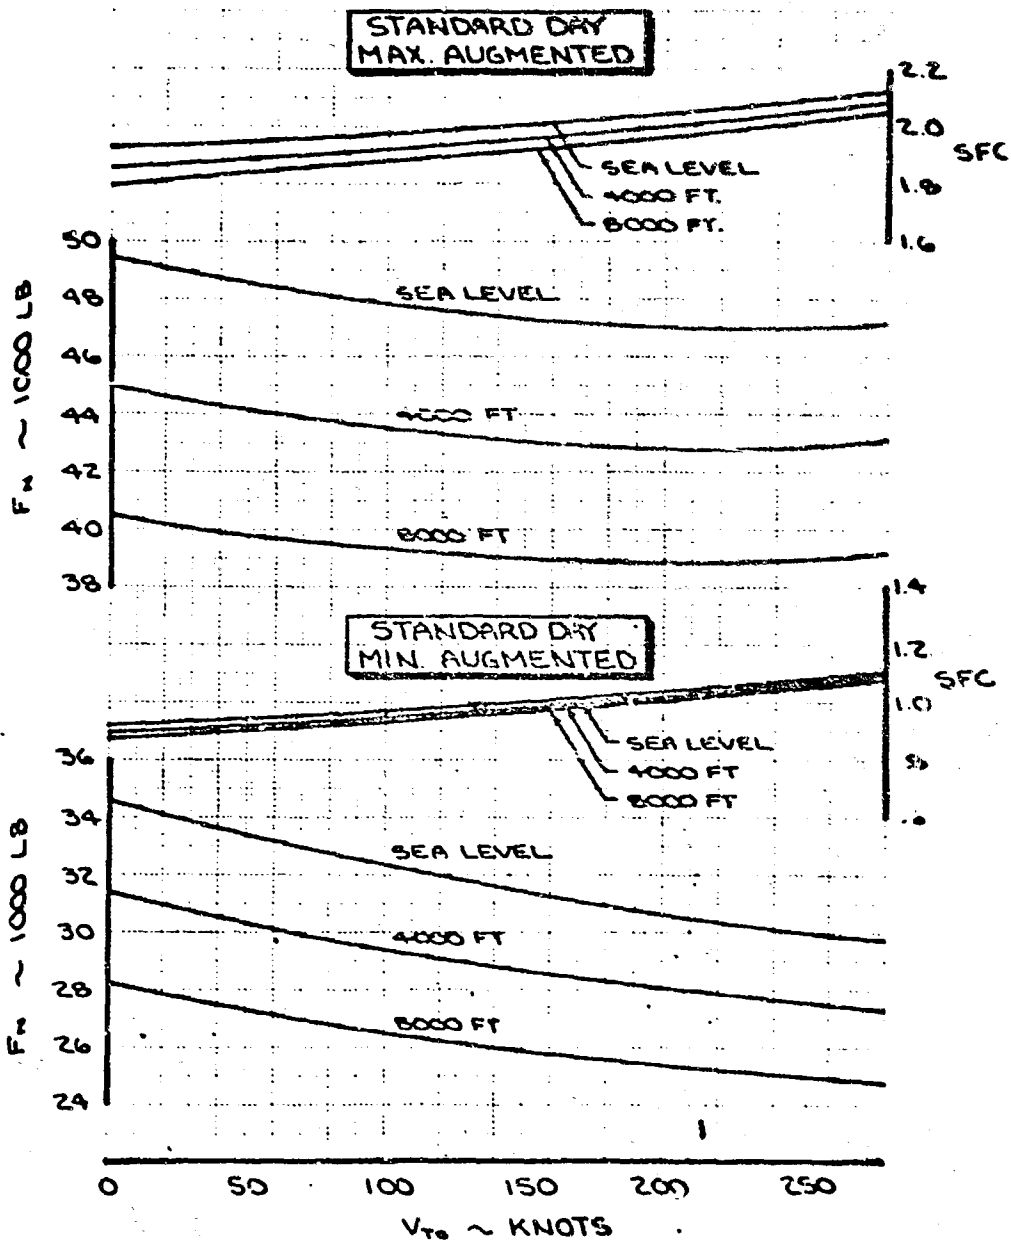


Fig. 4 Takeoff Thrust and SFC - Standard Day

CONFIDENTIAL

JTF 17A-20B-1900°F/2000°F RATING

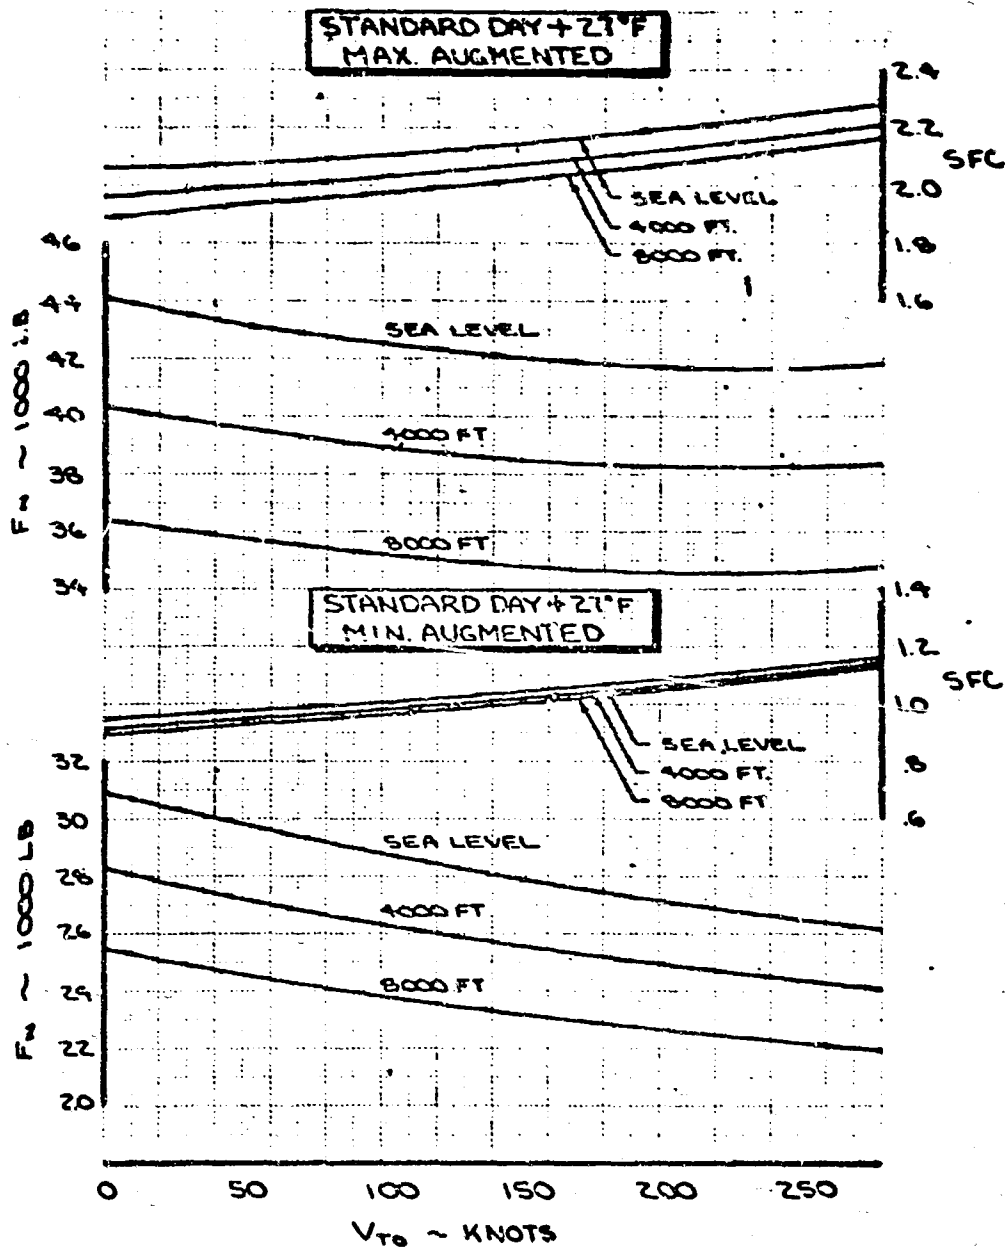


Fig. 5 Takeoff Net Thrust and SFC - Standard Day + 27°F

DS-1990C-2

CONFIDENTIAL

CONFIDENTIAL

JTF 17A-208-1500°F/2000°F RATING

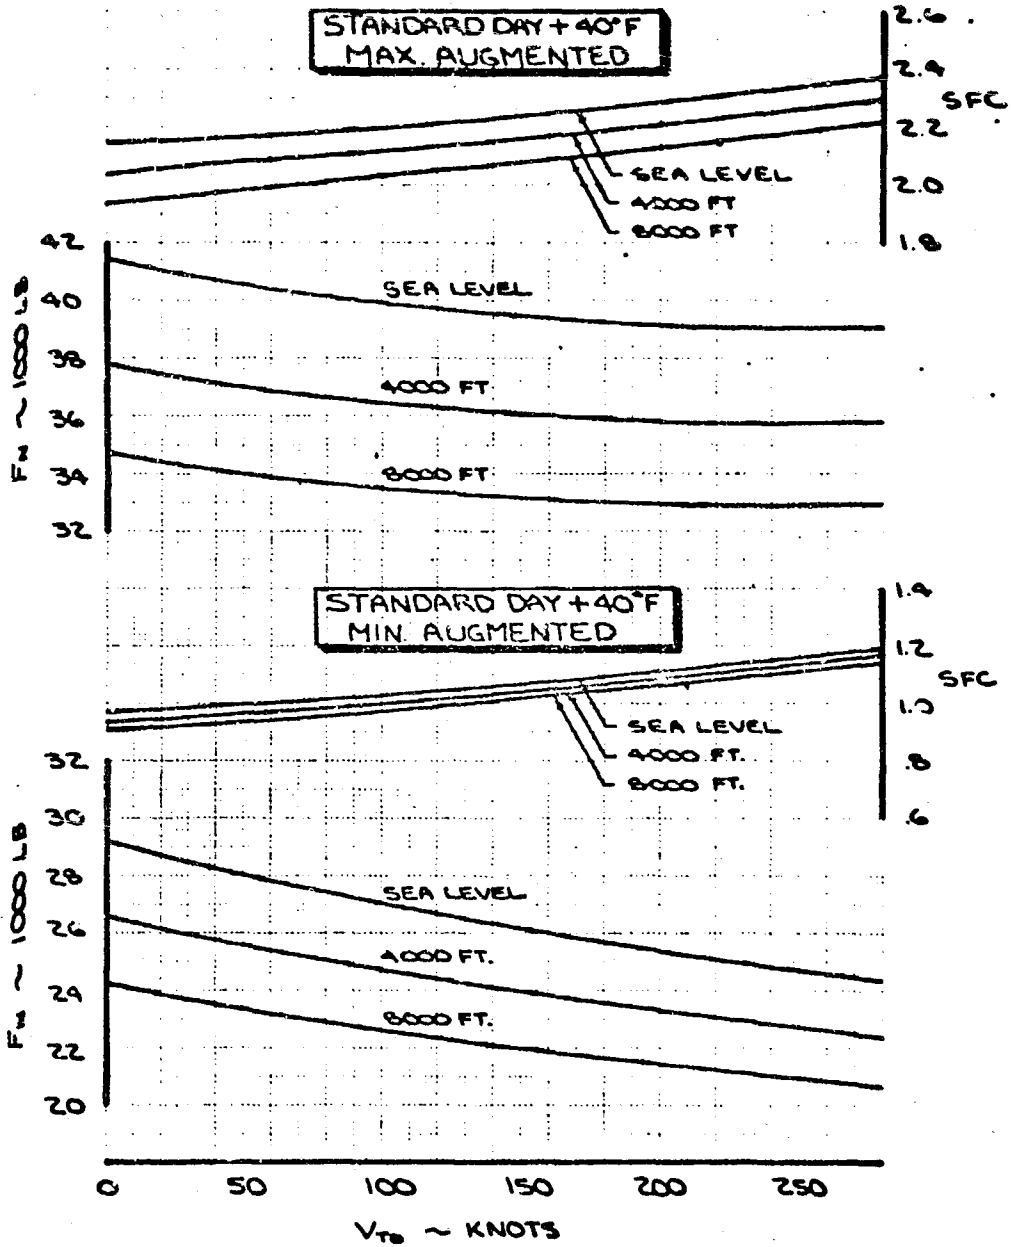


Fig. 6 Takeoff Net Thrust and SFC - Standard Day + 40°F

CONFIDENTIAL

JTF ITA-208 ~ 1500°F / 2000°F RATING

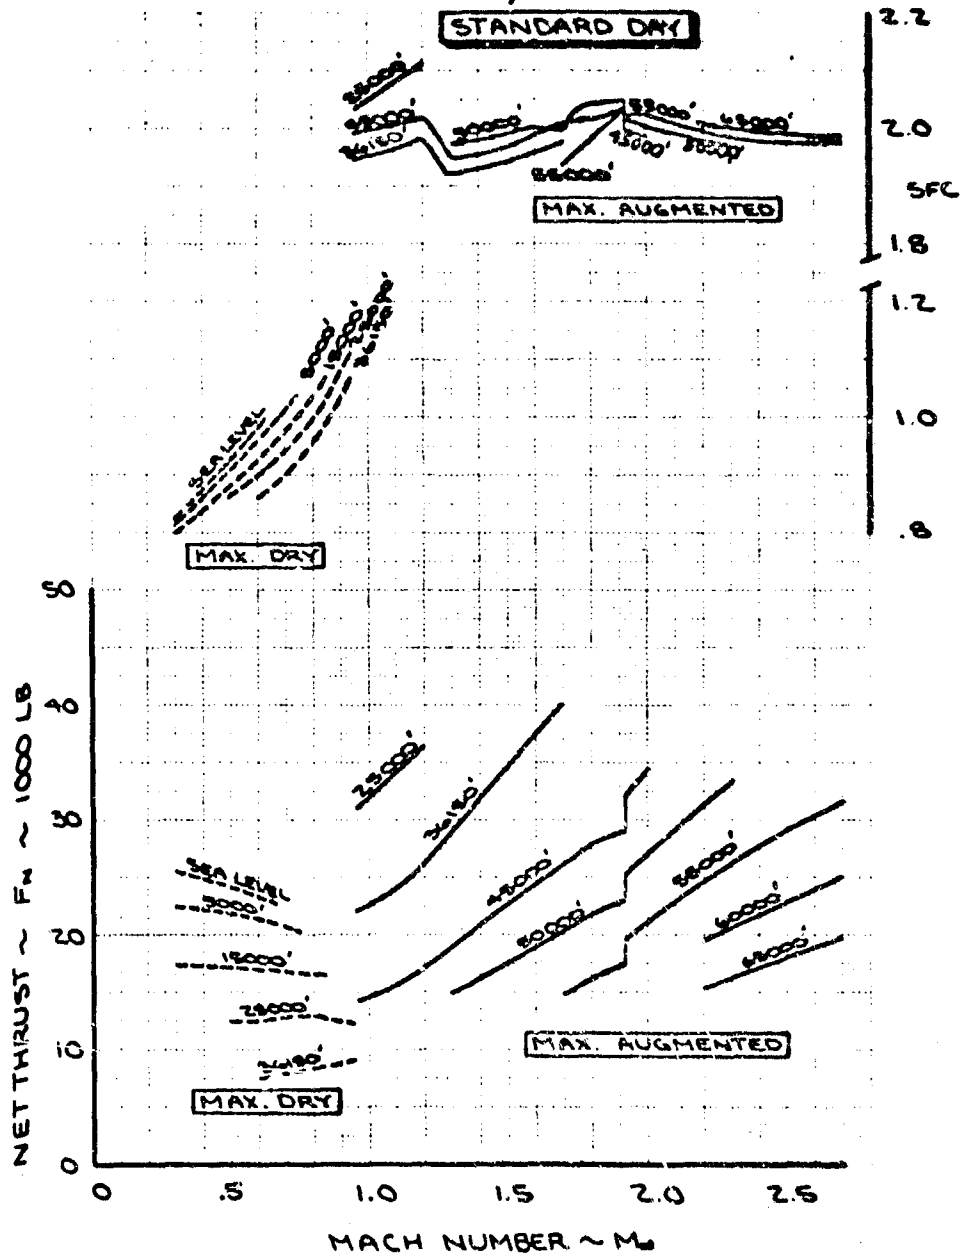


Fig. 7 Climb and Acceleration Net Thrust and SFC - Standard Day

DS-19408-2

CONFIDENTIAL

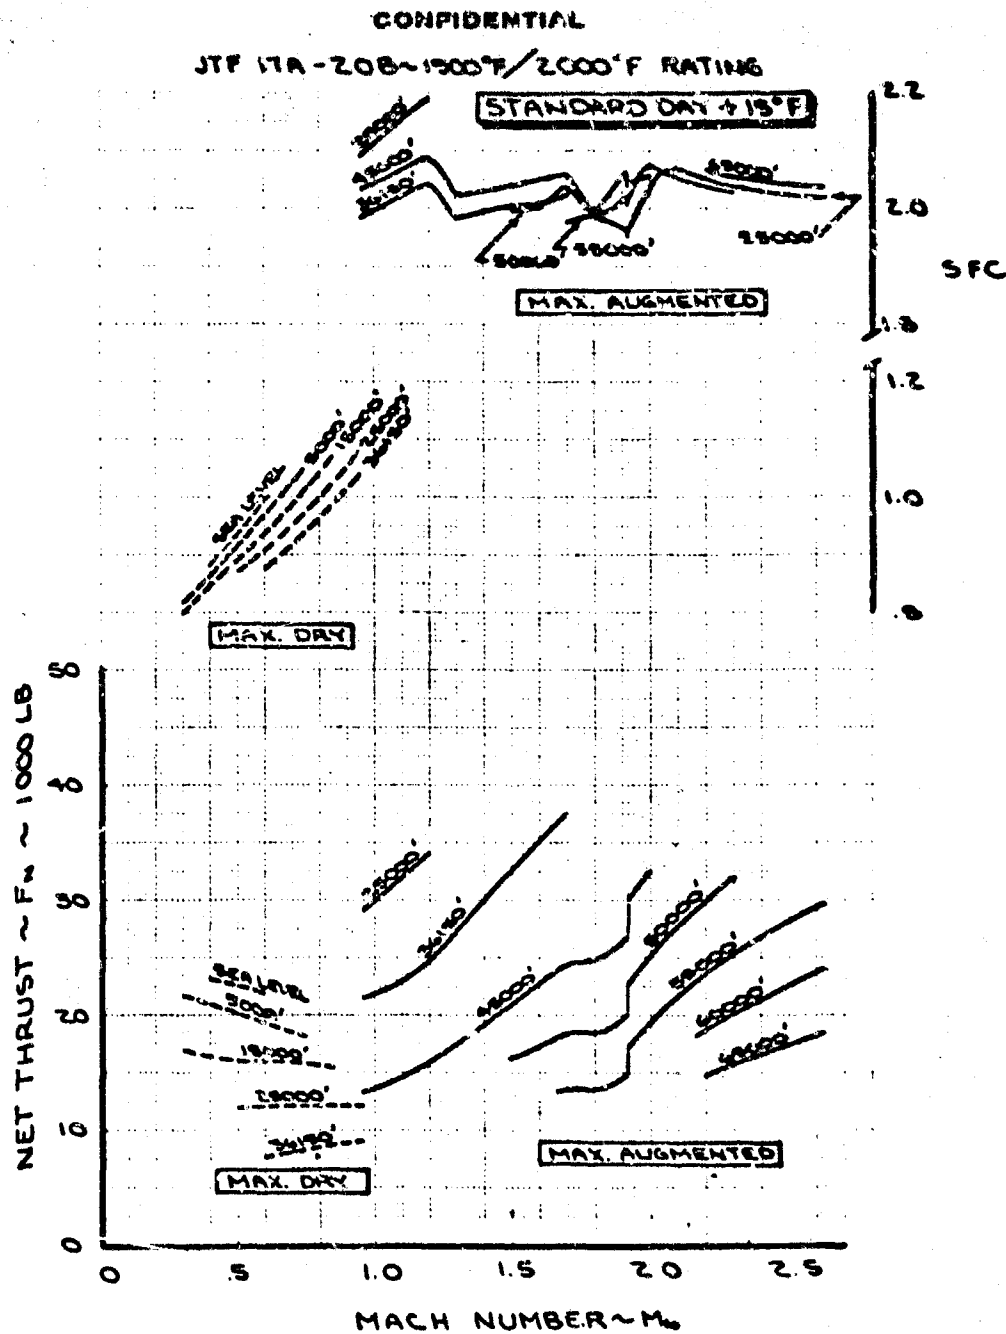


Fig. 8 Climb and Acceleration Net Thrust and SFC Standard Day + 15°F

CONFIDENTIAL

JTF 17A - 20B-1900°F / 2000°F RATING

MACH 2.1 CRUISE
STANDARD DAY
T₂ LIMIT = 500°F

AUGMENTED

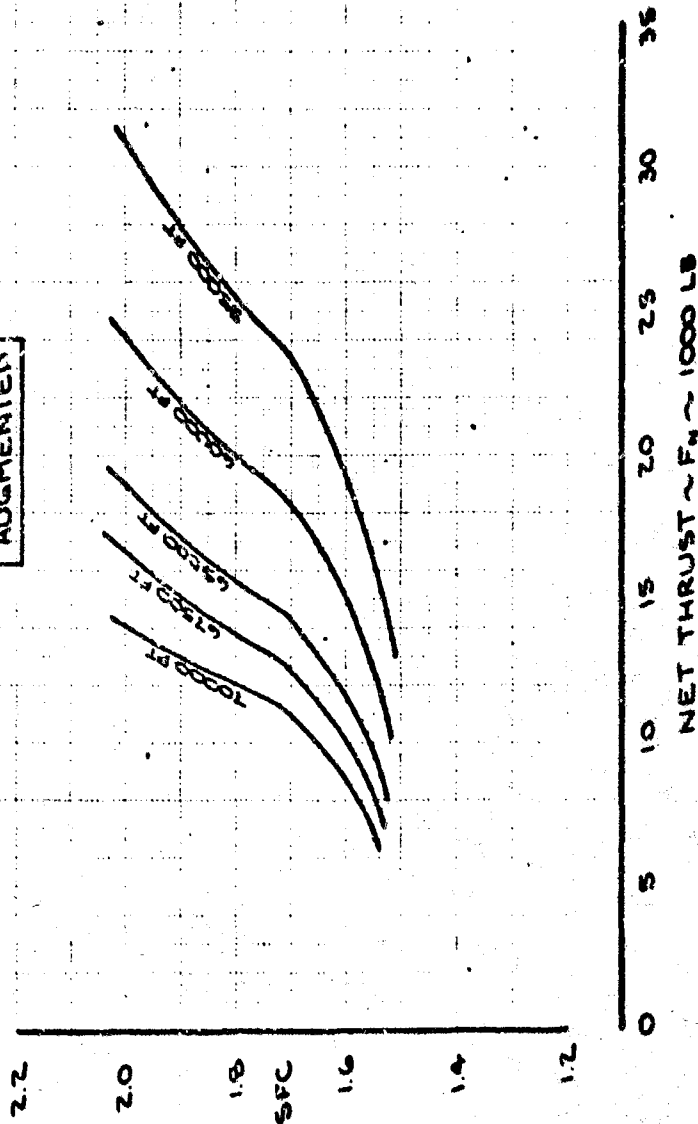


Fig. 9 Cruise No. Thrust and SFC - Standard Day

06-19906-2

CONFIDENTIAL

JTF 17A-ZOB ~ 1900F / 2000° F RATING

MACH 2.63 CRUISE
STANDARD DAY + 15° F
T_{max} LIMIT = 500° F

AUGMENTED

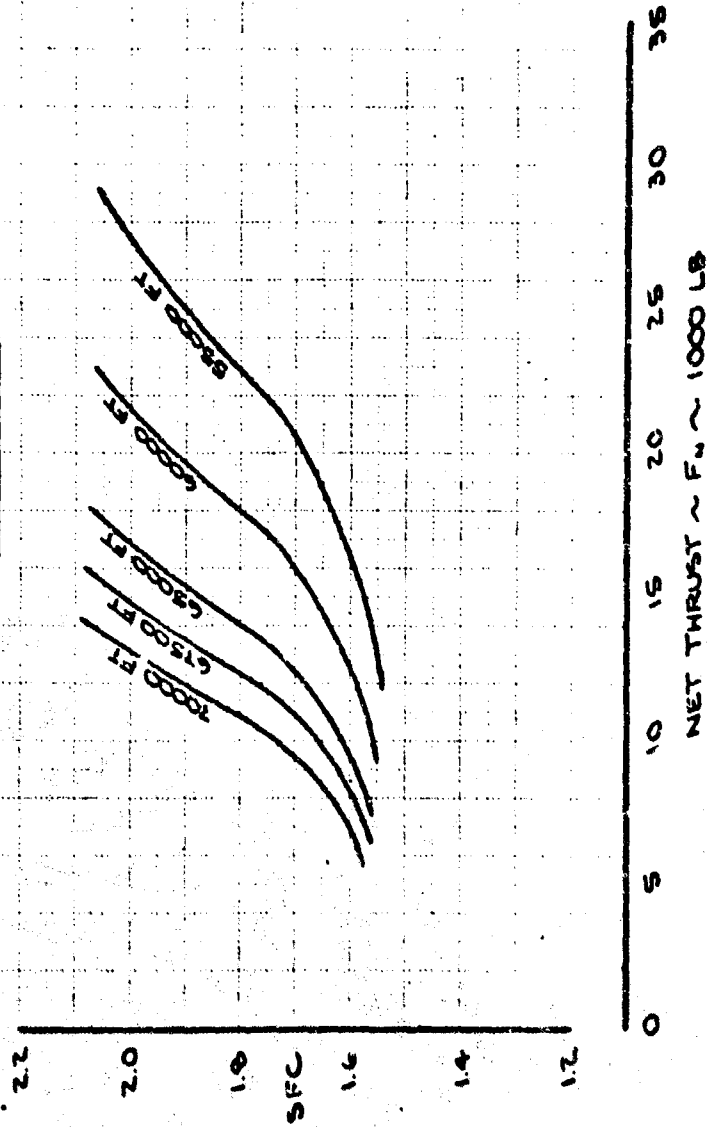


Fig. 10 Cruise Net Thrust and SFC - Standard Day + 15° F

CONFIDENTIAL

JTF 17A - 20B - 1900°F / 2000°F RATING

STANDARD DAY
SEA LEVEL

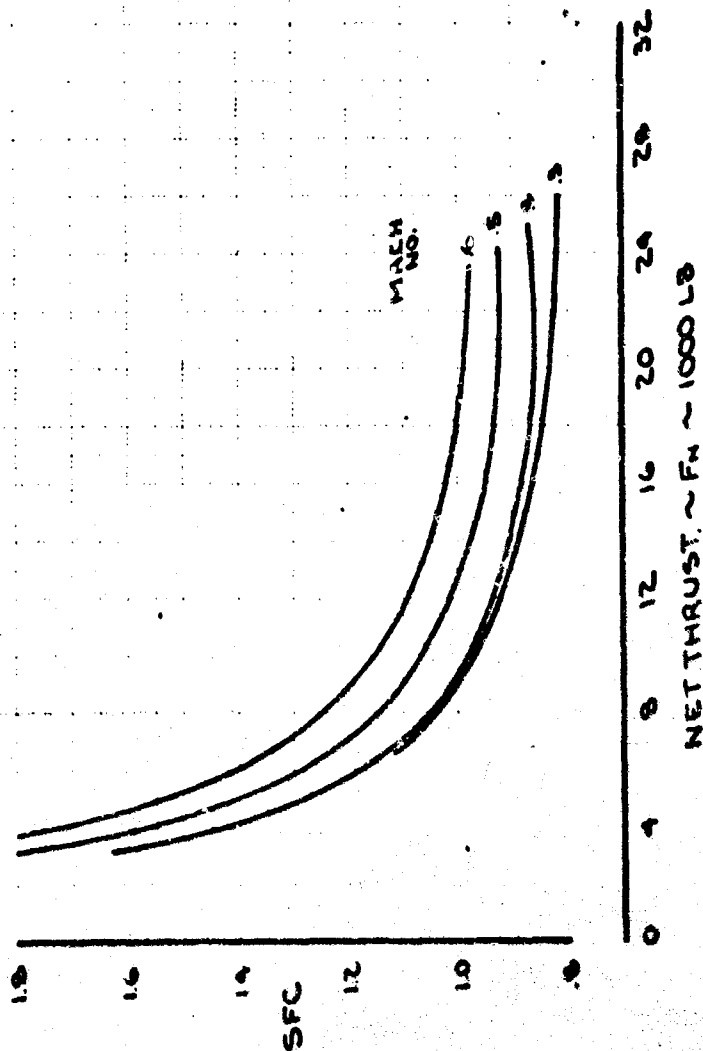


Fig. 11 SFC versus Thrust - Standard Day, Sea Level

02-1896-2
CONFIDENTIAL

CONFIDENTIAL

JTF 17A-20B ~ 1900°F / 2000°F RATING

STANDARD DAY
15000 FT.

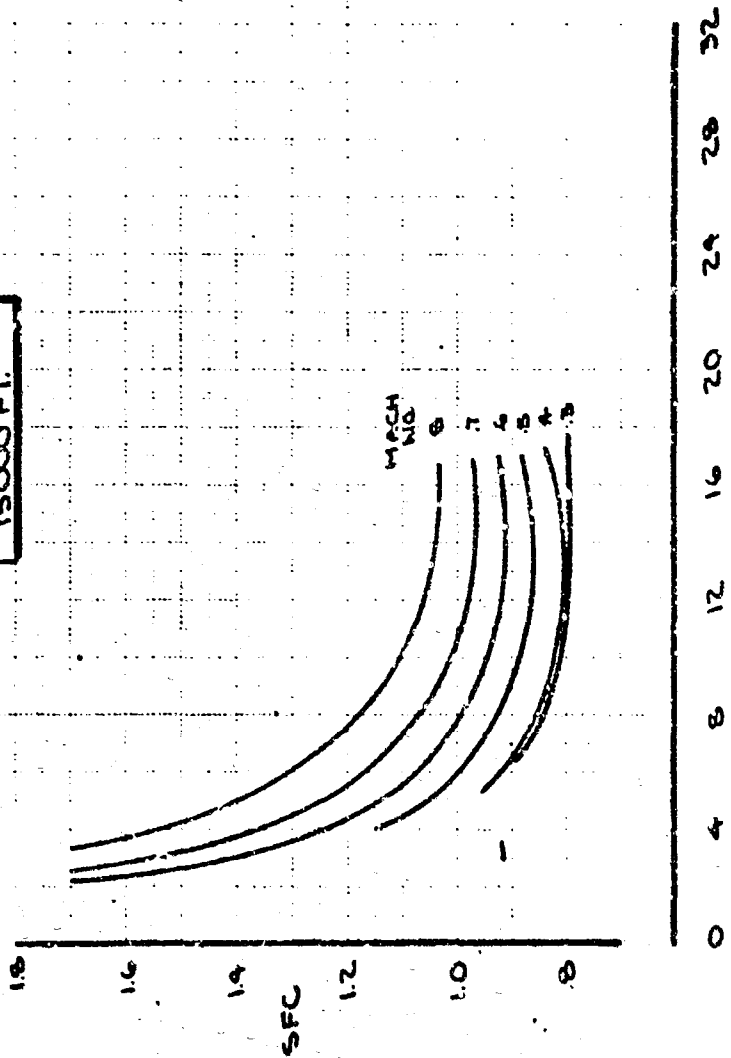


Fig. 12 SFC versus Thrust - Standard Day, 15,000 Ft.

DS-1903-2
CONFIDENTIAL

3

CONFIDENTIAL

JTF ITA - 20B - 1900°F/2000°F RATING

STANDARD DAY
25,000 FT

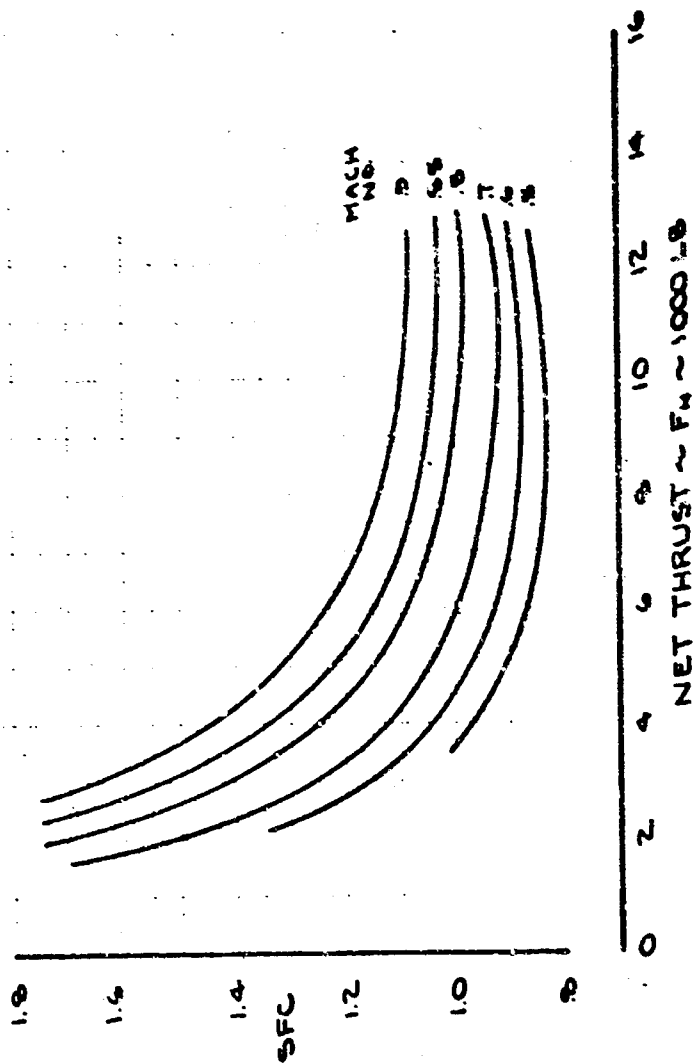


Fig. 13 SFC versus Thrust - Standard Day, 25,000 Ft.


DS-19906-2

CONFIDENTIAL

CONFIDENTIAL

JTF 17A-20B-1900FT/2000°F RATING

STANDARD DAY
36,150 FT

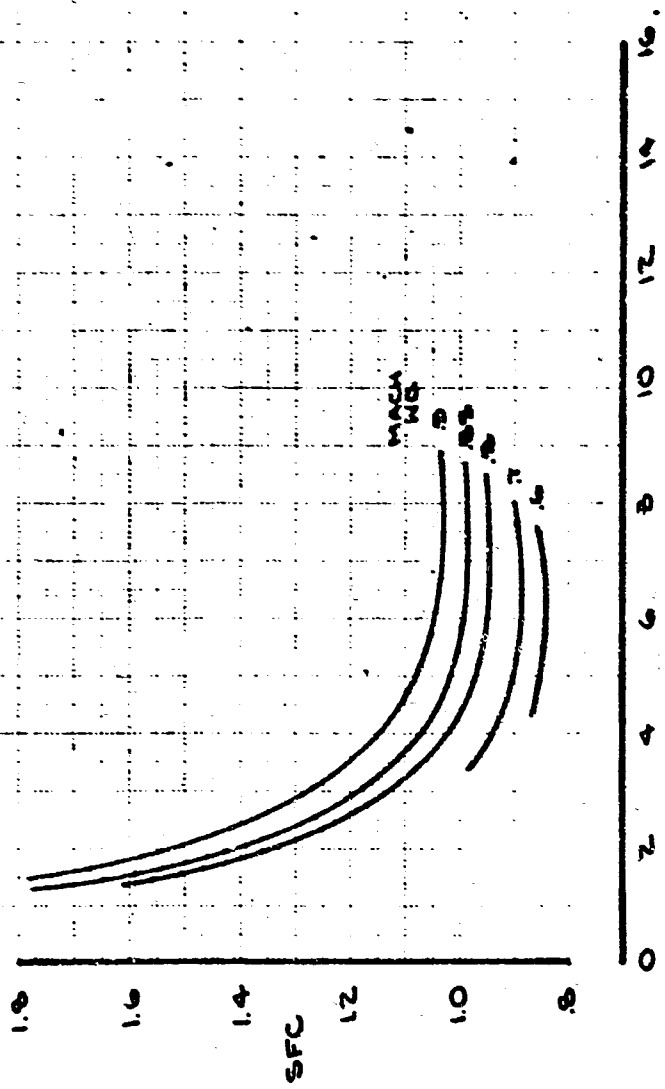

NET THRUST ~ FN ~ 1000 LB

Fig. 14 SFC versus Thrust - Standard Day, 36,150 Ft.

DS-19506-2
CONFIDENTIAL

CONFIDENTIAL

JTF 17A - 2.0B-1500°F / 2000°F RATING

STANDARD DAY
45000 FT.

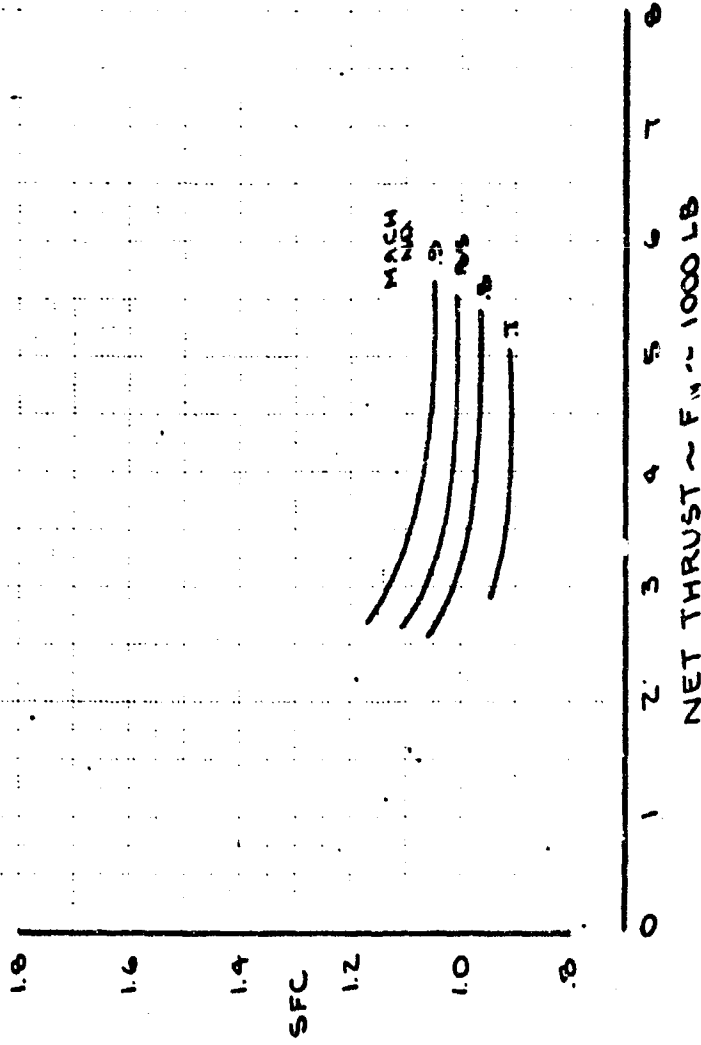


Fig. 15 SFC versus Thrust - Standard Day, 45,000 Ft.

DS-19008-2

CONFIDENTIAL

CONFIDENTIAL

JTF17A-20B ~ 1900°F / 2000°F RATING

STANDARD DAY
IDLE POWER

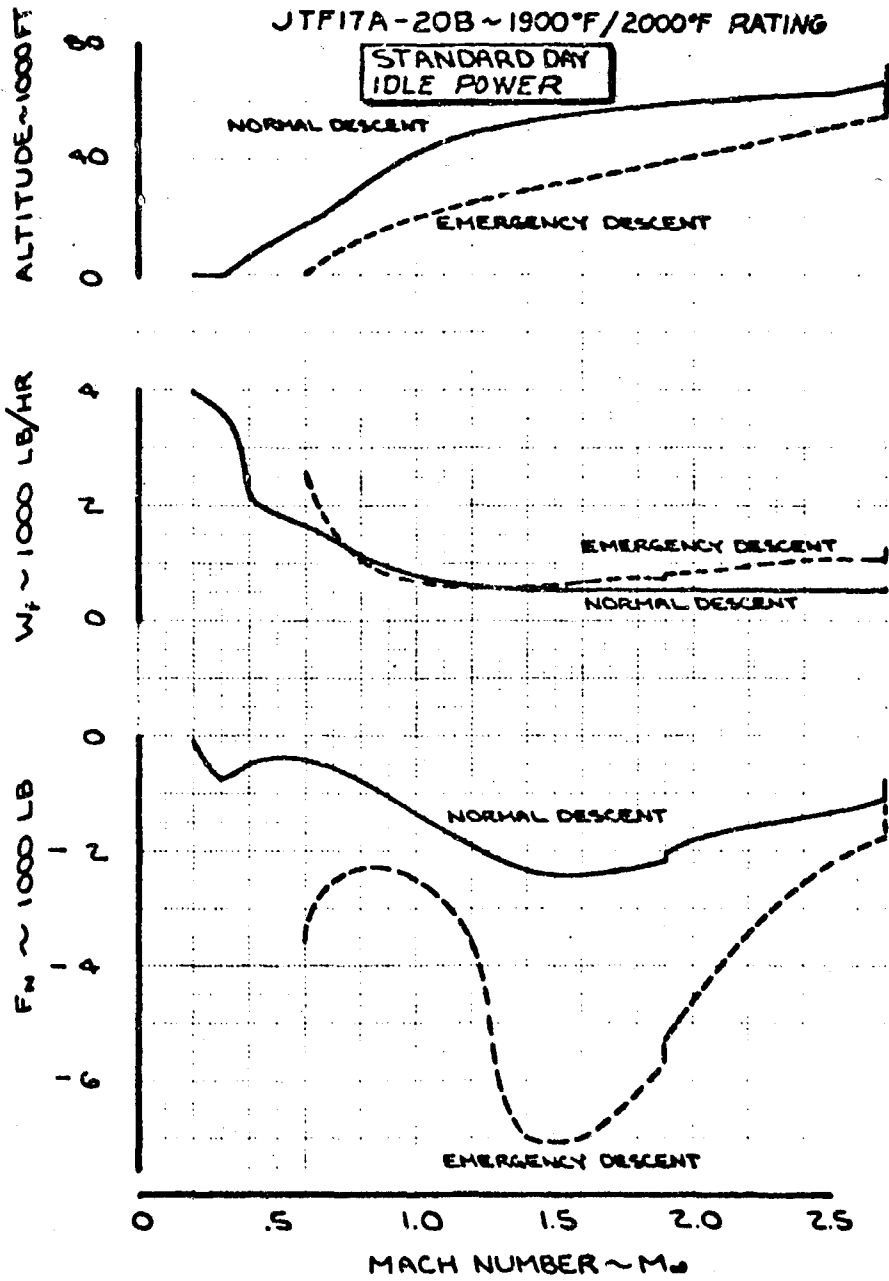


Fig. 16 Normal and Emergency Descent - Thrust and Fuel Flow - Standard Day

5.0 PROPULSION SYSTEM DRAG

5.1 INLET DRAG

Inlet drag is included in the airplane drag build-up for airplane performance calculations. The inlet drag includes spillage, cowl suction, bypass momentum, bypass louver, boundary layer bleed, and aircraft air-conditioning bleed drags. Table A lists the airbleed extracted from the inlet for various flight conditions to supply high-pressure air for air conditioning.

Fig. 1 shows the inlet drag for maximum dry and augmented power settings during standard and hot-day operation. The excess air drag at partial power when engine airflow demand is reduced is also shown on Fig. 1.

The inlet drag during normal and emergency descent operation at idle power settings is shown in Fig. 17.

5.2 NOZZLE DRAG

No correction to airplane drag is made for nozzle external drag because this drag is included in the nozzle thrust coefficient.

JTF 17A-20B - 1900T / 2000°F RATINGS

STANDARD DAY
IDLE POWER

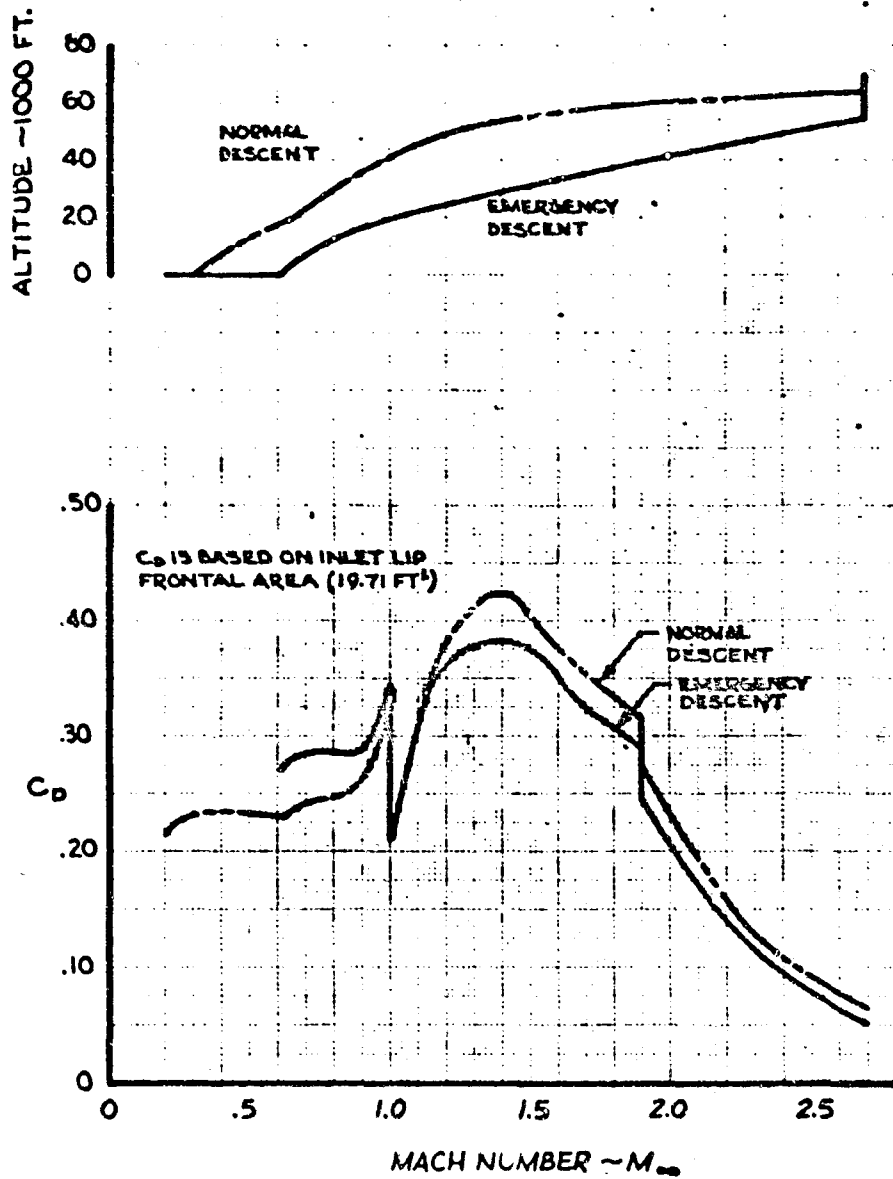


Fig. 17 Installed Inlet Drag Coefficients - Idle Descent

CG-19906-2

APPENDIX

JTF17A-20B 2200° F/2300° F

The appendix (Figs. A-1 through A-12) presents the installed engine performance data for the "basic" FFA JTF17A-20B turbofan engine rated at 2200° F cruise turbine-in-temperature.

The airflow schedule and inlet drags for this engine are the same as for the 1900° F engine.

CONFIDENTIAL

JTF 17A-208 ~ 2200°F / 2300°F RATING

STANDARD DAY
MAX. AUGMENTED

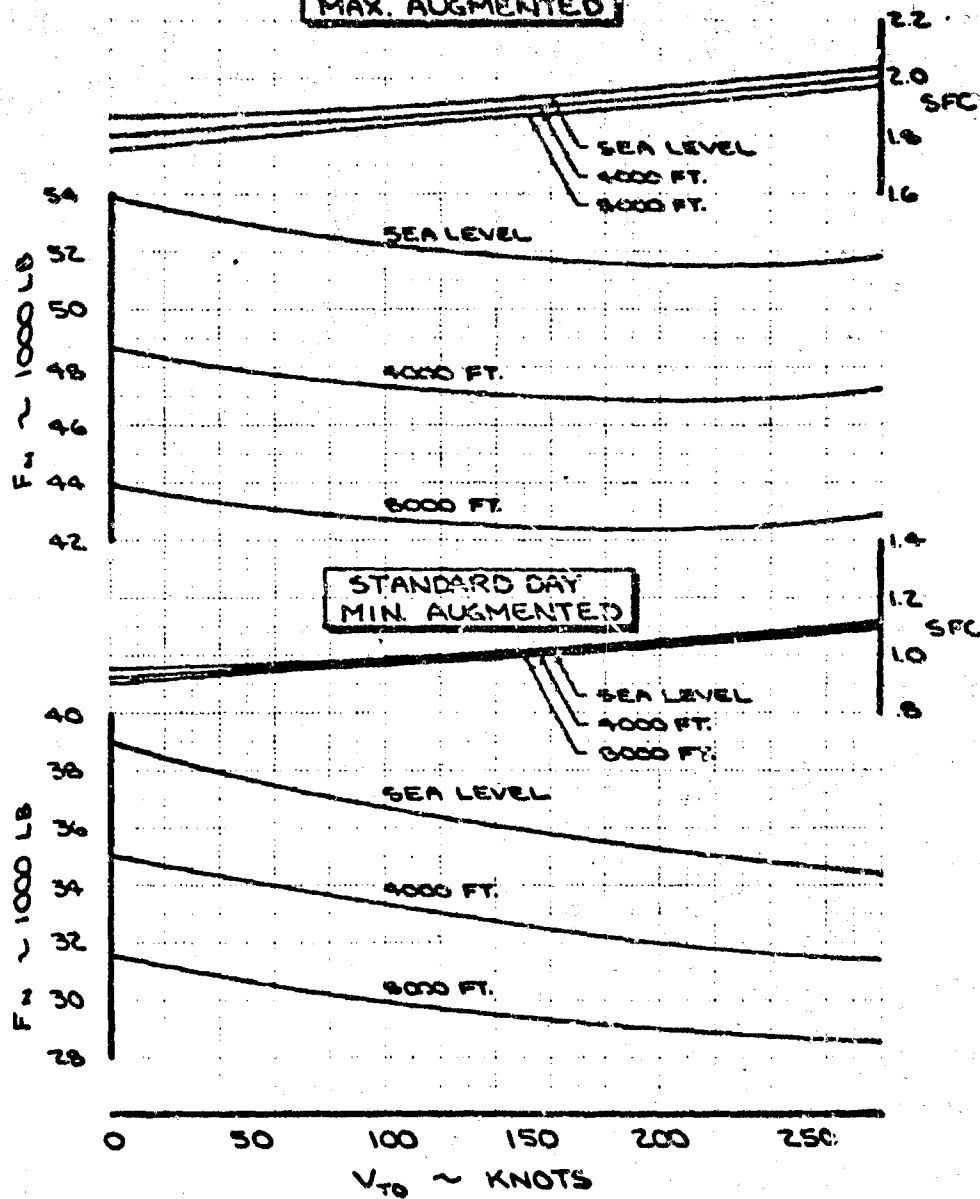


Fig. A-1 Takeoff Net Thrust and SFC - Standard Day

CONFIDENTIAL

JTF ITA-208 ~ 2,200°F/2,300°F RATING

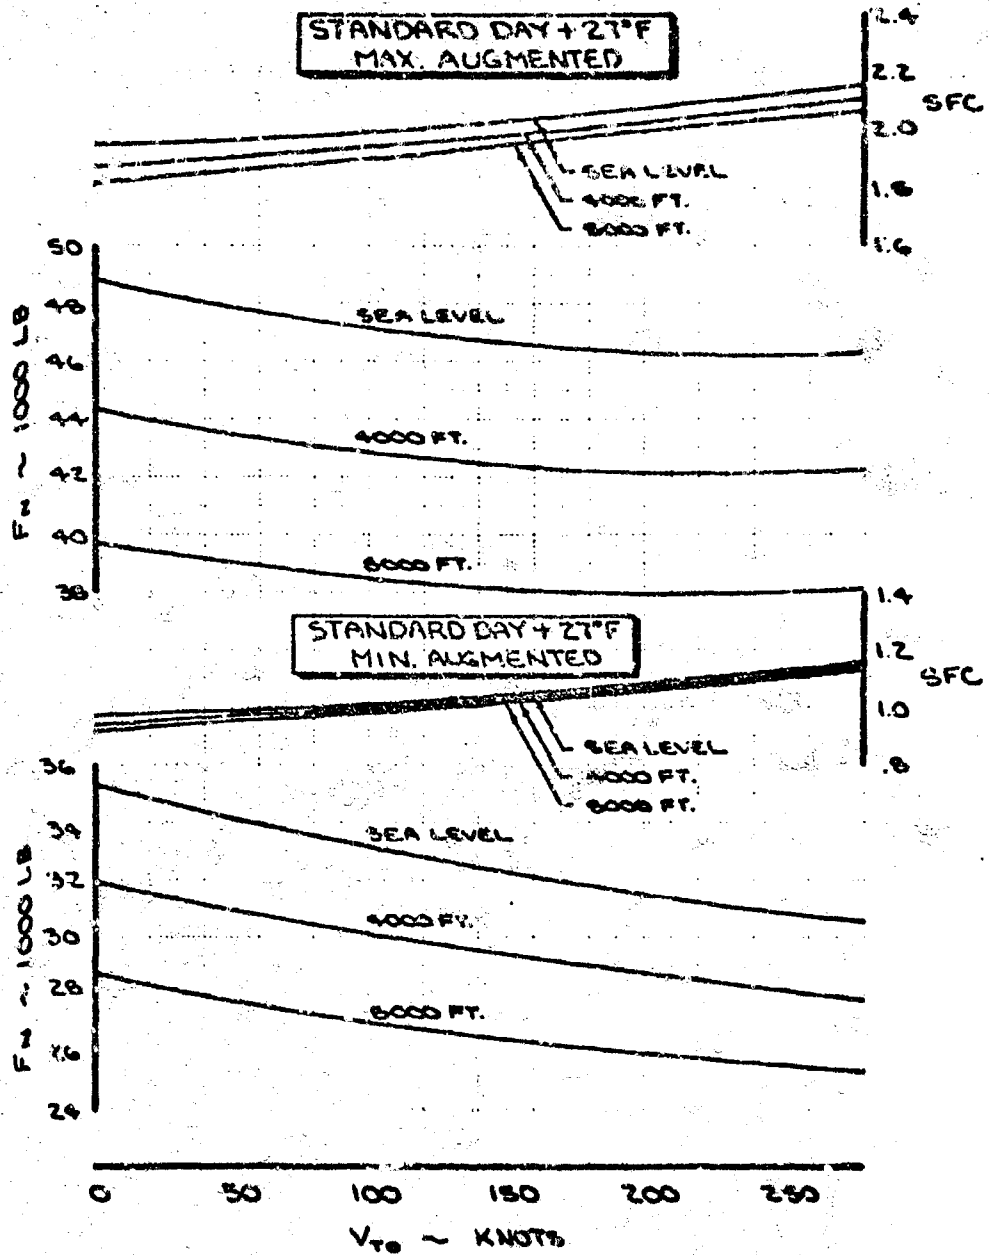


Fig. A-2 Takeoff Net Thrust and SFC - Standard Day + 27°F

DS-10908-2

CONFIDENTIAL

CONFIDENTIAL

JTF17A-208 ~ 2200°F / 2300°F RATING

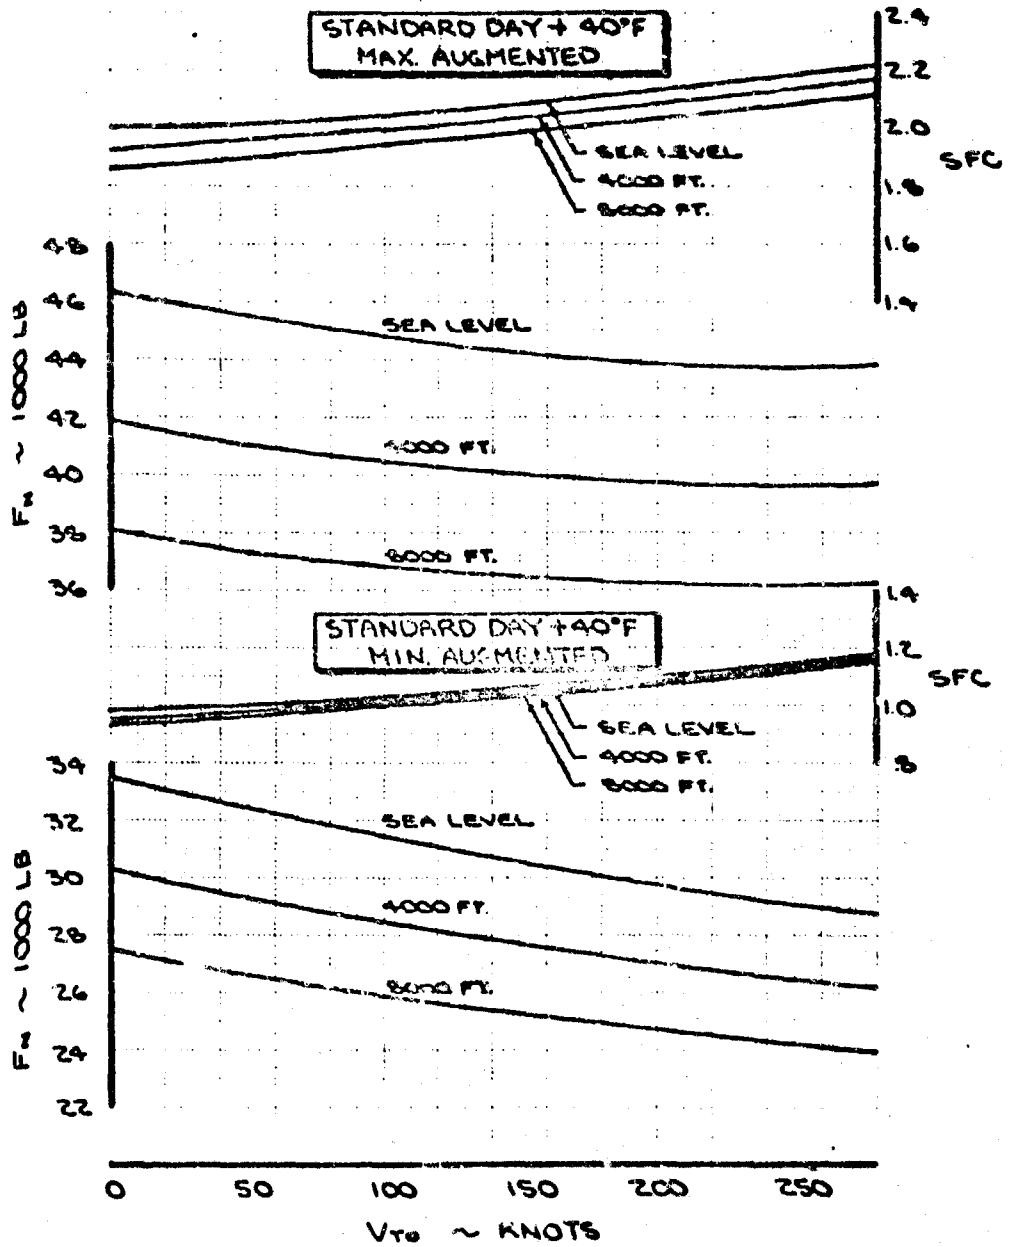


Fig. A-3 Takeoff Net Thrust and SFC - Standard Day + 40°F

CONFIDENTIAL

JTF 17A-208-22WJF/2300F RATING

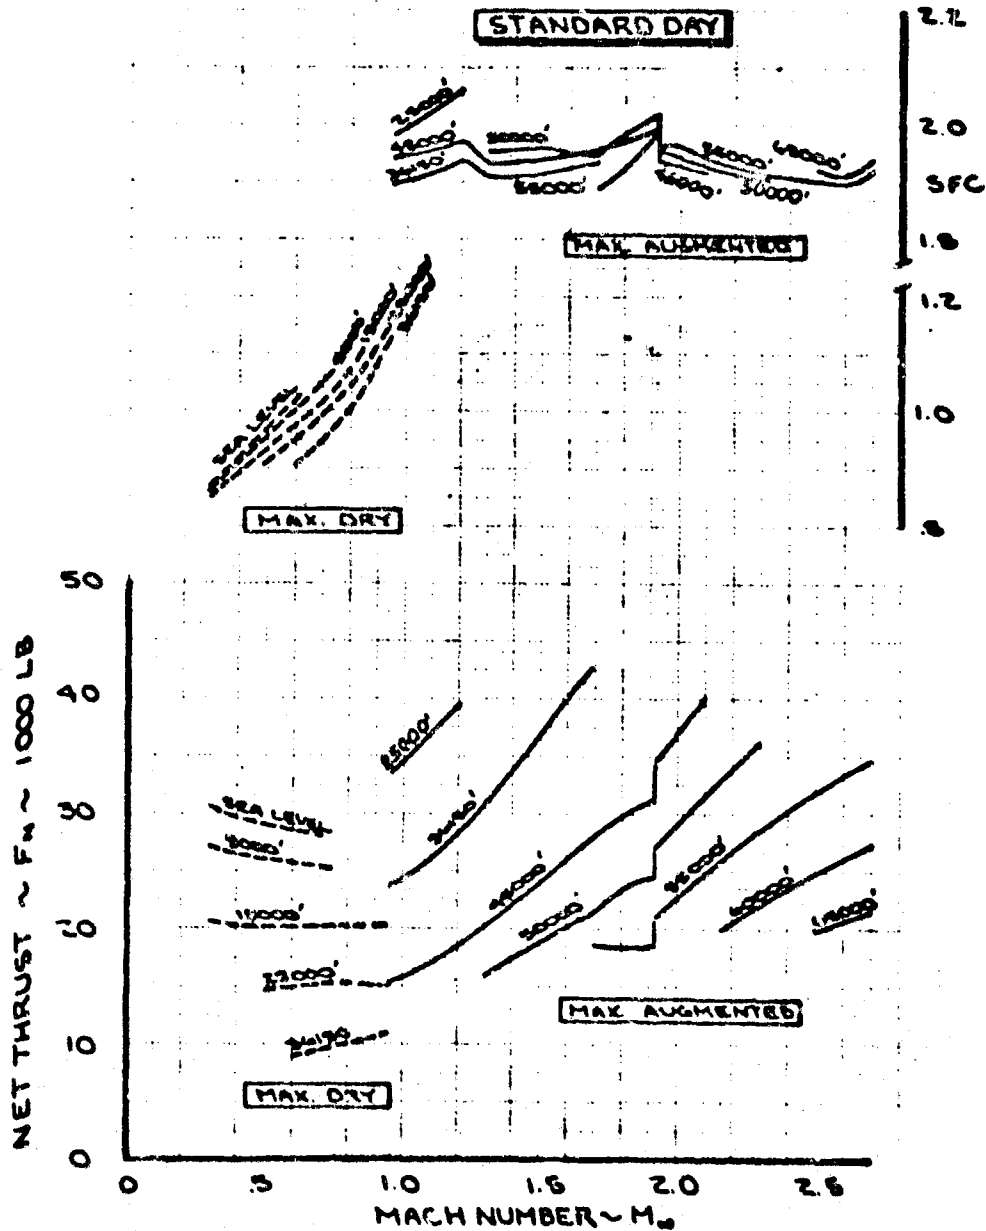


Fig. A-4 Climb and Acceleration Net Thrust and SFC - Standard Day

08-1000-2

CONFIDENTIAL

CONFIDENTIAL

JTF 17A-205 -- 2200°F / 2300°F RATING

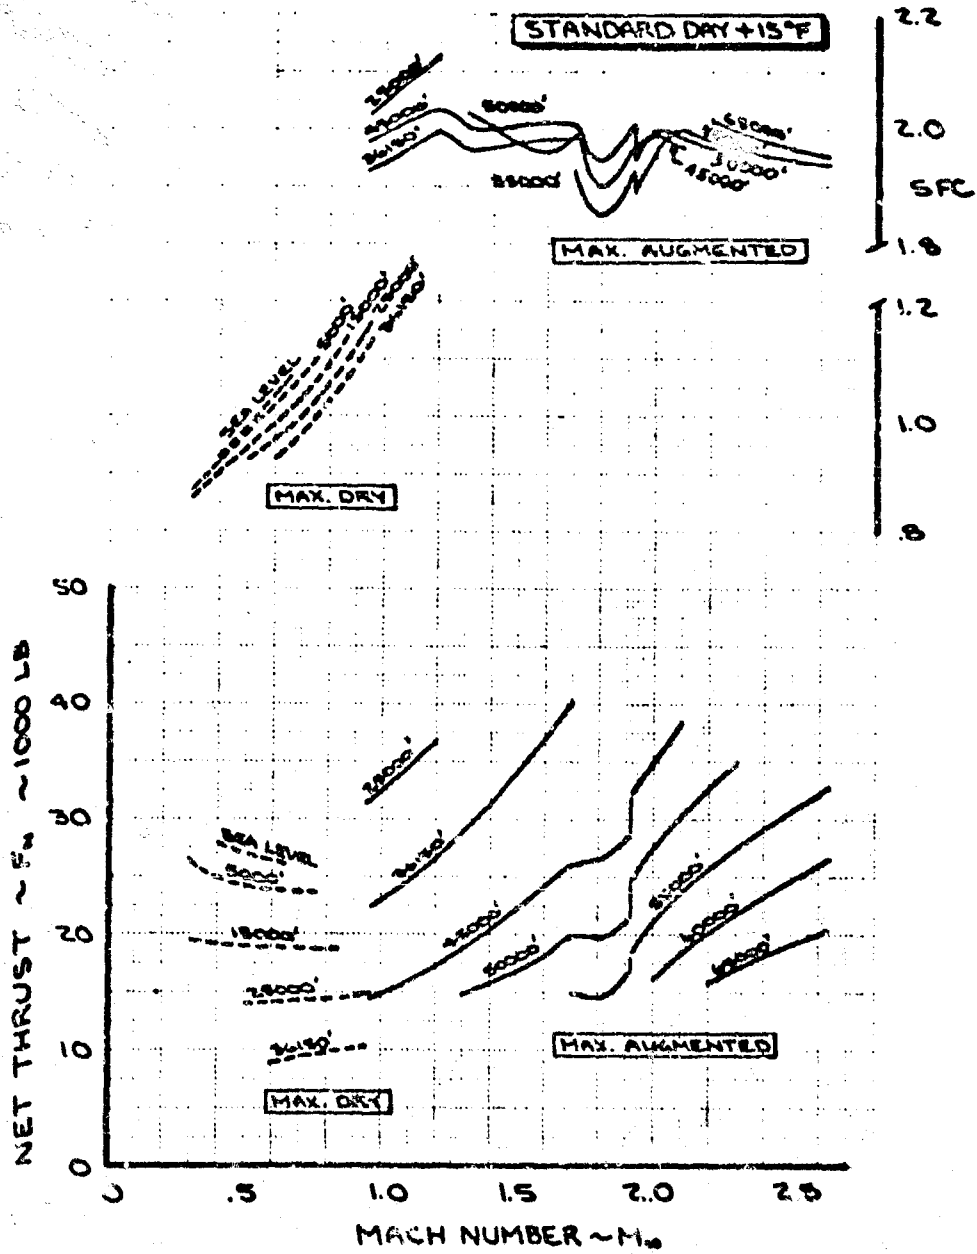


Fig. A-5 Climb and Acceleration Net Thrust and SFC - Standard Day + 15°F

CONFIDENTIAL

JTF 17A-20B ~ 2200°F / 2300°F RATING

MACH 2.7 CRUISE
STANDARD DAY
T₃ LIMIT = 500°F

AUGMENTED

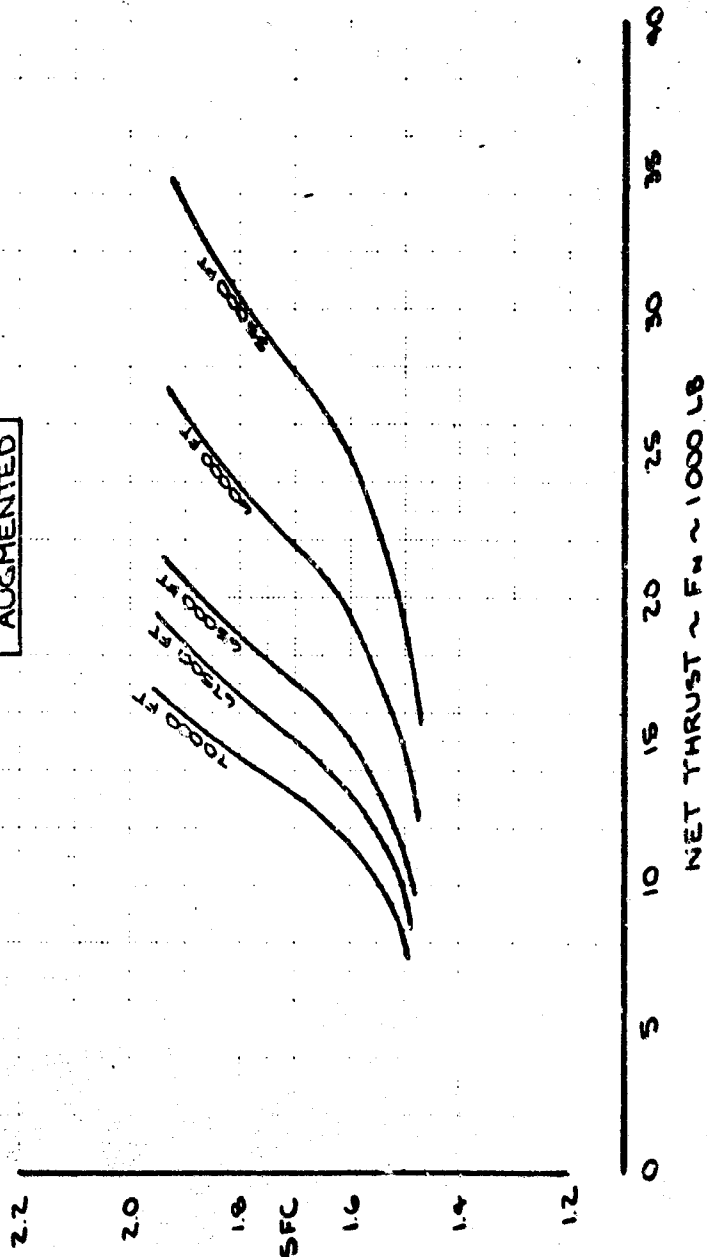


Fig. A-6 Cruise Net Thrust and SFC - Standard Day

06-15906-2
CONFIDENTIAL

CONFIDENTIAL

JTF 17A-20B ~ 2200°F / 2300°F RATING

MACH 2.63 CRUISE
STANDARD DAY + 15°F
T₂ LIMIT = 500°F

AUGMENTED

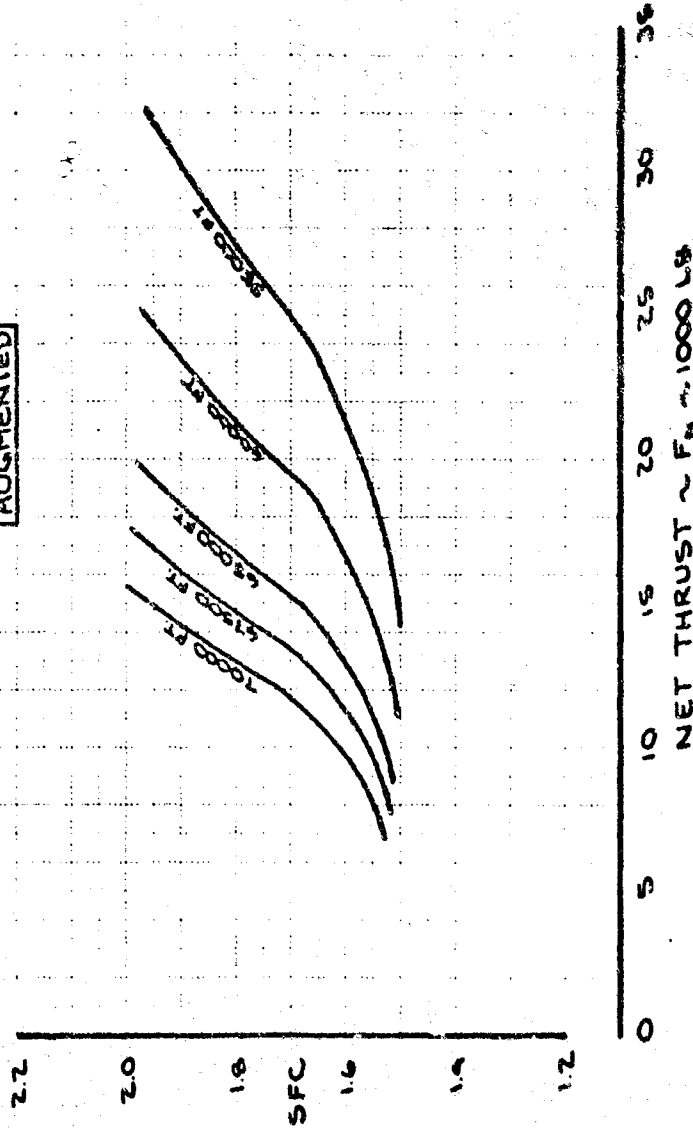


Fig. A-7 Cruise Net Thrust and SFC - Standard Day + 15°F

CONFIDENTIAL

JTF1A - ZOB ~ 2200°F / 2300°F RATING

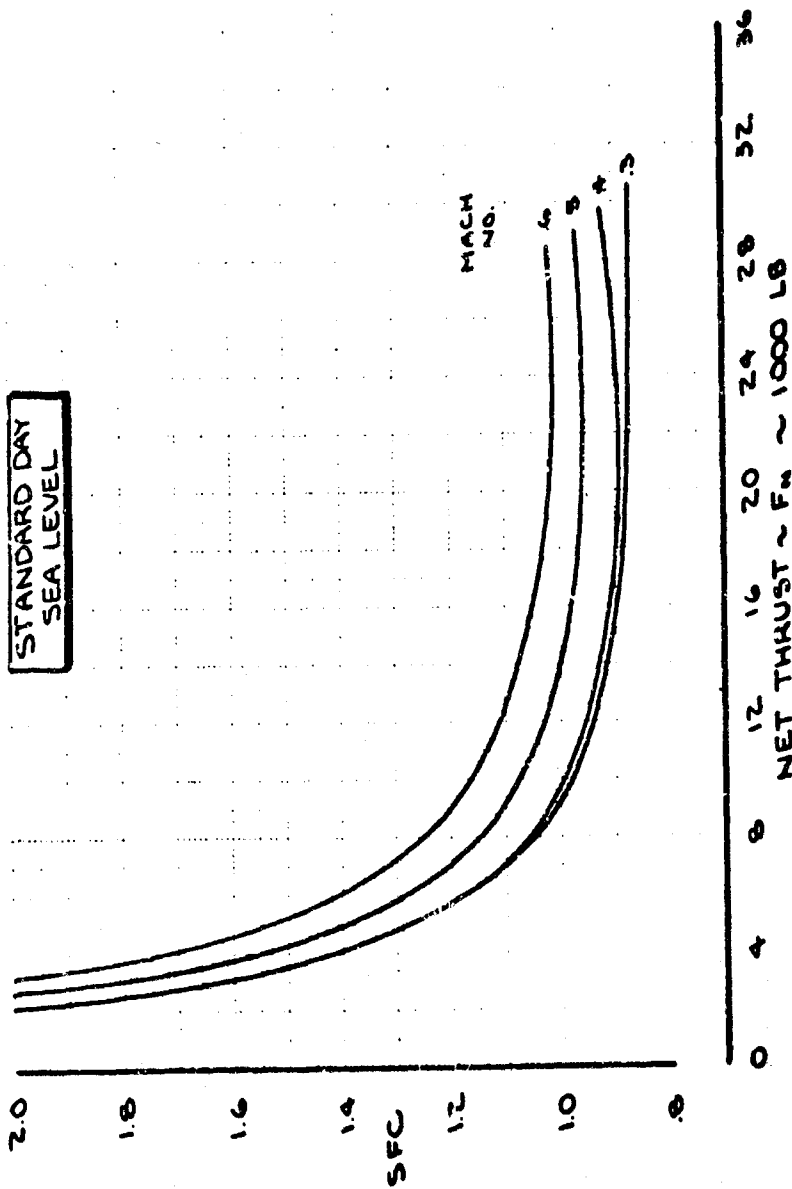


Fig. A-8 SFC versus Thrust Standard Day, Sea Level

08-19908-2

CONFIDENTIAL

CONFIDENTIAL

JTF 17A-208 ~ 2200°F/2300°F RATING

STANDARD DAY
15000 FT.

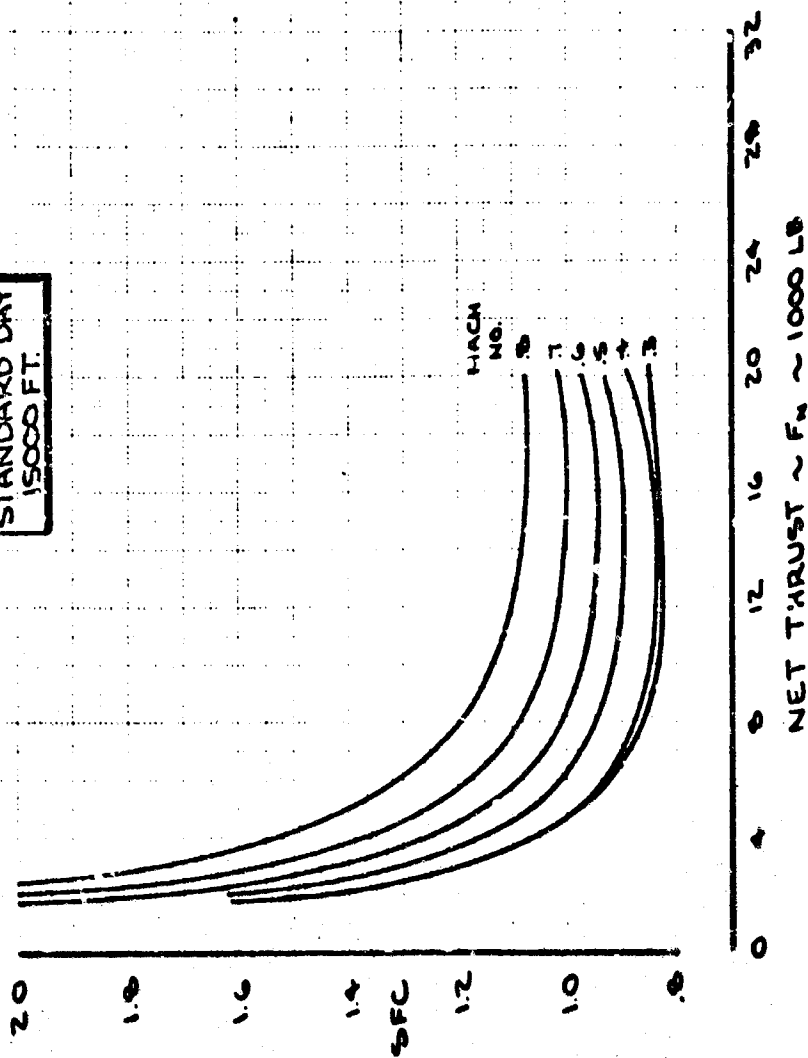


Fig. A-9 SFC versus Thrust Standard Day, 15,000 ft.

DB-19908-3
CONFIDENTIAL

CONFIDENTIAL

JTF 17A-20B ~ 2200°F / 2300°F RATINGS

STANDARD DAY
25000 FT.

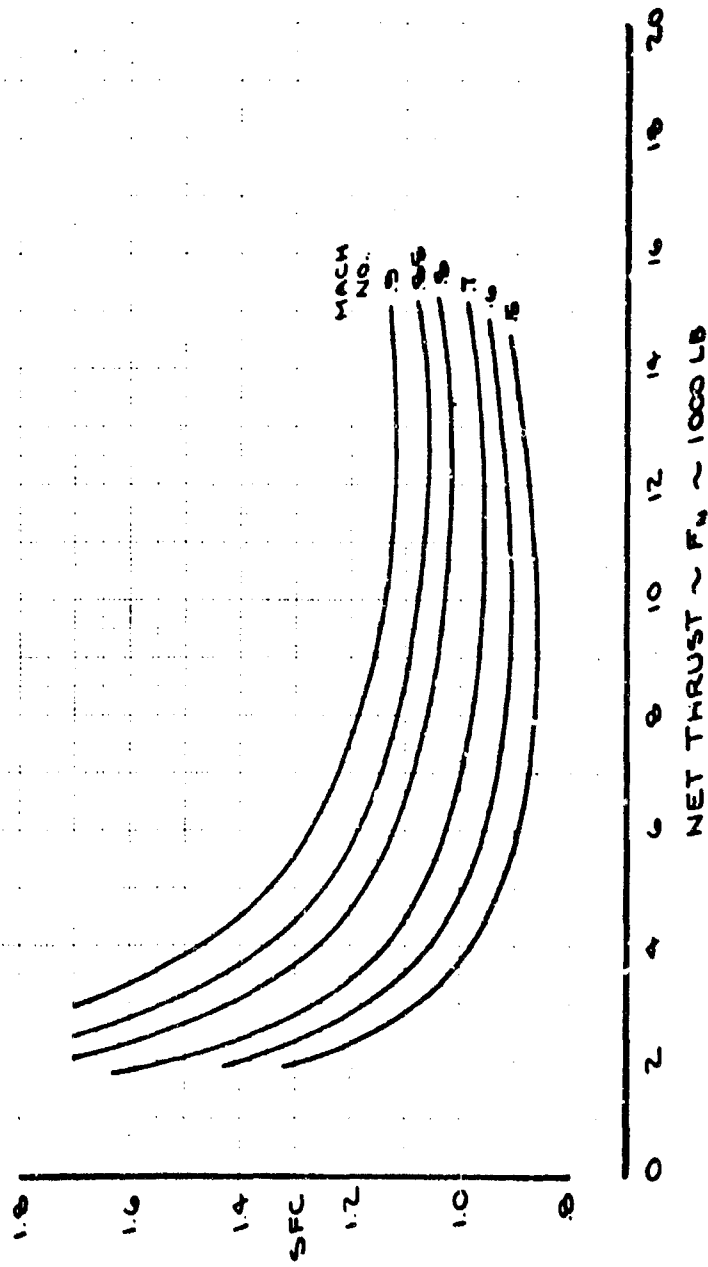


Fig. A-10 SFC versus Thrust Standard Day, 25,000 ft.

DS-18906-2
CONFIDENTIAL

UNCLASSIFIED

JTF 17A-20B ~ 2200°F/2300°F RATING

STANDARD DAY
36150 FT.

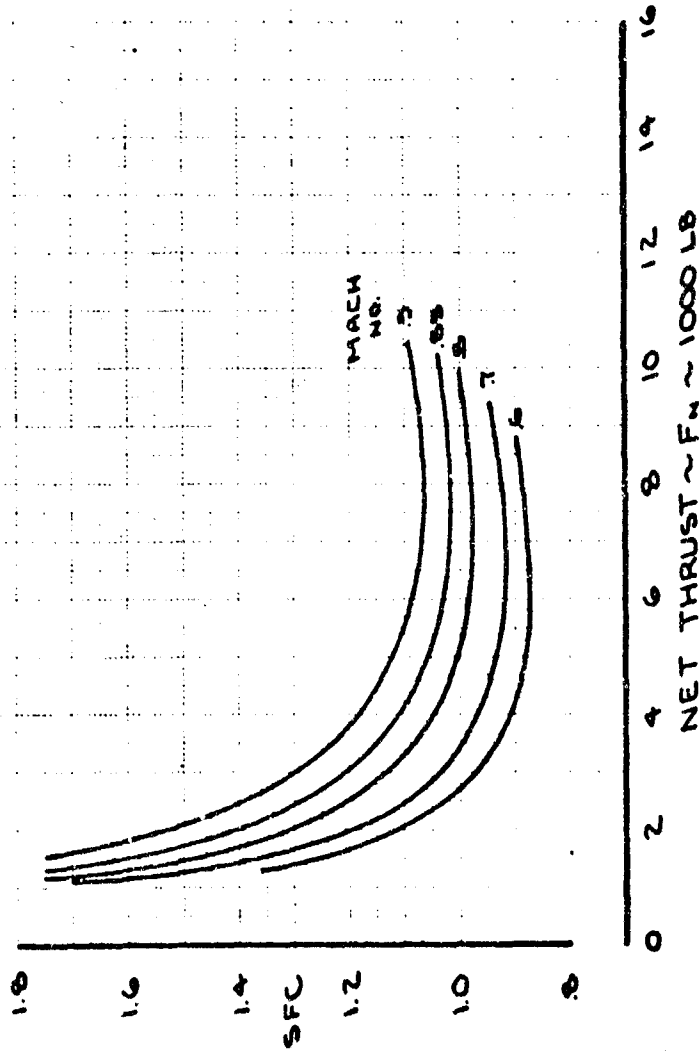


Fig. A-11 SFC versus Thrust Standard Day, 36,150 ft.

UNCLASSIFIED

UNCLASSIFIED

JTF 17A-20B ~ 2200°F / 2300°F RATING

STANDARD DAY
45000 FT

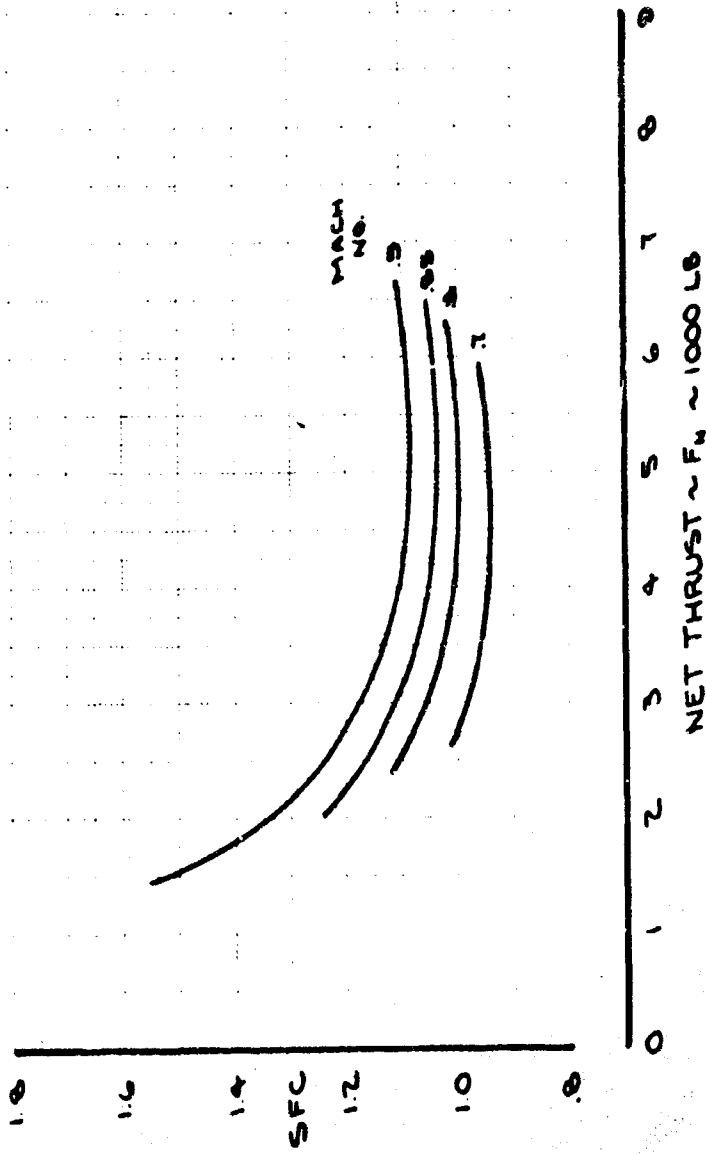


Fig. 4-12 SFC versus Thrust Standard Day, 45,000 ft.

CONFIDENTIAL
UNCLASSIFIED