

UNCLASSIFIED

AD NUMBER	
AD399780	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	restricted
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Foreign Government Information; APR 1970. Other requests shall be referred to British Embassy, 3100 Massachusetts Avenue, NW, Washington, DC 20008.	
AUTHORITY	
DSTL ltr dtd 12 Dec 2006; DSTL ltr dtd 12 Dec 2006	

THIS PAGE IS UNCLASSIFIED

15/70

U.K. Restricted
RESTRICTED

COPY No.

JUN 26 1970
76

TRC ER 18785



Decl OADR

PICATINNY ARSENAL

SCIENTIFIC AND TECHNICAL

MINISTRY OF DEFENCE

ROYAL
ARMAMENT RESEARCH AND DEVELOPMENT
ESTABLISHMENT

EXPLOSIVES DIVISION

R.A.R.D.E. MEMORANDUM 15/70

EXCLUDED FROM AUTOMATIC REGRADING
DOD DIR 5200.10 DOES NOT APPLY

A small scale study of the fragmentation effect
of aluminised RDX/binder compositions [R]

FOR OVERSEAS RELEASE ONLY
SEE INSIDE COVER

P. Emmott, B.Sc., Ph.D., A.R.I.C.

L. Cottle

The information given in this document is not to be communicated either directly or indirectly
to the Press or to any person not authorised to receive it.

U.K. Restricted
RESTRICTED

Fort Halstead
Kent.

April
1970

20090108 001

DDC
RECEIVED
JUN 22 1970
(176)

AD-399780

AD-10-236

CTH 115797

This Document was Graded
RESTRICTED
at the 244th meeting of the R.A.R.D.E.
Security Classification Committee

RELEASE CONDITIONS FOR OVERSEAS DISTRIBUTION

- A**
1. THIS INFORMATION IS RELEASED BY THE UK GOVERNMENT TO THE RECIPIENT GOVERNMENT FOR DEFENCE PURPOSES ONLY.
 2. THIS INFORMATION MUST BE ACCORDED THE SAME DEGREE OF SECURITY PROTECTION AS THAT ACCORDED THERETO BY THE UK GOVERNMENT.
 3. THIS INFORMATION MAY BE DISCLOSED ONLY WITHIN THE DEFENCE DEPARTMENTS OF THE RECIPIENT GOVERNMENT AND TO ITS DEFENCE CONTRACTORS WITHIN ITS OWN TERRITORY EXCEPT AS OTHERWISE AUTHORISED BY THE MINISTRY OF DEFENCE. SUCH RECIPIENTS SHALL BE REQUIRED TO ACCEPT THE INFORMATION ON THE SAME CONDITIONS AS THE RECIPIENT GOVERNMENT.
 4. THIS INFORMATION MAY BE SUBJECT TO PRIVATELY-OWNED RIGHTS.
- B**
1. THIS INFORMATION IS RELEASED BY THE UK GOVERNMENT TO THE RECIPIENT GOVERNMENT FOR DEFENCE PURPOSES ONLY.
 2. THIS INFORMATION MUST BE ACCORDED THE SAME DEGREE OF SECURITY PROTECTION AS THAT ACCORDED THERETO BY THE UK GOVERNMENT.
 3. THIS INFORMATION MAY BE DISCLOSED ONLY WITHIN THE DEFENCE DEPARTMENTS OF THE RECIPIENT GOVERNMENT AND TO THOSE NOTED IN THE ATTACHED LIST, EXCEPT AS OTHERWISE AUTHORISED BY THE MINISTRY OF DEFENCE. SUCH RECIPIENTS SHALL BE REQUIRED TO ACCEPT THE INFORMATION ON THE SAME CONDITIONS AS THE RECIPIENT GOVERNMENT.
 4. THIS INFORMATION MAY BE SUBJECT TO PRIVATELY-OWNED RIGHTS.
- C**
1. THIS INFORMATION IS RELEASED BY THE UK GOVERNMENT TO THE RECIPIENT GOVERNMENT FOR DEFENCE PURPOSES ONLY.
 2. THIS INFORMATION MUST BE ACCORDED THE SAME DEGREE OF SECURITY PROTECTION AS THAT ACCORDED THERETO BY THE UK GOVERNMENT.
 3. THIS INFORMATION MAY BE DISCLOSED ONLY WITHIN THE DEFENCE DEPARTMENTS OF THE RECIPIENT GOVERNMENT, EXCEPT AS OTHERWISE AUTHORIZED BY THE MINISTRY OF DEFENCE.
 4. THIS INFORMATION MAY BE SUBJECT TO PRIVATELY-OWNED RIGHTS.
- D**
5. THIS INFORMATION IS RELEASED FOR INFORMATION ONLY AND IS TO BE TREATED AS DISCLOSED IN CONFIDENCE. THE RECIPIENT GOVERNMENT SHALL USE ITS BEST ENDEAVOURS TO ENSURE THAT THIS INFORMATION IS NOT DEALT WITH IN ANY MANNER LIKELY TO PREJUDICE THE RIGHTS OF ANY OWNER THEREOF TO OBTAIN PATENT OR OTHER STATUTORY PROTECTION THEREFOR.
 6. BEFORE ANY USE IS MADE OF THIS INFORMATION FOR THE PURPOSE OF MANUFACTURE THE AUTHORIZATION OF THE MINISTRY OF DEFENCE, D SALES (SALES 5a (A)), ST. CHRISTOPHER HOUSE, SOUTHWARK STREET, LONDON S.E.1 MUST BE OBTAINED.

RESTRICTED

2
MINISTRY OF DEFENCE

ROYAL ARMAMENT RESEARCH AND DEVELOPMENT ESTABLISHMENT, *GL, Brit.*

6
R.A.R.D.E. MEMORANDUM 15/70

5 April 1970

78.76

3
A small scale study of the fragmentation effect
of aluminised RDX/binder compositions

4 *ed al*
P. Emmott, B.Sc., Ph.D., A.R.I.C. (E1)
L. Cottle, (E1)

Summary

The shattering effect of charges of various aluminised RDX/polyurethane and other high explosive compositions has been evaluated in terms of a fragmentation parameter derived from the mass distribution of the fragments of the metal casings used to contain the charges. The effect of variations in the proportions of the explosive components has been investigated and the data used to estimate the fragmentation effect of practical compositions. The relationship between the fragmentation and other explosive properties of these compositions has been studied.

Approved for issue:

D. F. Runnicles, Principal Superintendent, 'E' Division

This material contains information affecting
the national defense of the United States
within the meaning of the Espionage Laws
(Title 18, U.S.C., sections 793 and 794),
the transmission or revelation of which in
any manner to an unauthorized person is
prohibited by law.

RESTRICTED

AD-399780

RESTRICTED

CONTENTS

	<u>Page</u>
1. Introduction	1
2. The number-mass distribution law	1
3. Experimental	2
4. Evaluation of the number-mass parameter	3
5. The effect of variations of polyurethane and aluminium content on fragmentation	3
6. The estimation of the fragmentation effect of new compositions	4
7. The relationship between fragmentation and other explosive properties	4
7.1 Detonation pressure	4
7.2 Velocity of detonation	5
7.3 Heat of explosion	5
7.4 Volume of gaseous explosion products	5
8. Conclusions	6
9. References	6
10. Tables of results	7

Figures

IMPORTANT

This document should be returned to the Reports Officer, Royal Armament Research and Development Establishment, Fort Halstead, Sevenoaks, Kent, when no longer required

INITIAL DISTRIBUTION

Internal

No.	1	Director
	2	Deputy Director (1)
	3	Deputy Director (2)
	4	SMO
	5	PS/E
	6	PS/A
	7	PS/B
	8	PS/C
	9	PS/D
	10	Dr W M Evans
	11	SNO
	12	SAFO
	13	S/E1
	14	S/E2
	15	S/E3
	16	S/E4
	17	S/B3
	18	S/C3
	19	S/F1
	20-27	E1 (Attn Mr L Cottle, Mr R E Davis, Dr P Emmott, Dr E A Hutton, Mr J Trower, Dr J Wilby, Mr H C Woodman, Mr H B Young)
	28	C3 (Attn Mr C A Beck)
	29	E3 (Attn Mr R Harris)
	30	E4 (Attn Mr N Griffiths)

External (UK)

	31	Chief Scientist (Army)
	32	Chief Scientist (RAF)
	33	Controller Research, M of Tech
	34	Deputy Chief Scientist (Army)
	35	DG of Arty (Arty Coord)
	36	D of Arty (2)
	37	CS/AUWE, Navy Dept, Portland, Dorset
	38	D A Arm, M of Tech, St Giles Court
	39	CILSA, Vauxhall Barracks, Didcot, Berks
	40	D/ERDE, M of Tech, Waltham Abbey, Essex
	41-42	- (Attn Mr E G Whitbread, Dr R Campbell)

RESTRICTED

RESTRICTED

External (UK) (continued)

43 D/GW(X), M of Tech, Prospect House
44 - (Attn Mr G Senior)
45 DGW(I), Navy Dept, Bath
46 D/RAE, Farnborough, Hants
47 Secretary, OB
48 S/PEE, Shoeburyness, Essex
49 Commandant, RMCS, Shrivenham, Swindon, Wilts
50 MOD Library (C&A), Old War Office Bldg., Whitehall
51 DCROF (2), Northumberland House
52 DROF, Chorley, Lancs
53 DROF, Glascoed, Mon
54 DROF, Bridgwater, Somerset
55 DCI, Royal Arsenal, Woolwich, S.E.18 (through TIO)
56 ICI Ltd., Nobel Division, Stevenston, Ayrshire
57 TRC - for retention

Overseas (through TRC)

58 BDSW (R&D) (Attn Director of Munitions)
59 BDLS (Army) Ottawa (Attn Lt Col D A Heath)

60-62 Canada - CFHQ for DGOS Technical Library
63-66 - Def Res Board
67 - CDLS

68 Australia - AAS(UK)
69-73 - Dept of Supply
74 - WRE, Salisbury

75 USA - Assist Sec of Def (Dep DDR&E)
76-95 - ONR (London)
96 - Picatinny Arsenal, Dover, NJ (Attn Dr R Walker)
97 - Naval Ordnance Laboratory, Whiteoak, Md
(Attn Mr J Ablard)
98 - Defense Documentation Center, Cameron Station,
Alexandria, Va. 22314
99 - US Army Standardization Group, UK

Stock

100-104

RESTRICTED

RESTRICTED

1. INTRODUCTION

The standard R.A.R.D.E. calorimetric method¹ for the determination of the heat of explosion of explosives has been extended to include the determination of fragmentation parameters² based on the mass distribution of the fragments from the standard mild steel cylindrical container used for the explosive charge. The latter is detonated in a special evacuated closed vessel of known thermal capacity. The temperature rise is measured and certain corrections are applied to the measured heat change based on the analysis of the explosion products. The analysis of the solid products necessitates the collection of all materials left in the calorimeter including the fragments of the steel casing from which any solid deposits are separated. These steel fragments are used to evaluate the fragmentation parameters of the explosive.

It was decided to apply this technique to the study of the fragmentation effect of aluminised RDX/Binder compositions. A number of experimental compositions containing polyurethane³ as the binder had already been prepared and used for heat of explosion determinations³ and the casing fragments had been retained. Since these compositions had a systematically varied polyurethane and aluminium content it was proposed to use them to obtain information about the effect of these compositional variables on fragmentation and to attempt to relate this with other explosive properties, such as velocity of detonation, heat of explosion and volume of gaseous explosion products. It was hoped that the data obtained from this series of experimental compositions could be used to predict the fragmentation effect of RDX/binder/aluminium charges in general. To investigate this possibility other RDX-based explosives of current interest were also studied.

2. THE NUMBER-MASS DISTRIBUTION LAW

The fragment size distribution can be expressed in terms of the number of fragments in a given mass range by the basic frequency law :-

$$dN = f(m)dm$$

where the integral of dN represents the number of fragments each with a mass lying between two standard mass intervals m_1 and m_2 . The search for the functional form $f(m)$ of this law led to an empirical equation derived by Mott⁴ which can be expressed essentially as

$$N_m = N_0 e^{-Am^{\frac{1}{2}}}$$

where N_m is the number of fragments each with a mass lying between the mass intervals $m_1 = m$ and $m_2 = \text{infinity}$. N_0 is the total number of fragments, and, like A , is a constant for a given explosive and casing. The constant A will be referred to as the number-mass parameter. It can be seen that a plot of $\log N_m$ against $m^{\frac{1}{2}}$ should enable A and N_0 to be determined. The difficulty of extrapolating such a curve from $m = 2g$ (the lowest mass considered in practice) to $m = 0$ on a logarithmic scale makes any evaluation of N_0 unreliable. It has been found convenient in this work to

RESTRICTED

express values of the parameter A for RDX/binder/aluminium compositions as a percentage, relative to A = 100 for pure RDX of the same density. This relative percentage value will be referred to as the fragmentation effect of the composition. Any absolute value of A is difficult to interpret in view of the non-ideal nature of the steel container and also of the secondary fragmentation due to primary fragments striking the closed vessel walls.

Two other fragmentation parameters have been considered in earlier work²; the weight-mass parameter, and the ratio parameter. Neither revealed any information about fragmentation not offered by the number-mass parameter and since the latter offers the optimum combination of ease of calculation together with precision of results, it was chosen in the present work to express the experimental data.

It should be noted that the higher the value of the parameter A, the greater is the shattering effect or disruptive performance of the explosive and the smaller are the resulting fragments of the steel casing. The parameter A is thought to be associated with the detonation pressure of an explosive rather than the heat of explosion.

3. EXPERIMENTAL

The procedure and apparatus described in this Memorandum were identical to those used in the R.A.R.D.E. calorimetric method for the determination of heats of explosion¹ except that the washed fragments were retained for mass distribution studies. The term 'heat of explosion' is used here to denote the energy release, measured under the conditions of the experiment, when the explosive charge is detonated. Whilst complete detonation is achieved in these experiments it is considered advisable to reserve the term 'heat of detonation' for the theoretical energy release at the instant of detonation; this heat is modified in practice by the rapid shifts of equilibrium which occur just after detonation. Essentially the procedure consisted of detonating 100g of the explosive in a standard cylindrical casing which was contained in a 10 litre evacuated closed vessel from which the fragments were collected after detonation.

The charges used in this work were all of density 1.63 g/cc and were made up from one inch diameter pellets of explosive. A number of the charges were prepared from experimental RDX/polyurethane/aluminium compositions in which the polyurethane and aluminium content were systematically varied. The other charges were of explosives of current interest, i.e. RDX/wax (91/9 and 88/12), plastic explosive PE4 (88/12), RDX/silicone (88/12), RDX/polyurethane (88/12), Hexal (82/18 RDX/aluminium with 2% graphite), RDX/wax/aluminium (71/9/20 and 73/12/15), PE6/Al (an aluminised version of PE4 containing 15% aluminium and 11% binder) and RDX/polyurethane/aluminium (70/13/17).

The cylindrical casings¹ were made from mild steel BS/STA5/V3 and weighed about one kg. They were 9.7 in long, with $\frac{1}{4}$ in thick walls and an internal diameter of one inch. The casing was threaded at either end to receive two end caps, one of which was drilled so as to allow the insertion of an electric detonator.

RESTRICTED

After detonation the fragments were collected and washed. The two end caps, usually intact, were discarded together with the metal plugs used to fill any space between the charge and the bottom cap. It was also found that more consistent results were obtained if any fragments which included the threaded ends of the casing were also disregarded. These fragments, usually large and readily identifiable, were part of the casing supported by the end caps and not in direct contact with the explosive charge.

The individual fragments were weighed to the nearest 0.1g on a direct reading balance, the larger fragments being chosen visually and weighed first. This weighing process was carried out until all fragments weighing more than or equal to 2g had been weighed. This necessitated weighing many fragments less than 2g in weight to ensure that no fragment weighing 2g or over was overlooked. Fragments weighing less than 2g were bulked together.

4. EVALUATION OF THE NUMBER-MASS PARAMETER

An example of the tabulation and calculation of the mass distribution results is given in Table 1 for a 100g charge of RDX (density = 1.63 g/cc). The weight of all fragments of more than 14g are grouped together as are those weighing less than 2g. The remaining fragments are grouped in mass intervals of 2g, i.e. the number of individual fragments in the mass ranges 14g to 12g, 12g to 10g, etc are given.

The results given in Table 1 exemplify the method of calculation of the number-mass parameter A. The cumulative total number (N) of fragments having a mass greater than or equal to m (where m = 14g, 12g etc down to 2g) is first found and log N plotted against m^2 (Fig.1). The slope of the straight line so obtained gives the value of A, and for the example quoted i.e. RDX of density 1.63 this value was 0.79. In a similar manner the parameter A was determined for the different RDX/binder/Al compositions and the parameter A expressed as a percentage, relative to RDX = 100 at the same density.

The reproducibility of the determination of the parameter A has been determined² for TNT, the coefficient of variation being about 6%. Where replicate results are available for the charges considered here, the reproducibility is slightly worse than this e.g. the results for RDX/10% PU would indicate a coefficient of variation of about 8%. This might indicate some difficulty in preparing pellets of reproducible and homogeneous composition.

5. THE EFFECT OF VARIATIONS OF POLYURETHANE AND ALUMINIUM CONTENT ON FRAGMENTATION

The effects of variations of polyurethane content on fragmentation are shown by the curves in Fig.2 which are based on the results given in Table 2. It can be seen that the fragmentation is decreased by increasing the polyurethane content and the effect is usually greater than would be expected on a straight dilution basis e.g. 10% polyurethane decreased the fragmentation of RDX by 15%.

The effect of variations of aluminium content on fragmentation are shown by the curves in Fig.3 which are based on the results given in Table 3. In general, increasing the aluminium content results in a decrease in the fragmentation but the effect is usually less than would be expected from the amount of aluminium present.

The curves shown in Fig.2 and Fig.3 can be combined in the form of a triangular co-ordinate graph (Fig.4) which shows lines of constant fragmentation effect.

6. THE ESTIMATION OF THE FRAGMENTATION EFFECT OF NEW COMPOSITIONS

The triangular co-ordinate graph (Fig.4) can be used for estimating the fragmentation of compositions containing up to 20% binder and up to 35% aluminium by interpolation between the lines of constant fragmentation effect. Table 3 compares the experimental fragmentations with the fragmentations estimated using Fig.4 and includes data for the experimental series of RDX/polyurethane/aluminium compositions and the other compositions. It can be seen that the value obtained using Fig.4 is quite close to the experimental result, the average error involved being about 4%. The validity of using this graph for RDX/binder/aluminium compositions in general is confirmed by the relevant results for the other compositions. With the possible exception of the silicone composition the use of different inert binders does not significantly affect the fragmentation properties of the explosives.

It should be noted that the fragmentation as described by the parameter A is a small scale measure of performance, determined under standardised conditions and best expressed as a relative value. It would be difficult to apply the results to the prediction of the fragmentation of actual explosive stores without taking into account the scaling laws⁵ which need to be applied to such variables as the weight of explosive, the ratio of weight of explosive to the weight of the whole store, the geometry of the store and the thickness of the casing. It is hoped to investigate the applicability of such scale laws in the future.

7. THE RELATIONSHIP BETWEEN FRAGMENTATION AND OTHER EXPLOSIVE PROPERTIES

7.1 Detonation pressure

The correlation of fragmentation with the theoretically calculated detonation pressure of pure explosives has already been noted². This relationship would be difficult to apply to aluminised RDX/binder compositions because of the problem of calculating the detonation pressure of these explosive mixtures, though there is no reason to suppose the same correlation would not hold good.

The Plate Dent test⁸ has been used as a small scale measure of explosive performance and is considered to give a good indication of the detonation pressure of explosives. In this test the volume of the dent produced in the surface of a steel plate by an 8g pellet of the explosive is related to the volume produced by an 8g

RESTRICTED

pellet of a standard explosive fired on the same plate. The Plate Dent test results for the experimental and the supplementary compositions are given in Tables 4 and 5 respectively, and are expressed relative to RDX = 100, all pellets being of density 1.63 g/cc. In spite of the lack of confinement of the pellets and other experimental differences the agreement between the Plate Dent test and the fragmentation effect is satisfactory.

7.2 Velocity of detonation

A direct relationship between fragmentation and the square of the velocity of detonation (D) should hold good² in the case of pure explosives, because the detonation pressure was calculated from the product 'density $\times D^2$ ', and the density of the different charges did not vary to any great extent. In the case of the RDX/binder/Al charges there are few results available for the compositions and densities involved. The relevant data, obtained from recent and wartime R.A.R.D.E. sources, are shown in Tables 4 and 5 (at charge density 1.63 g/cc). It would appear that whilst an increase in the velocity of detonation is always accompanied by an increase in fragmentation, fragmentation values for RDX/binder compositions appear to be lower than would be indicated by the D^2 values, and the fragmentation values for RDX/aluminium compositions appear to be higher than would be expected. It is possible that the enhanced energy of the aluminised system might play some part in improving the fragmentation.

It can be seen from Table 5 that the RDX/silicone composition has a low velocity of detonation result when compared with the other 88/12 compositions. This is reflected in its low fragmentation and plate dent test result and it is proposed to investigate this effect further.

Work is proceeding on the theoretical prediction of the velocity of detonation of aluminised explosive/binder systems and despite the difficulties of preparing suitable samples it is hoped to accumulate more experimental velocity of detonation data for comparative purposes.

7.3 Heat of explosion

The term 'heat of explosion' as used here refers to the experimental value determined⁴ at R.A.R.D.E. and not to any value calculated from theories of detonation. The data given in Table 4 enable the heat of explosion (H_e) to be compared graphically with fragmentation (Fig.5) the trends being confirmed by the supplementary results in Table 5. In the case of charges containing no aluminium or the same amount of aluminium there seems to be a direct relationship between H_e and fragmentation; both decrease with increase in polyurethane content. The effect of aluminium in amounts greater than 10% is to cause the fragmentation to decrease as the H_e increases.

7.4 Volume of gaseous explosion products

A graphical comparison of the gas volume³ with fragmentation (Fig.6) can be made using the data given in Table 4 and the trends confirmed by the supplementary results in Table 5. A decrease in the volume of the gaseous products is always accompanied by a decrease in the fragmentation. The volume of the explosion

RESTRICTED

products might reasonably be expected to have this effect and, together with the rate of release of energy, (i.e. the velocity of detonation), and the amount of energy released, should make up the more fundamental factors which affect the disruptive performance of an explosive.

8. CONCLUSIONS

The determination of the fragmentation parameter of explosives as an extension of the method used to measure heat of explosion has been applied to aluminised RDX/binder compositions. Whilst compositions based on a polyurethane binder have been mainly considered, work on other compositions indicates that the type of binder used has little effect on fragmentation.

The effect of different amounts of binder and aluminium on the fragmentation has been investigated; the results indicate that both have an adverse effect.

Fragmentation has been compared with other explosive parameters and is considered to be associated with detonation pressure, though other factors such as heat of explosion and volume of gaseous explosive products are also relevant.

The results have been used to construct a triangular co-ordinate graph which can be used to estimate the fragmentation effect of practicable aluminised RDX/binder compositions.

9. REFERENCES

1. H.W. Sexton, A.R.D.E. Report (S) 4/56
2. P. Emmott and L. Cottle, R.A.R.D.E. Memo 34/68
3. P. Emmott and L. Cottle, R.A.R.D.E. Memo 27/68
4. Science of Explosives p.460, Ministry of Supply 1956
5. Science of Explosives p.476, Ministry of Supply 1956
6. P. Emmott and A. Scott-Jupp, R.A.R.D.E. Memo 19/68

RESTRICTED

10. TABLES OF RESULTS

TABLE 1

An example of the fragmentation mass distribution results 100g charge of RDX of density 1.63 g/cc					
Mass range g	Numbers of fragments	Lower mass limit "m" g	Total number of fragments "N"	Log N	$\frac{1}{m^2}$
over 14	2	14	2	0.30	3.73
14-12	1	12	3	0.48	3.46
12-10	2	10	5	0.70	3.16
10-8	5	8	10	1.00	2.83
8-6	7	6	17	1.23	2.45
6-4	28	4	45	1.65	2.00
4-2	54	2	99	2.00	1.41
2-0					
plot of $\frac{1}{m^2}$ against log N gives a straight line having a slope = 0.79 = A					

TABLE 2

Fragmentation effect of experimental RDX composition of varying PU and Al content				
Composition			Number-mass parameter A	Fragmentation (RDX = 100) %
RDX %	PU %	Al%		
100			0.79	100
95	5		0.71, 0.74	92
90	10		0.61, 0.74, 0.64, 0.69	85
87	13		0.62	78
85	15		0.63, 0.60	78
85.5	4.5	10	0.73	92
76	4.0	20	0.64	81
66.5	3.5	30	0.53	67
81	9	10	0.62	79
72	8	20	0.52	66
63	7	30	0.45	57
76.5	13.5	10	0.54	68
68	12	20	0.42	53
59.5	10.5	30	0.28	35
90		10	0.78, 0.79	99
80		20	0.63, 0.74	87
70		30	0.58, 0.53	70

RESTRICTED

TABLE 3

Comparison of actual fragmentation with predicted value					
Composition			Measured fragmentation (RDX = 100)	Estimated fragmentation using Graph 4	Error %
RDX %	Binder %	Al %			
100	0	0	100	100	0
95	5 (PU)	0	92	94	2
90	10 (PU)	0	85	86	1
87	13 (PU)	0	78	80	2
85	15 (PU)	0	78	76	2
85.5	4.5 (PU)	10	92	91	1
76	4.0 (PU)	20	81	81	0
66.5	3.5 (PU)	30	67	66	1
81	9 (PU)	10	79	80	1
72	8 (PU)	20	66	68	3
63	7 (PU)	30	57	55	3
76.5	13.5 (PU)	10	68	66	3
68	12 (PU)	20	53	54	2
59.5	10.5 (PU)	30	35	-	-
90	0	10	99	99	0
80	0	20	87	90	3
70	0	30	70	73	4
91	9 (Wax)	0	87	88	1
88	12 (Wax)	0	80	83	4
88	12 (PE4)	0	89	83	7
88	12 (Silicone)	0	76	83	9
88	12 (PU)	0	82	83	1
82	Hexal	18	87	89	2
71	9 (Wax)	20	67	66	1
73	12 (Wax)	15	67	64	4
74	11 (PE6)	15	70	67	4
70	13 (PU)	17	53	56	6

RESTRICTED

TABLE 4

Comparison of fragmentation with other explosive properties of experimental RDX/PU/Al compositions							
Composition			Fragmentation (RDX = 100)	Heat of explosion cals/g	Volume of gas ml/g	Plate dent RDX = 100	Velocity of detonation km/sec
RDX %	PU %	Al %					
100	0	0	100	1345	858	100	8.4
95	5	0	92	1280	860	98	8.3
90	10	0	85	1190	866	90	8.3
87	13	0	78	1159	860		8.0
85	15	0	78	1130	860	68	8.0
85.5	4.5	10	92	1473	830		
76	4.0	20	81	1645	746		
66.5	3.5	30	67	1842	580		
81	9	10	79	1386	835		
72	8	20	66	1628	742		
63	7	30	57	1867	559		
76.5	13.5	10	68	1288	848		
68	12	20	53	1552	749		
59.5	10.5	30	35	1732	580		
90	0	10	99	1550	837	93	7.8
80	0	20	87	1750	746	83	7.2
70	0	30	70	1950	574	67	6.6

TABLE 5

Comparison of fragmentation with other explosive properties of the other compositions							
RDX %	Composition		Fragmentation (RDX = 100)	Heat of explosion cal/g	Volume of gas ml/g	Plate dent RDX = 100	Velocity of detonation km/sec
	binder %	Al %					
91	9 (Max)	0	87	1223	823	90	8.3
88	12 (Max)	0	80	1177	826	79	8.3
88	12 (PE4)	0	90	1195	872	83	8.3
88	12 (Silicone)	0	76	1243	823	72	7.8
88	12 (PU)	0	82	1184	826	80	8.2
82	Hexal	18	87	1715	742	75	7.3
71	9 (Max)	20	67	1660	762	49	7.2
73	12 (Max)	15	67	1518	802	50	7.6
74	11 (PE6)	15	70	1511	823	67	7.6
70	13 (PU)	17	53	1430	780	50	7.5

RESTRICTED

FIG. I

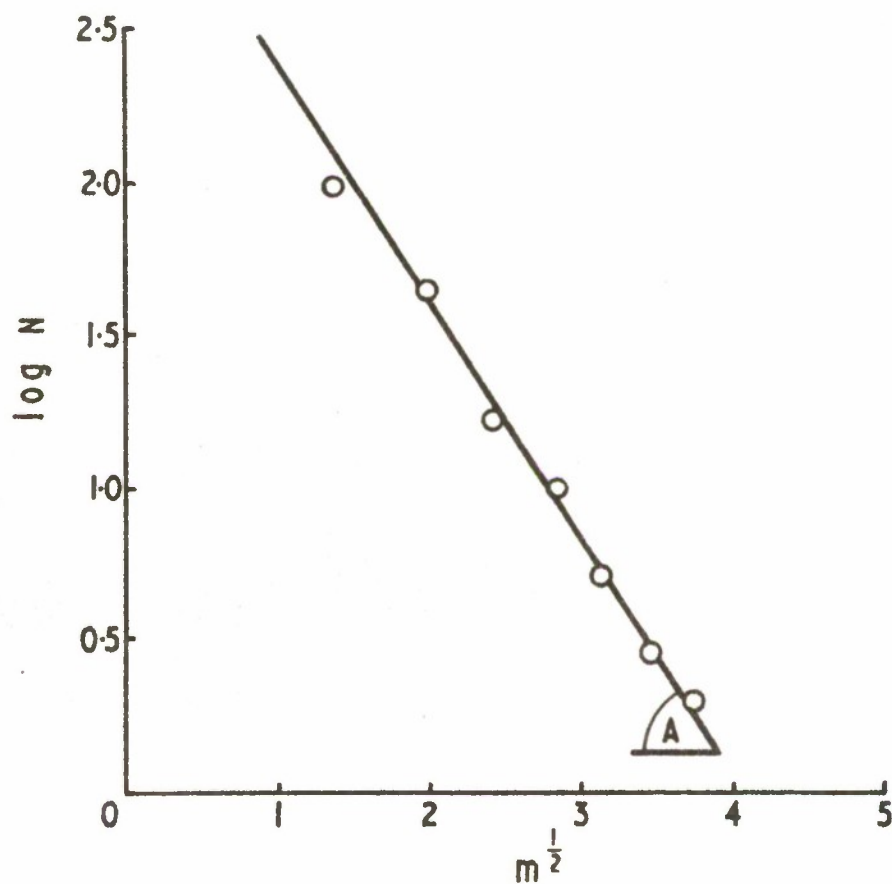


FIG. I NUMBER - MASS PARAMETER $\hat{A}$
(100 g RDX CHARGE)

RESTRICTED

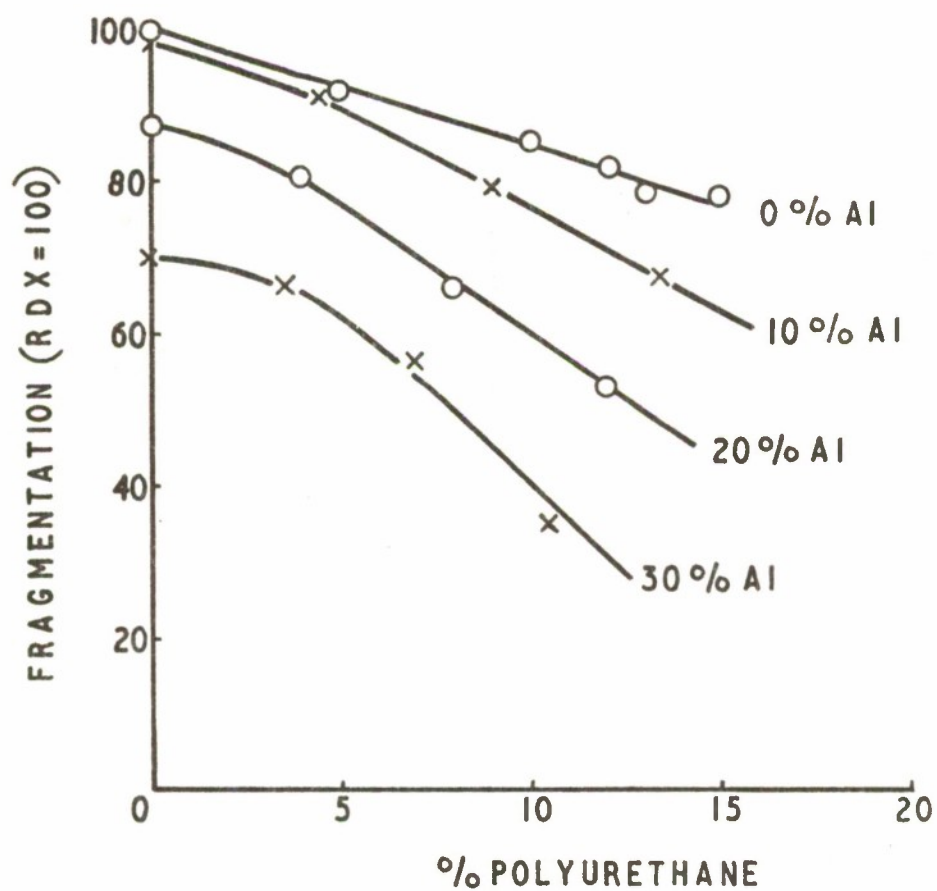


FIG.2 THE EFFECT OF VARIATIONS OF
POLYURETHANE CONTENT ON FRAGMENTATION


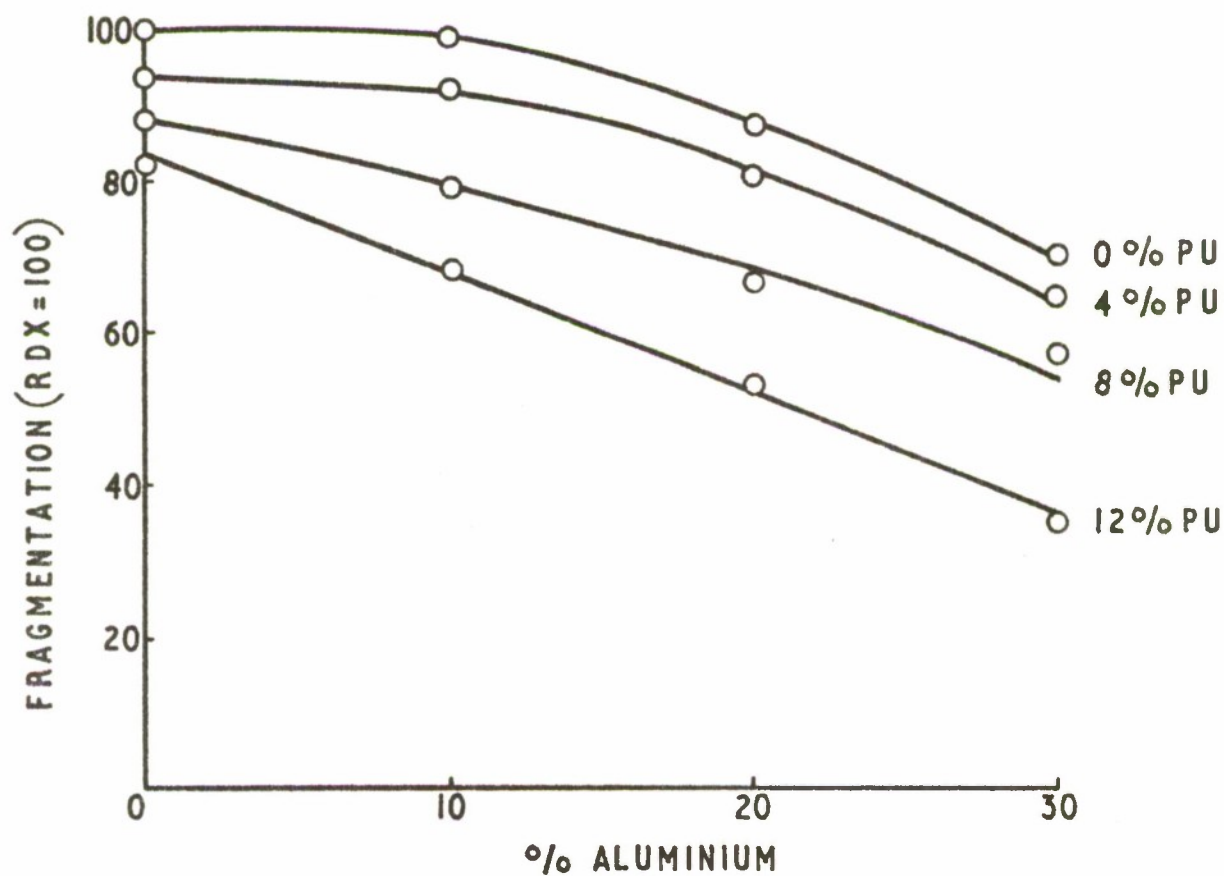


FIG.3 THE EFFECT OF VARIATIONS OF ALUMINIUM
CONTENT ON FRAGMENTATION

RESTRICTED

FIG.4

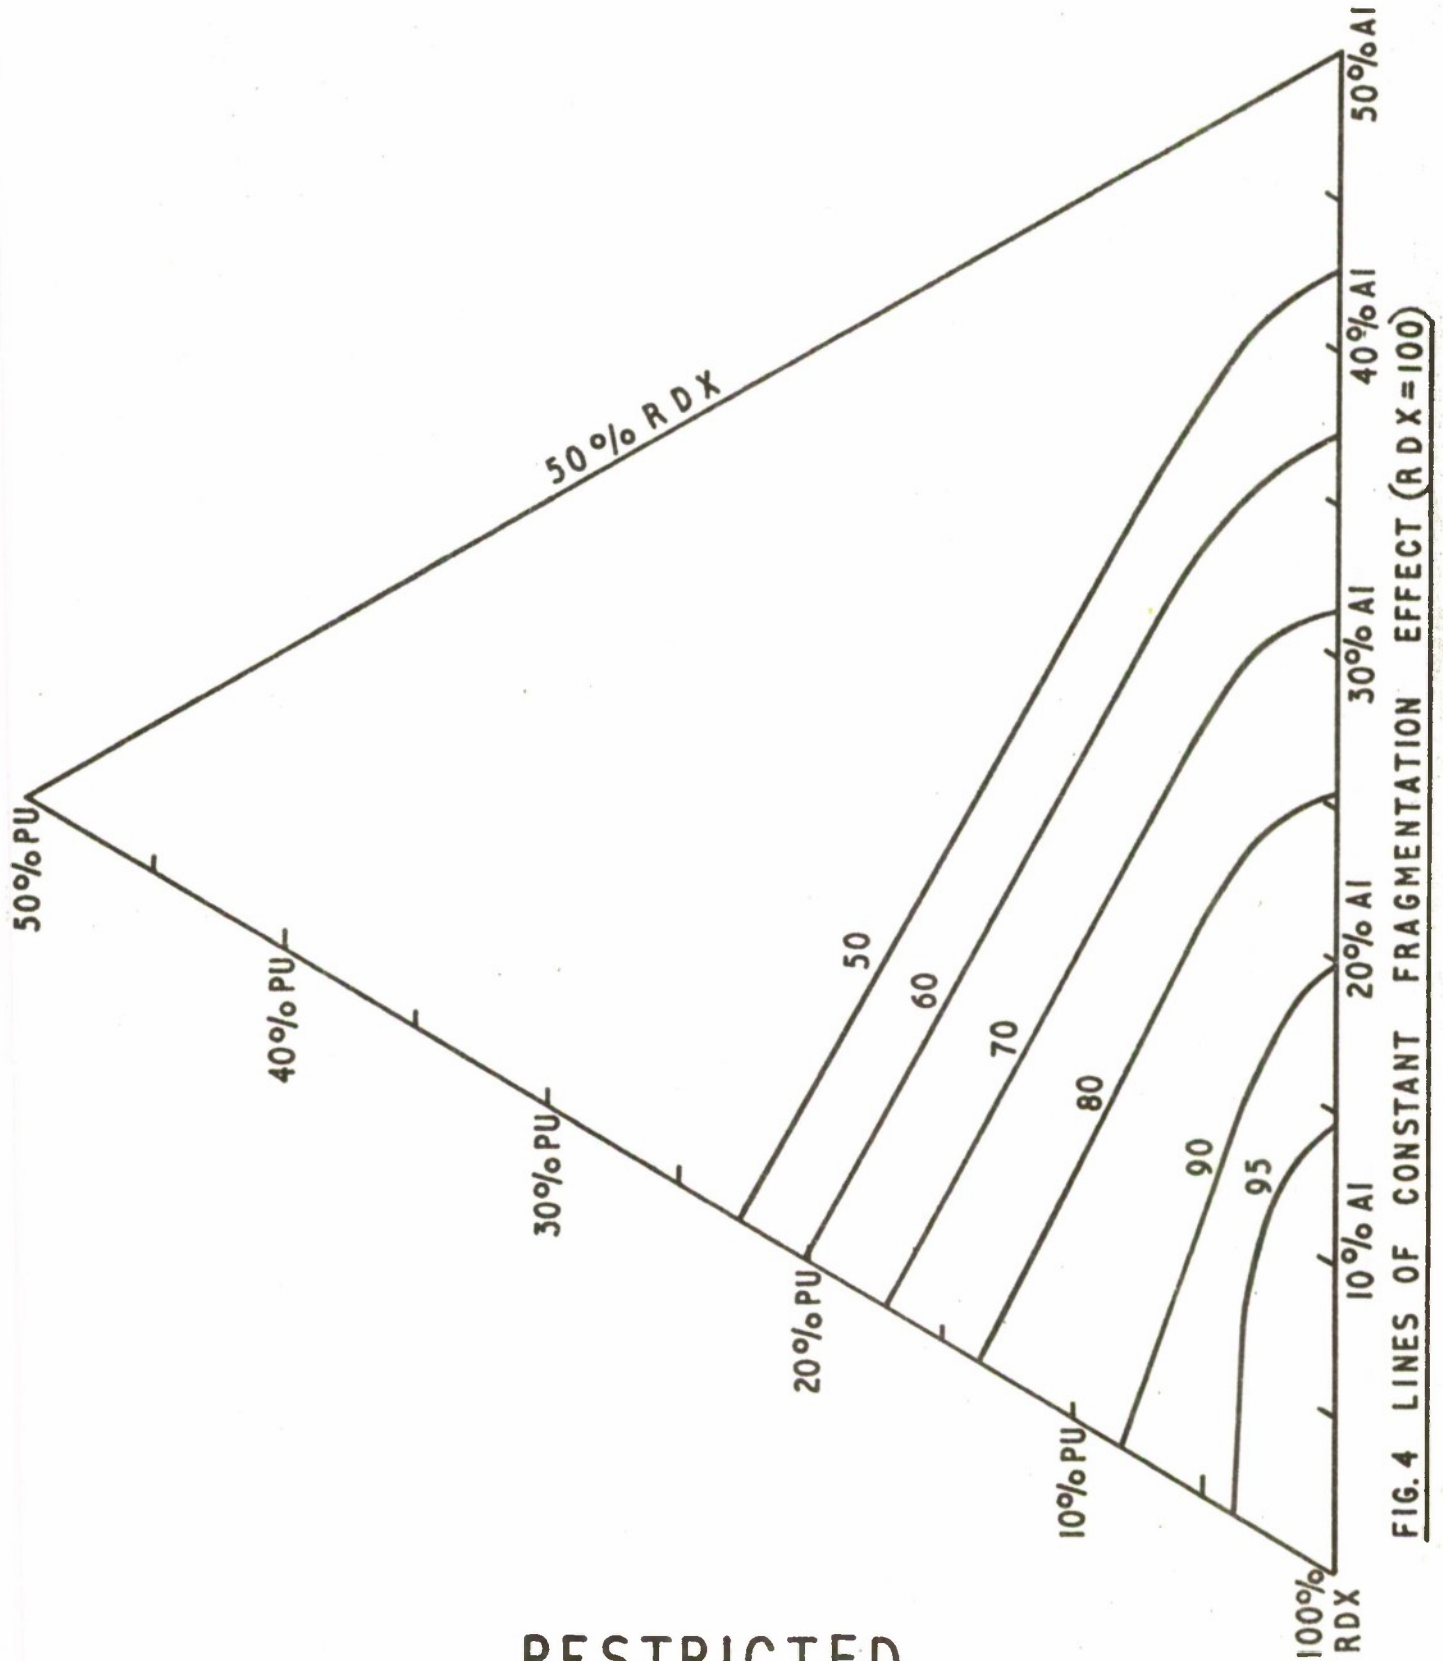

RESTRICTED

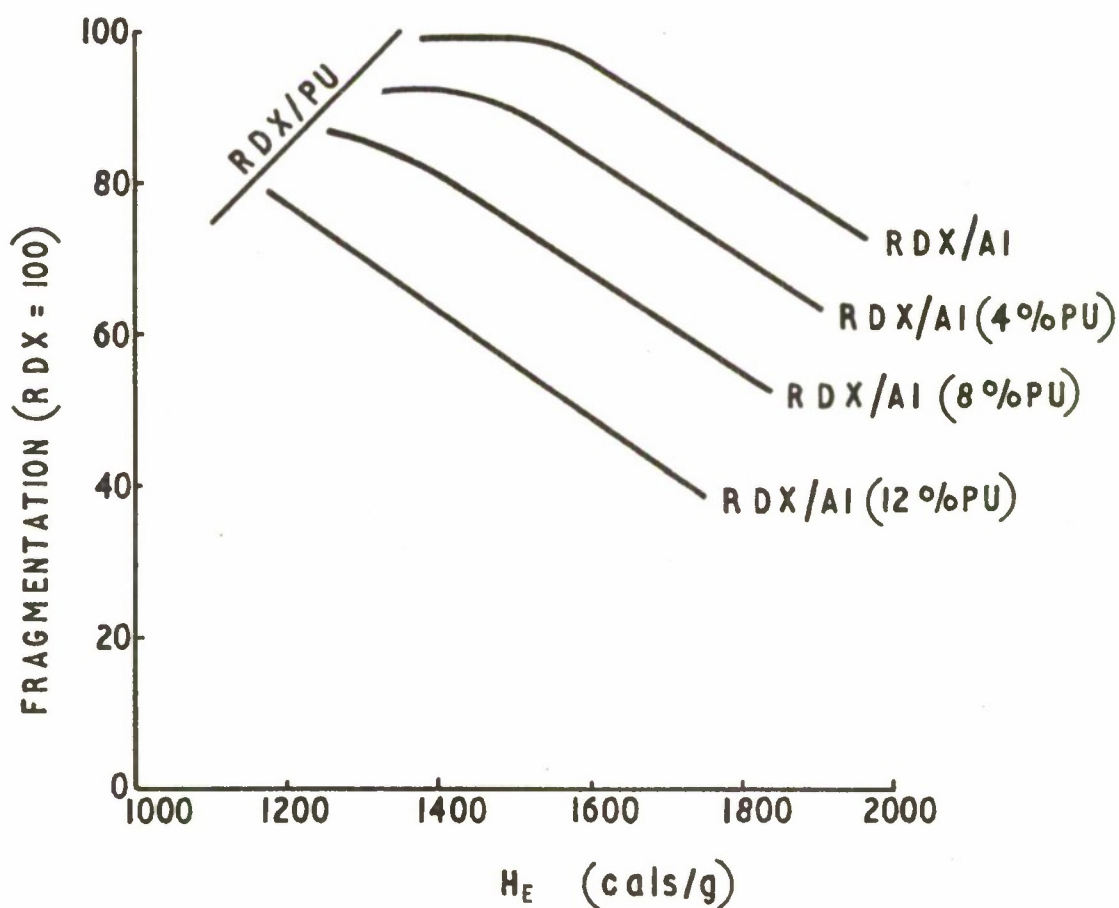


FIG. 5 HEAT OF EXPLOSION AND FRAGMENTATION

RESTRICTED

FIG.6

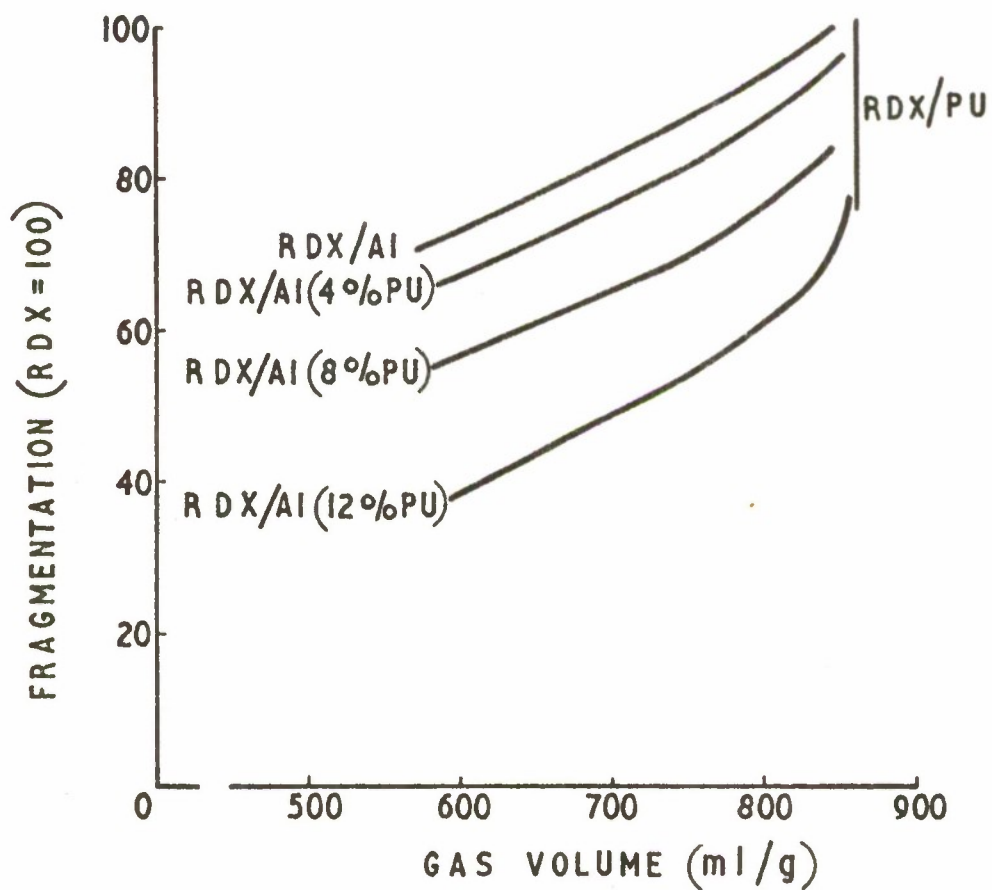


FIG. 6 VOLUME OF GAS PRODUCED AND
FRAGMENTATION

RESTRICTED

RESTRICTED Ministry of Defence Royal Armament Research and Development Establishment R.A.R.D.E. Memorandum 15/70 662.2 RDX/Al: 678.664: 623.565.32: 662.21 April 1970 A small scale study of the fragmentation effect of aluminised RDX/binder compositions. P. Emmott, L. Cottle The shattering effect of charges of various aluminised RDX/polyurethane and other high explosive compositions has been evaluated in terms of a fragmentation parameter derived from the mass distribution of the fragments of the metal casings used to contain the charges. The effect of variations in the proportions of the explosive components has been investigated and the data used to estimate the fragmentation effect of practical compositions. The relationship between the fragmentation and other explosive properties of these compositions has been studied. 10 pp. 6 figs. 5 tabs. 6 refs. RESTRICTED	RESTRICTED Ministry of Defence Royal Armament Research and Development Establishment R.A.R.D.E. Memorandum 15/70 662.2 RDX/Al: 678.664: 623.565.32: 662.21 April 1970 A small scale study of the fragmentation effect of aluminised RDX/binder compositions. P. Emmott, L. Cottle The shattering effect of charges of various aluminised RDX/polyurethane and other high explosive compositions has been evaluated in terms of a fragmentation parameter derived from the mass distribution of the fragments of the metal casings used to contain the charges. The effect of variations in the proportions of the explosive components has been investigated and the data used to estimate the fragmentation effect of practical compositions. The relationship between the fragmentation and other explosive properties of these compositions has been studied. 10 pp. 6 figs. 5 tabs. 6 refs RESTRICTED
RESTRICTED Ministry of Defence Royal Armament Research and Development Establishment R.A.R.D.E. Memorandum 15/70 662.2 RDX/Al: 678.664: 623.565.32: 662.21 April 1970 A small scale study of the fragmentation effect of aluminised RDX/binder compositions. P. Emmott, L. Cottle The shattering effect of charges of various aluminised RDX/polyurethane and other high explosive compositions has been evaluated in terms of a fragmentation parameter derived from the mass distribution of the fragments of the metal casings used to contain the charges. The effect of variations in the proportions of the explosive components has been investigated and the data used to estimate the fragmentation effect of practical compositions. The relationship between the fragmentation and other explosive properties of these compositions has been studied. 10 pp. 6 figs. 5 tabs. 6 refs. RESTRICTED	RESTRICTED Ministry of Defence Royal Armament Research and Development Establishment R.A.R.D.E. Memorandum 15/70 662.2 RDX/Al: 678.664: 623.565.32: 662.21 April 1970 A small scale study of the fragmentation effect of aluminised RDX/binder compositions. P. Emmott, L. Cottle The shattering effect of charges of various aluminised RDX/polyurethane and other high explosive compositions has been evaluated in terms of a fragmentation parameter derived from the mass distribution of the fragments of the metal casings used to contain the charges. The effect of variations in the proportions of the explosive components has been investigated and the data used to estimate the fragmentation effect of practical compositions. The relationship between the fragmentation and other explosive properties of these compositions has been studied. 10 pp. 6 figs. 5 tabs. 6 refs. RESTRICTED



*Information Centre
Knowledge Services
[dstl] Porton Down,
Salisbury
Wiltshire
SP4 0JQ
Tel: 01980-613753
Fax 01980-613970*

Defense Technical Information Center (DTIC)
8725 John J. Kingman Road, Suit 0944
Fort Belvoir, VA 22060-6218
U.S.A.

AD#: 399780
Date of Search: 12 December 2006

Record Summary:

Title: A small scale study of the fragmentation effect of aluminised
RDX/binder compositions
Covering dates 1970 Apr 01 - 1970 Apr 30
Availability Open Document, Open Description, Normal Closure before FOI
Act: 30 years
Former reference (Department) RARDE Memorandum 15/70
Held by The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website
(<http://www.nationalarchives.gov.uk>) and found the document is available and
releasable to the public.

Access to UK public records is governed by statute, namely the Public
Records Act, 1958, and the Public Records Act, 1967.
The document has been released under the 30 year rule.
(The vast majority of records selected for permanent preservation are made
available to the public when they are 30 years old. This is commonly referred
to as the 30 year rule and was established by the Public Records Act of
1967).

This document may be treated as **UNLIMITED**.

U.K. Restricted
RESTRICTED

The information given in this document is not to be communicated either directly or indirectly to the Press or to any person not authorised to receive it.

U.K. Restricted

RESTRICTED

