

AD-A076 836 NAVAL POSTGRADUATE SCHOOL MONTEREY CA F/G 3/2
SOLAR ENERGY DESIGN IMPROVEMENT: A METHODOLOGY FOR HYDRONIC FLA--ETC(U)
SEP 79 L W KOZOYED

UNCLASSIFIED NL

1 OF 3
AD A076836

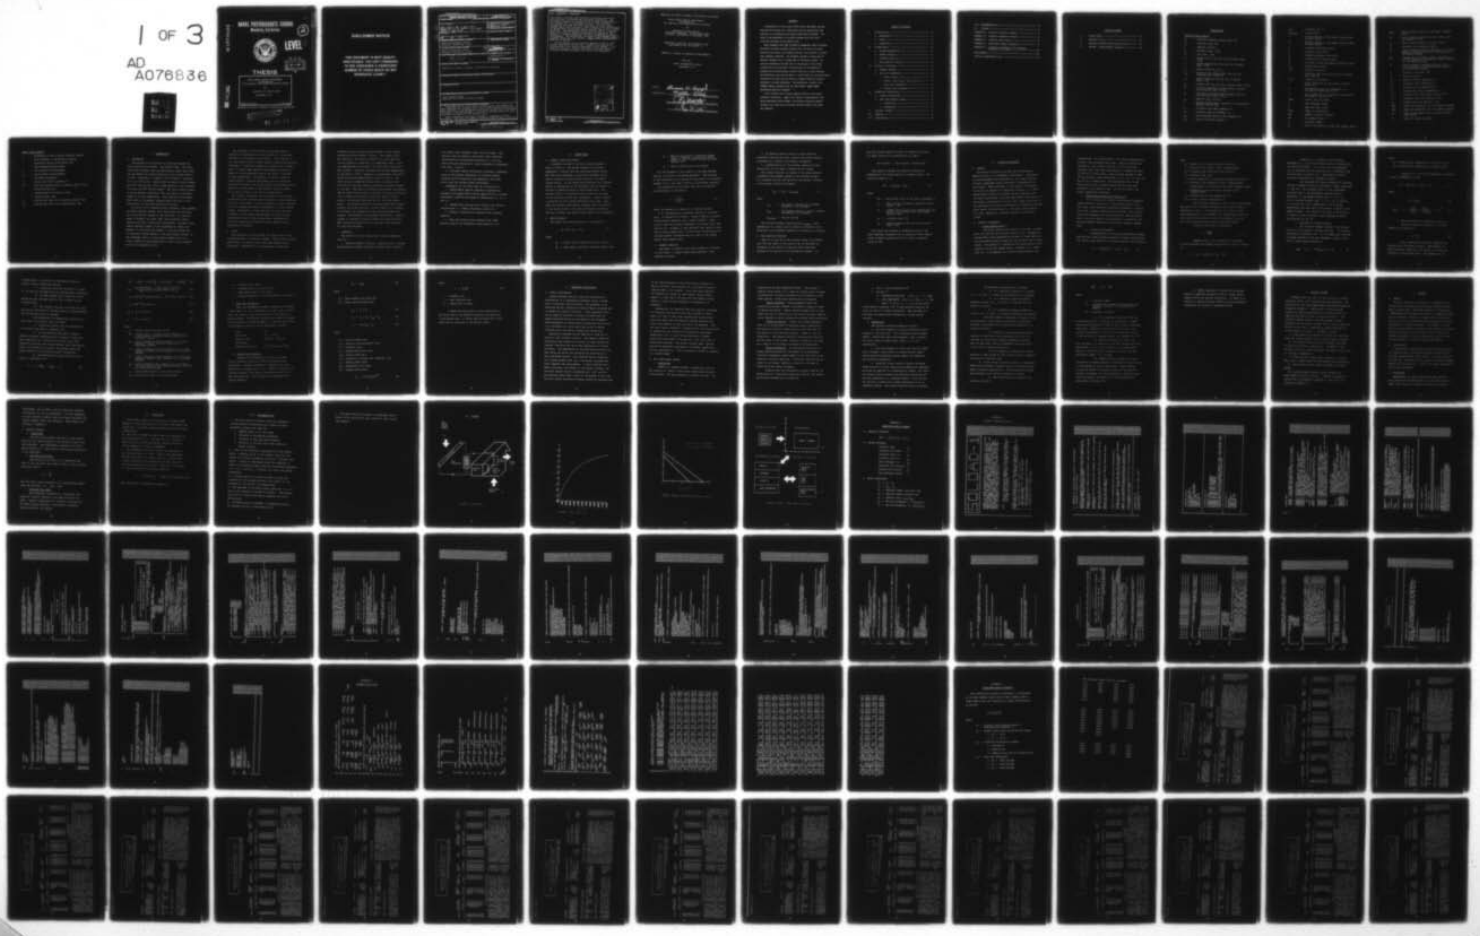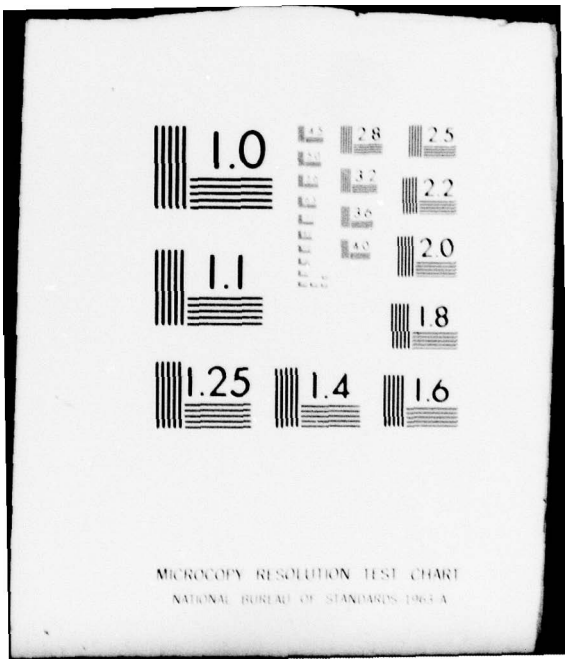


1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A

AD A076836

NAVAL POSTGRADUATE SCHOOL
Monterey, California

(2)

LEVEL II

DDC
RECEIVED
NOV 16 1979
B

THESIS

SOLAR ENERGY DESIGN IMPROVEMENT:
A METHODOLOGY
FOR HYDRONIC FLAT PLATE COLLECTOR SYSTEMS

by

Lawrence William Kozoyed

September 1979

Thesis Advisor: M. Kelleher

Approved for public release; distribution unlimited.

DDC FILE COPY

THIS DOCUMENT IS BEST QUALITY PRACTICABLE
THE COPY FURNISHED TO DDC CONTAINED A
SIGNIFICANT NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

79 11 14 008

DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DDC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. / 3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle): Solar Energy Design Improvement: A Methodology For Hydronic Flat Plate Collector Systems	5. TYPE OF REPORT & PERIOD COVERED: Master's Thesis; September 1979
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s): Lawrence William Kozoyed	8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS: Naval Postgraduate School, Monterey, California 93940	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS: Naval Postgraduate School, Monterey, California 93940	12. REPORT DATE: Sep[redacted]79 / 13. NUMBER OF PAGES: 234
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	15. SECURITY CLASS. (of this report): Unclassified / 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Solar Energy Design
Hydronic Flat Plate Collector Systems

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A methodology for solar energy system design improvement has been developed and coupled with a constrained function optimization code resulting in an automated solar energy system design procedure. The scope of the methodology is limited to systems using flat plate collectors and water as the working fluid.

Eight parameters have been included as independent design variables. The design variables included collector area, collector

DD FORM 1 JAN 73 1473 (Page 1) EDITION OF 1 NOV 65 IS OBSOLETE S/N 0102-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

2521450

#20 - ABSTRACT - CONTINUED

tilt angle, collector and storage fluid stream velocities, and collector to storage heat exchanger dimensions. The procedure includes an accounting for economic parameters as an intimate part of the design process. The resulting methodology has been used for the design of solar energy systems which would use shelf item collectors for the purposes of determining the optimum design variable vector for a given situation. The methodology could also be used on a limited basis for collector design optimization by exploring the effects of changing selected collector parameters on system performance. The methodology is coded in the FORTRAN computer language under the name SOLOAD-1 (SOLAR ENERGY OPTIMAZATION ANALYSIS OR DESIGN).

Initial system trials indicate complete stability with minimal constraint activations. Based on the results of approximately fifty design experiments using SOLOAD-1, new findings concerning optimum collector tilt angle and an incariant optimum collector flow factor are suggested.

ACCESSION for
NTIS White Section ☑
DDC Buff Section ☐
UNANNOUNCED ☐
JUSTIFICATION
BY
DISTRIBUTION/AVAILABILITY CODES
Dist. and/or SPECIAL
A

Approved for public release; distribution unlimited.

Solar Energy Design Improvement: A Methodology For Hydronic Flat Plate Collector Systems

by

Lawrence William Kozoyed
Lieutenant Commander, United States Navy
B.S.E.P., University of Oklahoma, 1965

Submitted in partial fulfillment of the requirements for the degree of

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL

September 1979

Author Lawrence W. Kozoyed

Approved by: Matthew Kelleher
Thesis Advisor

R. J. Marto
Chairman, Department of Mechanical Engineering

William M. Tolles
Dean of Science and Engineering

ABSTRACT

A methodology for solar energy system design improvement has been developed and coupled with a constrained function optimization code resulting in an automated solar energy system design procedure. The scope of the methodology is limited to systems using flat plate collectors and water as the working fluid.

Eight parameters have been included as independent design variables. The design variables included collector area, collector tile angle, collector and storage fluid stream velocities, and collector to storage heat exchanger dimensions. The procedure includes an accounting for economic parameters as an intimate part of the design process. The resulting methodology has been used for the design of solar energy systems which would use shelf item collectors for the purposes of determining the optimum design variable vector for a given situation. The methodology could also be used on a limited basis for collector design optimization by exploring the effects of changing selected collector parameters on system performance. The methodology is coded in the FORTRAN computer language under the name SOLOAD-1 (SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN).

Initial system trials indicate complete stability with minimal constraint activations. Based on the results of approximately fifty design experiments using SOLOAD-1, new findings concerning optimum collector tilt angle and an invariant optimum collector flow factor are suggested.

TABLE OF CONTENTS

I. INTRODUCTION ---------- 12

A. BACKGROUND ---------- 12

B. SCOPE ---------- 13

C. OBJECTIVES ---------- 14

II. SYSTEM MODEL ---------- 16

A. SYSTEM DESCRIPTION ---------- 16

B. ENERGY BALANCE ---------- 16

C. ECONOMIC ANALYSIS ---------- 17

D. THE OBJECTIVE FUNCTION ---------- 18

III. SYSTEM OF EQUATIONS ---------- 20

A. GENERAL SUMMARY ---------- 20

B. SPECIFIC PARAMETERS ---------- 20

1. Annual Energy Load, Q_L ---------- 20

2. Annual Solar Energy Load Fraction, $\bar{f}$ --- 21

3. Fuel Cost Parameters ---------- 27

4. System Cost Parameters ---------- 27

IV. NUMERICAL OPTIMIZATION ---------- 30

A. SIMPLE OPTIMIZATION ---------- 30

B. THE COPES/CONMIN SYSTEM ---------- 31

1. Terminology ---------- 31

2. Methodology ---------- 33

V. SOLOAD-1 SYSTEM ---------- 37

VI. RESULTS ---------- 38

VII. CONCLUSIONS ---------- 40

VIII. RECOMMENDATIONS ---------- 41

IX. FIGURES ---------- 43

APPENDIX A: Subroutine Analiz Summary ---------- 47

APPENDIX B: SOLOAD-1 Computer Program ---------- 48

APPENDIX C: SOLOAD-1 Data Files ---------- 70

APPENDIX D: Experiment Report Summaries ---------- 76

APPENDIX E: Potential Correlation for Optimum Collector Flow Rate ---------- 228

BIBLIOGRAPHY ---------- 231

INITIAL DISTRIBUTION LIST ---------- 233

LIST OF FIGURES

1. System Model ---------- 43

2. Typical $\bar{f}$ vs A_c ---------- 44

3. Typical Collector Efficiency Curves ------- 45

4. SOLOAD - COPES/CONMIN Interface ---------- 46

NOMENCLATURE

English Letter Symbols

A_r - load heat transfer surface area, ft^2

A_c - collector area, ft_c^2

C - capacity, Btu/hr F

C_c - collector cost, $\$/ft_c^2$

C_f - fuel cost, \$/Btu

C_i - system initial cost per unit collector area, $\$/ft_c^2$

C_I - system installation cost per unit collector area, $\$/ft_c^2$

C_L - system lifecycle cost, \$

C_{pp} - system annual pumping power cost per unit collector area, $\$/ft_c^2$ yr

C_s - system lifecycle cost per unit collector area, $\$/ft_c^2$

C_{tk} - storage tank cost per unit collector area, $\$/ft_c^2$

C_v - lifecycle operation and maintenance cost per unit collector area, $\$/ft_c^2$

C_x - collector to storage heat exchanger cost per unit collector area, $\$/ft_c^2$

c_p - specific heat, Bty/lb F

d - monthly diffuse solar insolation on a horizontal surface, Btu/ft^2 mon

d_i - collector loop inner diameter, ft

d_o - collector loop out diameter, ft

d_{xi} - heat exchanger annulus inner diameter, ft

D_{in} - value of the solar energy, \$

D_{out} - lifecycle cost, $

$D_{storage}$ - net savings, $

$\bar{f}$ - annual fraction of the energy load provided by solar energy

f_i - monthly fraction of the energy load provided by solar energy

F' - collector efficiency factor

F" - collector flow factor

F_m - system maintenance cost factor

F_r - collector heat removal factor

F_r' - collector to heat exchanger efficiency factor

F_i' - present worth factor

$F(\bar{X})$ - objective function

G - collector loop flow rate per unit collector area, gpm/ft_c^2

$G_j(\bar{X})$ - inequality constraint

I - solar insolation on a horizontal surface, Btu/hr ft^2

I_o - extraterrestrial solar insolation on a horizontal surface, Btu/hr ft^2

I_t - solar insolation on a surface tilted towards the equator, Btu/hr ft^2

ICALC - control flag for COPES

L - heat exchanger length

$\dot{m}$ - mass flow rate, lb/hr

NCON - number of constraints

NDV - number of design variables

NPV - net present value, $

q - iteration number

Q_e - rate of utilization of auxiliary energy, Btu/hr

Q_{hex} - rate of energy transfer at the heat exchanger, Btu/hr

Q_L - rate of energy transfer from the load to the environment, Btu/hr

Q_u - rate of useful energy collection, Btu/hr

R - collector tilt correction factor

R_d - ratio of monthly diffuse insolation on a tilted surface to the monthly direct insolation on a horizontal surface

$\bar{R}_D$ - average ratio of monthly direct insolation on a tilted surface to the monthly direct insolation on a horizontal surface

R_o - ratio of monthly reflected radiation on a tilted surface to the monthly total radiation on a horizontal surface

s - collector tilt angle, deg

$\bar{S}$ - search direction

T_a - ambient climatic temperature, F

T_i - collector inlet temperature, F

T_o - collector outlet temperature, F

T_s - storage tank outlet temperature, F

U_L - collector loss coefficient, Btu/hr ft^2 F

v_c - collector loop flow velocity, ft/hr

v_s - storage loop flow velocity, ft/hr

VLB_i - lower side constraint for i-th design variable

VUB_i - upper side constraint for i-th design variable

W_p - rate of work energy used to maintain system flow, Btu/hr

$\bar{X}$ - vector of deisgn variables

Greek Letter Symbols

α - absorptance of the collector absorber surface

α^* - move parameter in optimization problem

δ - declination angle of the earth, deg

ε - heat exchanger effectiveness

ζ_1 - 1st collector flow parameter

ζ_2 - 2nd collector flow parameter

η - collector efficiency

κ^* - unique flow factor (optimum F")

κ^{**} - flow rate proportionality constant, gpm hr F/Btu

ρ - ground reflectivity

τ - transmittance of collector covers

ϕ - latitude angle, deg

ω_s - sunrise hour angle for horizontal surface, deg

$\omega_{s'}$ - sunrise hour angle for tilted surface, deg

I. INTRODUCTION

A. BACKGROUND

The control and utilization of energy has become the major issue of this decade: the energy crises. The inflation rate of energy costs and particularly fossil fuel costs has the spector of uncontrollability as this decade comes to a close. Reference [1] reports a 30% increase in the price of oil in 1978 alone. Reports from the media in early September 1979 indicate the price of home heating oil has incresed 70% since the 1978 heating season. The crisis center appears to be an emerging realization that the supply of available energy is in fact exhaustible. This realization has spread from a few to the masses; unquestionably the fruit of the Organization of Petroleum Exporting Countries.

In June of 1979, President Carter proposed to the Congress an energy strategy whereby solar energy would be providing 20% of the Nation's energy by the year 2000. For the purposes of domestic hot water (DHW) and residential space heating this goal is technically achievable. The basic solar energy technical theory is well documented by Duffie and Beckman [2] and Kreith and Kreider [3] and the technology is continually being updated in the Solar Energy Journal [4]. The increased effort in solar energy research work is in clear evidence as the documentation in this journal appears to be on an exponential rise.

The treatment of solar energy system performance is typically a determination of the fraction of a given heat load which is provided by solar energy. This fraction, $\bar{f}$, is a nonlinear function of many system variables but typically increases in a monotonic fashion as a function of collector area. To simply seek maximum $\bar{f}$ and maximum collection of energy in an unconstrained fashion can result in extreme initial system costs. Accordingly, in order to assure a proper balance, technical performance and cost should be considered throughout the design process and economics should become an intimate part of the technical design problem; not an after thought at the end of system design.

The economic ingredient in the problem of solar energy system design has received little attention in the literature. In view of this there is little information in the literature on how to proceed with design improvement of a solar energy system. Accordingly, a broad objective for this work was to develop a solar energy system model including economic considerations and to seek system design improvement by using the resulting eco-technical model together with an optimization algorithm.

B. SCOPE

The conversion of solar energy into useful work covers a broad spectrum of collection schemes. These include thermal, photovoltaic, biological, wind, and ocean thermal energy conversion. Reference [5] is an excellent introductory

information source covering many methods of solar energy conversion and has become a classic. This thesis effort was limited to the thermal conversion of solar radiation for the purpose of generating low temperature heat. Since low temperatures are involved, only flat plate collectors were studied. Flat plat collectors can provide temperatures on the order of 200° F compared to concentrating collectors which can provide temperatures as high as 6700° F. The restrictions on temperature were chosen in keeping with availability analysis; matching the solar conversion system to its task. The task of providing high entropy, low quality DHW and space heating energy is matched with low availability (i.e., minimum utilization of available energy in high quality, low entropy forms such as oil, gas, and central power). The collector working fluid was restricted to water. Further, since the collection of solar energy is a stochastic process, only analysis for long term performance was studied. The analysis of the dynamic performance of specific systems in response to hourly climatic data has previously been conducted by Kline et al [6] and now forms the basis for long term analysis.

C. OBJECTIVE

The objective of this thesis was to develop methodologies for:

1. System synthesis including a determination of optimum system design variables including collector area, collector

tilt angle, heat exchanger sizes, and flow rates. This analysis would be based on using shelf item collectors characterized by performance parameters $F_r\tau\alpha$ and F_rU_L which have been determined by tests conducted in accordance with refs. [7 and 8].

2. Collector design optimization including a determination of the optimum combination of collector design variables such as materials and geometries; and which would yield the optimum system performance.

Fundamental to the effort was the utilization of:

1. COPES/CONMIN (Control Program for Engineering Synthesis with Constrained Function Minimization), a design improvement algorithm developed by Vanderplaats [9, 10, 11 and 12].

2. Standardized long term solar energy load fraction correslations (f - CHART) developed by Kline [6].

3. Economic considerations combined with technical analysis.

4. Long term climatic data obtained from (NOAA) National Oceanic and Atmospheric Administration [13].

II. SYSTEM MODEL

A. OVERALL SYSTEM DESCRIPTION

A schematic diagram of the solar heating system is shown in Figure 1. The system consists of four heat exchangers, a storage tank and associated system piping. The first heat exchanger is called the collector and is used to transform incident solar radiation into useful thermal energy. At the second heat exchanger the collected energy is transferred to the secondary loop and stored in the form of sensible energy in the storage tank. The sensible energy is transferred from storage to the loads via the third and fourth heat exchangers. Energy transfer is achieved via four forced convection flow loops. This model was further simplified by assuming total utilization of the energy stored in the tank and thereby eliminating the need to detail the DHW and space heating heat exchangers.

B. ENERGY BALANCE

The steady state power balance for the system is

$$Q_u + W_p + Q_e = Q_L \qquad (1)$$

where,

Q_u = Useful rate of energy collection (Btu/hr)

W_p = Work energy utilized to maintain system flow

Q_e = Rate of utilization of auxiliary energy which is required in addition to solar energy in order to meet the DHW and space heating load

Q_L = Rate of energy loss by the system

For the purposes of this thesis, it has been assumed that W_p is a known or estimated parameter. Most analyses in the literature do not account for W_p since it is typically assumed to be a very small fraction of the energy required.

The percentage of the energy load which is supplied by solar energy is defined as:

$$\bar{f} = \frac{\sum_i Q_{u_i}}{\sum_i Q_{L_i}} \qquad (2)$$

where the summation is taken over 12 monthly values.

$\bar{f}$ is a monotonically increasing function of collector area. No optimum $\bar{f}$ is evident. Figure 2 depicts a typical $\bar{f}$ distribution resulting from a design problem. Since initial costs are strongly dependent on collector area (see Section III), attempts to seek maximum $\bar{f}$ can result in very high initial system costs. At this point the motivation to include economic considerations as a part of the system design model become clear.

C. ECONOMIC ANALYSIS

The matter of economics has been treated as it evolved in this study: a simple common sense approach. This approach includes:

1. An economic equation which utilizes technical parameters obtained from mass, momentum and energy balance considerations together with economic parameters.

2. Standardization of the economic equation by characterization of all terms in present dollar values.

The economic analysis is similar to an energy balance. Considering the economic system as the monetary account of a consumer and the time period as the economic lifetime of the energy conversion equipment:

$$D_{in} = D_{out} + D_{storage} \qquad (3)$$

where,

D_{in} = The value if dollars of the energy produced by the equipment

D_{out} = The expense dollars to obtain, operate and maintain the equipment

$D_{storage}$ = The net savings

The rational consumer seeks maximum $D_{storage}$. This methodology is a simple capital budgeting technique and is contained in any standard reference in accounting or finance.

D. THE OBJECTIVE FUNCTION

Implicit in the use of the economic model is an assumption that the terms in the equation can be expressed as variables of the technical functions which have been defined by the physics of the engineering problem. For

the solar energy system utilized for domestic hot water and space heating the transformation is simple:

$$\text{Net Savings} = \text{Fuel Savings} - \text{System Costs}$$

This equation becomes the objective function by standardizing all dollar amounts to present values. The resulting equation is:

$$NPV = \bar{f} Q_L C_f F_i' - A_c C_s \qquad (4)$$

where,

NPV = Net present value of the solar investment, \$

C_f = Fuel cost for the energy replaced by solar energy, \$/Btu

F_i' = Present worth factor which standardizes fuel savings during system life into present dollars, years

A_c = Collector area, ft_c^2

C_s = System lifecycle cost per unit collector area, $\$/ft_c^2$

The effort now proceeds to determining each of the above dependent parameters and to obtaining those combinations of these variables which will result in maximum values of NPV.

III. SYSTEM OF EQUATIONS

A. GENERAL

The objective function has been fully developed by examining each of its parameters individually. Completion of this development has resulted in a non linear function of eight independent design variables; a hypersurface in eight space. When formulated in this manner, the problem is clearly not amenable to analytical solution. In a very simple manner however the problem can be interfaced with the design improvement algorithm COPES/CONMIN (see Section IV). The primary contribution for this effort comes from Kline [6] who developed the f-chart correlations for determining monthly solar energy load fractions f_i. The annual load fraction $\bar{f}$ is then computed by a weighted average of the monthly values.

B. SPECIFIC PARAMETERS

1. Annual Energy Load, Q_L

The annual energy load consists of two basic ingredients; the DHW load and the space heating load. Assuming an average mean ground temperature the month to month DHW load was considered constant except for the variation due to month length. The methods for determining the space heating loads typically follow the ASHRAE manual, reference [14]. Reference [15] is recommended as a text for space heating load

computations. For the purposes of this study representative building loss parameters were used. Typical building conductance or $(UA)_r$ values of 30,000, 20,000 and 10,000 (Btu/deg F day) have been used based on a standard building of 1750 ft^2 of floor area, a heat transfer surface of 5000 ft^2 and building loss coefficients, U_r, of .25, .17, and .09 Btu/ft^2 hr F respectively. The conductance, UA, is the space heating load at design conditions which has been estimated in the manner of Ref. [14] and divided by the design temperature difference.

2. Annual Solar Energy Load Fraction, $\bar{f}$

$\bar{f}$ is a function of collector performance parameters, thermal physical properties of the working fluids, fluid flow rates, heat exchanger performance parameters, collector tilt angle, climatic conditions and latitude. The climatic conditions determine the load distribution (heating degree days), the solar energy flux distribution (insolation) and the environmental stress on the collector (ambient temperature).

a. Collector Performance

A determination of collector performance proceeds from the well known collector equation of Hottel and Whillier [16] which is the result of an energy balance on the collector:

$$Q_u = F_r U_L A_c (IR\tau\alpha - U_L(T_i - T_a)) \qquad (5)$$

where,

Q_u = Useful rate of energy collection (Btu/hr)

F_r = Collector heat removal factor (dimensionless)

U_L = Collector loss coefficient (Btu/hr ft^2 F)

A_c = Collector area (ft_c^2)

I = Solar insolation on a horizontal surface (Btu/hr ft^2)

R = Collector tilt correction factor (dimensionless)

τ = Transmittance of collector cover system (dimensionless)

α = Absorptivity of the collector absorber plate (dimensionless)

T_i = Collector fluid inlet temperature (F)

Ta = Climatic ambient temperature (F)

The analytical expressions for F_r and U_L are complex and result from a lengthy development which can be found in references [2 and 3]. The computation of F_r and U_L using these expressions is not necessary for system design analysis using shelf item collectors since the parameters F_rU_L and $F_r\tau\alpha$ can be obtained from collector efficiency tests.

Collector efficiency is defined as:

$$\eta = \frac{Q_u/A_c}{IR} \qquad (6)$$

Assuming that U_L is not sensitive to changes in the environment and combining equations (4) and (5) results in:

$$\eta = F_r\tau\alpha - F_rU_L((T_i - T_a) / IR) \qquad (7)$$

Equation (7) is linear in the collector parameter $(T_i - T_a)/IR$ and forms the basis for determining collector performance. It is clear that the parameter $F_r U_L$ is obtained from the slope and $F_r \tau\alpha$ is obtained from the intercept of equation (6). Some typical curves of collector efficiency are included in Figure 3.

Two standards have been developed for collector testing to measure collector performance, namely references [7] and [8]. The standards differ in the independent variables used in the performance characterization. Reference [7] the ASHRAE standard uses $T = T_i - T_a$; ref [8] the NBS standard uses $T = (T_i + T_o)/2$, where T_o is the collector outlet temperature. All collector performance test data used in this effort is based on the ASHRAE standard. All collector data used in this effort is based on actual collector tests conducted by NAVFAC and reported via ref [17].

b. Collector to Storage Coupling

The collector becomes coupled to the storage tank via the collector to storage heat exchanger following the method of de Winter [20]. It is assumed that the rate of energy transfer at the heat exchanger is equal to the rate of useful energy collection:

$$Q_{hex} = Q_u = \varepsilon(\dot{m}c_p)_{min} (T_o - T_s) \qquad (8)$$

where,

T_o = Maximum system temperature or collector outlet

T_s = Minimum system temperature or storage outlet.

Equations (5) and (8) are combined to eliminate T_i and T_o dependence to give:

$$Q_u = F'_r U_L (IR\tau\alpha - U_L(T_s - T_a)) \tag{9}$$

where,

$$F'_r = F_{hex} F_r \tag{10}$$

$$F_{hex} = \left\{1 + \frac{F_r U_L A_c}{(\dot{m}c_p)_c} \left[\frac{(\dot{m}c_p)_c}{\varepsilon(\dot{m}c_p)_{min}} - 1 \right] \right\}^{-1} \tag{11}$$

c. Solar Insolation at Optimum Tilt Angle, I_t

The solar radiation intensity on a tilted surface is by definition:

$$I_t = IR \tag{12}$$

Solar insolation is typically measured and reported for a horizontal surface. Improvements in a solar collector installation are sought by tilting the collector to the optimum angle. The computation for

optimum angle is iterative for each design situation. Several rules of thumb have evolved:

(1) Collectors should be oriented at a slope of .9 times the latitude angle for maximum annual collection.

(2) For DHW systems where loads vary little during the year the best angle of tilt is equal to the latitude angle.

(3) The optimum collector tilt angle for least cost per Btu delivered for building heating is approximately the latitude angle plus 15 degrees.

The methodology for determining collector tilt angle used in this effort was as follows:

(1) Horizontal monthly data was obtained for 97 locations from NOAA in reference [13].

(2) An algorithm was developed to compute monthly horizontal extraterrestrial radiation intensities. This computation is a function of latitude, daily hour angles on horizontal and tilted surfaces, daily declination angle, and collector tilt angle. The azimuth angle was always chosen for a due south collector orientation.

(3) The methodology follows that of Liu and Jordan in reference [19]:

$$R = (1 - \frac{d}{I})\bar{R}_D + \frac{d}{I} R_d + R_\rho \qquad (13)$$

$$\frac{d}{\bar{I}} = 1.3903 - 4.0273\left(\frac{\bar{I}}{\bar{I}_o}\right) + 5.5315\left(\frac{\bar{I}}{\bar{I}_o}\right)^2 - 3.108\left(\frac{\bar{I}}{\bar{I}_o}\right)^3 \quad (14)$$

$$R_d = \frac{\omega_s' \sin(\phi-s)\sin\delta + \cos(\phi-s)\cos\delta\sin\omega_s'}{\omega_s \sin\phi\sin\delta + \cos\phi\cos\delta\sin\omega_s} \quad (15)$$

$$\omega_s' = \min[\cos^{-1}(-\tan(\phi-s)\tan\delta),\ \cos^{-1}(-\tan\phi\tan\delta)] \quad (16)$$

$$\omega_s = \cos^{-1}[-\tan\phi\tan\delta] \quad (17)$$

$$R_d = \frac{1}{2}(1 + \cos s) \quad (18)$$

$$R = \frac{1}{2}(1 - \cos s)\rho \quad (19)$$

where,

R = monthly slope correction factor

$\bar{R}_D$ = average ratio of monthly direct radiation on a tilted surface to monthly direct radiation on a horizontal surface

R_d = ratio of monthly diffuse radiation on a tilted surface to monthly diffuse radiation on a horizontal surface

R_ρ = ratio of monthly reflected radiation on a tilted surface to monthly total radiation on a horizontal surface

$\frac{d}{\bar{I}}$ = ratio of monthly diffuse radiation on a horizontal surface to monthly total radiation on a horizontal surface

$\frac{\bar{I}}{\bar{I}_o}$ = ratio of monthly total radiation on a horizontal surface to monthly total extraterrestrial radiation on a horizontal surface

ω_s = sunrise hour angle on a horizontal surface

ω_s' = sunrise hour angle on a tilted surface

s = collector tilt angle

ϕ = latitude angle at collector site

δ = declination angle of the earth

ρ = ground reflectance for area adjacent to collector.

3. Fuel Cost Parameters

Fuel cost parameters included a selection from among 3 fuel types (i.e. oil, electricity, or gas), unit of issue cost, fuel heating value and efficiency of the auxiliary heating system. The SOLOAD-1 system allows complete freedom in the selection of these parameters. A typical set of fuel cost parameters used in a design experiment included:

Fuel:	Oil
Unit Cost:	.9 ($/Gal)
Heating value:	142,000 (Btu/Gal)
Efficiency:	.7
Resulting Fuel Cost:	C_f = \$9.05 per 10^6 Btu

4. System Cost Parameters

System cost considerations typically include initial costs and life cycle costs for operation and maintenance. Detailed guidance for complete cost considerations is included in ref. [3]. Further, reference [20] contains guidance to be used in determining costs for US Navy installations. The following cost parameters were used in SOLOAD-1:

$$C_L = A_c C_s \tag{20}$$

where,

C_L = Total system life cycle cost

C_s = Total cost per square foot

$$C_s = C_i + C_v \tag{21}$$

$$C_i = C_c + C_I + C_{tk} + C_x \tag{22}$$

$$C_v = F_i'(C_i F_m + C_p) \tag{23}$$

where,

C_i = Initial system cost

C_v = Operation and maintenance costs

C_c = Collector cost

C_I = System installation cost

C_{tk} = Storage tank costs

C_x = Collector to storage heat exchanger costs

C_p = Pumping power costs

F_m = Maintenance cost factor

F_i' = Present worth factor

$$F_i' = \frac{1 - (1 + i')^{-N}}{i'} \tag{24}$$

where,

$$i' = \frac{i - j}{1 + j} \tag{25}$$

i = Discount rate

j = Fuel inflation rate

N = System life in years

It should be noted that F_i' occurs explicitly in the first term of the objective function and implicitly in the second term. It should also be noted that initial costs are not amortized in the SOLOAD-1 model.

IV. NUMERICAL OPTIMIZATION

A. SIMPLE OPTIMIZATION

Design problems typically seek the minimization or maximization of an appropriate parameter within a framework of constraint specifications. The parameter to be optimized may be a function of several design variables and is termed the objective function. Other parameters which may be separate functions of design variables must not exceed specified bounds for the design to be acceptable. These parameters are termed design constraints and are not to be confused with limits which may be set on design variables which are usually termed side constraints.

Engineering problems can be numerically coded for an analysis (once through) solution. The simplest scheme for optimization may consist of a series of loops through the computer code which may cycle many combinations of design variables. The combination of variables which provides the best design and which also satisfies the constraints is then considered optimum. This approach may be economical for a design problem with just a few design variables and short computer time requirements. A design problem with 3 design variables, ten values for each design variable, and one-tenth seconds central processing unit (CPU) time for each analysis would take a total of 100 seconds of CPU time. The solar energy optimization design problem as characterized

by the code developed by this thesis has a minimum of 8 design variables; each analysis of its objective function requires about 2 CPU seconds. Using the simple approach and assuming ten values for each design variable would result in a CPU time of 68 years for each design problem. Clearly, a more rational approach to optimization is necessary.

Vanderplaats [9] suggested that many special algorithms for numerical optimization have been proposed in recent years, but that in many cases unsuspecting practitioners find their particular optimization problem unsolved only after large amounts of time and effort are expended. This can occur usually because of inexperience by the practitioner in determining the limitations of specified algorithms. Vanderplaats [10, 11, and 12] has developed a FORTRAN coded algorithm capable of optimizing a very wide class of engineering problems. The system includes COPES (Control Program for Engineering Synthesis) and CONMIN (Constrained function Minimization). This optimization system is referred to as COPES/CONMIN.

B. THE COPES/CONMIN SYSTEM

1. Terminology

CONMIN is a FORTRAN program in subroutine form for the solution of linear or non-linear constrainted optimization problems. The user prepares an analysis program. The

program must be named SUBROUTINE ANALIZ. The process of computer aided design or of trade off studies with a minimum of man-machine interaction becomes fully automated via the COPES program. Three basic definitions are required:

Design Variables. Those parameters which the optimization program (CONMIN) is allowed to change in order to improve the design. Design variables appear only on the right hand side of equations in the analysis program (ANALIZ). Limits imposed on design variables are termed side constraints.

Objective Function. Usually the single parameter which is to be minimized or maximized during optimization. The objective function always occurs on the left side of the equation in the analysis program. (Refer to [12] for exceptions.) The equation defining the objective function may be linear or non-linear, implicit or explicit, but must be a function of the design variables to be meaningful.

Design Constraints. Any parameter which must not exceed specified bounds for the design to be acceptable. Constraint parameters always appear on the left side of the constraint function equations. Constraint functions may be linear or non-linear, implicit or explicit, but must be functions of the design variables.

Assuming that the optimization process requires the maximization of a particular objective function, the general optimization problem can be stated as:

a. Find: $\bar{X}$ which maximizes $f(\bar{X})$

b. Subject to:

(1) CONSTRAINT EQUATIONS $G_j(\bar{X}) \leq 0$, $j = 1, NCON$

(2) SIDE CONSTRAINTS $VLB_i \leq X_i \leq VUB_i$, $i = 1, NDV$

Where, $\bar{X} = \bar{X}(X_1, X_2, \ldots, X_n)$ is the vector of NDV design variables, $F(\bar{X})$ is the objective function and $G_j(\bar{X})$ are the set of NCON constraints. VLB_i and VUB_i are the lower and upper bounds respectively on each design variable.

2. Methodology

The solution process proceeds as follows:

a. The user prepares an analysis subroutine which defines $\bar{X}$, $F(\bar{X})$ and $G_j(\bar{X})$. This subroutine must be named ANALIZ. ANALIZ must have three segments; input, analysis and output keyed to COPES flags, ICALC = 1, 2, or 3 respectively.

b. The user prepares an input data file for COPES which includes a wide variety of system options, appropriate matching mechanisms between ANALIZ and CONMIN and the constraint boundaries.

c. Using the initial vector of design variables COPES obtains an initial solution from ANALIZ and subsequent solutions by updating $\bar{X}$ as determined by CONMIN. Any analysis solution which satisfies the constraint equations and the side constraints is a feasible design. If an analytical solution violates any of these constraints it is an infeasible design. The minimum feasible design is optimal.

The feasibility determination includes:

(1) If a constraint equation is violated (i.e., if $G_j(\bar{X}) > 0$) then the jth constraint is violated.

(2) If a constraint equation equality condition is met (i.e., if $G_j(\bar{X}) = 0$) then the jth constraint is active.

(3) If a constraint equation condition is met (i.e., if $G_j(\bar{X}) < 0$) then the constraint is inactive.

Note that CONMIN is designed to minimize objective functions; the process of maximizing an objective function is concerned with minimizing the negative of an objective function.

(4) Similarly, side constraints may be inactive or active but side constraints will never be violated in a particular analysis computation because they are specified limits not dependent variables which is the case for design constraints.

(5) All inequality conditions are represented by a band around the zero condition due to computer limitations in defining zero.

d. If the initial analysis solution is infeasible CONMIN moves towards a feasible solution by adjusting the design variables appropriately. The optimization process then proceeds in an iterative fashion as follows:

(1) The iterations are governed by the recursion relation:

$$\overline{X}^{q+1} = \overline{X}^{q} + \alpha^{*}\overline{S}^{q}$$

where,

q = iteration number

α^* = a scalar move parameter which defines the distance of travel in the direction of search

$\overline{S}$ = direction of search

(2) $\overline{S}$ is determined such that $\overline{F}(\overline{X})$ will be minimized without violating any constraints. CONMIN calculates the gradient of $\overline{F}(\overline{X})$ by using finite difference techniques. Because no constraints are violated, the greatest improvement in $F(\overline{X})$ will be realized by moving in the direction of steepest ascent, the gradient of $F(\overline{X})$.

(3) Once the directive is known, the move parameter, α^*, which will allow the largest magnitude improvement in $F(X)$ is to be found. A one dimensioned search of the $\overline{S}$ direction is carried out until the best improvement number, α^*, is found.

(4) CONMIN utilizes methods other than the method of steepest descent in determining $\overline{S}$ particularly in the presence of active constraints. These methods include the method of conjugate directions developed by Fletcher and Reeves [21] and the method of feasible directions developed by Zoutendijh [22] and implemented by Vanderplaats and Moses [23].

e. CONMIN continues to iterate for an optimal design by computing successive $\overline{S}$ and α^* values always keeping within the defined constraints. If there is no relative or absolute change in $\overline{F}(\overline{X})$ for three successive iterations, the optimum is considered found.

V. SOLOAD-1 SYSTEM

A FORTRAN coded algorithm for the analysis of systems containing shelf item collectors has been developed. The algorithm has been named SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN (SOLOAD-1). The portions of the algorithm reserved for design optimization of collectors were not completed and have not been included in SOLOAD-1. The interface between SOLOAD-1 and COPES/CONMIN has been developed via the Control Program (CP-67) and the Cambridge Monitor System (CMS) a time-sharing system developed for the IBM System 360 Model 67. SOLOAD-1 includes:

A. Three executive programs to provide the interfaces among the system elements and to initiate design problems.

B. An analysis subroutine which includes the system of equations covered in Section III. A summary of the objective function, design variables, and design constraints is included in Appendix A.

C. Three auxiliary subroutines including a calendar data array, climatic data and user defined input parameters.

D. Data files for user input to SOLOAD-1 and COPES/CONMIN.

The interface among SOLOAD-1 system elements and COPES/CONMIN is shown in Figure 3. SOLOAD-1 programs and subroutines are included in Appendix B. Data files are included in Appendix C.

VI. RESULTS

A. GENERAL

The first objective of developing a methodology for the analysis of systems with previously defined collector design was achieved. The second objective of developing a methodology for optimizing the collector component design was not achieved. However, it appears that the potential exists for using the system analysis methodology to obtain improvements in collector design. For example, if cost data on various types of collector cover plates or collector absorber surfaces can be correlated with collector performance parameters, then the system model could be used for quick checks on collector design improvements.

B. VERIFICATION

A single design problem was selected and started using 10 different sets of the starting design variable vector. The same optimal design result within ± 0.5% was achieved for each run. This was the only actual verification deemed possible at this time due to lack of any known optimization data in the literature.

C. EXPERIMENTS

Approximately 50 design experiments were analyzed. Each problem was characterized by a unique identification number which could tie together the location, economic

environment, the collector, and the space heat transfer coefficient, UA, for the experiment. For each experiment an input parameter summary report and output parameter and results summary report was generated. These reports are included in Appendix D.

D. SPECIFIC RESULTS

1. Constraints

The only active design constraint in most experiments was the tube thickness in the collector loop at the heat exchanger. Some experiments resulted in no active design constraints. There were no active side constraints in any experiment.

2. Collector Flow Factor

The collector flow factor F" is defined as the ratio of the collector heat removal factor to the collector efficiency factor:

$$F'' = \frac{F_r}{F'}$$

The flow factor result obtained in all optimization experiments was the same. $F'' = .948 \pm .008$.

3. Collector Tilt Angle

Each experiment conducted for a particular geographical location resulted in the same collector tilt angle. However, experiments for different locations but the same latitude resulted in significantly different optimum collector tilt angles.

VII. CONCLUSIONS

A. The SOLOAD-1 system in conjunction with COPES/CONMIN appears to offer the potential for further improvement and potentially a valuable automated technique for solar energy system design.

B. The "rule of thumb" typically used for collector tilt angle optimization (i.e., latitude plus 15°) should be used with caution since preliminary results indicate a strong tendency for climatic dependency.

C. The uniqueness of the flow factor was suggested by the continued result of .948 ± .008 for each experiment. Pending confirmation by further testing it appears that a simple correlation for determining optimum collector loop flow rates may be available. Based on a flow factor of 0.948 the resulting correlation would be:

$$G = .01955\ F_r U_L \quad (\text{gpm/ft}^2 \text{ of collector area})$$

This correlation is developed in Appendix E.

VIII. RECOMMENDATIONS

A. The basic model of SOLOAD-1 should be upgraded to include specific characterization instead of simple parameter selection and input for:

1. Pumping power in all four loops
2. Inclusion of the DHW heat exchanger
3. Inclusion of the space heat exchanger
4. Inclusion of building loss coefficients as a design variable.

B. Prior to any additional experiments with the present model, a complete survey of the industry should be conducted for collector parameters and costs. Following this survey, a series of experiments should be conducted in search of correaltions among collector performance parameters (i.e., $F_r(\tau\alpha)$ and F_rU_L), collector unit costs, and system performance.

C. A larger sample size should be used to verify the uniqueness of the optimum collector flow factor (F") as suggested by the results of 50 experiments.

D. The remainder of the NOAA climatic data bank (i.e., 67 more cities) should be included in SOLOAD-1. The optimum collector tilt angle could then be computed for the 97 NOAA regions.

E. The model should be upgraded to accommodate analysis for systems with air as the working fluid.

F. The model should be upgraded to accommodate amortization of the installation cost instead of just initial cash payment.

IX. FIGURES

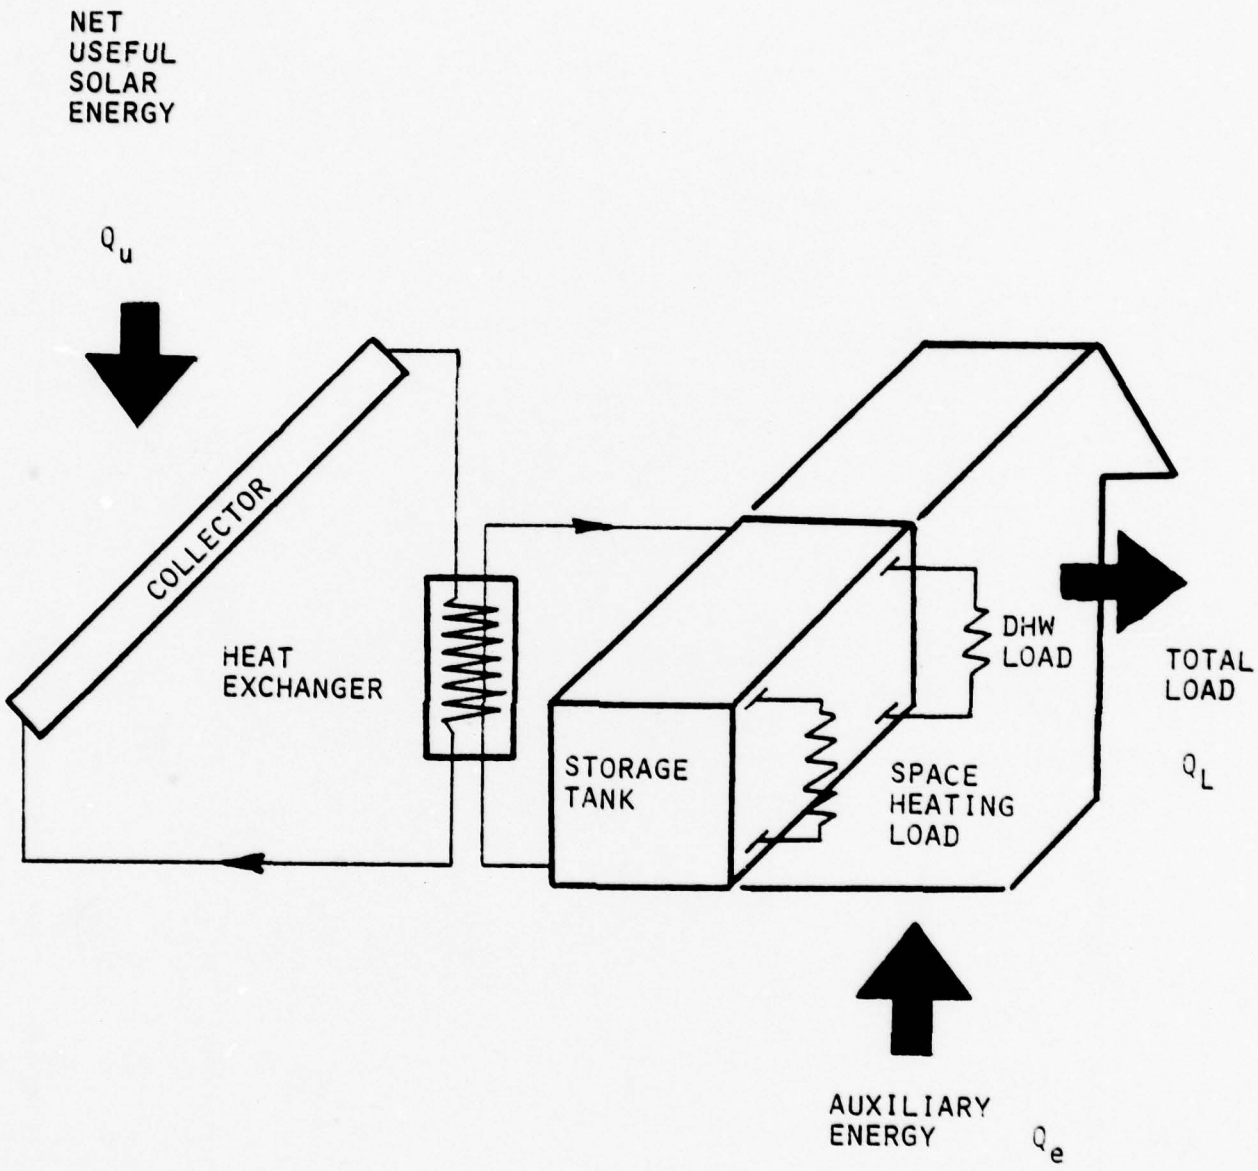


FIGURE 1 System Model

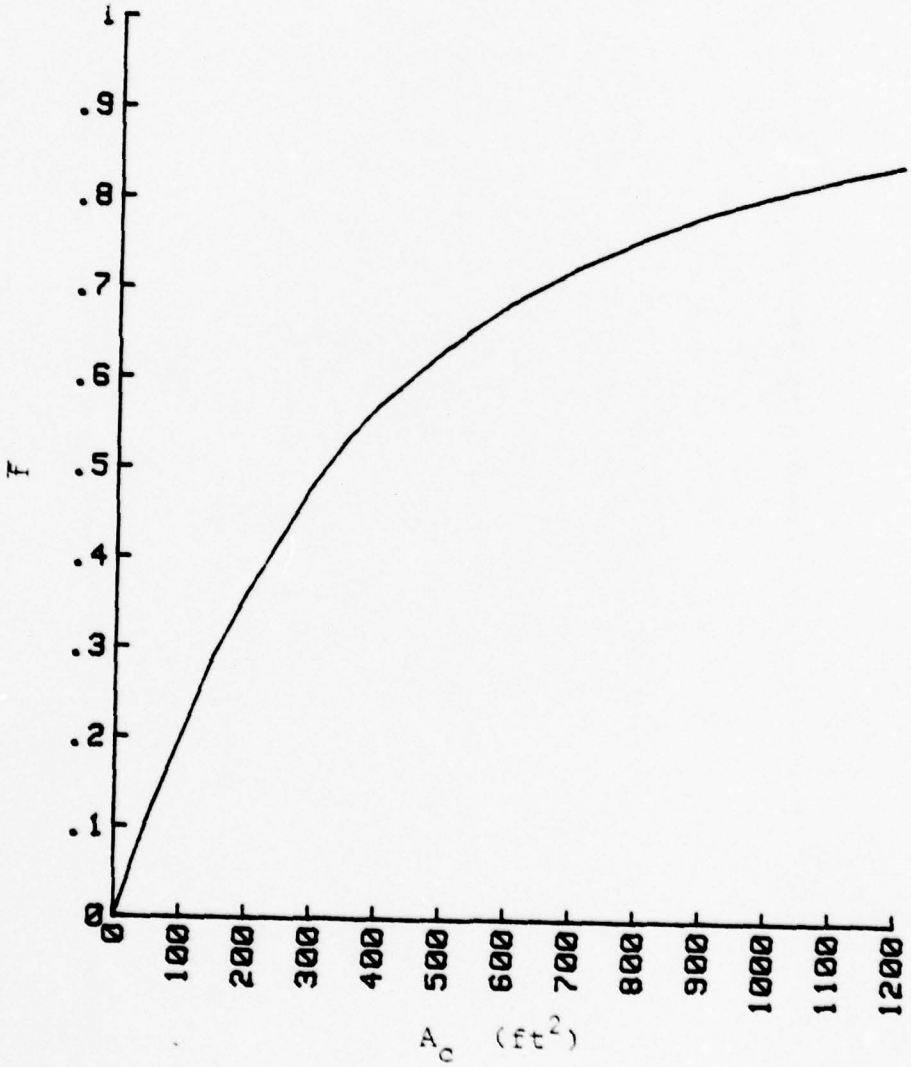


FIGURE 2 Typical $\bar{F}$ vs A_c

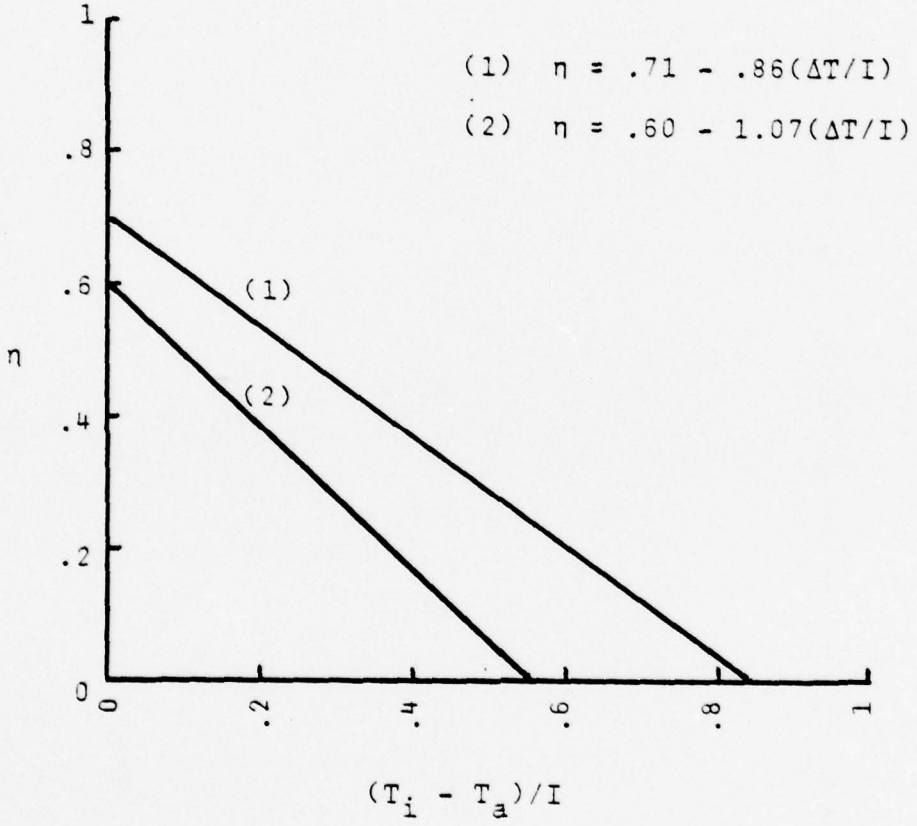


FIGURE 3 Typical Collector Efficiency Curves

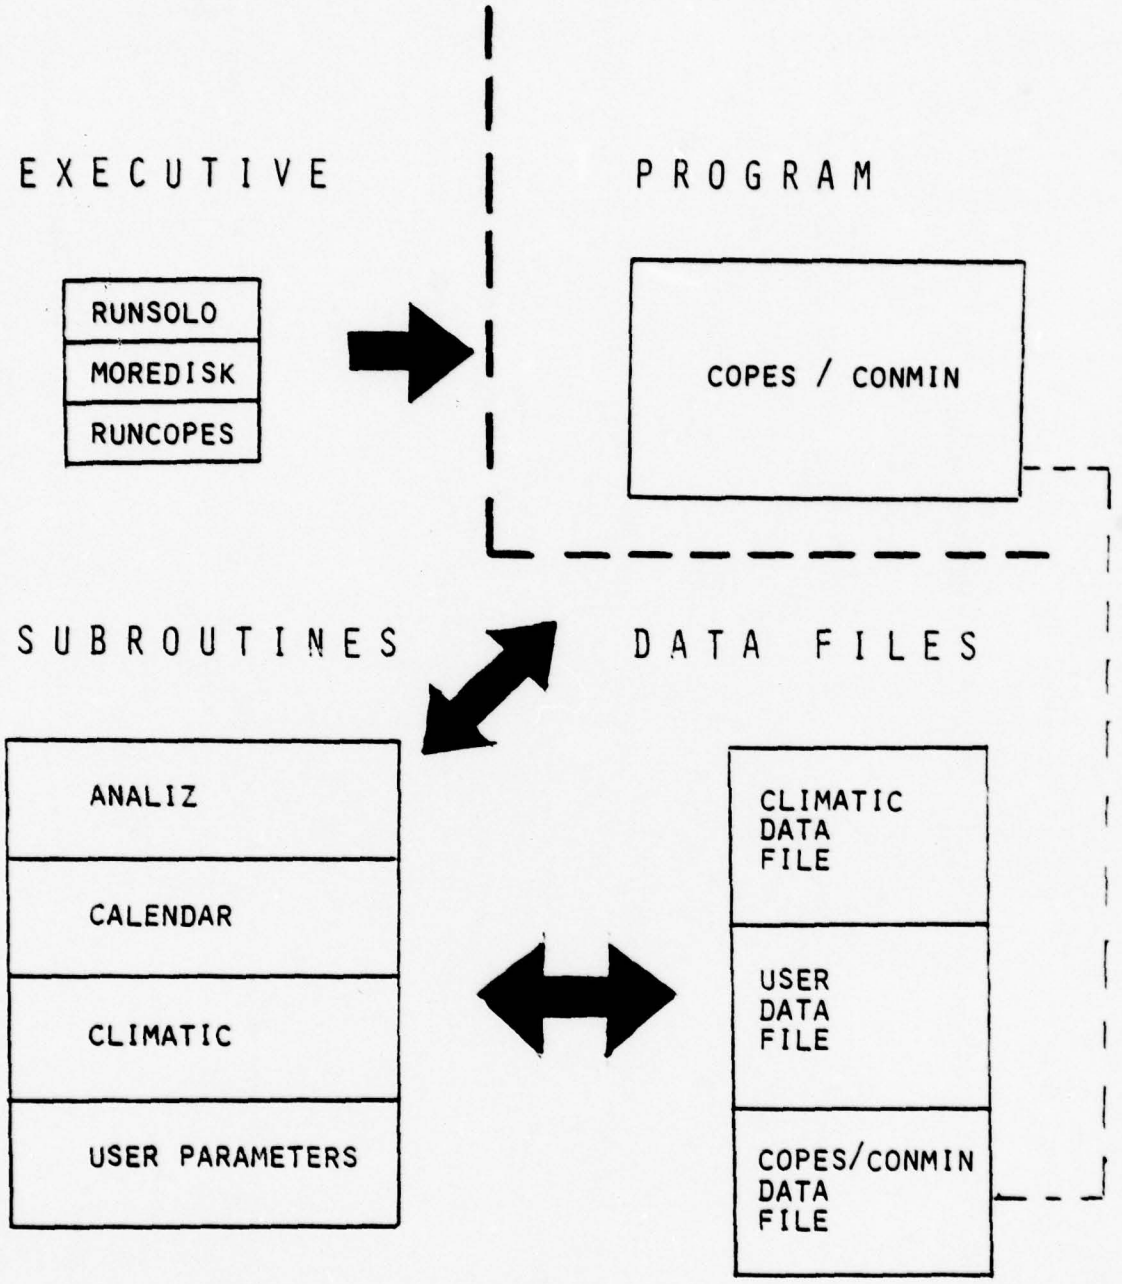


FIGURE 4 SOLOAD - COPES/CONMIN Interface

APPENDIX A

SUBROUTINE ANALIZ SUMMARY

A. OBJECTIVE FUNCTION

$$NPV = \bar{f}\, Q_L\, C_f\, F_i' - A_c\, C_s$$

B. DESIGN VARIABLES

Collector Area	A_c
Collector Tilt Angle	s
Collector Loop I.D.	d_i
Collector Loop O.D.	d_o
Heat Exchanger I.D.	d_{xi}
Collector Flow Velocity	v_c
Storage Flow Velocity	v_s
Heat Exchanger Length	L

C. DESIGN CONSTRAINTS

$G_1 = d_o - d_i$

$G_2 = d_{xi} - d_o$

G_3 = Reynolds number, Collector loop

G_4 = Reynolds number, Storage loop

G_5 = Capacity ratio, C_{min}/C_{max}

G_6 = 1st Flow parameter, $\zeta_1 = \dot{m}c_p/A_cF'U_L$

G_7 = 2nd Flow parameter, $\zeta_2 = \dot{m}c_p/A_cF_rU_1$

```
C ***************************************************************************
C *                                                                         *
C *  SSSSSSS  OOOOOOO  L        COCOOOO     A     DDDDD            11      *
C *  S        O     O  L        O     O    A A    D    D          111      *
C *  S        O     O  L        O     O   A   A   D     D          11      *
C *  SSSSSSS  O     O  L        O     O  AAAAAAA  D     D  DDDD    11      *
C *        S  O     O  L        O     O  A     A  D     D          11      *
C *        S  O     O  L        O     O  A     A  D     D          11      *
C *  SSSSSSS  OOOOOOO  LLLLLLL  OOOOOOO  A     A  DDDDD        111111    *
C *                                                                         *
C ***************************************************************************
C
C
C     SOLOAD-1 ( SOLAR OPTIMIZATION ANALYSIS OR DESIGN ) IS A FORTRAN
C     SYSTEM FOR OPTIMIZATION OF SOLAR ENERGY CONVERSION SYSTEMS
C     WHICH UTILIZE FLAT PLATE COLLECTORS FOR GENERATING HEAT FOR
C     DOMESTIC SPACE AND WATER HEATING.  OPTIMIZATION IS BASED ON LONG
C     TERM PERFORMANCE MODELS AND INTEGRATION WITH A NET PRESENT
C     VALUE COST MODEL TO ACHIEVE  AN OBJECTIVE FUNCTION ( PROGRAM
C     SOLOAD-1: SUBROUTINE ANALIZ ) WHICH BECOMES THE PRIMARY INPUT
C     FOR THE COPES/CONMIN  OPTIMIZATION PROGRAM.  SEE 'SOLAR ENERGY
C     OPTIMIZATION, A METHODOLOGY', AN MSME THESIS WRITTEN AT THE
C     NAVAL POSTGRADUATE SCHOOL, MONTEREY, CALIFORNIA IN SEPTEMBER,
C     1979, BY LAWRENCE W. KOZOYED, LCDR, USN.
C
C
C     NOTE:  THIS IS AN AUXILIARY COMPACT LISTING OF THE SOLOAD-1
C            SYSTEM.  EACH FILE IS REQUIRED TO BE COMPILED SEPARATELY
C            BY INSERTING A USERID CARD AND A FILENAME READ CARD AT
C            THE HEAD OF EACH FILE.
C
C
C     SOLOAD-1 IS DESIGNED TO USE THE NAVAL POSTGRADUATE SCHOOL
C     CP/CMS TIME SHARING SYSTEM.  THE SOLOAD-1 DECK IS READ INTO THE
C     PRIVATE DISK.  THE PROCEDURE  TO USE THE SYSTEM IS SIMPLY:
C
C     1.  LOGIN WITH 512K CORE:  LOGIN ____P 512K
C
C     2.  EDIT FILE FT08F001 TO INCLUDE APPROPRIATE
C         USER INPUT DATA.
C
C     3.  EDIT FILE FT05F001 TO INCLUDE APPROPRIATE
C         COPES/CONMIN INPUT DATA.
C
C     4.  RUNSOLO TO LINK TO COPES/CONMIN
```

```
C     5.  MOREDISK TO OBTAIN SCRATCH FILES FOR COPES/CONMIN                  SOL00490
C                                                                           SOL00500
C     6.  RUNCOPES TO EXECUTE SYSTEM                                        SOL00510
C                                                                           SOL00520
C                                                                           SOL00530
C     RUNSOLO IS AN EXECUTIVE PROGRAM WHICH LINKS THE USER(191) TO          SOL00540
C     THE COPES/CONMIN  DISK (I.E. LOCATED ON USERID: 0981P) AND TO         SOL00550
C     ADDITIONAL TEMPORARY STORAGE DISKS.                                   SOL00560
C                                                                           SOL00570
C                                                                           SOL00580
C     MOREDISK IS AN EXEC PROGRAM WHICH OBTAINS  ADDITIONAL TEMPORARY       SOL00590
C     STORAGE DISKS.                                                        SOL00600
C                                                                           SOL00610
C                                                                           SOL00620
C     RUNCOPES IS AN EXEC PROGRAM WHICH COMBINES THE FILES AND EXECUTES     SOL00630
C     THE SYSTEM.                                                           SOL00640
C                                                                           SOL00650
C                                                                           SOL00660
C     BACKON IS AN EXEC PROGRAM FOR REENTRY INTO THE SYSTEM IF THE          SOL00670
C     CMS  IS LOST TO CP.                                                   SOL00680
C                                                                           SOL00690
C                                                                           SOL00700
C     ANALYSE IS THE FILE NAME OF THE FORTRAN SUBROUTINE ANALIZ             SOL00710
C     AND IS USED IN TEXT VERSION                                           SOL00720
C                                                                           SOL00730
C                                                                           SOL00740
C                                                                           SOL00750
C                                                                           SOL00760
C     SETCAL  IS A SUBROUTINE WHICH BUILDS A CALENDAR ARRAY.                SOL00770
C                                                                           SOL00780
C                                                                           SOL00790
C     FILE08 IS A SUBROUTINE TO READ IN THE USER DEFINED CONSTANTS          SOL00800
C     IN PROGRAM ANALIZ.  READIN IS FROM FILE FT08F001.                     SOL00810
C                                                                           SOL00820
C                                                                           SOL00830
C     CMATIC IS A SUBROUTINE WHICH BUILDS THE CLIMATIC DATA                 SOL00840
C     ARRAY CLIMAT(I,J,K) BY READING IN DATA FROM FILE FT09F001.            SOL00850
C                                                                           SOL00860
C                                                                           SOL00870
C     FILE FT05F001 IS AN INPUT DATA FILE FOR COPES/CONMIN WHICH            SOL00880
C     IS PREPARED BY THE USER.                                              SOL00890
C                                                                           SOL00900
C-----------------------------------------------------------------------    SOL00910
C                                                                           SOL00920
C     RUNSOLO EXEC P1                                                       SOL00930
C                                                                           SOL00940
C     CP LINK 0981P 191 199 R PASS= COPES                                   SOL00950
C     LOGIN 199 A,P                                                         SOL00960
```

```
C                                                                                SOLCC97C
C--------------------------------------------------------------------------------SOL00980
C                                                                                SOL00990
C      MCREDISK EXEC P1                                                          SOL01CCC
C                                                                                SOL01010
C      VSET RDYMSG OFF                                                           SOL01020
C      CP SET LINELN 130                                                         SOL01030
C      &BEGSTACK                                                                 SOL01040
C      CF DEFINE T2314 192 8                                                     SOL01C5C
C      FORMAT T ALL (NOTYPE)                                                     SOL01060
C      RELEASE 192 T                                                             SCL01070
C      LCGIN 192 P                                                               SOL01080
C      LOGIN 191 B,P                                                             SOL01090
C      &ENDSTACK                                                                 SOL01100
C                                                                                SOLC1110
C--------------------------------------------------------------------------------SOL01120
C                                                                                SOL01130
C      RLNCOPES EXEC P1                                                          SOL01140
C                                                                                SOL01150
C      &TYPEOUT OFF                                                              SOL0116C
C      GLOBAL T SYSLIB SSPLIB IMSLOP                                             SOL01170
C      FILEDEF 05 DSK FILE FT05F001                                              SCL01180
C      FILEDEF 07 DSK FILE FT07F001                                              SOL01190
C      FILEDEF 08 DSK FILE FT08F001                                              SOL01200
C      FILEDEF 09 DSK FILE FT09F001                                              SOL01210
C      FILEDEF 06 PRT                                                            SOL01220
C      FILEDEF 02 DSK-P4 FILE FT02F001 RECFM VS LRECL 7290 BLKSIZE 7294          SOL01230
C      FILEDEF 04 DSK-P4 FILE FT04F001 RECFM VS LRECL 7290 BLKSIZE 7294          SOLC1240
C      LOAD SOLOAD-1 COPES CONMIN (CLEAR NOMAP XEQ)                              SOL01250
C                                                                                SOL01260
C--------------------------------------------------------------------------------SOLC127C
C                                                                                SOL01280
C      BACKON EXEC P1                                                            SOL01290
C                                                                                SOL01300
C      &BEGSTACK                                                                 SCL01310
C      RELEASE 192 T                                                             SOL01320
C      LCGIN 192 P                                                               SOL01330
C      LOGIN 191 B,P                                                             SCL01340
C      LCGIN 199 A,P                                                             SOL01350
C      &ENDSTACK                                                                 SOL01360
C                                                                                SCL01370
C                                                                                SOL0138C
C                                                                                SOL01390
C--------------------------------------------------------------------------------SOL01400
C
C
C
C
```

```
C
C
C     DEFINITIONS
C
C       XLIFE = LIFE NUMBER OF SYSTEM (YR)                                    SOL01420
C      DISCON = PROJECTED DISCOUNT RATE OVER LIFE OF SYSTEM                   SOL01430
C       FLATE = PROJECTED INFLATION RATE OVER LIFE OF SYSTEM                  SOL01440
C                                                                             SOL01450
C                                                                             SOL01460
C      COSTIL = INITIAL COST                                                  SOL01470
C      COSTCR = COLLECTOR COST QUOTED BY MFGR  ($/FT*FT)                      SOL01480
C      COSTIN = SYSTEM INSTALLATION COST  ($/FT*FT)                           SOL01490
C      COSTTK = STORAGE TANK COST PER LB FLUID ($/LB)                         SOL01500
C      OPTSTO = OPTIMUM STORAGE MASS PER COLLECTOR AREA (LB/FT*FT)            SOL01510
C      COSTHX = HEAT EXCHANGER COST PER HEX SURFACE ($/HEX FT*FT)             SOL01520
C      OPTHEX = OPTIMUM HEX SURFACE AREA PER COLLECTOR AREA                   SOL01530
C               (HEX FT*FT/CR FT*FT)                                          SOL01540
C         XMR = PERCENTAGE OF INITIAL COST FOR MAINTENANCE,REPAIR             SOL01550
C               AND/OR REPLACEMENT                                            SOL01560
C      COSTPR = ANNUAL POWER COST TO OPERATE SYSTEM PER                       SOL01570
C               COLLECTOR AREA                                                SOL01580
C      PUMPOW = PUMPING ENERGY REQUIRED (KWHR/FT*FT)                          SOL01590
C      NFUEL  = COMPARISON BASE INDICATOR: 1=OIL,2=ELE,3=GAS                  SOL01600
C                                                                             SOL01610
C                                                                             SOL01620
C      ULOSSR = CONDUCTANCE OF BUILDING(BTU/HR FT*FT F)                       SOL01630
C       AREAR = SURFACE HEAT TRANSFER AREA OF BUILDING (FT*FT)                SOL01640
C      HDD(I) = MONTHLY HEATING DEGREE DAYS ( HDD/MONTH )                     SOL01650
C       DENTS = NUMBER OF RESIDENTS OF BUILDING (PER)                         SOL01660
C      USEH2O = AVERAGE DAILY WATER  USEAGE PER RESIDENT (GAL/PER) *****      SOL01670
C      TEMH2O = DHW SUPPLY TANK DESIGN TEMPERATURE ( F )                      SOL01680
C       TEMGR = MEAN TEMPERATURE OF GROUND SUPPLY WATER ( F )                 SOL01690
C                                                                             SOL01700
C                                                                             SOL01710
C      I          = MONTHLY INDEX 1,12                                        SOL01720
C      M          = DAILY INDEX 1,365                                         SOL01730
C      K          = BEGINING DAY NUMBER FOR MONTH I                           SOL01740
C      L          = ENDING DAY NUMBER FOR MONTH I                             SOL01750
C      XXX(I,J)   = CALENDAR ARRAY: J=1 MONTHLY DAYS, J=2 MONTHLY             SOL01760
C                   BEGINNING DAY NUMBER, J=3 ENDING DAY NUMBER               SOL01770
C      DELTA(M)   = DECLINATION, RADIANS                                      SOL01780
C      XOMEGA(M)  = DAILY HOUR ANGLE ON HORIZONTAL SURFACE                    SOL01790
C      SOMEGA(M)  = DAILY HOUR ANGLE ON TILTED SURFACE                        SOL01800
C      FOMEGA(M)  = MINIMUM DAILY HOUR ANGLE (H OR T)                         SOL01810
C      DDRAT(M)   = DAILY RATIO OF DIRECT RADIATION COMPONENTS,               SOL01820
C                   TILTED TO HORIZONTAL                                      SOL01830
C      DIO(M)     = DAILY IRRADIANCE ON HORIZONTAL SURFACE AT                 SOL01840
C                   LATITUDE OF INTEREST, EXTRATERRESTRIAL                    SOL01850
```

```
C      DIRRAT(I) = MONTHLY AVERAGE RATIO OF DIRECT COMPONENTS                  SOL01860
C      XIO(I)    = MONTHLY AVERAGE DAILY IRRADIANCE ON HORIZONTAL              SOL01870
C                  SURFACE, EXTRATERRESTRIAL                                  SOL01880
C      XKT(I)    = RATIO OF TOTAL HORIZONTAL RADIATION AT LOCATI-              SOL01890
C                  ON OF INTEREST, LOCAL TO EXTRATERRESTRIAL                  SOL01900
C      DIFRAT(I) = RATIO OF DIFFUSE TO TOTAL RADIATION ON HORI-              SOL01910
C                  ZONTAL SURFACE (LIU&JORDAN CORRELATION)                    SOL01920
C      RHO       = REFLECTIVITY OF GROUND AREA NEAR COLLECTOR                 SOL01930
C      SLOPE     = ANGLE AT WHICH COLLECTOR IS TILTED FROM THE                SOL01940
C                  HORIZONTAL, FIXED FOR ALL MONTHS                           SOL01950
C      SLOCOR(I) = MONTHLY AVERAGE DAILY IRRADIANCE RATIO,                    SOL01960
C                  TILTED TO HORIZONTAL                                       SOL01970
C                                                                             SOL01980
C                                                                             SOL01990
C      SUMFQ  = ANNUAL ENERGY LOAD PROVIDED BY SOLAR (BTU/YR)                 SOL02000
C      COSTFU = COST OF CONVENTIONAL ENERGY IN THE YEAR ANALYSIS              SOL02010
C               IS CONDUCTED. ($/BTU)                                         SOL02020
C      INTFAC = INTEREST FACTOR (INCLUDES INFLATION AND COST OF               SOL02030
C               MONEY FACTORS)                                                SOL02040
C      AREAC  = COLLECTOR AREA (SQFT)                                         SOL02050
C      COSTSY = TOTAL SYSTEM COST COMPUTED PER COLLECTOR AREA                 SOL02060
C               ($/SQFT)                                                      SOL02070
C                                                                             SOL02080
C*************************************************************************** SOL02090
C                                                                             SOL02110
C                                                                             SOL02120
C      SOLOAD-1  FORTRAN P1                                                   SOL02130
C                                                                             SOL02140
C                                                                             SOL02150
      SUBROUTINE ANALIZ(ICALC)                                                SOL02160
C                                                                             SOL02170
      LOGICAL LANA,LDES                                                       SOL02180
C                                                                             SOL02190
      COMMON/GLOBCM/AREAC,SLOPE,DIACTO,DIACTI,DIASTI,VELOC,VELOS,             SOL02200
     *HXLONG,XNPV,G1,G2,G3,G4,G5,G6,G7,COSTEN,OPTSLO,FBAR,SUMQ                 SOL02210
C                                                                             SOL02220
      COMMON/FILE89/LOCATE                                                    SOL02230
C                                                                             SOL02240
      COMMON/DAYS/XXX(12,3)                                                   SOL02250
C                                                                             SOL02260
      COMMON/FILE8/NAME1,NAME2,NAME3,NAME4,                                   SOL02270
     *LANA,LDES,NFUEL,                                                        SOL02280
     *NAME5,NAME6,NAME7,NAME8,NAME9,FRTA,FRUL,                                SOL02290
     *TARAT,RHO,CSUBPC,CSUBPS,XLIFE,DISCON,FLATE,                             SOL02300
     *COSTCR,COSTIN,COSTTK,OPTSTO,COSTHX,PUMPOW,                              SOL02310
     *CSTOIL,CSTELE,CSTGAS,EFFOIL,EFFELE,EFFGAS,                              SOL02320
     *ULOSSR,AREAR,DENTS,USEH2O,TEMH2O,TEMGR,                                 SOL02330
```

```
     *CONDTU,DENSYC,DENSYS,RFOULC,RFOULS,                                SOL02340
     *IONUM,SEFFEC,TEMPCF,TEMPSF,CONDCF,CONDSF,                          SOL02350
     *CCNOIL,CONELE,CONGAS,XMR                                           SOL02360
C                                                                        SOL02370
      COMMON/FILES/NAM10,NAM11,NAM12,NAM13,XLAT,                         SOL02380
     *TAMB(12),HDD(12),WIND(12),XI(12),                                  SOL02390
     *XMEANT,HDDTOT,XMEANW,XMEANI                                        SOL02400
C                                                                        SOL02410
C                                                                        SOL02420
      DIMENSION QSUBI(12),QHLI(12),QDHWI(12),                            SOL02430
     *DELTA(365),XOMEGA(365),SOMEGA(365),POMEGA(365),                    SOL02440
     *DDRAT(365),CIO(365),DIRRAT(12),XIC(12),XKT(12),DIFRAT(12),         SOL02450
     *SLOCOR(12),SUMDIR(12),SUMIO(12),ARGN(365),AFGD(365),               SCL02460
     *COEFFI(12),Y(12),Z(12),FBARI(12)                                   SOL02470
C                                                                        SOL02480
C                                                                        SCL02490
      DATA PI/3.14159/                                                   SOL02500
C                                                                        SOL02510
      RDEG=180./PI                                                       SOL02520
      DRAD=PI/180.                                                       SOL02530
C                                                                        SOL02540
      GO TO (1000,2000,3000),ICALC                                       SOL02550
1000  CONTINUE                                                           SOL02560
C           ------------------------------                               SOL02570
C                                                                        SOL02580
C                    INPUT SECTION                                       SOL02590
C                                                                        SOL02600
C           ------------------------------                               SOL02610
C                                                                        SOL02620
C     OBTAIN DESIGN VARIABLE INITIAL VALUES                              SOL02630
C                                                                        SOL02640
C     READ(5,1001)AREAC,SLOPE,DIACTO,DIACTI,DIASTI,                      SOL02650
C    *VELOC,VELOS,HXLONG                                                 SOL02660
C                                                                        SOL02670
C1001  FORMAT(8F9.4)                                                     SOL02680
C                                                                        SOL02690
C     INITIALIZE CALENDAR ARRAY:                                         SCL02700
C     RETURN VIA COMMON/DAYS/                                            SOL02710
C                                                                        SOL02720
      CALL SETCAL                                                        SOL02730
C                                                                        SOL02740
C     INITIALIZE USER DEFINED OPTIONS/INPUTS:                            SOL02750
C     RETURN VIA COMMON/FILES/                                           SOL02760
C                                                                        SOL02770
      CALL FILE08                                                        SCL02780
C                                                                        SOL02790
      DLCTAN=24.0*ULOSSR*AREAR                                           SOL02800
C     INITIALIZE CLIMATIC DATA:                                          SOL02810
```

```
C      RETURN VIA COMMON/FILE9/                                                  SOL02820
C                                                                                SOL02830
       CALL CMATIC                                                               SOL02840
C                                                                                SOL02850
C                                                                                SOL02860
C                                                                                SOL02870
C                                                                                SOL02880
       WRITE(6,1500)LOCATE,IDNUM                                                 SOL02890
1500   FORMAT(1H1,////                                                           SOL02900
      *  ,T25,53H* * * * * * * * * * * * * * * * * * * * * * * * * * * * * *,/  SOL02910
      *  ,T25,53H*                                                         *,/   SOL02920
      *  ,T25,53H*                    S O L O A D - 1                      *,/   SOL02930
      *  ,T25,53H*                                                         *,/   SOL02940
      *  ,T25,53H*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN        *,/   SOL02950
      *  ,T25,53H*     ---                                                 *,/   SOL02960
      *  ,T25,53H*           DESIGN DATA OPTIONS/INPUTS SUMMARY            *,/   SOL02970
      *  ,T25,53H*                                                         *,/   SOL02980
      *  ,T25,53H* * * * * * * * * * * * * * * * * * * * * * * * * * * * * *,/  SOL02990
      *  ,T25,47H                >>>>>DATA MATCH TO OUTPUT ID NO.,I3,I3,/         SOL03000
      *  ,T25,53H                                  IMCD-1 LWK AUGUST 1979)        SOL03010
C                                                                                SOL03020
       WRITE(6,1501)NAM10,NAM11,NAM12,NAM13,                                     SOL03030
      *             NAME5,NAME6,NAME7,NAME8,NAME9,                               SOL03040
      *             NAME1,NAME2,                                                 SOL03050
      *                   LOCATE,                                                SOL03060
      *                    XLAT,                                                 SOL03070
      *                  XMEANT,   FRUL,                                        SOL03080
      *                  XMEANI,XLIFE,                                          SOL03090
      *                  HDDTOT,   FRTA,DISCON,                                 SOL03100
      *                   TEMGR,COSTCR,FLATE                                    SOL03110
1501   FORMAT(1HO,////                                                           SOL03120
      *  ,T5,8HLOCATION,T19,4A4,T40,9HCOLLECTOR,T50,5A4,                         SOL03130
      *                         T75,14HSTUDY APPROACH,T97,2A4,/                 SOL03140
      *  ,T5,8H--------,T40,9H---------,T75,14H--------------,//                SOL03150
      *  ,T5,20HLOCATION INDEX.....,7X,I3,T40,28HCOLLECTOR TEST RESULTS,         SOL03160
      *        ,T75,18HECONOMIC ESTIMATES,/                                      SOL03170
      *  ,T5,20HLATITUDE,DEGREES....,4X,F6.2,T40,8H   SLOPE:                     SOL03180
      *        ,T75,18H-----------------,/                                       SOL03190
      *  ,T5,20HMEAN TEMPERATURE....,F10.2                                       SOL03200
      *     ,T40,20H  PARAMETER,FRUL....,1X,F9.4,/                               SOL03210
      *  ,T5,20HINSOL(BTU/DAY FT**2),F10.2,T40,12H  INTERCEPT:,                  SOL03220
      *        T75,20HSYSTEM LIFE(YEARS)...,1X,F9.2,//                           SOL03230
      *  ,T5,20HLOAD FACTOR,HDD.....,F10.2,T40,20H  PARAMETER,FRTA....           SOL03240
      *                                       ,1X,F9.4                          SOL03250
      *        ,T75,20HDISCOUNT RATE .....,1X,F5.4,/                             SOL03260
      *  ,T5,20HMEAN GROUND TEMP....,F10.2,T40,20HBASE COST,$/FT**2...           SOL03270
      *   1X,F5.2,T75,20HINFLATION RATE.....,1X,F9.4)                            SOL03280
C                                                                                SOL03290
```

```
C                                                                       SOL03300
      WRITE(6,1502)NAME3, NAME4,TEMPCF,                                 SOL03310
     *                          DENSYC,                                SOL03320
     *     EFFOIL,CSTOIL,CONOIL,CSUBPC,                                SOL03330
     *     EFFELE,CSTELE,CONELE,CONDCF,                                SOL03340
     *     EFFGAS,CSTGAS,CONGAS,TEMPSF                                 SOL03350
     *                         ,DENSYS                                 SOL03360
     *                         ,CSUBPS                                 SOL03370
     *                         ,CONDSF                                 SOL03380
C                                                                       SOL03390
C                                                                       SOL03400
1502  FORMAT(1H ,///                                                    SOL03410
     *,T5,28HENERGY COMPARATIVE ESTIMATES,T57,19HSELECTED PARAMETERS,/   SOL03420
     *,T5,28H----------------------------,T57,19H--------------------,// SOL03430
     *  ,T5,40HTYPE ENERGY BASE.....,T47,2A4                           SOL03440
     *    ,T57,40HCOLLECTOR FLUID MEAN TEMPERATURE.....,F10.2,/        SOL03450
     *  ,T5,50HINDEX TYPE EFFICIENCY   COST      HEATING VALUE  ,       SOL03460
     *    T57,40HCOLLECTOR FLUID DENSITY(LB/FT**3).....,F10.2,/        SOL03470
     *  ,T7,1H1,T11,3HOIL,T16,F7.2,T25,F5.2,7H($/GAL),                 SOL03480
     *           T38,F8.1,9H(BTU/GAL),                                  SOL03490
     *    T57,40HCOLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F)..,F10.4,/     SOL03500
     *  ,T7,1H2,T11,3HELE,T16,F7.2,T25,F5.2,7H($/KWH),                 SOL03510
     *           T38,F8.1,9H(BTU/KWH),                                  SOL03520
     *    T57,40HCOLLECTOR FL'D CONDUCTIVITY(BTU/HR*FT*F),F10.4,/      SOL03530
     *  ,T7,1H3,T11,3HGAS,T16,F7.2,T25,F5.2,7H($/THM),T38,F8.1,        SOL03540
     *9H(BTU/THM),T57,39HSTORAGE FLUID MEAN TEMPERATURE .....,F11.2,/   SOL03550
     *    ,T57,40HSTORAGE FLUID DENSITY(LB/FT**3).....,F10.2,/        SOL03560
     *    ,T57,40HSTORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...,F10.4,/    SOL03570
     *  ,T5,40HHEAT LOAD CHARACTERISTICS                               SOL03580
     *    T57,40HSTORAGE FLUID CONDUCTIVITY(BTU/HR FT'F).,F10.4)      SOL03590
C                                                                       SOL03600
C                                                                       SOL03610
      WRITE(6,1503)RFOULC,RFOULS,CONDTU,ULOSSR,OPTSTO,AREAR,RHO,        SOL03620
     *             DUCTAN,PUMPOW,TEMH2C,TARAT,USEH2O,COSTIN,DENTS,     SOL03630
     *             COSTHX,SEFFEC,COSTTK,XMR                            SOL03640
C                                                                       SOL03650
C                                                                       SOL03660
1503  FORMAT(1H ,                                                       SOL03670
     *  T5,25H-------------------------,                               SOL03680
     *    T57,40HCOLLECTOR SIDE FOULING FACTOR(HR F/BTU) ,F10.4,/      SOL03690
     *    ,T57,40HSTORAGE SIDE FOULING FACTOR(HR F/BTU)  ,F10.4,/      SOL03700
     *    ,T57,40HHEX TUBE CONDUCTIVITY(BTU/HR FT F).....,F10.2,/      SOL03710
     *  ,T5,40HLOAD LOSS COEFFICIENT (BTU/HR F FT**2)..,F10.2          SOL03720
     *    ,T57,40HESTIMATED OPTIMUM STORAGE(LB/AREAC) ....,F10.2,/     SOL03730
     *  ,T5,40HLOAD SURFACE HEAT TRANSFER AREA(FT**2)..,F10.2          SOL03740
     *    ,T57,40HESTIMATED GROUND REFLECTANCE.....,F10.2,/            SOL03750
     *  ,T5,40HLOAC CONDUCTANCE (BTU/DEG F DAY).....,F10.2             SOL03760
     *    ,T57,40HESTIMATED PUMPING POWER(KWH/AREAC).....,F10.4,/      SOL03770
```

```
     *  ,T5,40HDOMESTIC HOT WATER(DHW) DESIGN TEMP. ...,F10.2                  SOL03780
     *    ,T57,40HESTIMATED CORRECTION FOR TAU ALFHA PROD.,F10.2,/              SOL03790
     *  ,T5,40HESTIMATED DAILY DHW USEAGE (GAL/PER) ...,F10.2                  SOL03800
     *    ,T57,40HESTIMATED INSTALL/LABOR COST ($/AREAC)..,F10.2,/             SOL03810
     *  ,T5,40HESTIMATED DHW USERS (PER).....,F10.2                            SOL03820
     *    ,T57,40HESTIMATED HEX COST ($/FT**2) .....,F10.2,/                   SOL03830
     *  ,T5,40HESTIMATED STORAGE TO LOAD EFFECTIVENESS.,F10.2                  SOL03840
     *    ,T57,40HESTIMATED STORAGE TANK COST($/LB STORED),F10.2,/             SOL03850
     *    ,T57,40HMAINTENANCE (% INSTALLED COST/YR).....,F10.4)                SOL03860
C                                                                             SOL03870
C                                                                             SOL03880
C                                                                             SOL03890
C                                                                             SOL03900
      RETURN                                                                  SOL03910
2000  CONTINUE                                                                SOL03920
C                                                                             SOL03930
C                    ------------------------------                           SOL03940
C                                                                             SOL03950
C                       ANALYSIS SECTION                                      SOL03960
C                                                                             SOL03970
C                    ------------------------------                           SOL03980
C                                                                             SOL03990
C       XNPV = NET PRESENT VALUE (THE OBJECTIVE FUNCTION)                     SOL04000
C                                                                             SOL04010
C       XNPV = XNPV(FACINT,COSTFU,COSTSY,SUMFQ,AREAC)                         SOL04020
C     FACINT = FACINT(XLIFE,DISCON,FLATE)                                     SOL04030
C     COSTFU = COSTFU(NFUEL,CST(N),CON(N),EFF(N))                             SOL04040
C     COSTSY = COSTSY(COSTCR,COSTIN,COSTTK,COSTHX,CCSTPR,CPTSTC,              SOL04050
C              OPTHEX,XMR)                                                    SOL04060
C      SUMFQ = SUMFQ(FACHEX,AREAC,QSUBI(I),FRTA,FRUL,XI(I),                   SOL04070
C              SLOCOR(I),TAMB(I))                                             SOL04080
C     AREAC  = INDEPENDENT VARIABLE                                           SOL04090
C                                                                             SOL04100
                                                                              SOL04110
                                                                              SOL04120
      COMPUTE MAJOR DEPENDENT DESIGN VARIABLE                                 SOL04130
                  FACINT, INTEREST FACTOR  (DIMENSIONLESS)                    SOL04140
                                                                              SOL04150
C                                                                             SOL04160
C                                                                             SOL04170
      IF(DISCON.EQ.FLATE) GO TO 610                                           SOL04180
C                                                                             SOL04190
      ARG20 = (DISCON-FLATE)/(1.0 + FLATE)                                    SOL04200
C                                                                             SOL04210
      FACINT = (1.0-(1.0+ARG20)** (-XLIFE))/ARG20                             SOL04220
      GO TO 620                                                               SOL04230
610   FACINT = XLIFE                                                          SOL04240
620   CONTINUE                                                                SOL04250
```

```
C                                                                       SOL04260
                                                                        SOL04270
                                                                        SOL04280
      COMPUTE MAJOR DEPENDENT DESIGN VARIABLE                           SOL04290
                    COSTFU, 1ST YEAR FUEL COST  ($/BTU)                 SOL04300
                                                                        SOL04310
C                                                                       SOL04320
C                                                                       SOL04330
C                                                                       SOL04340
      CONOIL=142000.                                                    SOL04350
      CONELE=3413.                                                      SOL04360
      CONGAS=100000.                                                    SOL04370
C                                                                       SOL04380
C                                                                       SOL04390
      IF(NFUEL.EQ.1)GO TO 523                                           SOL04400
      IF(NFUEL.EQ.2)GO TO 524                                           SOL04410
      COSTFU=CSTGAS/(CONGAS*EFFGAS)                                     SOL04420
      GO TO 525                                                         SOL04430
523   COSTFU=CSTOIL/(CONOIL*EFFOIL)                                     SOL04440
      GO TO 525                                                         SOL04450
524   COSTFU=CSTELE/(CONELE*EFFELE)                                     SOL04460
525   CONTINUE                                                          SOL04470
C                                                                       SOL04480
C                                                                       SOL04490
                                                                        SOL04500
                                                                        SOL04510
      COMPUTE MAJOR DEPENDENT DESIGN VARIABLE                           SOL04520
                    SUMFC, TOTAL ANNUAL SOLAR ENERGY PROVIDED (BTU/YR)  SOL04530
                                                                        SOL04540
                                                                        SOL04550
C                                                                       SOL04560
C                                                                       SOL04570
      DO 74 II=1,12                                                     SOL04580
C                                                                       SOL04590
      QSUBI(II)=0.0                                                     SOL04600
      SUMDIR(II)=0.0                                                    SOL04610
      SUMIO(II)=0.0                                                     SOL04620
      DIRRAT(II)=0.0                                                    SOL04630
      XIO(II)=0.0                                                       SOL04640
      XKT(II)=0.0                                                       SOL04650
      DIFRAT(II)=0.0                                                    SOL04660
      SLOCOR(II)=0.0                                                    SOL04670
      CCEFF1(II)=0.0                                                    SOL04680
      Y(II)=0.0                                                         SOL04690
      Z(II)=0.0                                                         SOL04700
      FBARI(II)=0.0                                                     SOL04710
74    CONTINUE                                                          SOL04720
C                                                                       SOL04730
```

```
C                                                                       SOL04740
CC      COMPUTE COLLECTOR/STORAGE FLOWRATE AND CAPACITANCE              SOL04750
CC                                                                      SOL04760
C                                                                       SOL04770
        ARECTO=PI*DIACTO*DIACTO/4.0                                     SOL04780
        ARECTI=PI*DIACTI*DIACTI/4.0                                     SOL04790
        AREAST=PI*(DIASTI*DIASTI-DIACTO*DIACTO)/4.0                     SOL04800
        FLOWC=DENSYC*ARECTI*VELOC                                       SOL04810
        FLOWS=DENSYS*AREAST*VELOS                                       SOL04820
        CAPAC=3600.*FLOWC*CSUBPC                                        SOL04830
        CAPAS=3600.*FLOWS*CSUBPS                                        SOL04840
        GPMC=448.83*ARECTI*VELOC                                        SOL04850
        GPMS=448.83*AREAST*VELOS                                        SOL04860
        GPMCAR=GPMC/AREAC                                               SOL04870
        GPMSAR=GPMS/AREAC                                               SOL04880
C                                                                       SOL04890
CC                                                                      SOL04900
CC      OBTAIN MINIMUM CAPACITANCE FOR COLLECTOR/STORAGE HEAT EXCHANGER SOL04910
CC                                                                      SOL04920
C                                                                       SOL04930
        IF(CAPAC.LE.CAPAS) GO TO 19                                     SOL04940
        CMIN=CAPAS                                                      SOL04950
        CMAX=CAPAC                                                      SOL04960
        GO TO 21                                                        SOL04970
19      CMIN=CAPAC                                                      SOL04980
        CMAX=CAPAS                                                      SOL04990
21      CONTINUE                                                        SOL05000
C                                                                       SOL05010
CC                                                                      SOL05020
CC      COMPUTE COLLECTOR/STORAGE HEAT EXCHANGER COEFFICIENTS           SOL05030
CC                                                                      SOL05040
C                                                                       SOL05050
        VIS104=0.708E-05                                                SOL05060
        PR104=4.34                                                      SOL05070
        CND104=0.364                                                    SOL05080
        VIS176=0.392E-05                                                SOL05090
        PR176=2.22                                                      SOL05100
        CND176=0.387                                                    SOL05110
C                                                                       SOL05120
        REYNC=(VELOC*DIACTI)/VIS176                                     SOL05130
        REYNS=(VELOS*(DIASTI-DIACTO))/VIS104                            SOL05140
C                                                                       SOL05150
        RSTAR=DIACTO/DIASTI                                             SOL05160
C                                                                       SOL05170
        IF(REYNC.GE.2200.)GO TO 1025                                    SOL05180
        HXFRI=(CND176/DIACTI)*(48.0/11.0)                               SOL05190
        GO TO 1026                                                      SOL05200
1025    HXFRI=(CND176/DIACTI)*0.023*(REYNC**0.8)*(PR176**0.4)           SOL05210
```

```
1026  IF(REYNS.GE.5000.) GO TO 1027                                          SOL05220
      HXFRO=(CND104/(DIASTI-DIACTO))*4.934*(RSTAR**(-0.396))                 SOL05230
      GO TO 1028                                                             SOL05240
1027  ARG11=0.0234*RSTAR+0.8035                                              SOL05250
      HXFRO=(CND104/(DIASTI-DIACTO))*0.0289*(RSTAR**(-0.2645))               SOL05260
     1*REYNS**ARG11                                                          SOL05270
1028  CONTINUE                                                               SOL05280
C                                                                            SOL05290
CC                                                                           SOL05300
CC    COMPUTE COLLECTOR/STORAGE HEAT EXCHANGER EFFECTIVENESS, EFFECT         SOL05310
CC                                                                           SOL05320
C                                                                            SOL05330
      RONE=1.0/HXFRI                                                         SOL05340
      DRAT=DIACTO/DIACTI                                                     SOL05350
      RTWO=DIACTI*ALOG(DRAT)/(2.0*CONDTU)                                    SOL05360
      RTHREE=1.0/(DRAT*HXFRO)                                                SOL05370
      RFOUR=RFOULC                                                           SOL05380
      RFIVE=RFOULS                                                           SOL05390
      UHEXI=1.0/(RONE+RTWO+RTHREE+RFOUR+RFIVE)                               SOL05400
      AHEXI=PI*DIACTI*HXLONG                                                 SOL05410
      AHEXO=PI*DIACTO*HXLONG                                                 SOL05420
      OPTHEX=AHEXI/AREAC                                                     SOL05430
      XNTU=UHEXI*AHEXI/CMIN                                                  SOL05440
      CRAT=CMIN/CMAX                                                         SOL05450
      ARG=-XNTU*(1.0-CRAT)                                                   SOL05460
      EFFECT=(1.0-EXP(ARG))/(1.0-CRAT*EXP(ARG))                              SOL05470
C                                                                            SOL05480
CC    COMPUTE FLOWRATE CONSTRAINTS                                           SOL05490
C                                                                            SOL05500
      GCP=CAPAC/AREAC                                                        SOL05510
      Z2=GCP/FRUL                                                            SOL05520
      Z1=-1.0/ALOG(1.0-(1.0/Z2))                                             SOL05530
      FPP=Z1/Z2                                                              SOL05540
C                                                                            SOL05550
CC    COMPUTE COLLECTOR/STORAGE HEAT EXCHANGER FACTOR, FACHEX                SOL05560
CC                                                                           SOL05570
C                                                                            SOL05580
      FACHEX=1.0/(1.0+(FRUL*AREAC/CAPAC)*(CAPAC/(EFFECT*CMIN)-1.0))          SOL05590
C                                                                            SOL05600
CC                                                                           SOL05610
C                                                                            SOL05620
      DO 25 I=1,12                                                           SOL05630
C                                                                            SOL05640
CC                                                                           SOL05650
CC    COMPUTE MONTHLY ENERGY LOAD, QSUBI(I)                                  SOL05660
CC                                                                           SOL05670
C                                                                            SOL05680
                                                                             SOL05690
```

```
      QHLI(I)=24.*ULOSSR*AREAR*HDD(I)                                          SOL05700
      QCHW(I)=8.34*XXX(I,1)*DENTS*USEH20*(TEMH20-TEMGR)                        SOL05710
      QSUBI(I)=QHLI(I)+QCHWI(I)                                                SOL05720
C                                                                              SOL05730
CCCCC                                                                          SOL05740
CCCCC                                                                          SOL05750
CCCCC                                                                          SOL05760
CCCCC  COMPUTE MONTHLY COLLECTOR TILT SLOPE CORRECTION FACTOR, SLOCOR(I)       SOL05770
CCCCC                                                                          SOL05780
CCCCC                                                                          SCL05790
C                                                                              SOL05800
      K=XXX(I,2)                                                               SOL05810
      L=XXX(1,3)                                                               SOL05820
C                                                                              SOL05830
      DO 75 MM=1,365                                                           SOL05840
      DELTA(MM)=0.0                                                            SOL05850
      XOMEGA(MM)=0.0                                                           SOL05860
      SOMEGA(MM)=0.0                                                           SOL05870
      POMEGA(MM)=0.0                                                           SOL05880
      ARGN(MM)=0.0                                                             SOL05890
      ARGD(MM)=0.0                                                             SOL05900
      DDRAT(MM)=0.0                                                            SOL05910
      DIO(MM)=0.0                                                              SOL05920
75    CONTINUE                                                                 SOL05930
CC                                                                             SOL05940
C                                                                              SOL05950
      DO 8 M=K,L                                                               SOL05960
      XM=M                                                                     SOL05970
      DELTA(M)=23.45*SIN(360.*((284.+XM)/365)*DRAD)                            SOL05980
      XOMEGA(M)=RDEG*ARCOS(-TAN(XLAT*DRAD)*TAN(DELTA(M)*DRAD))                 SOL05990
      SOMEGA(M)=RDEG*ARCOS(-TAN((XLAT-SLOPE)*DRAD)*                            SOL06000
     *TAN(DELTA(M)*DRAD))                                                      SOL06010
      IF(SOMEGA(M).GE.XOMEGA(M))GO TO 4                                        SOL06020
      POMEGA(M)=SOMEGA(M)                                                      SOL06030
      GO TO 5                                                                  SOL06040
4     POMEGA(M)=XOMEGA(M)                                                      SOL06050
5     CONTINUE                                                                 SOL06060
CC                                                                             SOL06070
C                                                                              SOL06080
      ARGN(M)=(POMEGA(M)*DRAD)*SIN((XLAT-SLOPE)*DRAD)*SIN(DELTA(M)             SOL06090
     *        *DRAD)+COS((XLAT-SLOPE)*DRAD)                                    SOL06100
     *        *COS(DELTA(M)*DRAD)*SIN(POMEGA(M)*DRAD)                          SOL06110
      ARGD(M)=(XOMEGA(M)*DRAD)*SIN(XLAT*DRAD)*SIN(DELTA(M)*DRAD)               SOL06120
     *        +COS(XLAT*DRAD)*COS(DELTA(M)*DRAD)*SIN(XOMEGA(M)*DRAD)           SOL06130
      DDRAT(M)=ARGN(M)/ARGD(M)                                                 SOL06140
      DIO(M)=(24./PI)*429.*(DRAD*XOMEGA(M)*SIN(XLAT*DRAD)*SIN(DELTA(M)         SOL06150
     *       *DRAD)+COS(XLAT*DRAD)                                             SOL06160
     *       *COS(DELTA(M)*DRAD)*SIN(XOMEGA(M)*DRAD))                          SOL06170
```

```
      SUMDIR(I)=SUMDIR(I)+DDRAT(M)                                          SOL06180
      SUMIO(I)=SUMIO(I)+DIO(M)                                              SOL06190
8     CONTINUE                                                              SOL06200
      DIRRAT(I)=SUMDIR(I)/XXX(I,1)                                          SOL06210
      XIO(I)=SUMIO(I)/XXX(I,1)                                              SOL06220
      XKT(I)=XI(I)/XIO(I)                                                   SOL06230
      DIFRAT(I)=1.3903-4.0273*XKT(I)+5.3115*XKT(I)*XKT(I)                   SOL06240
     *          -3.108*XKT(I)*XKT(I)*XKT(I)                                SOL06250
C                                                                           SOL06260
      SLOCOR(I)=(1.0-DIFRAT(I))*DIRRAT(I)+DIFRAT(I)                         SOL06270
     *          *(1.0+COS(SLOPE*DRAD))*.5+RHO*(1.0-COS(SLOPE*DRAD))*.5      SOL06280
C                                                                           SOL06290
C                                                                           SOL06300
C-----COMPUTE KLINE CORRELATION PARAMETERS                                  SOL06310
C                                                                           SOL06320
C                                                                           SOL06330
      COEFF1(I)=FACHEX*AREAC*XXX(I,1)/QSUBI(I)                              SOL06340
      Y(I)=COEFF1(I)*FRTA*TARAT*XI(I)*SLOCOR(I)                             SOL06350
      Z(I)=COEFF1(I)*FRUL*24.*(212.-TAME(I))                                SOL06360
C                                                                           SOL06370
C                                                                           SOL06380
C                                                                           SOL06390
C-----COMPUTE MONTHLY LOAD FRACTIONS BASED ON KLINE CORRELATION             SOL06400
C                                                                           SOL06410
C                                                                           SOL06420
      FBARI(I)=1.029*Y(I)-0.065*Z(I)-0.245*Y(I)*Y(I)+0.0018*Z(I)*Z(I)       SOL06430
     *+.0215*Y(I)*Y(I)*Y(I)                                                 SOL06440
      IF(FBARI(I).GE.1.0)GO TO 255                                          SOL06450
      GO TO 256                                                             SOL06460
255   FBARI(I)=1.0                                                          SOL06470
256   CONTINUE                                                              SOL06480
25    CONTINUE                                                              SOL06490
C                                                                           SOL06500
C                                                                           SOL06510
C-----COMPUTE  ANNUAL SOLAR ENERGY  PROVIDED  ,  SUMFQ                      SOL06520
C                                                                           SOL06530
C                                                                           SOL06540
C                                                                           SOL06550
      SUMHL=0.0                                                             SOL06560
      SUMDHW=0.0                                                            SOL06570
      SUMQ=0.0                                                              SOL06580
      SUMFQ=0.0                                                             SOL06590
      DO 825 I=1,12                                                         SOL06600
      SUMHL=SUMHL+QHLI(I)                                                   SOL06610
      SUMDHW=SUMDHW+QDHWI(I)                                                SOL06620
      SUMQ=SUMQ+QSUBI(I)                                                    SOL06630
      SUMFQ=SUMFQ+FBARI(I)*QSUBI(I)                                         SOL06640
825   CONTINUE                                                              SOL06650
```

```
      FBAR=SUMFQ/SUMQ                                                    SOL06660
C                                                                        SOL06670
C                                                                        SOL06680
                                                                         SOL06690
                                                                         SOL06700
      COMPUTE MAJOR DEPENDENT DESIGN VARIABLE                            SOL06710
              COSTSY, SYSTEM COST ($/FT**2 COLLECTOR AREA)               SOL06720
                                                                         SOL06730
                                                                         SOL06740
C                                                                        SOL06750
C                                                                        SOL06760
      CCSTIL=COSTCR+COSTIN+COSTTK*OPTSTO+COSTHX*OPTHEX                   SOL06770
C                                                                        SOL06780
      CCSTPR=PUMPCW*CSTELE                                               SOL06790
C                                                                        SOL06800
      CCSTSY=COSTIL*FACINT*(COSTIL*XMR+COSTPR)                           SOL06810
C                                                                        SOL06820
C                                                                        SOL06830
      CCSTTO=COSTIL*AREAC                                                SOL06840
C                                                                        SOL06850
C                                                                        SOL06860
C     CONSTRAINT EQUATIONS                                               SOL06870
C                                                                        SOL06880
C                                                                        SOL06890
      G1=DIASTI-DIACTO                                                   SOL06900
      G2=DIACTO-DIACTI                                                   SOL06910
      G3=REYNC                                                           SOL06920
      G4=REYNS                                                           SOL06930
      G5=CRAT                                                            SOL06940
      G6=Z2                                                              SOL06950
      G7=Z1                                                              SOL06960
C                                                                        SOL06970
C                                                                        SOL06980
C                                                                        SOL06990
C                                                                        SOL07000
C                                                                        SOL07010
      XNPV=FACINT*COSTFU*SUMFQ-COSTSY*AREAC                              SOL07020
C                                                                        SOL07030
      COSTEN=(COSTFU*FACINT/XLIFE)-(XNPV/(XLIFE*SUMQ))                   SOL07040
      CFTSLO=COSTSY/(FACINT*COSTFU*SUMQ)                                 SOL07050
C                                                                        SOL07060
C                                                                        SOL07070
      RETURN                                                             SOL07080
3000  CONTINUE                                                           SOL07090
C                                                                        SOL07100
C                                                                        SOL07110
C               ------------------------------                           SOL07120
C                                                                        SOL07130
```

```
C                    CUTPUT SECTION                                          SOLC714C
C                                                                            SOL07150
C                ----------------------------                                SOL07160
C                                                                            SOL07170
C                                                                            SOL07180
C                                                                            SOL07190
C                                                                            SOLC72CC
      WRITE(6,3500)NAME1,NAME2,NAM10,NAM11,NAM12,NAM13,LOCATE,ICNUM          SOL07210
3500  FORMAT(1H1,////                                                        SOL07220
     *  ,T25,53H* * * * * * * * * * * * * * * * * * * * * * * * * * * *  *,/ SOL07230
     *  ,T25,53H*                                                        *,/ SOL07240
     *  ,T25,53H*                    S O L O A D - 1                     *,/ SOLC725C
     *  ,T25,53H*                                                        *,/ SOL07260
     *  ,T25,53H*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN       *,/ SOL07270
     *  ,T25,53H*     ---   -      -        -                           *,/ SOL07280
     *  ,T25,1EH*       RESULTS OF ,2A4,5H FOR ,4A4,6H      *,/             SOL07290
     *  ,T25,53H*                                                        *,/ SOL07300
     *  ,T25,53H* * * * * * * * * * * * * * * * * * * * * * * * * * * *  *,/ SOL07310
     *  ,T25,47H                  >>>>>DATA MATCH TO INPUT ID NO.,I3,13,/    SCL07320
     *  ,T25,53H                                  OMOD-1 LWK AUGUST 1975)    SOL07330
C                                                                            SOL07340
C                                                                            SOL07350
      WRITE(6,3501)                                                          SOLC736C
C                                                                            SOL07370
3501  FORMAT(1H ,////                                                        SOL07380
     *    ,T27,7HHEATING,T73,6HEXTRA-,T87,9HCOLLECTOR,T98,5HSOLAR,/          SOL07390
     *    ,T12,10HHORIZONTAL,T27,6HDEGREE,T36,7HAMBIENT,T49                  SCL07400
     *,7HHEATING,T62,3HDHW,T73,11HTERRESTRIAL,T87,4HTILT,T98                 SOL07410
     *                                                  ,6HENERGY,/         SOL07420
     *,T5,5HMONTH,T12,10HINSOLATION,T27,4HDAYS,T36,11HTEMPERATURE,T49        SCL07430
     *,4HLOAD,T62,4HLOAD,T73,10HINSOLATION,T87,6HFACTOR,T98,8HFRACTION,/     SOL07440
     *  //,T12,13HBTU/DAY FT**2,T27,7HDEG DAY,T39,5HDEG F                   SOL07450
     *    ,T49,37HBTU/MONTH    BTU/MONTH  BTU/DAY FT**2,/                    SOL07460
     *,T5,5H-----,T12,13H-------------,T27,7H-------,T36                     SOL0747C
     *    ,11H-----------,T49,9H---------,T62,9H---------                    SOL07480
     *    ,T73,13H-------------,T87,9H---------,T98,8H--------)              SOL07490
C                                                                            SOL07500
C                                                                            SOL07510
C                                                                            SOL07520
      WRITE(6,3502) (XI(IR),HDD(IR),TAVE(IR),QHLI(IR),QDHWI(IR)             SOL07530
     *                ,XIO(IR),SLOCOR(IR),FBARI(IR), IR=1,6)               SOL07540
C                                                                            SOL07550
3502  FORMAT(1H ,/                                                           SOL07560
     *,T5,4H JAN,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4             SOL07570
     *          ,T77,F6.1,T89,F5.3,T100,F5.3,/                             SOL0758C
     *,T5,4H FEB,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4             SOL07590
     *          ,T77,F6.1,T89,F5.3,T100,F5.3,/                             SOL07600
     *,T5,4H MAR,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4             SOL07610
```

```
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07620
     *,T5,4H APR,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07630
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07640
     * T5,4H MAY,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07650
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07660
     *,T5,4H JUN,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07670
     *           ,T77,F6.1,T89,F5.3,T100,F5.3)                                   SOL07680
C                                                                                SOL07690
C                                                                                SOL07700
      WRITE(6,3503) (XI(IR),HDD(IR),TAMB(IR),QHLI(IR),QDHWI(IR)                 SOL07710
     *              ,XIO(IR),SLOCOR(IR),FBARI(IR), IR=7,12)                     SOL07720
     *                                 ,HDDTOT,SUMHL,SUMDHW,FBAR                SOL07730
C                                                                                SOL07740
C                                                                                SOL07750
3503  FORMAT(1H ,                                                                SOL07760
     * T5,4H JUL,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07770
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07780
     *,T5,4H AUG,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07790
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07800
     *,T5,4H SEP,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07810
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07820
     *,T5,4H OCT,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07830
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07840
     *,T5,4H NOV,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07850
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07860
     *,T5,4H DEC,T15,F6.1,T27,F6.1,T39,F6.1,T48,E11.4,T61,E11.4                  SOL07870
     *           ,T77,F6.1,T89,F5.3,T100,F5.3,/                                  SOL07880
     *,T5,5HTOTAL,T25,F8.1,T48,E11.4,T61,E11.4,/                                 SOL07890
     *           ,T77,19H>>>WEIGHTED AVERAGE,T100,F5.3)                          SOL07900
C                                                                                SOL07910
      WRITE(6,3504)AREAC,CAPAC                                                   SOL07920
     *            ,SLOPE,CAPAS                                                   SOL07930
     *            ,DIACTI,HXFRI                                                  SOL07940
     *            ,DIACTO,HXFRO                                                  SOL07950
     *            ,DIASTI,GPMC                                                   SOL07960
     *            ,VELOC,GPMS                                                    SOL07970
3504  FORMAT(1H ,T18                                                             SOL07980
     *      ,28HDESIGN VARIABLES/CONSTRAINTS,T72,16HOTHER PARAMETERS,/           SOL07990
     *  ,T18,28H----------------------------,T72,16H----------------,/           SOL08000
     *      ,T5,40HCOLLECTOR AREA  (FT**2) ..............>>>,F10.2              SOL08010
     *     ,T57,4CHCOLLECTOR SIDE CAPACITY (BTU/HR F).....,E10.3,/              SOL08020
     *      ,T5,40HCOLLECTOR TILT ANGLE  (DEG) ..........>>>,F10.2              SOL08030
     *     ,T57,4CHSTORAGE SIDE CAPACITY (BTU/HR F).......,E10.3,/              SOL08040
     *      ,T5,4CHCOLLECTOR SIDE TUBE INNER DIA. (FT) ....,F10.4               SOL08050
     *     ,T57,40HCOLLECTOR SIDE CONVECTION COEFF.........,F10.4,/              SOL08060
     *      ,T5,4CHCOLLECTOR SIDE TUBE OUTER DIA. (FT) ....,F10.4               SOL08070
     *     ,T57,4CHSTORAGE SIDE CONVECTION COEFFICIENT ....,F10.4,/             SOL08080
     *      ,T5,4CHSTORAGE SIDE TUBE(HEX) INNER DIA. (FT)..,F10.4               SOL08090
```

```
     *      ,T57,40HCOLLECTOR SIDE FLOW RATE  (GPM) .........,F10.4,/      SOL08100
     *       ,T5,40HCOLLECTOR SIDE FLUID VELOCITY (FT/SEC)..,F10.4         SOL08110
     *      ,T57,4CHSTORAGE SIDE FLOW RATE  (GPM) ..........,F10.4)        SOL08120
C                                                                          SOL08130
C                                                                          SOL08140
      WRITE(6,3505)VELOS,GPMCAR                                            SOL08150
     *            ,HXLONG,GPMSAR                                         SOL08160
     *                   ,EFFECT                                         SOL08170
     *                ,G1,SUMFQ                                          SOL08180
     *                ,G2,SUMQ                                           SOL08190
     *                ,G3,FBAR                                           SOL08200
     *                ,G4,XNPV                                           SOL08210
     *                ,G5,UHEXI                                          SOL08220
C                                                                          SOL08230
C                                                                          SOL08240
3505  FORMAT(1H ,                                                          SOL08250
     *       T5,4CHSTORAGE SIDE FLUID VELOCITY  (FT/SEC) .. ,F10.4        SOL08260
     *      ,T57,40HNORMALIZED COLLECTOR FLOW (GPM/AREAC)...,F10.4,/      SOL08270
     *       ,T5,4CHHEAT EXCHANGER LENGTH (FT) .............,F10.2        SOL08280
     *      ,T57,4CHNORMALIZED STORAGE FLOW  (GPM/AREAC) ...,F10.4,/      SOL08290
     *       ,T5,40H////////////////CONSTRAINTS//////////////              SOL08300
     *      ,T57,4CHHEAT EXCHANGER EFFECTIVENESS............,F10.4/       SOL08310
     *       ,T5,40HHEX ANNULAR DIAMETER DIFFERENCE (FT)....,F10.4        SOL08320
     *      ,T57,4CHSOLAR ENERGY DELIVERED (BTU/YEAR).......,E10.3,/      SOL08330
     *       ,T5,4CHCOLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).,F10.4        SOL08340
     *      ,T57,40HTOTAL ENERGY DEMAND  (BTU/YEAR) ........,E10.3,/      SOL08350
     *       ,T5,4CHCOLLECTOR SIDE REYNOLDS NUMBER..........,E10.3        SOL08360
     *      ,T57,40HANNUAL AVERAGE SOLAR LOAD FRACTION .....,F10.4,/      SOL08370
     *       ,T5,4CHSTORAGE SIDE REYNOLDS NUMBER ...........,E10.3        SOL08380
     *      ,T57,4CHOBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>,E10.3,/      SOL08390
     *       ,T5,40HCAPACITY RATIO (CMIN/CMAX)..............,F10.4       SOL08400
     *      ,T57,4CHHEX COEFFICIENT (BTU/HR F FT**2)........,F10.2)       SOL08410
C                                                                          SOL08420
C                                                                          SOL08430
      WRITE(6,3506)G6,COSTTC,G7,FPP                                        SOL08440
C                                                                          SOL08450
C                                                                          SOL08460
3506  FORMAT(1H ,                                                          SOL08470
     *       T5,4CHFLOW PARAMETER Z2(GCF/FRUL)..............,F10.4       SOL08480
     *      ,T57,40HTOTAL INSTALLATION COST ($) ............,F10.2,/      SOL08490
     *       ,T5,40HFLOW PARAMETER Z1(GCF/FRPUL)............,F10.2        SOL08500
     *      ,T57,4CHCOLLECTOR FLOW FACTOR(FPP).............,F10.4)       SOL08510
C                                                                          SOL08520
C                                                                          SOL08530
      WRITE(6,3507)                                                        SOL08540
3507  FORMAT(1H1,///////,28HERROR MESSAGES IF ANY FOLLOW)                  SOL08550
      RETURN                                                               SOL08560
      END                                                                  SOL08570
```

```
C                    ------------------------------                                  SOLC858C
CC                                                                                   SOL08590
CCC                     SUBROUTINE SECTION                                           SOL08600
CCCC                                                                                 SOL08610
CCCCC                ------------------------------                                  SOL08620
CCCCCC                                                                               SOL08630
CCCCCC!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!SOLC864C
CCCCCC                                                                               SOL08650
CCCCCC                                                                               SOL08660
CCCCCC                                                                               SOL08670
CCCCCC                                                                               SOL08680
CCCCCC!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!SOL08690
CCCCC                                                                                SOL08700
CCCC                                                                                 SOL08710
CCC                                                                                  SCL08720
      SUBROUTINE SETCAL                                                              SOL08730
C                                                                                    SOL08740
C-----THIS FILE IS SET UP TO  ESTABLISH THE CALENDAR ARRAY                           SOL08750
C     XXX(I,J).  I IS THE MONTH NUMBER, J=1 IS  DAYS PER MONTH                       SOL08760
C     J=2 IS THE JULIAN DAY NUMBER FOR THE FIRST DAY OF THE                          SOL08770
C     MONTH AND J=3 IS THE JULIAN DAY NUMBER FOR THE LAST DAY                        SOL08780
C     OF THE MONTH.                                                                  SOL08790
C                                                                                    SOL08800
      COMMON/DAYS/XXX(12,3)                                                          SOL08810
C                                                                                    SOL08820
      XXX(1,1)=31.                                                                   SOL08830
      XXX(2,1)=28.                                                                   SOL08840
      XXX(3,1)=31.                                                                   SOL08850
      XXX(4,1)=30.                                                                   SOL08860
      XXX(5,1)=31.                                                                   SOL08870
      XXX(6,1)=30.                                                                   SOL08880
      XXX(7,1)=31.                                                                   SOL08890
      XXX(8,1)=31.                                                                   SOL08900
      XXX(9,1)=30.                                                                   SOL08910
      XXX(10,1)=31.                                                                  SOL08920
      XXX(11,1)=30.                                                                  SOL08930
      XXX(12,1)=31.                                                                  SCL08940
C                                                                                    SOL08950
      XXX(1,2)=1.                                                                    SOL08960
      XXX(1,3)=31.                                                                   SOL08970
C                                                                                    SOL08980
C                                                                                    SOL08990
      DO 251 I=2,12                                                                  SOL09000
      K=I-1                                                                          SOL09010
C                                                                                    SOL09020
      XXX(I,2)=XXX(K,3) + 1.                                                         SOL09030
      XXX(I,3)=XXX(K,3) + XXX(I,1)                                                   SOL09040
C                                                                                    SOL09050
```

```
251   CONTINUE                                                                  SOL09060
C                                                                               SOL09070
      RETURN                                                                    SOL09080
      END                                                                       SOL09090
C                                                                               SOLC9100
C                                                                               SOL09110
C!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!SOL09120
      SUBROUTINE FILE08                                                         SOL09130
C                                                                               SOL09140
C                                                                               SOL09150
C     THIS FILE IS SET UP TC ALLOW USER INPUT FOR CERTAIN                       SOL09160
C     PARAMETERS WHICH WILL REMAIN CONSTANT .                                   SOL09170
C                                                                               SOLC9180
      COMMON/FILE09/LOCATE                                                      SOL09190
C                                                                               SOL09200
C                                                                               SOL09210
      COMMON/FILE8/NAME1,NAME2,NAME3,NAME4,                                     SOL09220
     *LANA,LDES,NFUEL,                                                          SOL09230
     *NAME5,NAME6,NAME7,NAME8,NAME9,FRTA,FRUL,                                  SOL09240
     *TARAT,RHO,CSUBPC,CSUBPS,XLIFE,DISCON,FLATE,                               SOL09250
     *CCSTCR,COSTIN,COSTTK,OPTSTO,COSTHX,PUMPOW,                                SOL09260
     *CSTOIL,CSTELE,CSTGAS,EFFOIL,EFFELE,EFFGAS,                                SOL09270
     *ULOSSR,AREAR,DENTS,USEH2O,TEMH2O,TEMGR,                                   SOL09280
     *CCNDTU,DENSYC,DENSYS,RFOULC,RFOULS,                                       SOL09290
     *IDNUM,SEFFEC,TEMPCF,TEMPSF,CONDCF,CONDSF,                                 SOL09300
     *CCNOIL,CONELE,CONGAS,XMR                                                  SOL09310
C                                                                               SOL09320
C                                                                               SOL09330
      READ(8,800) NAME1,NAME2,NAME3,NAME4                                       SOL09340
      READ(8,801) LANA,LDES,LOCATE,NFUEL                                        SOL09350
      READ(8,802) NAME5,NAME6,NAME7,NAME8,NAME9,FRTA,FRUL                       SOL09360
      READ(8,803) TARAT,RHO,CSUBPC,CSUBPS,XLIFE,DISCON,FLATE                    SOL09370
      READ(8,804) COSTCR,COSTIN,COSTTK,CPTSTO,CCSTHX,PUMPCW                     SOL09380
      READ(8,804) CSTOIL,CSTELE,CSTGAS,EFFOIL,EFFELE,EFFGAS                     SOL09390
      READ(8,804) ULOSSR,AREAR,DENTS,USEH2O,TEMH2C,TEMGR                        SOL09400
      READ(8,805) CONDTU,DENSYC,DENSYS,RFOULC,RFOULS                            SOL09410
      READ(8,806) IDNUM,SEFFEC,TEMPCF,TEMPSF,CONDCF,CONDSF                      SOL09420
      READ(8,807) CONOIL,CCNELE,CCNGAS,XMR                                      SOL09430
C                                                                               SOL09440
C                                                                               SOL09450
800   FCRMAT(////////////,4A4)                                                  SOL09460
801   FORMAT(//////,2L1,2I3)                                                    SOL09470
802   FORMAT(////,5A4,2F9.4)                                                    SOL09480
803   FORMAT(//,7F9.4)                                                          SOL09490
804   FORMAT(//,6F9.4)                                                          SOL09500
805   FCRMAT(//,5F9.4)                                                          SOL09510
806   FORMAT(//,I5,5F9.4)                                                       SOL09520
807   FCRMAT(//,3F8.1,1F9.4)                                                    SOL09530
```

```
C                                                                       SOL09540
      RETURN                                                            SOL09550
      END                                                               SOL09560
C                                                                       SOL09570
CC                                                                      SCL09580
CC                                                                      SOL09600
C                                                                       SOL09610
      SUBROUTINE CMATIC                                                 SOL09620
C                                                                       SOL09630
CC                                                                      SOL09640
CC    THIS FILE IS SET UP TO PROVIDE CLIMATILOGICAL DATA FOR            SOL09650
CC    THE 97 LOCATIONS DEFINED BY NOAA. INFORMATION INCLUDES            SOL09660
CC    LATITUDE, (XLAT) , ETC                                            SOL09670
C                                                                       SOL09680
      COMMON/FILE89/LOCATE                                              SOL09690
C                                                                       SOL09700
C                                                                       SOL09710
      COMMON/FILE9/NAM10,NAM11,NAM12,NAM13,XLAT,                        SOL09720
     *TAMB(12),HDD(12),WIND(12),XI(12),                                 SOL09730
     *XMEANT,HDDTOT,XMEANW,XMEANI                                       SOL09740
C                                                                       SOL09750
      DIMENSION LOCNM(20),NAME10(20),NAME11(20),NAME12(20),NAME13(20),  SOL09760
     *XXLAT(20),CLIMAT(20,12,4)                                         SOL09770
C                                                                       SOL09780
      DO 900 LL=1,20                                                    SOL09790
      READ(9,902)LOCNM(LL),NAME10(LL),NAME11(LL),NAME12(LL),NAME13(LL), SOL09800
     *XXLAT(LL)                                                         SOL09810
      READ(9,903) ((CLIMAT(LL,I,K),I=1,12),K=1,4)                       SOL09820
900   CONTINUE                                                          SOL09830
C                                                                       SOL09840
      L=LOCATE                                                          SOL09850
      XLAT=XXLAT(L)                                                     SOL09860
      NAM10=NAME10(L)                                                   SOL09870
      NAM11=NAME11(L)                                                   SCL09880
      NAM12=NAME12(L)                                                   SOL09890
      NAM13=NAME13(L)                                                   SOL09900
C                                                                       SOL09910
      SUMT=0.0                                                          SOL09920
      SUMH=0.0                                                          SCL09930
      SUMW=0.0                                                          SOL09940
      SUMI=0.0                                                          SOL09950
      DO 901 I=1,12                                                     SOL09960
      TAMB(I)=CLIMAT(L,I,1)                                             SOL09970
      HDD(I)=CLIMAT(L,I,2)                                              SOL09980
      WIND(I)=CLIMAT(L,I,3)                                             SOL09990
      XI(I)=CLIMAT(L,I,4)                                               SOL10000
      SUMT=SUMT+TAMB(I)                                                 SOL10010
      SUMH=SUMH+HDD(I)                                                  SOL10020
```

```
      SUMW=SUMW+WIND(I)                                                 SOL10030
      SUMI=SUMI+XI(I)                                                   SOL10040
901   CONTINUE                                                          SOL10050
C                                                                       SOL10060
      XMEANT=SUMT/12.0                                                  SOL10070
      HDDTOT=SUMH                                                       SOL10080
      XMEANW=SUMW/12.0                                                  SOL10090
      XMEANI=SUMI/12.0                                                  SOL10100
C                                                                       SOL10110
902   FORMAT(I4,4A4,F6.2)                                               SOL10120
903   FORMAT(12F6.1)                                                    SOL10130
                                                                        SOL10140
      RETURN                                                            SOL10150
      END                                                               SOL10160
C                                                                       SOL10170
C                                                                       SOL10180
C!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!SOL10190
C                                                                       SOL10200
C                                                                       SOL10210
C                                                                       SOL10220
C!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!SOL10230
```

```
$     COPES/CONMIN INPUT DATA:  FILE FTC5F001
$
    SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN
$
$
$    NCALC       NDV       NSV     N2VAR    IPNPUT    IPSENS    IPZVAR
        2         8         0         0         2         0         0
$
$   IPRINT      ITMAX    ICNDIR     NSCAL      ITRM    LINOBJ    NACMX1      NFDG
        1       500         0         5         0         0         0         0
$
$     FDCH     FDCHM        CT     CTMIN       CTL    CTLMIN     THETA
     0.01     0.001     -0.05     0.004     -0.01     0.001      1.0
$
$   DELFUN    DABFUN    ALPHAX    ABOBJ1
    0.001     0.001       0.1       0.1
$
$   NDVTOT      IOBJ    SGNOBJ
        0         9     +1.0
$
$    DESIGN VARIABLE LIMITS: BOUNDS/INITIAL VALUE/SCALE FACTOR
$
$   V.LB       V.UB       X.       SCAL.
$
$          COLLECTOR AREA     (FT**2)
  100.0     2000.0     400.0
$
$          COLLECTOR TILT ANGLE     (DEGREES)
    0.0       90.0       60.0
$
$          PRIMARY LOOP OUTER DIAMETER     (FEET)
   .005        .30       0.05
$
$          PRIMARY LOOP INNER DIAMETER     (FEET)
   .004        .28       0.03
$
$          STORAGE LOOP HEX CASING INNER DIAMETER     (FEET)
   .05        1.0        0.10
$
$          PRIMARY LOOP FLUID VELOCITY     (FT/SEC)
   1.0      3000.0       20.0
$
$          STORAGE LOOP FLUID VELOCITY     (FT/SEC)
   1.0       100.0       10.0
$
$          HEX LENGTH     (FEET)
   5.0       500.0        6.0
$
```

```
$     DESIGN VARIABLE IDENTIFICATION
$
$     NDSGN      IDSGN     A.MULT
           1          1        1.0
           2          2        1.0
           3          3        1.0
           4          4        1.0
           5          5        1.0
           6          6        1.0
           7          7        1.0
           8          8        1.0
$
$     NCONS
           7
$
$     CONSTRAINT FUNCTION IDENTIFICATION AND BOUNDS
$
$          HEX ANNULAR THICKNESS    (FEET)
          10         10          1
       0.005                  10.0
$
$          PRIMARY LOOP DOUBLE THICKNESS    (FEET)
          11         11          1
       0.005                  0.01
$
$          PRIMARY LOOP REYNOLDS NUMBER    (DIMENSIONLESS)
          12         12          0
         C.0                .49E 06
$
$          STORAGE LOOP REYNOLDS NUMBER    (DIMENSIONLESS)
          13         13          0
         0.0                .50E 06
$
$          CAPACITY RATIO    CMIN/CMAX    (DIMENSIONLESS)
          14         14          0
      0.0001                  0.999
$
$          FLOW PARAMETER Z2 (GCP/FRUL)  (DIMENSIONLESS)
          15         15          0
         1.0                .10E 08
$
$          FLOW PARAMETER Z1 (GCP/FRPUL)  (DIMENSIONLESS)
          16         16          0
         9.0                  16.0
$
$          INITIAL VALUES TO BE READ IN FOLLOW .....END
END
 600.0      50.0       0.05       0.03       0.10      20.0       20.0       6.0
```

```
$
$      SCLOAD-1 SYSTEM USER DEFINED OPTICNS:  FILE FT08F001
$
$
$      THIS FILE IS CALLED BY THE SOLOAC-1 SYSTEM SUBROUTINE
$      FILE08 AND ALLOWS COMPLETE FLEXIBILITY FOR THE USER IN
$      CHOOSING VARIOUS PARAMETERS.
$
$ STUDY APPROACH: NAME1, NAME2(2A4) ; ENERGY COMPARISON: NAME3, NAME4(2A4)
$                 ANALYSIS/DESIGN                        OIL/ELECTRIC/GAS
$
ANALYSIS      OIL
$
$ LOGICAL INDEX(ANALYSIS):LANA(1L1); LOGICAL INDEX(DESIGN):LDES(1L1);
$                          T/F                                  T/F
$ LOCATION INDEX: LOCATE(I3); ENERGY INDEX: NFUEL(I3)
$                 1/2/3.../97                1=OIL/2=ELE/3=GAS
$
IF 1C  1
$
$ COLLECTOR MANUFACTURER: NAME5/6/7/8/9 (5A4);
$ INTERCEPT PARAMETER: FRTA(F9.4); SLOPE PARAMETER: FRUL(F9.4)
$
FEDERAL PRISON I. D     .627      .883
$
$   TARAT       RHO    CSUBPC    CSUBPS      XLIFE     DISCON     FLATE
    .93        .20      1.0       1.0       20.        .0900     .1100
$
$  COSTCR    COSTIN    COSTTK    OPTSTO    COSTHX    PUMPOW
   9.4    10.       00.08     15.30      5.00      1.00
$
$  CSTOIL    CSTELE    CSTGAS    EFFOIL    EFFELE    EFFGAS
    .90       .05       .40       .70       .99       .70
$
$  ULOSSR     AREAR     DENTS    USEH2O    TEMH2O     TEMGR
    .09  5000.          6.        20.      140.       55.
$
$  CONDTU    DENSYC    DENSYS    RFOULC    RFOULS
 220.0      60.81     62.09      0.001     0.001
$
$    IDNUM    SEFFEC    TEMPCF    TEMPSF    CONDCF    CONDST
       233     1.0      176.0     104.0      0.387     0.364
$
$ CONCIL  CONELE  CONGAS      XMR
142000.    3413. 100000.     .001
$
$
$
```

```
$
$      SOLOAD-1 SYSTEM CLIMATIC DATA:  FILE FT09F001
$      THIS FILE IS CALLED BY SUBROUTINE CMATIC
$
$
$      LINE 1 INCLUDES LOCATION NUMBER,CITY,STATE, AND LATITUDE
$      LINE 2 CONTAINS MONTHLY MEAN AMBIENT TEMPERATURES
$      LINE 3 CONTAINS MONTHLY HEATING DEGREE DAYS
$      LINE 4 CONTAINS MONTHLY MEAN WIND SPEEDS , MI/HR  (N.A. SOLOAD-1)
$      LINE 5 CONTAINS MONTHLY AVERAGE DAINLY INSOLATION , BTU/FT**2 DAY
$
$
$
1    LACROSSE     WISC 43.87
  15.4  20.7  31.0  47.0  58.7  68.5  72.5  70.4  60.8  50.9  35.4  22.1
1536.11253.11055.6 546.8 235.2 42.3   6.9  19.1 174.1 444.3 886.91331.2    8.7
   8.7   5.7   9.2  10.6   9.8   8.3   7.6   7.4   8.1   9.3   9.7   8.6
 481.3 764.51100.81426.21712.81905.51900.51666.31241.9 863.5 493.9 369.5
2    SHERIDAN  WYOMING 44.77
  21.0  26.7  32.4  43.0  53.6  62.6  70.8  69.5  57.8  46.9  32.6  25.3
1364. 1083. 1012.  661.4 359.7 127.6  17.3  34.3 241.8 562.  973. 1230.8
   7.8   8.1   9.1   9.8   8.9   7.9   7.1   7.2   7.4   7.5   7.8   7.8
 517.5 788.31204.81537.21882.72156. 2329. 2006. 1502. 1006.  591.  441.4
3    SALEM       OREGON 44.92
  39.7  42.3  44.4  48.6  54.9  60.6  66.2  65.4  61.0  52.2  44.8  40.9
 783.5 642.5 638.9 493.6 316.2 154.7  46.2  50.1 140.6 397.1 605.6 748.
   6.8   7.8   8.2   7.4   6.7   6.6   6.5   6.3   6.2   6.2   7.4   8.2
 332.1 588.0 947.11370.41737.81841.62142.41774.71328.3 769.4 410.4 277.4
4    PORTLAND    MAINE 43.65
  24.2  24.2  32.3  42.8  52.9  62.7  68.0  66.6  59.0  48.8  38.8  26.3
1327.81152.71013.4 664.7 379.9 118.5  22.1  42.0 202.8 502.1 785.41195.0
   9.5   9.8  10.4  10.2   9.5   8.4   7.8   7.7   8.0   8.6   8.8   9.3
 450.3 681.6 969.61304.  1567. 1712. 1659. 1461. 1158.  822.3 459.2 362.8
5    INDIANAPOLIS  IN 39.73
  27.2  31.0  39.8  52.5  62.4  71.9  74.9  72.9  66.2  54.7  41.7  31.4
1172.5 961.7 781.4 385.3 144.2  15.7   1.2   4.3  74.0 332.9 700.61042.3
  10.9  11.2  11.8  11.4   9.7   8.6   7.4   7.2   8.0   8.8  10.3  10.4
 495.6 746.71037.41396.31688.01868.11806.41643.51324.  977.  579.1 416.6
6    PHILADELPHIA PA 39.88
  31.7  34.7  41.3  52.7  62.4  71.7  76.1  74.6  67.7  56.6  45.9  35.7
1031.4 875.7 733.5 380.2 134.8  12.9   .2   1.1  50.3 276.1 572.7 907.5
  10.3  11.0  11.5  11.1   9.7   8.8   8.1   8.0   8.4   8.9   9.5  10.1
 555.3 794.11108.21433.91659.91811.21758.11574.51281.3 958.5 619.2 470.5
7    EAGLE    COLORADO 39.65
  17.3  23.0  31.6  41.4  51.6  60.2  65.9  63.1  54.6  43.4  29.3  18.0
1479.21188.31034.5 707.8 415.2 157.4  21.8  81.9 313.4 672.91070.01457.9
   4.7   5.1   6.6   7.5   7.0   6.7   5.5   5.2   5.4   5.0   4.7   4.1
 754.21078.51501.71932.62255.32508.92384.52083.81766.71307.2 868.6 690.9
```

```
8   KANSAS CITY   MO 39.12
  28.8  34.5  42.7  56.3  66.3  75.4  80.1  78.3  69.8  59.3  44.6  33.7
1125.0 863.6 692.6 289.6  87.3   6.7    .2    .9  47.3 228.2 612.4 971.6
  10.0  10.3  11.4  11.5  10.8   9.9   8.9   8.5   9.0   9.3  10.0  10.0
 647.9 894.41202.91575.11872.62079.62102.11862.41452.41092.3 737.2 561.5
9   OAKLAND   CALIF. 37.73
  48.3  51.7  53.1  55.3  58.0  61.0  61.8  62.4  63.4  60.4  54.6  49.1
 518.2 376.5 370.3 291.5 222.0 138.2 110.2  91.2  75.6 151.3 307.4 493.0
   6.8   7.4   9.1   9.7  10.1  10.0   9.4   9.1   8.0   8.5   6.5   6.7
 707.91017.41456.31922.12211.32350.02322.52052.61701.21212.0 822.2 647.0
10  BRYCE CANYON   UT 37.70
  19.5  23.2  29.1  37.6  47.5  56.9  63.2  60.6  52.7  42.1  29.6  21.2
1412. 1186. 1114.  821.4 542.0 249.0  76.9 144.4 370.0 710. 1060. 1358.6
   6.9   7.9   8.4   9.1   8.5   8.3   6.7   6.5   7.1   7.4   7.2   6.9
 914. 1236. 1685. 2133. 2454. 2655. 2424. 2157. 1920. 1465. 1016.  818.2
11  DODGE CITY    KAN 37.77
  29.2  34.0  41.2  53.7  64.0  74.0  79.0  77.5  67.9  57.1  41.7  32.4
1109.  875.3 739.2 354.7 128.2  15.4   1.4   1.9  70.9 275.4 701. 1011.7
  13.3  13.8  15.2  15.5  14.6  14.3  12.8  12.5  13.4  13.4  13.5  13.3
 827. 1122. 1477. 1886. 2070. 2358. 2296. 2055. 1687. 1301.  893.6 731.9
12  RICHMOND      VA 37.50
  36.9  39.4  46.6  57.7  65.8  73.3  76.9  75.5  69.0  58.0  48.4  39.6
 869.6 722.9 572.7 255.9  76.3   7.6    .0    .6  36.4 241.2 500.6 787.4
   7.9   8.7   9.0   8.9   7.9   7.2   6.7   6.3   6.6   6.8   7.3   7.5
 631.9 876. 1210.21566.01762.01872.41774.41600.61347.91032.7 733.  566.8
13  MONTEREY    CALIF 36.6
  51.4  52.9  52.9  53.9  55.9  58.3  59.4  60.6  62.2  60.6  56.4  52.3
 434.  336.  372.  333.  282.  201.  174.  136.   84.  136.  258.  394.
   5.0   5.3   6.3   6.8   7.2   7.1   6.5   6.1   5.1   4.6   4.2   4.4
 720.  980. 1410. 1930. 2210. 2320. 2240. 2020. 1650. 1180.  790.  620.
14  FRESNO      CALIF 36.77
  44.3  49.3  53.8  59.6  67.5  75.3  81.1  78.7  73.2  63.2  51.9  44.3
 640.7 442.4 349.7 187.0  55.6   5.3   0.0    .3   4.1 105.3 394.3 641.7
   5.3   5.7   6.7   7.2   7.9   8.0   7.0   6.5   5.8   5.2   4.8   5.0
 657. 1012. 1566. 2093. 2484. 2733. 2685. 2423. 1985. 1429.  888.6 574.1
15  TULSA    OKLAHOMA 36.20
  35.8  40.9  48.8  60.8  68.9  77.0  82.2  80.7  72.7  61.9  48.8  39.2
 906.7 681.3 513.7 180.3  45.0   1.8    .3    .1  21.5 163.0 490.8 799.9
  10.0  11.3  12.4  12.4  11.0  10.3   9.4   9.1   9.3  10.0  10.6  10.5
 732.  978. 1306. 1603. 1822. 2021. 2031. 1865. 1473. 1164.  827.4 659.3
16  NORFOLK VIRGINIA 36.90
  40.3  41.8  48.1  57.9  66.2  74.1  77.7  76.7  71.5  61.2  51.8  43.3
 764.4 655.4 527.5 248.0  71.7   4.9    .0    .1  10.1 153.5 403.0 671.9
  11.6  12.1  12.3  11.8  10.4   9.5   8.8   8.8   9.6  10.4  10.6  11.1
 679.6 931.41281. 1676.71887.52000.31853.21680.21395.61083.0 811.2 623.8
17  CARIBOU     MAINE 46.87
  11.4  13.8  24.6  37.1  50.1  60.9  65.4  62.6  54.5  43.4  31.6  16.7
1661.51445.61252.4 835.9 466.1 159.9  58.5 114.9 323.8 670. 1001.11497.9
```

```
  11.7  11.7  12.4  11.5  11.3  10.6   9.7   9.5  10.1  10.7  10.9  11.3
 415.3 724. 1133.21414.31577.81757.41762.41500.61102.5 688.3 366.4 310.6
18   ADAK          ALASKA  51.88
  33.8  32.8  34.7  37.1  40.3  44.1  46.4  50.7  47.8  42.4  37.4  34.2
 967.9 909.5 940.3 836.8 765.2 628.3 514.9 443.0 516.6 701.5 828.0 953.9
  14.4  14.6  15.3  14.8  13.6  11.6  11.2  12.4  13.2  14.8  15.4  14.4
 231.2 432.5 716.41032.61179.61182.11120.4 948.6 759.3 528.2 307.9 187.2
19   PHEONIX   ARIZONA 33.43
  51.4  55.5  61.1  68.8  78.3  87.5  92.4  89.9  84.4  72.6  59.8  52.0
 422.0 272.0 156.8  35.6   3.1    .0    .0    .0    .2  17.3 172.0 404.5
   5.3   6.0   6.6   7.2   7.2   7.2   7.4   6.8   6.6   6.0   5.5   5.3
1021.31374.21814.12354.92676.52739.22486.52292.72015.51576.51150.5 932.0
20   POCATELLO   IDAHO 42.92
  24.5  29.2  35.1  44.1  54.7  63.0  72.2  69.7  59.3  47.7  35.4  26.5
1255.61014.9 926.6 626.5 330.4 129.5   5.2  30.0 195.9 538.2 889.01193.6
  11.1  11.1  11.6  12.0  10.6  10.5   9.3   9.2   9.3   9.3  10.4  10.4
 539.2 881.81371.51820.32280.32479.82559.82239.41769.31203.2 688.7 477.1
```

APPENDIX D

EXPERIMENT REPORT SUMMARIES

Each optimization problem or experiment is represented by an input summary report and an output summary report. These reports are tied together by a unique identification as follows:

$$\underline{L}\ \underline{L}\ \underline{N_1}\ \underline{N_2}\ \underline{N_3}$$

where,

LL = location identification number in accordance with Appendix C

N_1 = present worth factor identification number

1 - F_i' = 18.22

2 - F_i' = 24.34

N_2 = collector identification number

1 - Solarnetics

2 - American Sun

3 - Federal Prison Institute Double Glaze

N_3 = heat load conductance

1 - UA = 30000 Btu/HDD

2 - UA = 20000 Btu/HDD

3 - UA = 10000 Btu/HDD

The following report sets are included:

1111	2222	3111	4111
1112	2223	3112	4112
1113	2232	3213	4113
1213	2233	3222	4222
1223		3223	4223
1232		3232	4232
1233		3233	4233

9111	10111	11111	12111
9112	10112	11112	12112
9113	10112	11113	12113
9213	10213	11221	12221
9221	10221	11222	12222
9222	10222	11223	12223
9223	10223	11232	12232
9231	10231		
9232	10232		
	10233		

13111	14111	15111	16111
13112	14112	15112	16112
13223	14224	15223	16222
13232	14232	15232	16223
			16232

08/30/79 20.27.48

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1111
IMOD-1 LWK AUGUST 1979

LOCATION	LACROSSE	WISC
LOCATION INDEX.....		1
LATITUDE,DEGREES....		43.87
MEAN TEMPERATURE....		46.12
INSOL(BTU/DAY FT**2)		1160.56
LOAD FACTOR,HDD.....		6531.59
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/ARE(C)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR LACROSSE WISC

>>>>>DATA MATCH TO INPUT ID NO. 1111

OMCU-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	481.3	1536.1	15.4	0.4608E 08	0.2637E 07	1088.7	1.841	0.017
FEB	764.5	1253.1	20.7	0.3759E 08	0.2382E 07	1537.6	1.584	0.034
MAR	1100.8	1055.6	31.0	0.3167E 08	0.2637E 07	2213.7	1.276	0.056
APR	1426.2	546.8	47.0	0.1640E 08	0.2552E 07	2947.9	1.055	0.110
MAY	1712.8	235.2	58.7	0.7056E 07	0.2637E 07	3507.0	0.934	0.235
JUN	1905.5	42.3	68.5	0.1269E 07	0.2552E 07	3757.0	0.886	0.541
JUL	1900.5	6.9	72.5	0.2070E 06	0.2637E 07	3641.9	0.908	0.701
AUG	1666.3	19.1	70.4	0.5730E 06	0.2637E 07	3178.5	1.007	0.627
SEP	1241.9	174.1	60.8	0.5223E 07	0.2552E 07	2486.2	1.186	0.252
OCT	863.5	444.3	50.9	0.1333E 08	0.2637E 07	1751.0	1.468	0.106
NOV	493.9	886.9	35.4	0.2661E 08	0.2552E 07	1193.9	1.713	0.028
DEC	369.5	931.2	22.1	0.2936E 07	0.2637E 07	959.2	1.856	0.035
TOTAL		6531.6		0.1959E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.086

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.987E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	38.57	STORAGE SIDE CAPACITY (BTU/HR F).....	0.627E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0408	COLLECTOR SIDE CONVECTION COEFF	1321.7246
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0508	STORAGE SIDE CONVECTION COEFFICIENT	4248.0586
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1342	COLLECTOR SIDE FLOW RATE (GPM)	2.0237
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.4469	STORAGE SIDE FLOW RATE (GPM)	125.5017
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	23.1532	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
HEAT EXCHANGER LENGTH (FT)	66.29	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.2590
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.5434
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0834	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.194E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.227E 09
COLLECTOR SIDE REYNOLDS NUMBER..... 0.359E 05		ANNUAL AVERAGE SOLAR LOAD FRACTION	0.0855
STORAGE SIDE REYNOLDS NUMBER 0.273E 06		OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.199E 03
CAPACITY RATIO (CMIN/CMAX).....	0.0157	HEX COEFFICIENT (BTU/HR F FT**2).....	337.16
FLOW PARAMETER Z2(GCP/EPSUL).....	9.5092	TOTAL INSTALLATION COST ($)	3002.69
FLOW PARAMETER Z1(GCP/EPSUL).....	9.00	COLLECTOR FLOW FACTOR(FFP).....	0.9464

08/31/79 10.53.04

SOLOAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1112
IMOD-1 LWK AUGUST 1979

LOCATION	LACROSSE	WISC
LOCATION INDEX.....		1
LATITUDE,DEGREES....		43.87
MEAN TEMPERATURE....		46.12
INSOL(BTU/DAY FT**2)		1160.56
LOAD FACTOR,HDD.....		6531.59
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATE) INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR LACROSSE WISC

>>>>>DATA MATCH TO INPUT ID NO. 1112

UMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	481.3	1536.1	15.4	0.3134E 08	0.2637E 07	1088.7	1.846	0.024
FEB	764.5	1253.1	20.7	0.2556E 08	0.2382E 07	1537.6	1.587	0.048
MAR	1100.8	1055.6	31.0	0.2153E 08	0.2637E 07	2213.7	1.277	0.078
APR	1426.2	546.6	47.0	0.1115E 08	0.2552E 07	2947.9	1.054	0.149
MAY	1712.8	235.2	58.7	0.4798E 07	0.2637E 07	3507.0	0.932	0.257
JUN	1905.5	42.3	68.5	0.8629E 06	0.2552E 07	3757.0	0.884	0.587
JUL	1901.5	6.9	72.5	0.1408E 06	0.2637E 07	3641.9	0.906	0.710
AUG	1666.3	19.1	70.4	0.3896E 06	0.2637E 07	3178.5	1.005	0.652
SEP	1241.9	174.1	60.8	0.3552E 07	0.2552E 07	2486.2	1.185	0.312
OCT	863.5	444.3	50.9	0.9064E 07	0.2637E 07	1751.0	1.470	0.143
NOV	493.9	886.9	35.4	0.1809E 08	0.2552E 07	1153.9	1.716	0.039
DEC	369.5	331.2	22.1	0.6756E 07	0.2637E 07	959.2	1.861	0.048
TOTAL		6531.6		0.1332E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.116

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	38.91
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0361
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0401
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1260
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.4123
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	21.2084
HEAT EXCHANGER LENGTH (FT)	71.73
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0799
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.406E 05
STORAGE SIDE REYNOLDS NUMBER	0.239E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0193
FLOW PARAMETER Z2(GCP/FPPUL).....	9.5209
FLOW PARAMETER Z1(GCE/FPPUL).....	9.01

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.988E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.512E 05
COLLECTOR SIDE CONVECTION COEFF.....	1650.4468
STORAGE SIDE CONVECTION COEFFICIENT	4009.2195
COLLECTOR SIDE FLOW RATE (GPM)	2.0252
STORAGE SIDE FLOW RATE (GPM)	102.7698
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.0277
HEAT EXCHANGER EFFECTIVENESS.....	0.9438
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.191E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.164E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1161
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.147E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	354.45
TOTAL INSTALLATION COST ($)	3000.53
COLLECTOR FLOW FACTOR(FPP).....	0.9465

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1113
MOD-1 LWK AUGUST 1979

LOCATION	LACROSSE	WISC
LOCATION INDEX.....		1
LATITUDE,DEGREES....		43.87
MEAN TEMPERATURE....		46.12
INSOL(BTU/DAY FT**2)	1160.56	
LOAD FACTOR,HDD.....	6531.59	
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR LACROSSE    WISC                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  1113
                              UMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	481.3	1536.1	15.4	0.1659E 08	0.2637E 07	1088.7	1.853	0.043
FEB	764.5	1253.1	20.7	0.1353E 08	0.2382E 07	1537.6	1.591	0.083
MAR	1100.8	1055.6	31.0	0.1140E 08	0.2637E 07	2213.7	1.278	0.132
APR	1420.2	546.8	47.0	0.5905E 07	0.2552E 07	2947.9	1.052	0.232
MAY	1712.8	235.2	58.7	0.2540E 07	0.2637E 07	3507.0	0.930	0.402
JUN	1905.5	42.3	68.5	0.4568E 06	0.2552E 07	3757.0	0.881	0.639
JUL	1900.5	6.9	72.5	0.7452E 05	0.2637E 07	3641.9	0.903	0.719
AUG	1666.3	19.1	70.4	0.2063E 06	0.2637E 07	3178.5	1.003	0.678
SEP	1241.9	174.1	60.8	0.1880E 07	0.2552E 07	2486.2	1.185	0.408
OCT	863.5	444.3	50.9	0.4798E 07	0.2637E 07	1751.0	1.473	0.218
NOV	493.9	886.9	35.4	0.9579E 07	0.2552E 07	1193.9	1.722	0.066
DEC	369.5	331.2	22.1	0.3577E 07	0.2637E 07	959.2	1.869	0.072
TOTAL		6531.6		0.7054E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.182

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.590E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	39.41	STORAGE SIDE CAPACITY (BTU/HR F).....	0.881E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0314	COLLECTOR SIDE CONVECTION COEFF	2129.5378
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0414	STORAGE SIDE CONVECTION COEFFICIENT	5139.9102
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1381	COLLECTOR SIDE FLOW RATE (GPM)	2.0307
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	5.8581	STORAGE SIDE FLOW RATE (GPM)	176.9727
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	28.9072	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	76.75	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.7697
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9439
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0968	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.185E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.102E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.469E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1822
STORAGE SIDE REYNOLDS NUMBER	0.395E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.564E 02
CAPACITY RATIO (CMIN/CMAX).....	0.0112	HEX COEFFICIENT (BTU/HR F FT**2).....	379.24
FLOW PARAMETER Z2(GCP/FRUL).....	9.5421	TOTAL INSTALLATION COST ($)	2997.26
FLOW PARAMETER Z1(GCP/FRPUL).....	9.03	COLLECTOR FLOW FACTOR(FPP).....	0.9466

09/01/79 16.49.40

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1213
IMOD-1 LWK AUGUST 1979

LOCATION	LACROSSE	WISC	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		1	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		43.87	SLOPE:			
MEAN TEMPERATURE....		46.12	PARAMETER,FRUL	1.0380		
INSOL(BTU/DAY FT**2)		1160.56	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		6531.59	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.33
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	25.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	134.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.00

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR LACROSSE    WISC                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  1213
                                  OMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	481.3	1536.1	15.4	0.1659E 08	0.2637E 07	1088.7	1.868	0.070
FEB	764.5	1253.1	20.7	0.1353E 08	0.2382E 07	1537.6	1.611	0.132
MAR	1100.8	1055.6	31.0	0.1140E 08	0.2637E 07	2213.7	1.280	0.204
APR	1426.2	646.8	47.0	0.5905E 07	0.2552E 07	2947.9	1.043	0.344
MAY	1712.8	235.2	58.7	0.2540E 07	0.2637E 07	3507.0	0.915	0.565
JUN	1905.5	42.3	68.5	0.4568E 06	0.2552E 07	3757.0	0.864	0.825
JUL	1900.5	6.9	72.5	0.7452E 05	0.2637E 07	3641.9	0.887	0.899
AUG	1666.3	19.1	70.4	0.2063E 06	0.2637E 07	3178.5	0.991	0.866
SEP	1241.9	174.1	60.8	0.1880E 07	0.2552E 07	2486.2	1.183	0.579
OCT	863.5	444.3	50.9	0.4798E 07	0.2637E 07	1751.0	1.486	0.331
NOV	493.9	886.9	35.4	0.9579E 07	0.2552E 07	1193.9	1.751	0.106
DEC	369.5	331.2	22.1	0.3577E 07	0.2637E 07	959.2	1.906	0.120
TOTAL		6531.6		0.7054E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.262

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	159.72
COLLECTOR TILT ANGLE (DEG) .....>>>	42.11
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0593
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0677
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1248
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.0355
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.2333
HEAT EXCHANGER LENGTH (FT)	70.43
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0571
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0084
COLLECTOR SIDE REYNOLDS NUMBER.....	0.399E 05
STORAGE SIDE REYNOLDS NUMBER	0.147E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0453
FLOW PARAMETER Z2(GCP/FRUL).....	9.6264
FLOW PARAMETER Z1(GCP/FRPUL).....	9.12

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.160E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.352E 05
COLLECTOR SIDE CONVECTION COEFF.....	989.3655
STORAGE SIDE CONVECTION COEFFICIENT	3574.7625
COLLECTOR SIDE FLOW RATE (GPM)	3.2720
STORAGE SIDE FLOW RATE (GPM)	70.6953
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4426
HEAT EXCHANGER EFFECTIVENESS.....	0.913C
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.266E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	C.102E C9
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2616
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.164E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	305.46
TOTAL INSTALLATION COST ($)	3931.48
COLLECTOR FLOW FACTOR(FPP).....	C.9471

09/02/79 13.17.17

S O L O A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1223
IMOD-1 LWK AUGUST 1979

LOCATION	LACROSSE	WISC	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		1	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		43.87	SLOPE:			
MEAN TEMPERATURE....		46.12	PARAMETER,FRUL....	1.0350		
INSOL(BTU/DAY FT**2)		1160.56	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		8551.55	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.03
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0100

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L J A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR LACROSSE     WISC                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  1223
                                        OMCD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	461.3	1536.1	15.4	0.1659E 08	0.2637E 07	1088.7	1.916	0.084
FEB	764.5	1253.1	20.7	0.1353E 08	0.2382E 07	1537.6	1.627	0.162
MAR	1100.3	1055.6	31.0	0.1140E 08	0.2637E 07	2213.7	1.281	0.248
APR	1426.2	546.8	47.0	0.5905E 07	0.2552E 07	2947.9	1.033	0.408
MAY	1712.8	235.2	58.7	0.2540E 07	0.2637E 07	3507.0	0.900	0.645
JUN	1905.3	42.3	68.5	0.4508E 06	0.2552E 07	3757.0	0.847	0.884
JUL	1900.5	6.9	72.5	0.7452E 05	0.2637E 07	3641.9	0.871	0.943
AUG	1666.3	19.1	70.4	0.2063E 06	0.2637E 07	3178.5	0.980	0.919
SEP	1241.9	174.1	60.8	0.1880E 07	0.2552E 07	2486.2	1.179	0.664
OCT	863.5	444.3	50.9	0.4798E 07	0.2637E 07	1751.0	1.496	0.398
NOV	495.9	886.9	35.4	0.9579E 07	0.2552E 07	1193.9	1.773	0.128
DEC	369.5	1231.2	22.1	0.3577E 07	0.2637E 07	959.2	1.935	0.140
TOTAL		6531.6		0.7054E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.301

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	224.84	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.236E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	44.46	STORAGE SIDE CAPACITY (BTU/HR F).....	0.491E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0661	COLLECTOR SIDE CONVECTION COEFF.....	1114.6167
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0719	STORAGE SIDE CONVECTION COEFFICIENT	3887.8962
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1366	COLLECTOR SIDE FLOW RATE (GPM)	4.8418
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1426	STORAGE SIDE FLOW RATE (GPM)	98.5827
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.7016	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0215
HEAT EXCHANGER LENGTH (FT)	85.13	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4385
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9007
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0648	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.306E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0057	TOTAL ENERGY DEMAND (BTU/YEAR)	0.102E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.530E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3014
STORAGE SIDE REYNOLDS NUMBER	0.189E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.229E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0481	HEX COEFFICIENT (BTU/HR F FT**2).....	317.83
FLOW PARAMETER 2 (GCP/FRUL).....	10.1093	TOTAL INSTALLATION COST ($)	4084.64
FLOW PARAMETER 1 (GCP/FRPUL).....	9.60	COLLECTOR FLOW FACTOR(FPP).....	0.9497

XXXX

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S C L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        ---        -                 -                                *
*        RESULTS OF ANALYSIS FOR LACROSSE     WISC                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                >>>>>DATA MATCH TO INPUT ID NO.  1233
                                    MOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	431.3	1536.1	15.4	0.1659E 08	0.2637E 07	1088.7	1.857	0.085
FEB	764.5	1253.1	20.7	0.1353E 08	0.2382E 07	1537.6	1.616	0.155
MAR	1100.8	1055.6	31.0	0.1140E 08	0.2637E 07	2213.7	1.281	0.236
APR	1426.2	540.8	47.0	0.5903E 07	0.2552E 07	2947.9	1.040	0.392
MAY	1712.8	235.2	58.7	0.2540E 07	0.2637E 07	3507.0	0.910	0.629
JUN	1905.5	42.3	68.5	0.4568E 06	0.2552E 07	3757.0	0.859	0.889
JUL	1900.5	6.9	72.5	0.7452E 05	0.2637E 07	3641.9	0.882	0.957
AUG	1666.3	19.1	70.4	0.2063E 06	0.2637E 07	3178.5	0.986	0.927
SEP	1241.9	174.1	60.8	0.1880E 07	0.2552E 07	2486.2	1.182	0.646
OCT	863.5	444.3	50.9	0.4798E 07	0.2637E 07	1751.0	1.490	0.380
NOV	473.9	886.9	35.4	0.9579E 07	0.2552E 07	1193.9	1.757	0.123
DEC	369.5	991.2	22.1	0.3577E 07	0.2637E 07	959.2	1.915	0.151
TOTAL		6531.6		0.7054E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.296

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	201.32	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.173E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	42.81	STORAGE SIDE CAPACITY (BTU/HR F).....	0.355E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0587	COLLECTOR SIDE CONVECTION COEFF.....	1076.1470
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0687	STORAGE SIDE CONVECTION COEFFICIENT	3493.5029
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1241	COLLECTOR SIDE FLOW RATE (GPM)	3.5452
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9194	STORAGE SIDE FLOW RATE (GPM)	71.2998
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.3141	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0176
HEAT EXCHANGER LENGTH (FT)	66.42	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3542
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8832
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0604	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.301E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.102E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.437E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2960
STORAGE SIDE REYNOLDS NUMBER	0.152E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.207E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0487	HEX COEFFICIENT (BTU/HR F FT**2).....	312.12
FLOW PARAMETER Z2(GCP/LRUL).....	9.7272	TOTAL INSTALLATION COST ($)	4213.31
FLOW PARAMETER Z1(GCP/F2PUL).....	9.22	COLLECTOR FLOW FACTOR(FFF).....	0.9477

09/04/79 16.29.54

S O L A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 1232
IMDD-1 LMA AUGUST 1979

LOCATION	LACROSSE	MISC	COLLECTOR FEDERAL PRISON I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	1		COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.87		SLOPE:			
MEAN TEMPERATURE....	46.12		PARAMETER,FRUL	0.8830		
INSOL(BTU/DAY FT**2)	1160.56		INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HLL.....	6531.59		PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00		RATE COLT,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE.....				OIL
INDEX TYPE EFFICIENCY	COST	HEATING VALUE		
1 OIL 0.70	0.90($/GAL)	142000.0(BTU/GAL)		
2 ELE 0.99	0.05($/KWH)	3413.0(BTU/KWH)		
3 GAS 0.70	0.40($/THM)	100000.0(BTU/THM)		

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE F LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE(F).....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR PLATE CONDUCTIVITY(BTU/HR*FT*F)	9.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.55
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3600
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/SQ FAC)	15.50
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/SQ FAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/SQ FAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.30
MAINTENANCE (% INSTALLED COST/YR).....	0.0100

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

RESULTS OF ANALYSIS FOR LACROSSE WISC

>>>>>DATA MATCH TO INPUT ID OF. 1232
SIMD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	481.3	1536.1	15.4	0.3134E 08	0.2637E 07	1088.7	1.915	0.042
FEB	704.5	1253.1	20.1	0.2556E 08	0.2382E 07	1537.6	1.626	0.114
MAR	1100.8	1055.6	31.0	0.2153E 08	0.2637E 07	2213.7	1.281	0.177
APR	1426.2	546.8	47.0	0.1115E 08	0.2552E 07	2947.9	1.034	0.313
MAY	1712.3	235.2	58.7	0.4793E 07	0.2637E 07	3507.0	0.901	0.566
JUN	1905.5	42.3	68.5	0.8629E 06	0.2552E 07	3757.0	0.848	0.916
JUL	1930.5	6.9	72.5	0.1408E 06	0.2637E 07	3641.9	0.872	1.000
AUG	1662.3	19.1	70.4	0.3890E 06	0.2637E 07	3178.5	0.980	0.970
SEP	1241.9	174.1	60.8	0.3552E 07	0.2552E 07	2486.2	1.179	0.805
OCT	863.5	444.3	50.9	0.9064E 07	0.2637E 07	1751.0	1.498	0.316
NOV	493.5	836.9	35.4	0.1803E 08	0.2552E 07	1193.9	1.772	0.097
DEC	369.5	991.2	22.1	0.6756E 07	0.2637E 07	959.2	1.934	0.129
TOTAL		6531.6		0.1332E 09	0.3105E 08	>>>WEIGHTED AVERAGE		0.228

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	252.23
COLLECTOR TILT ANGLE (DEG) .....>>>	44.35
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0620
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0634
STORAGE SIDE TUBE(HEX) TUBE DIA. (FT)..	0.1295
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2336
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.5484
HEAT EXCHANGER LENGTH (FT)	76.89
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0612
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0064
COLLECTOR SIDE REYNOLDS NUMBER	0.5162 05
STORAGE SIDE REYNOLDS NUMBER	0.1602 06
CAPACITY RATIO (COLL/STOR).....>>>	0.0545
FLOW PARAMETER 1 (GPM/FT**2).....>>>	9.6926
FLOW PARAMETER 2 (GPM/FT**2).....>>>	7.13

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.2152 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.3948 05
COLLECTOR SIDE CONVECTION COEFF	1100.5505
STORAGE SIDE CONVECTION COEFFICIENT	3591.0062
COLLECTOR SIDE FLOW RATE (GPM)	4.4035
STORAGE SIDE FLOW RATE (GPM)	79.1362
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0175
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3137
HEAT EXCHANGER EFFECTIVENESS.....	0.8842
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.3752 08
TOTAL ENERGY LOADS (BTU/YEAR)	0.1646 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2284
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.2566 04
HEX COEFFICIENT (BTU/HR F FT**2).....	315.73
TOTAL INSTALLATION COST ($)	5276.79
COLLECTOR FLOW FACTOR(FPP).....	0.5472

09/02/79 17.00.31

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 2222
IMCD-1 LNK AUGUST 1979

LOCATION	SHERIDAN WYOMING	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	2	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	44.77	SLOPE:			
MEAN TEMPERATURE....	45.18	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1330.10	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	7666.88	PARAMETER,FTA....	0.0380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PEO).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3370
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX FIBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREA)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREA).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREA)..	10.00
ESTIMATED [illegible] COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S J L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN                     *
*        RESULTS OF ANALYSIS FOR SHERIDAN WYOMING                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH ID INPUT ID NO.  2222
                                  SMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	517.5	1364.0	21.0	0.2783E 08	0.2637E 07	1042.0	2.127	0.166
FEB	788.3	1083.0	26.7	0.2209E 08	0.2382E 07	1452.4	1.722	0.261
MAR	1204.9	1012.0	32.4	0.2064E 08	0.2637E 07	2175.8	1.324	0.373
APR	1537.2	661.4	43.0	0.1349E 08	0.2552E 07	2923.7	1.023	0.491
MAY	1882.7	359.7	53.6	0.7336E 07	0.2637E 07	3457.7	0.868	0.730
JUN	2196.0	127.6	62.6	0.2603E 07	0.2552E 07	3755.8	0.807	0.967
JUL	2329.0	17.3	70.8	0.3529E 06	0.2637E 07	3636.8	0.833	1.000
AUG	2006.0	34.3	69.5	0.6997E 06	0.2637E 07	3159.9	0.967	1.000
SEP	1562.0	241.8	57.8	0.4953E 07	0.2552E 07	2452.5	1.222	0.903
OCT	1005.3	562.0	46.5	0.1146E 08	0.2637E 07	1707.5	1.620	0.573
NOV	591.0	971.0	32.6	0.1785E 08	0.2552E 07	1147.3	2.030	0.255
DEC	441.4	1230.8	25.3	0.2511E 08	0.2637E 07	912.6	2.279	0.157
TOTAL		7866.9		0.1564E 09	0.3105E 08		>>>WEIGHTED AVERAGE	0.382

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	496.07	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.490E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	50.28	STORAGE SIDE CAPACITY (BTU/HR F).....	0.880E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0300	COLLECTOR SIDE CONVECTION COEFF.....	1169.5313
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0958	STORAGE SIDE CONVECTION COEFFICIENT	4105.9375
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1752	COLLECTOR SIDE FLOW RATE (GPM)	10.0486
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.5052	STORAGE SIDE FLOW RATE (GPM)	176.6272
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	23.2928	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	140.99	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3561
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9185
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0794	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.716E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0958	TOTAL ENERGY DEMAND (BTU/YEAR)	0.187E 09
COLLECTOR SIDE REYNOLDS NUMBER	0.317E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3820
STORAGE SIDE REYNOLDS NUMBER	0.261E 05	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.594E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0557	HEX COEFFICIENT (BTU/HR F FT**2).....	322.97
FLOW PARAMETER Z2(GCP/FPPUL).....	9.5092	TOTAL INSTALLATION COST ($)	7014.31
FLOW PARAMETER Z1(GCP/FPPUL).....	9.00	COLLECTOR FLOW FACTOR(FPP).....	0.9404

09/02/79 16.44.20

SOLOAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 2223
IMCD-1 LNK AUGUST 1979

LOCATION	SHERIDAN WYOMING	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	2	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	44.77	SLOPE:			
MEAN TEMPERATURE....	45.10	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1330.10	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	7666.88	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	3.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	1079.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00


SELECTED PARAMETERS


COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.53
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

AD-A076 836 NAVAL POSTGRADUATE SCHOOL MONTEREY CA F/G 3/2
SOLAR ENERGY DESIGN IMPROVEMENT: A METHODOLOGY FOR HYDRONIC FLA--ETC(U)
SEP 79 L W KOZOYED

UNCLASSIFIED NL

2 OF 3
AD
A076836

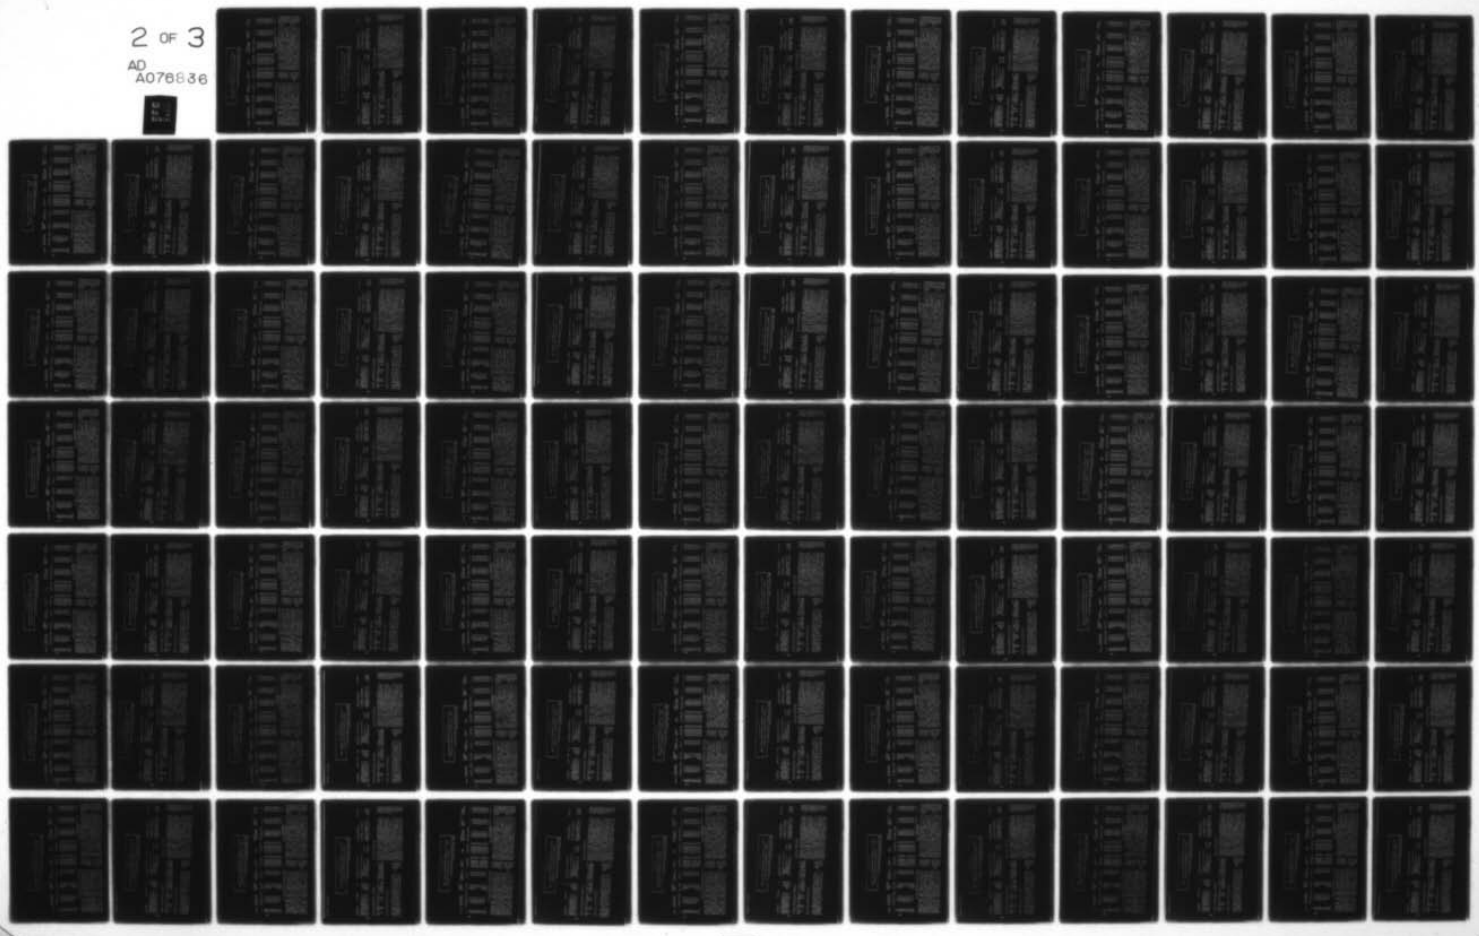

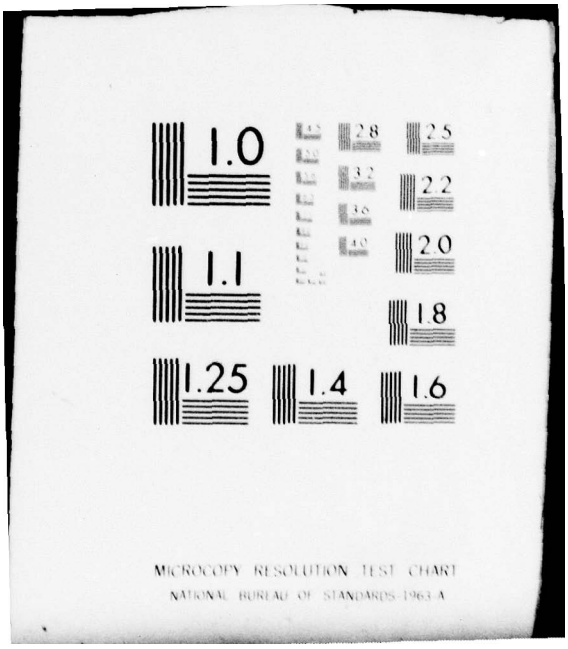
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SHERIDAN WYOMING

>>>>>DATA MATCH TO INPUT ID NO. 2223

OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	517.5	1364.0	21.0	0.1473E 08	0.2637E 07	1042.0	2.124	0.178
FEB	788.3	1083.0	26.7	0.1170E 08	0.2382E 07	1492.4	1.720	0.277
MAR	1204.8	1012.0	32.4	0.1093E 08	0.2637E 07	2175.8	1.324	0.391
APR	1537.2	661.4	43.0	0.7143E 07	0.2552E 07	2523.7	1.024	0.459
MAY	1882.7	359.7	53.6	0.3885E 07	0.2637E 07	3497.7	0.870	0.707
JUN	2156.0	127.6	62.6	0.1378E 07	0.2552E 07	3755.8	0.808	0.927
JUL	2329.0	17.3	70.8	0.1868E 06	0.2637E 07	3636.8	0.835	1.000
AUG	2006.0	34.3	69.5	0.3704E 06	0.2637E 07	3159.9	0.969	1.000
SEP	1502.0	241.8	57.8	0.2611E 07	0.2552E 07	2452.5	1.222	0.866
OCT	1005.3	562.0	46.9	0.6070E 07	0.2637E 07	1707.5	1.619	0.577
NOV	591.0	973.0	32.6	0.1051E 08	0.2552E 07	1147.3	2.028	0.267
DEC	441.4	1230.8	25.3	0.1329E 08	0.2637E 07	912.6	2.277	0.167
TOTAL		7666.9		0.8280E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.411

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	308.46
COLLECTOR TILT ANGLE (DEG) .....>>>	50.06
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0759
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0809
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1408
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1431
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.1529
HEAT EXCHANGER LENGTH (FT)	79.96
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0599
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.609E 05
STORAGE SIDE REYNOLDS NUMBER	0.162E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0697
FLOW PARAMETER Z2(GCP/FRUL).....	9.7182
FLOW PARAMETER Z1(GCP/FPPUI).....	9.21

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.311E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.447E 05
COLLECTOR SIDE CONVECTION COEFF.....	1084.3394
STORAGE SIDE CONVECTION COEFFICIENT	3666.0127
COLLECTOR SIDE FLOW RATE (GPM)	6.3855
STORAGE SIDE FLOW RATE (GPM)	89.6845
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0207
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2908
HEAT EXCHANGER EFFECTIVENESS.....	0.8422
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.468E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.114E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4115
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.423E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	313.56
TOTAL INSTALLATION COST ($)	5577.83
COLLECTOR FLOW FACTOR(FPP).....	0.9476

65/04/19 14.46.47

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 2232
SOLOAD-1 LWK AUGUST 1979

LOCATION	SHERIDAN WYOMING	COLLECTOR FEDERAL PRISM I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	2	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	44.77	SLOPE:			
MEAN TEMPERATURE....	45.18	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1330.16	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	7666.88	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

96

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3670
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.39
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LARGE COST ($/ARE/C)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.05
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S P E A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SHERIDAN WYOMING

>>>>>DATA MATCH TO INPUT ID NO. 2232
SPEAD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	917.5	1364.0	21.0	0.2783E 08	0.2637E 07	1042.0	2.122	0.152
FEB	738.3	1083.0	26.7	0.2209E 08	0.2382E 07	1492.4	1.719	0.234
MAR	1204.8	1012.0	32.4	0.2064E 08	0.2637E 07	2175.8	1.324	0.333
APR	1537.2	661.4	43.0	0.1349E 08	0.2552E 07	2923.7	1.026	0.444
MAY	1862.7	359.7	53.6	0.7338E 07	0.2637E 07	3457.7	0.872	0.661
JUN	2150.0	127.6	62.6	0.2603E 07	0.2552E 07	3755.8	0.811	0.972
JUL	2329.0	17.3	70.8	0.3529E 06	0.2637E 07	3636.6	0.837	1.000
AUG	2066.0	39.3	69.5	0.5997E 06	0.2637E 07	3159.9	0.970	1.000
SEP	1502.0	241.8	57.8	0.4933E 07	0.2552E 07	2452.5	1.223	0.869
OCT	1006.0	562.0	46.9	0.1146E 08	0.2637E 07	1707.5	1.619	0.525
NOV	591.0	973.0	32.6	0.1985E 08	0.2552E 07	1147.3	2.026	0.230
DEC	441.6	1230.8	25.3	0.2511E 08	0.2637E 07	912.6	2.273	0.146
TOTAL		7806.9		0.1564E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.355

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	417.36
COLLECTOR TILT ANGLE (DEG) .....>>>	49.78
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0784
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0834
STORAGE SIDE TUBE(REF) INNER DIA. (FT)..	0.1650
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.3405
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.4225
HEAT EXCHANGER LENGTH (FT)	76.33
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0516
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.6008E 05
STORAGE SIDE REYNOLDS NUMBER	0.1009E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0737
FLOW PARAMETER 22(GPM/FT-HR).....	9.5814
FLOW PARAMETER 21(GPM/FT**2).....	9.07

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.353E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.979E 05
COLLECTOR SIDE CONVECTION COEFF.....	1131.1615
STORAGE SIDE CONVECTION COEFFICIENT	3039.2209
COLLECTOR SIDE FLOW RATE (GPM)	7.2395
STORAGE SIDE FLOW RATE (GPM)	96.2662
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0173
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2306
HEAT EXCHANGER EFFECTIVENESS.....	0.8035
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.665E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.187E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3546
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.523E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	17.47
TOTAL INSTALLATION COST ($)	8701.66
COLLECTOR FLOW FACTOR(FPP).....	0.5485

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 2233
IMOD-1 LWK AUGUST 1979

LOCATION	SHERIDAN WYMING	COLLECTOR FEDERAL PRISON I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	2	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	44.77	SLOPE:			
MEAN TEMPERATURE....	45.13	PARAMETER,FRUL....	0.3830		
INSOL(BTU/DAY FT**2)	1330.16	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,MOD.....	7666.38	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	35.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	3.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	3.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.0
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.387
STORAGE FLUID MEAN TEMPERATURE	104.0
STORAGE FLUID DENSITY(LB/FT**3).....	62.3
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.364
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.001
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.001
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.0
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.3
ESTIMATED GROUND REFLECTANCE.....	0.2
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.000
ESTIMATED CORRECTION FOR TAU ALPHA PROD..	0.9
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.0
ESTIMATED HEX COST ($/FT**2)	5.0
ESTIMATED STORAGE TANK COST($/LB STORED)	0.0
MAINTENANCE (% INSTALLED COST/YR).....	0.001

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SHERIDAN WYOMING

>>>>>DATA MATCH TO INPUT ID NO. 2233
OMCE-L LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	517.5	1364.0	21.0	0.1473E 08	0.2637E 07	1042.0	2.115	0.178
FEB	788.3	1083.0	26.7	0.1170E 08	0.2382E 07	1492.4	1.716	0.270
MAR	1204.8	1012.0	32.4	0.1093E 08	0.2637E 07	2175.8	1.325	0.379
APR	1537.2	661.4	43.0	0.7143E 07	0.2552E 07	2923.7	1.029	0.488
MAY	1832.7	359.7	53.6	0.3885E 07	0.2637E 07	3497.7	0.876	0.701
JUN	2156.0	127.6	62.6	0.1378E 07	0.2552E 07	3755.8	0.815	0.943
JUL	2329.0	17.3	70.8	0.1866E 06	0.2637E 07	3636.8	0.841	1.000
AUG	2006.0	44.3	69.5	0.3704E 06	0.2637E 07	3159.9	0.974	1.000
SEP	1502.0	241.8	57.8	0.2611E 07	0.2552E 07	2452.5	1.225	0.864
OCT	1006.0	562.0	46.9	0.6070E 07	0.2637E 07	1767.5	1.617	0.563
NOV	591.0	973.0	32.6	0.1051E 08	0.2552E 07	1147.3	2.020	0.263
DEC	441.4	1230.8	25.3	0.1329E 08	0.2637E 07	912.6	2.265	0.169
TOTAL		7666.9		0.8280E 08	0.3105E 08	>>>WEIGHTED	AVERAGE	0.407

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	279.68
COLLECTOR TILT ANGLE (DEG) .....>>>	49.22
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0635
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0706
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1379
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.4242
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.2442
HEAT EXCHANGER LENGTH (FT)	59.53
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0673
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0071
COLLECTOR SIDE REYNOLDS NUMBER.....	0.555E 05
STORAGE SIDE REYNOLDS NUMBER	0.193E 06
CAPACITY RATIO (CAP/CMAX).....	0.0476
FLOW PARAMETER 2 (GCP/FRPUL).....	9.6112
FLOW PARAMETER 1 (GSP/FRPUL).....	9.10

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.237E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.499E 05
COLLECTOR SIDE CONVECTION COEFF.....	1203.5054
STORAGE SIDE CONVECTION COEFFICIENT	3802.6697
COLLECTOR SIDE FLOW RATE (GPM)	4.8564
STORAGE SIDE FLOW RATE (GPM)	100.2001
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0174
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3583
HEAT EXCHANGER EFFECTIVENESS.....	0.9064
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.404E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.114E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4073
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.388E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	324.38
TOTAL INSTALLATION COST ($)	5857.43
COLLECTOR FLOW FACTOR(FPP).....	0.9470

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3111
IMOL-1 LWK AUGUST 1979

LOCATION	SALEM	OREGON	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		3	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		44.12	SLOPE:			
MEAN TEMPERATURE....		51.75	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)		1126.63	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		5017.00	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.58	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.60($/THM)	100300.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(LPH) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3111

DMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.2350E 08	0.2637E 07	1034.2	1.602	0.009
FEB	588.0	642.5	42.3	0.1927E 08	0.2382E 07	1484.8	1.473	0.038
MAR	547.1	638.9	44.4	0.1917E 08	0.2637E 07	2169.4	1.250	0.070
APR	1370.4	493.6	48.6	0.1481E 08	0.2552E 07	2919.6	1.071	0.116
MAY	1737.8	316.2	54.9	0.9486E 07	0.2637E 07	3496.1	0.962	0.200
JUN	1841.6	154.7	60.6	0.4641E 07	0.2552E 07	3755.5	0.917	0.318
JUL	2142.4	46.2	66.2	0.1386E 07	0.2637E 07	3635.9	0.938	0.632
AUG	1774.7	50.1	65.4	0.1503E 07	0.2637E 07	3156.7	1.034	0.566
SEP	1328.3	140.6	61.0	0.4218E 07	0.2552E 07	2446.9	1.210	0.317
OCT	769.4	397.1	52.2	0.1191E 08	0.2637E 07	1700.3	1.431	0.095
NOV	410.4	605.6	44.8	0.1817E 08	0.2552E 07	1139.5	1.611	0.024
DEC	277.4	748.0	40.9	0.2244E 08	0.2637E 07	904.9	1.656	0.003
TOTAL		5017.0		0.1505E 09	0.3105E 08	>>>WEIGHTED AVERAGE		0.101

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	34.21
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0261
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0361
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1394
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	8.4222
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	34.2500
HEAT EXCHANGER LENGTH (FT)	87.82
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.1032
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.502E 05
STORAGE SIDE REYNOLDS NUMBER	0.499E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0091
FLOW PARAMETER Z2(GCP/FPUL).....	9.5301
FLOW PARAMETER Z1(GCP/FPPUL).....	9.02

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.989E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.109E 06
COLLECTOR SIDE CONVECTION COEFF.....	2952.8518
STORAGE SIDE CONVECTION COEFFICIENT	5977.3281
COLLECTOR SIDE FLOW RATE (GPM)	2.0281
STORAGE SIDE FLOW RATE (GPM)	218.7775
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	2.1878
HEAT EXCHANGER EFFECTIVENESS.....	0.9497
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.183E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.182E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1008
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.214E 02
HEX COEFFICIENT (BTU/HR F FT**2).....	403.40
TOTAL INSTALLATION COST ($)	2996.05
COLLECTOR FLOW FACTOR(FPP).....	0.9466

S O L D A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3112
1980-1 LWK AUGUST 1979

LOCATION	SALEM	OREGON	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		3	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DECREES....		44.92	SLOPE:			
MEAN TEMPERATURE....		51.75	PARAMETER,FRUL	1.0380		
INSOL(BTU/DAY FT**2)		1126.63	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDL.....		5017.00	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	).05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LARGE COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3112

MOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.1598E 08	0.2637E 07	1034.2	1.666	0.012
FEB	588.0	642.5	42.3	0.1311E 08	0.2382E 07	1484.8	1.476	0.052
MAR	947.1	638.9	44.4	0.1303E 08	0.2637E 07	2165.4	1.251	0.097
APR	1370.4	493.6	48.6	0.1007E 08	0.2552E 07	2919.6	1.070	0.156
MAY	1737.8	316.2	54.5	0.6450E 07	0.2637E 07	3496.1	0.960	0.260
JUN	1841.5	154.7	60.6	0.3156E 07	0.2552E 07	3755.5	0.915	0.387
JUL	2142.4	46.2	66.2	0.9425E 06	0.2637E 07	3635.9	0.936	0.684
AUG	1774.7	50.1	65.4	0.1022E 07	0.2637E 07	3156.7	1.033	0.618
SEP	1328.3	140.6	61.0	0.2868E 07	0.2552E 07	2446.9	1.211	0.383
OCT	769.4	397.1	52.2	0.8101E 07	0.2637E 07	1700.3	1.433	0.127
NOV	410.4	605.6	44.8	0.1235E 08	0.2552E 07	1135.5	1.615	0.033
DEC	277.4	748.0	40.9	0.1526E 08	0.2637E 07	904.9	1.660	0.005
TOTAL		5017.0		0.1023E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.134

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	34.52
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0266
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0366
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1413
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	8.1301
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	33.7563
HEAT EXCHANGER LENGTH (FT)	87.36
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.1047
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.552E 05
STORAGE SIDE REYNOLDS NUMBER	0.499E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0090
FLOW PARAMETER Z1(GCP/ERUL).....	9.5356
FLOW PARAMETER Z1(GCP/ERUL).....	9.03

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.590E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.110E 06
COLLECTOR SIDE CONVECTION COEFF.....	2860.3540
STORAGE SIDE CONVECTION COEFFICIENT	5892.4609
COLLECTOR SIDE FLOW RATE (GPM)	2.0293
STORAGE SIDE FLOW RATE (GPM)	221.7651
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0203
NORMALIZED STORAGE FLOW (GPM/AREA) ...	2.2177
HEAT EXCHANGER EFFECTIVENESS.....	0.5473
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.178E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.133E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1337
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>-0.542E 02	
HEX COEFFICIENT (BTU/HR F FT**2).....	401.24
TOTAL INSTALLATION COST ($)	2995.62
COLLECTOR FLOW FACTOR(FPP).....	0.9466

S O L J A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3213
1400-1 LWK AUGUST 1979

LOCATION	SALEM	OREGON	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		3	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		44.92	SLOPE:			
MEAN TEMPERATURE....		51.75	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)		1126.63	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,FCC.....		5017.00	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	3.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.00

S T L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3213
DMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.8462E 07	0.2637E 07	1034.2	1.626	0.028
FEB	588.0	642.5	42.3	0.6939E 07	0.2382E 07	1484.8	1.490	0.111
MAR	947.1	638.9	44.4	0.6900E 07	0.2637E 07	2169.4	1.255	0.196
APR	1370.4	493.6	48.6	0.5331E 07	0.2552E 07	2919.6	1.067	0.300
MAY	1737.8	316.2	54.9	0.3415E 07	0.2637E 07	3496.1	0.952	0.451
JUN	1841.6	154.7	60.6	0.1671E 07	0.2552E 07	3755.5	0.906	0.589
JUL	2142.4	46.2	66.2	0.4990E 06	0.2637E 07	3635.9	0.927	0.853
AUG	1774.7	50.1	65.4	0.5411E 06	0.2637E 07	3156.7	1.028	0.750
SEP	1328.3	140.6	61.0	0.1518E 07	0.2552E 07	2446.9	1.213	0.584
OCT	769.4	397.1	52.2	0.4289E 07	0.2637E 07	1700.3	1.445	0.243
NOV	410.4	605.6	44.8	0.6540E 07	0.2552E 07	1139.5	1.635	0.071
DEC	277.4	748.0	40.9	0.8078E 07	0.2637E 07	904.9	1.683	0.013
TOTAL		5017.0		0.5418E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.244

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	129.13
COLLECTOR TILT ANGLE (DEG) .....>>>	36.24
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0521
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0621
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1211
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.7651
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.0230
HEAT EXCHANGER LENGTH (FT)	70.10
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0589
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.368E 05
STORAGE SIDE REYNOLDS NUMBER	0.150E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0378
FLOW PARAMETER Z2(GCP/FRPUL).....	9.6424
FLOW PARAMETER Z1(GCP/FRPUL).....	9.13

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.129E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.342E 05
COLLECTOR SIDE CONVECTION COEFF.....	1055.0974
STORAGE SIDE CONVECTION COEFFICIENT	3543.8700
COLLECTOR SIDE FLOW RATE (GPM)	2.6498
STORAGE SIDE FLOW RATE (GPM)	68.5733
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.5310
HEAT EXCHANGER EFFECTIVENESS.....	0.9330
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.208E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.852E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2444
OBJECTIVE: DPV OF SOLAR INVESTMENT ..>>>	0.117E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	311.98
TOTAL INSTALLATION COST ($)	3182.85
COLLECTOR FLOW FACTOR(FPP).....	0.9472

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3222
IMED-1 DJK AUGUST 1979

LOCATION	SALEM	OREGON	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		3	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		44.92	SLOPE:			
MEAN TEMPERATURE....		51.75	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)		1126.63	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		5017.00	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWh)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/MM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L T A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3222
OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.1598E 08	0.2637E 07	1034.2	1.640	0.022
FEB	588.0	642.5	42.3	0.1311E 08	0.2382E 07	1484.8	1.500	0.106
MAR	947.1	638.9	44.4	0.1303E 08	0.2637E 07	2169.4	1.258	0.193
APR	1370.4	493.6	48.6	0.1007E 08	0.2552E 07	2919.6	1.063	0.304
MAY	1737.8	316.2	54.9	0.6450E 07	0.2637E 07	3496.1	0.946	0.479
JUN	1841.0	154.7	60.6	0.3156E 07	0.2552E 07	3755.5	0.899	0.663
JUL	2142.4	46.2	66.2	0.9425E 06	0.2637E 07	3635.9	0.920	0.969
AUG	1774.7	50.1	65.4	0.1022E 07	0.2637E 07	3156.7	1.023	0.915
SEP	1328.3	140.6	61.0	0.2868E 07	0.2552E 07	2446.9	1.214	0.668
OCT	769.4	397.1	52.2	0.8101E 07	0.2637E 07	1700.3	1.454	0.253
NOV	410.4	605.6	44.8	0.1235E 08	0.2552E 07	1139.5	1.650	0.066
DEC	277.4	748.0	40.9	0.1526E 08	0.2637E 07	904.9	1.699	0.007
TOTAL		5017.0		0.1023E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.235

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	237.92
COLLECTOR TILT ANGLE (DEG) .....>>>	37.53
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0704
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0781
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1436
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.8680
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.6433
HEAT EXCHANGER LENGTH (FT)	86.47
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0655
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0078
COLLECTOR SIDE REYNOLDS NUMBER.....	0.515E 05
STORAGE SIDE REYNOLDS NUMBER	0.191E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0464
FLOW PARAMETER Z2(GCP/FPPUL).....	9.8749
FLOW PARAMETER Z1(GCP/FPPUL).....	9.37

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.244E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.526E 05
COLLECTOR SIDE CONVECTION COEFF.....	1023.1746
STORAGE SIDE CONVECTION COEFFICIENT	3856.6736
COLLECTOR SIDE FLOW RATE (GPM)	5.0045
STORAGE SIDE FLOW RATE (GPM)	105.6521
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0210
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4441
HEAT EXCHANGER EFFECTIVENESS.....	0.9052
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.313E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.133E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2348
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.218E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	309.83
TOTAL INSTALLATION COST ($)	4324.26
COLLECTOR FLOW FACTOR(FPP).....	0.9485

09/02/79 13.32.17

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3223
IMCD-1 LWK AUGUST 1979

LOCATION	SALEM	OREGON
LOCATION INDEX.....		3
LATITUDE,DEGREES....		44.92
MEAN TEMPERATURE....		51.75
INSOL(BTU/DAY FT**2)		1126.63
LOAD FACTOR,HDD.....		5017.00
MEAN GROUND TEMP....		55.00

COLLECTOR AMERICAN SUN	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0390
INTERCEPT:	
PARAMETER,FRTA....	0.6380
BASE COST,$/FT**2...	6.55

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

108

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	3.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	1.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PCS).....	6.30
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0100

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3223
SOLD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.8462E 07	0.2637E 07	1034.2	1.639	0.028
FEB	588.0	642.5	42.3	0.6939E 07	0.2382E 07	1484.8	1.499	0.128
MAR	947.1	638.9	44.4	0.6900E 07	0.2637E 07	2169.4	1.258	0.229
APR	1370.4	493.6	48.6	0.5331E 07	0.2552E 07	2919.6	1.064	0.349
MAY	1737.8	316.2	54.9	0.3415E 07	0.2637E 07	3496.1	0.947	0.517
JUN	1841.0	154.7	60.6	0.1671E 07	0.2552E 07	3755.5	0.899	0.661
JUL	2142.4	96.2	66.2	0.1039E 06	0.2637E 07	3635.9	0.921	0.916
AUG	1774.7	50.1	65.4	0.5411E 06	0.2637E 07	3156.7	1.024	0.859
SEP	1323.3	140.6	61.0	0.1518E 07	0.2552E 07	2446.9	1.214	0.660
OCT	769.4	397.1	52.2	0.4289E 07	0.2637E 07	1700.3	1.453	0.284
NOV	410.4	603.6	44.8	0.6546E 07	0.2552E 07	1139.5	1.649	0.079
DEC	277.4	744.0	40.9	0.8078E 07	0.2637E 07	904.9	1.658	0.009
TOTAL		5617.0		0.5418E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.275

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	176.82
COLLECTOR TILT ANGLE (DEG) .....>>>	37.45
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0572
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0622
STORAGE SIDE TUBE(S)EX) INNER DIA. (FT)..	0.1203
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1514
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.2766
HEAT EXCHANGER LENGTH (FT)	57.70
////////////////CONSTRAINTS////////////////	
AREA ANNULAR DIAMETER DIFFERENCE (FT)....	0.0050
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.4608E 05
STORAGE SIDE REYNOLDS NUMBER	0.1438E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0546
FLOW PARAMETER Z2(SCP/FPOL).....	9.0544
FLOW PARAMETER Z1(SCP/FPOL).....	9.15

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.177E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.325E 05
COLLECTOR SIDE CONVECTION COEFF.....	1149.8711
STORAGE SIDE CONVECTION COEFFICIENT	3425.5775
COLLECTOR SIDE FLOW RATE (GPM)	3.6364
STORAGE SIDE FLOW RATE (GPM)	55.2807
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0206
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3692
HEAT EXCHANGER EFFECTIVENESS.....	0.8351
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.234E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.852E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.274
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.167E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	317.56
TOTAL INSTALLATION COST ($)	3194.66
COLLECTOR FLOW FACTOR(FPP).....	0.9473

09/03/79 15.02.44

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 3232
IMED-1 LNK AUGUST 1979

LOCATION	SALEM	OREGON	COLLECTOR FEDERAL PRISON I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		3	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		44.92	SLOPE:			
MEAN TEMPERATURE....		51.75	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)		1126.63	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		5017.00	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20397.09
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE FOR LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.61
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.40
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L J A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR SALEM      OREGON                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  3232
                          JADD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.1598E 08	0.2637E 07	1034.2	1.640	0.032
FEB	588.0	642.5	42.3	0.1311E 08	0.2382E 07	1484.8	1.500	0.110
MAR	941.1	638.9	44.4	0.1303E 08	0.2637E 07	2169.4	1.258	0.191
APR	1370.4	493.6	48.6	0.1007E 08	0.2552E 07	2919.6	1.063	0.295
MAY	1737.8	316.2	54.9	0.6450E 07	0.2637E 07	3496.1	0.946	0.465
JUN	1841.9	154.7	60.6	0.3156E 07	0.2552E 07	3755.5	0.859	0.650
JUL	2142.4	46.2	66.2	0.9425E 06	0.2637E 07	3635.9	0.920	0.679
AUG	1774.7	50.1	65.4	0.1022E 07	0.2637E 07	3156.7	1.023	0.920
SEP	1328.3	140.6	61.0	0.2868E 07	0.2552E 07	2446.5	1.214	0.657
OCT	769.4	397.1	52.2	0.8101E 07	0.2637E 07	1700.3	1.453	0.251
NOV	410.4	605.6	44.8	0.1235E 08	0.2552E 07	1139.5	1.649	0.074
DEC	277.4	748.0	40.9	0.1526E 08	0.2637E 07	904.9	1.699	0.018
TOTAL		5017.0		0.1023E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.236

TIT

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	218.36
COLLECTOR TILT ANGLE (DEG) .....>>>	37.51
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0593
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0697
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1321
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9737
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.4656
HEAT EXCHANGER LENGTH (FT)	30.69
////////////////CONSTRAINTS////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0024
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0035
COLLECTOR SIDE REYNOLDS NUMBER	3.45#E 05
STORAGE SIDE REYNOLDS NUMBER	1.17#E 05
CAPACITY RATIO (COLL/STOR)	0.0425
FLOW PARAMETER 2 (GPM/FPUL)	9.4833
FLOW PARAMETER 1 (GPM/FPUL)	3.98

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.183E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.430E 05
COLLECTOR SIDE CONVECTION COEFF	1087.5956
STORAGE SIDE CONVECTION COEFFICIENT	3721.4675
COLLECTOR SIDE FLOW RATE (GPM)	3.7508
STORAGE SIDE FLOW RATE (GPM)	86.4347
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0172
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.3958
HEAT EXCHANGER EFFECTIVENESS.....	0.9347
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.15E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.133E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2361
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.198E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	315.41
TOTAL INSTALLATION COST ($)	4584.81
COLLECTOR FLOW FACTOR(FPP).....	0.9463

09/06/79 13.19.34

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 3233
IMOD-1 LWK AUGUST 1979

LOCATION	SALEM	OREGON
LOCATION INDEX.....		3
LATITUDE,DEGREES....		44.92
MEAN TEMPERATURE....		51.75
INSOL(BTU/DAY FT**2)		1126.63
LOAD FACTOR,HDD.....		5017.00
MEAN GROUND TEMP....		55.00

COLLECTOR FEDERAL PRISM I. D	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	0.8830
INTERCEPT:	
PARAMETER,FRTA....	0.6270
BASE COST,$/FT**2...	9.40

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE F) LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.0
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.0
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.387
STORAGE FLUID MEAN TEMPERATURE	104.0
STORAGE FLUID DENSITY(LB/FT**3).....	62.0
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.364
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.001
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.001
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.0
ESTIMATED OPTIMUM STORAGE(LB/AREA)	15.3
ESTIMATED GROUND REFLECTANCE.....	0.2
ESTIMATED PUMPING POWER(KWH/AREA).....	1.000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.9
ESTIMATED INSTALL/LABOR COST ($/AREA)..	10.0
ESTIMATED HEX COST ($/FT**2)	5.0
ESTIMATED STORAGE TANK COST($/LB STORED)	0.3
MAINTENANCE (% INSTALLED COST/YR).....	0.001

SOLJAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR SALEM OREGON

>>>>>DATA MATCH TO INPUT ID NO. 3233
MOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	332.1	783.5	39.7	0.8862E 07	0.2637E 07	1034.2	1.635	0.041
FEB	586.0	642.5	42.3	0.6939E 07	0.2382E 07	1484.8	1.496	0.136
MAR	947.1	638.9	44.4	0.6900E 07	0.2637E 07	2165.4	1.257	0.233
APR	1370.4	493.6	48.6	0.5331E 07	0.2552E 07	2919.6	1.065	0.351
MAY	1737.8	316.2	54.9	0.3415E 07	0.2637E 07	3456.1	0.948	0.518
JUN	1841.6	154.7	60.6	0.1671E 07	0.2552E 07	3755.5	0.901	0.665
JUL	2142.4	46.2	66.2	0.4990E 06	0.2637E 07	3635.9	0.923	0.931
AUG	1774.7	50.1	65.4	0.5411E 06	0.2637E 07	3156.7	1.025	0.870
SEP	1328.3	140.6	61.0	0.1518E 07	0.2552E 07	2446.9	1.213	0.663
OCT	769.4	397.1	52.2	0.4269E 07	0.2637E 07	1700.3	1.451	0.290
NOV	410.4	605.6	44.8	0.6540E 07	0.2552E 07	1139.5	1.644	0.091
DEC	277.4	748.0	40.9	0.8078E 07	0.2637E 07	904.9	1.693	0.023
TOTAL		5017.0		0.5416E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.263

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	166.68
COLLECTOR TILT ANGLE (DEG) .....>>>	37.06
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0394
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0560
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1235
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.3133
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.2154
HEAT EXCHANGER LENGTH (FT)	69.64
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0555
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0086
COLLECTOR SIDE REYNOLDS NUMBER.....	0.350E 05
STORAGE SIDE REYNOLDS NUMBER	0.143E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0413
FLOW PARAMETER ZZ(GPP/FPPUL).....	9.5292
FLOW PARAMETER ZI(GPP/FPPIL).....	9.02

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.140E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.340E 05
COLLECTOR SIDE CONVECTION COEFF.....	851.2476
STORAGE SIDE CONVECTION COEFFICIENT	3584.9177
COLLECTOR SIDE FLOW RATE (GPM)	2.8754
STORAGE SIDE FLOW RATE (GPM)	68.2253
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0173
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4093
HEAT EXCHANGER EFFECTIVENESS.....	0.9302
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.241E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.852E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2831
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.153E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	295.52
TOTAL INSTALLATION COST ($)	3502.55
COLLECTOR FLOW FACTOR(FPP).....	0.9466

08/30/79 21.28.26

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4111
IMOD-1 LWK AUGUST 1979

LOCATION	PORTLAND MAINE	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	4	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.65	SLOPE:			
MEAN TEMPERATURE....	45.38	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1050.57	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,FCC.....	7410.39	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

114

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	3.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3E7C
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR PORTLAND MAINE

>>>>>DATA MATCH TO INPUT ID NO. 4111
OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.3983E 08	0.2637E 07	1100.1	1.754	0.015
FEB	681.6	1152.7	24.2	0.3458E 08	0.2382E 07	1548.6	1.509	0.028
MAR	969.6	1013.4	32.3	0.3040E 08	0.2637E 07	2222.9	1.239	0.046
APR	1304.0	664.7	42.8	0.1994E 08	0.2552E 07	2953.7	1.050	0.081
MAY	1567.0	379.9	52.9	0.1140E 08	0.2637E 07	3509.2	0.941	0.148
JUN	1712.0	118.5	62.7	0.3555E 07	0.2552E 07	3757.2	0.898	0.330
JUL	1659.0	22.1	68.0	0.6630E 06	0.2637E 07	3643.1	0.918	0.554
AUG	1461.0	42.0	66.6	0.1260E 07	0.2637E 07	3182.9	1.004	0.468
SEP	1158.0	202.8	59.0	0.6084E 07	0.2552E 07	2494.3	1.170	0.205
OCT	822.3	502.1	48.8	0.1506E 08	0.2637E 07	1761.6	1.432	0.086
NOV	459.2	785.4	38.8	0.2356E 08	0.2552E 07	1205.3	1.632	0.024
DEC	362.8	1199.0	26.3	0.3597E 08	0.2637E 07	970.6	1.795	0.010
TOTAL		7410.4		0.2223E 09	0.3105E 08	>>>WEIGHTED AVERAGE		0.068

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	38.71
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0341
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0441
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1344
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.9560
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	25.9774
HEAT EXCHANGER LENGTH (FT)	72.87
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0703
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.431E 05
STORAGE SIDE REYNOLDS NUMBER	0.331E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0135
FLOW PARAMETER Z2(GCP/ERUL).....	9.5369
FLOW PARAMETER Z1(GCP/ERPUL).....	9.03

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.990E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.735E 05
COLLECTOR SIDE CONVECTION COEFF.....	1832.0872
STORAGE SIDE CONVECTION COEFFICIENT	4701.6367
COLLECTOR SIDE FLOW RATE (GPM)	2.0296
STORAGE SIDE FLOW RATE (GPM)	147.5214
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
NORMALIZED STORAGE FLOW (GPM/APEAC) ...	1.4752
HEAT EXCHANGER EFFECTIVENESS.....	0.9428
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.171E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.253E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.0675
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>-	0.176E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	366.27
TOTAL INSTALLATION COST ($)	2998.57
COLLECTOR FLOW FACTOR(FFP).....	0.9466

SOLDAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4112
IMOD-1 LWK AUGUST 1979

LOCATION	PORTLAND MAINE	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	4	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.65	SLOPE:			
MEAN TEMPERATURE....	45.38	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1050.57	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	7410.39	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.58	INFLATION RATE.....	0.1050

116

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.05
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR PORTLAND MAINE

>>>>>DATA MATCH TO INPUT ID NO. 4112

SOLD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.2709E 08	0.2637E 07	1100.1	1.752	0.022
FEB	681.6	1152.7	24.2	0.2352E 08	0.2382E 07	1548.6	1.508	0.040
MAR	969.6	1013.4	32.3	0.2067E 08	0.2637E 07	2222.5	1.239	0.065
APR	1304.0	664.7	42.8	0.1356E 08	0.2552E 07	2953.7	1.050	0.111
MAY	1567.0	379.5	52.5	0.7750E 07	0.2637E 07	3509.2	0.942	0.196
JUN	1712.0	118.5	62.7	0.2417E 07	0.2552E 07	3757.2	0.899	0.392
JUL	1659.0	22.1	68.0	0.4508E 06	0.2637E 07	3643.1	0.918	0.581
AUG	1461.0	42.0	66.6	0.8568E 06	0.2637E 07	3162.5	1.005	0.509
SEP	1158.0	202.8	59.0	0.4137E 07	0.2552E 07	2454.3	1.170	0.258
OCT	822.3	502.1	48.8	0.1024E 08	0.2637E 07	1761.6	1.431	0.117
NOV	459.2	785.4	38.8	0.1602E 08	0.2552E 07	1205.3	1.631	0.034
DEC	362.8	1199.0	26.3	0.2446E 08	0.2637E 07	970.6	1.793	0.015
TOTAL		7410.4		0.1512E 09	0.3109E 08		>>>WEIGHTED AVERAGE	0.052

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	30.00
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0453
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0553
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1212
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.7754
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.9064
HEAT EXCHANGER LENGTH (FT)	59.78
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0055
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER	0.323E 05
STORAGE SIDE REYNOLDS NUMBER	0.176E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0256
FLOW PARAMETER Z2(CCP/FRUL).....	9.5093
FLOW PARAMETER Z1(CCP/FRPUL).....	9.00

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.987E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.186E 05
COLLECTOR SIDE CONVECTION COEFF	1054.6016
STORAGE SIDE CONVECTION COEFFICIENT	3664.0430
COLLECTOR SIDE FLOW RATE (GPM)	2.0237
STORAGE SIDE FLOW RATE (GPM)	77.5582
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.7756
HEAT EXCHANGER EFFECTIVENESS.....	0.5318
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.168E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.182E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.0921
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	-0.233E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	316.65
TOTAL INSTALLATION COST ($)	3002.77
COLLECTOR FLOW FACTOR(FPP).....	0.9464

CE/31/75 19.04.46

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4113
IMOD-1 LWK AUGUST 1979

LOCATION	PORTLAND MAINE	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	4	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.65	SLOPE:			
MEAN TEMPERATURE....	45.38	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1050.57	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,FDL.....	7410.39	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.31
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0500
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR T&U ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR PORTLAND MAINE

>>>>>DATA MATCH TO INPUT ID NO. 4113

SOLD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.6	22.2	0.1434E 08	0.2637E 07	1100.1	1.769	0.035
FEB	681.6	1152.7	24.2	0.1245E 08	0.2382E 07	1548.6	1.518	0.069
MAR	969.6	1013.4	32.3	0.1094E 08	0.2637E 07	2222.9	1.241	0.109
APR	1304.0	664.7	42.8	0.7179E 07	0.2552E 07	2953.7	1.040	0.178
MAY	1567.0	379.9	52.9	0.4103E 07	0.2637E 07	3509.2	0.935	0.287
JUN	1712.0	118.5	62.7	0.1280E 07	0.2552E 07	3757.2	0.891	0.478
JUL	1659.0	22.1	68.0	0.2387E 06	0.2637E 07	3643.1	0.911	0.606
AUG	1401.0	42.0	66.6	0.4536E 06	0.2637E 07	3182.3	1.000	0.554
SEP	1158.0	202.8	59.0	0.2190E 07	0.2552E 07	2494.3	1.170	0.348
OCT	822.3	502.1	48.8	0.5423E 07	0.2637E 07	1761.6	1.435	0.182
NOV	459.2	785.4	38.8	0.8462E 07	0.2552E 07	1205.3	1.645	0.057
DEC	362.8	1199.0	26.3	0.1295E 08	0.2637E 07	970.6	1.811	0.026
TOTAL		7410.4		0.8003E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.146

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.989E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	37.85	STORAGE SIDE CAPACITY (BTU/HR F).....	0.571E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0414	COLLECTOR SIDE CONVECTION COEFF.....	1292.2117
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0514	STORAGE SIDE CONVECTION COEFFICIENT	4139.7383
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1312	COLLECTOR SIDE FLOW RATE (GPM)	2.0281
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.3623	STORAGE SIDE FLOW RATE (GPM)	114.7034
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	22.3427	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	61.63	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.1470
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9313
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0793	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.163E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.111E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.355E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1465
STORAGE SIDE REYNOLDS NUMBER	0.252E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>-	0.316E 03
CAPACITY RATIO (CMIN/CMAX).....	0.0173	HEX COEFFICIENT (BTU/HR F FT**2).....	334.59
FLOW PARAMETER (GCP/FPUL).....	9.5297	TOTAL INSTALLATION COST ($)	2999.80
FLOW PARAMETER 2 (GCP/FPUL).....	9.02	COLLECTOR FLOW FACTOR(FPP).....	0.9466

SOLAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4222
IMOD-1 LWK AUGUST 1979

LOCATION	PORTLAND	MAINE	COLLECTOR	AMERICAN SUN	
LOCATION INDEX.....		4	COLLECTOR TEST RESULTS,		
LATITUDE,DEGREES....		43.65	SLOPE:		
MEAN TEMPERATURE....		45.38	PARAMETER,FRUL....	1.0390	
INSOL(BTU/DAY FT**2)		1050.57	INTERCEPT:		
LOAD FACTOR,HDD.....		7410.39	PARAMETER,FRTA....	0.6380	
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	6.55	

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	3.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L D A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        ---   -          -                                           *
*        RESULTS OF ANALYSIS FOR PORTLAND   MAINE                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                  >>>>>DATA MATCH TO INPUT ID NO.  4242
                                  (MOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.2705E 08	0.2637E 07	1100.1	1.814	0.053
FEB	681.6	1152.7	24.2	0.2352E 08	0.2382E 07	1548.6	1.543	0.095
MAR	969.6	1013.4	32.3	0.2067E 08	0.2637E 07	2222.9	1.243	0.151
APR	1304.0	664.7	42.8	0.1356E 08	0.2552E 07	2953.7	1.034	0.249
MAY	1567.0	379.9	52.9	0.7750E 07	0.2637E 07	3509.2	0.916	0.413
JUN	1712.9	118.5	62.7	0.2417E 07	0.2552E 07	3757.2	0.869	0.715
JUL	1659.0	22.1	68.0	0.4508E 06	0.2637E 07	3643.1	0.890	0.891
AUG	1461.0	42.0	66.6	0.8568E 06	0.2637E 07	3182.9	0.985	0.839
SEP	1158.0	202.8	59.0	0.4137E 07	0.2552E 07	2454.3	1.167	0.531
OCT	822.3	502.1	48.8	0.1024E 08	0.2637E 07	1761.6	1.457	0.269
NOV	459.2	785.4	38.8	0.1662E 08	0.2552E 07	1205.3	1.680	0.081
DEC	362.8	1199.0	26.3	0.2446E 08	0.2637E 07	970.6	1.860	0.035
TOTAL		7410.4		0.1512E 09	0.3105E 08		>>>WEIGHTED AVERAGE	0.190

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	280.31	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.279E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	+1.49	STORAGE SIDE CAPACITY (BTU/HR F).....	0.391E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0710	COLLECTOR SIDE CONVECTION COEFF.....	1118.9341
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0760	STORAGE SIDE CONVECTION COEFFICIENT	3655.0542
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1327	COLLECTOR SIDE FLOW RATE (GPM)	5.7146
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2148	STORAGE SIDE FLOW RATE (GPM)	78.5578
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.8401	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0204
HEAT EXCHANGER LENGTH (FT)	69.38	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2802
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8156
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0567	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.346E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.182E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.582E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1897
STORAGE SIDE REYNOLDS NUMBER	0.151E 05	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.209E 04
CAPACITY RATIO (C11I/C11X).....	0.0712	HEX COEFFICIENT (BTU/HR F FT**2).....	316.43
FLOW PARAMETER Z2(GCP/FRPUL).....	9.5702	TOTAL INSTALLATION COST ($)	5059.69
FLOW PARAMETER Z1(GCP/FRPUL).....	9.06	COLLECTOR FLOW FACTOR(FPP).....	0.9468

09/02/79 13.48.06

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4223
IMOD-1 LWK AUGUST 1979

LOCATION	PORTLAND MAINE	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	4	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.65	SLOPE:			
MEAN TEMPERATURE....	45.38	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1050.57	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	7410.39	PARAMETER,FRTA....	0.6360	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

122

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREA)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KWH/AREA).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA FREQ.	0.93
ESTIMATED INSTALL/LABOR COST ($/A-REA)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L J A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR PORTLAND MAINE

>>>>>>DATA MATCH TO INPUT ID NO. +223

UMCD-1 LAK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.1434E 08	0.2637E 07	1100.1	1.754	0.063
FEB	681.6	1152.7	24.2	0.1245E 08	0.2382E 07	1548.6	1.532	0.114
MAR	969.6	1013.4	32.3	0.1094E 08	0.2637E 07	2222.9	1.243	0.178
APR	1304.0	664.7	42.8	0.7179E 07	0.2552E 07	2953.7	1.040	0.286
MAY	1567.0	379.5	52.9	0.4103E 07	0.2637E 07	3509.2	0.925	0.444
JUN	1712.0	118.5	62.7	0.1280E 07	0.2552E 07	3757.2	0.879	0.665
JUL	1659.0	22.1	69.0	0.2387E 06	0.2637E 07	3643.1	0.900	0.812
AUG	1451.0	42.0	66.6	0.4536E 06	0.2637E 07	3182.9	0.992	0.764
SEP	1158.0	202.8	59.0	0.2190E 07	0.2552E 07	2494.3	1.169	0.528
OCT	822.3	502.1	48.8	0.5423E 07	0.2637E 07	1761.6	1.449	0.295
NOV	459.2	785.4	38.8	0.8482E 07	0.2552E 07	1205.3	1.665	0.093
DEC	362.8	1199.0	26.3	0.1295E 08	0.2637E 07	970.6	1.839	0.041
TOTAL		7410.4		0.8003E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.223

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	199.83
COLLECTOR TILT ANGLE (DEG) .....>>>	39.82
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0584
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0634
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1153
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.3789
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	15.7176
HEAT EXCHANGER LENGTH (FT)	44.65
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0519
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.503E 05
STORAGE SIDE REYNOLDS NUMBER	0.119E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0774
FLOW PARAMETER Z2(GC*/EPUL).....	9.5313
FLOW PARAMETER Z1(GS*/EPUL).....	9.02

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.198E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.256E 05
COLLECTOR SIDE CONVECTION COEFF.....	1210.9487
STORAGE SIDE CONVECTION COEFFICIENT	3218.1931
COLLECTOR SIDE FLOW RATE (GPM)	4.0582
STORAGE SIDE FLOW RATE (GPM)	51.3571
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2569
HEAT EXCHANGER EFFECTIVENESS.....	0.7218
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.248E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.111E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2235
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.155E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	320.21
TOTAL INSTALLATION COST ($)	3593.55
COLLECTOR FLOW FACTOR(FPP).....	0.9466

09/04/79 15.37.CC

S O L A R - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4232
IMCD-1 LWK AUGUST 1979

LOCATION	PORTLAND MAINE	COLLECTOR	FEDERAL PRISON I. D	STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	4	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	43.65	SLOPE:			
MEAN TEMPERATURE....	45.38	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1050.57	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,MOD.....	7410.39	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC H/W WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR PORTLAND   MAINE                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  4232
                                  DOE-1 WRK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.2709E 08	0.2637E 07	1100.1	1.805	0.055
FEB	681.6	1152.7	24.2	0.2352E 08	0.2382E 07	1548.6	1.538	0.099
MAR	969.6	1013.4	32.3	0.2067E 08	0.2637E 07	2222.9	1.243	0.152
APR	1304.0	664.7	42.8	0.1356E 08	0.2552E 07	2953.7	1.037	0.249
MAY	1567.0	379.9	52.9	0.7750E 07	0.2637E 07	3509.2	0.920	0.413
JUN	1712.0	118.5	62.7	0.2417E 07	0.2552E 07	3757.2	0.874	0.723
JUL	1659.0	22.1	68.0	0.4508E 06	0.2637E 07	3643.1	0.895	0.917
AUG	1461.0	42.0	66.6	0.8568E 06	0.2637E 07	3162.9	0.988	0.858
SEP	1158.0	202.8	59.0	0.4137E 07	0.2552E 07	2494.3	1.168	0.533
OCT	822.3	502.1	48.8	0.1024E 08	0.2637E 07	1761.6	1.454	0.270
NOV	499.7	785.4	38.8	0.1602E 08	0.2552E 07	1205.3	1.673	0.089
DEC	382.8	1199.0	26.3	0.2446E 08	0.2637E 07	970.6	1.851	0.043
TOTAL		7410.4		0.1512E 09	0.3105E 08	>>>WEIGHTED AVERAGE		0.195

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	260.18	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.219E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	40.75	STORAGE SIDE CAPACITY (BTU/HR F).....	0.493E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0653	COLLECTOR SIDE CONVECTION COEFF.....	1071.7600
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0729	STORAGE SIDE CONVECTION COEFFICIENT	3853.5100
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1384	COLLECTOR SIDE FLOW RATE (GPM)	4.4916
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9336	STORAGE SIDE FLOW RATE (GPM)	100.0824
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.5306	NORMALIZED COLLECTOR FLOW (GPM/SQFEET)...	0.0173
HEAT EXCHANGER LENGTH (FT)	94.61	NORMALIZED STORAGE FLOW (GPM/SQFEET) ...	0.3847
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9332
HEX ANNULAR DIAMETER DIFFERENCE (FT).....	0.0655	SOLAR ENERGY DELIVERED (MTL/YEAR).....	0.154E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0075	TOTAL ENERGY DEMAND (BTU/YEAR)	0.182E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.497E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1945
STORAGE SIDE REYNOLDS NUMBER	0.190E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.190E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0440	HEX COEFFICIENT (BTU/HR F FT**2).....	314.28
FLOW PARAMETER 1 (GCP/EPSUL).....	9.5361	TOTAL INSTALLATION COST ($)	9463.02
FLOW PARAMETER 2 (GCP/EPSUL).....	9.03	COLLECTOR FLOW FACTOR(FPP).....	0.9466

09/06/79 13.53.29

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 4233

IMCD-1 LWK AUGUST 1979

LOCATION	PORTLAND	MAINE
LOCATION INDEX.....		4
LATITUDE,DEGREES....		43.65
MEAN TEMPERATURE....		45.38
INSOL(BTU/DAY FT**2)		1050.57
LOAD FACTOR,HDD.....		7410.39
MEAN GROUND TEMP....		55.10

COLLECTOR FEDERAL PRISM I. D	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	0.8830
INTERCEPT:	
PARAMETER,FRTA....	0.8270
BASE COST,$/FT**2...	9.40

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.33
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.0
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.8
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.387
STORAGE FLUID MEAN TEMPERATURE	104.0
STORAGE FLUID DENSITY(LB/FT**3).....	62.0
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.364
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.001
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.001
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.0
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.3
ESTIMATED GROUND REFLECTANCE.....	0.2
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.9
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.0
ESTIMATED HEX COST ($/FT**2)	5.0
ESTIMATED STORAGE TANK COST($/LB STORED)	0.0
MAINTENANCE (% INSTALLED COST/YR).....	0.001

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR PORTLAND MAINE

>>>>>DATA MATCH TO INPUT ID NO. 4233
MOD-1 LBK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	450.3	1327.8	22.2	0.1434E 08	0.2637E 07	1100.1	1.797	0.076
FEB	681.6	1152.7	24.2	0.1245E 08	0.2382E 07	1548.6	1.534	0.126
MAR	969.6	1013.4	32.3	0.1094E 08	0.2637E 07	2222.9	1.243	0.192
APR	1304.0	664.7	42.8	0.7177E 07	0.2552E 07	2953.7	1.035	0.302
MAY	1567.0	379.9	52.9	0.4103E 07	0.2637E 07	3505.2	0.924	0.465
JUN	1712.0	118.5	62.7	0.1281E 07	0.2552E 07	3757.2	0.878	0.714
JUL	1659.0	22.1	68.0	0.2387E 06	0.2637E 07	3643.1	0.899	0.847
AUG	1461.0	42.0	66.6	0.4536E 06	0.2637E 07	3182.9	0.991	0.798
SEP	1158.0	202.8	59.0	0.2190E 07	0.2552E 07	2494.3	1.169	0.555
OCT	822.3	502.1	48.8	0.5423E 07	0.2637E 07	1761.6	1.450	0.314
NOV	459.2	785.4	38.8	0.8482E 07	0.2552E 07	1205.3	1.667	0.109
DEC	362.8	1199.0	26.3	0.1295E 08	0.2637E 07	970.6	1.841	0.054
TOTAL		7410.4		0.8003E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.240

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	194.39
COLLECTOR TILT ANGLE (DEG) .....>>>	40.04
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0557
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0629
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1247
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.0324
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.1571
HEAT EXCHANGER LENGTH (FT)	30.01
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0617
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0073
COLLECTOR SIDE REYNOLDS NUMBER	0.438E 05
STORAGE SIDE REYNOLDS NUMBER	0.158E 05
CAPACITY RATIO (CR(I)/CMAX).....	0.0445
FLOW PARAMETER 22(GCP/FRUL).....	9.5527
FLOW PARAMETER 21(GCP/FRPUL).....	9.04

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.164E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.369E 05
COLLECTOR SIDE CONVECTION COEFF	1135.7930
STORAGE SIDE CONVECTION COEFFICIENT	3541.9067
COLLECTOR SIDE FLOW RATE (GPM)	3.3703
STORAGE SIDE FLOW RATE (GPM)	74.1427
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0173
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3814
HEAT EXCHANGER EFFECTIVENESS	0.9278
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.267E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.111E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2404
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.146E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	317.89
TOTAL INSTALLATION COST ($)	4039.33
COLLECTOR FLOW FACTOR(FPP).....	0.9467

08/30/79 19.09.13

SOLOAC-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9111
[MOD-1 LWK AUGUST 1975

LOCATION	OAKLAND CALIF.
LOCATION INDEX.....	9
LATITUDE,DEGREES....	37.13
MEAN TEMPERATURE....	56.59
INSOL(BTU/DAY FT**2)	1535.21
LOAD FACTOR,HLD.....	3145.40
MEAN GROUND TEMP....	55.00

COLLECTOR SOLARMETICS	
COLLECTOR TEST RESULTS, SLOPE:	
PARAMETER,FRUL	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

128

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9111
OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.1555E 08	0.2637E 07	1407.4	1.639	0.160
FEB	1017.4	376.5	51.7	0.1130E 08	0.2382E 07	1838.5	1.448	0.263
MAR	1456.3	370.3	53.1	0.1111E 08	0.2637E 07	2458.1	1.222	0.360
APR	1922.1	291.5	55.3	0.8745E 07	0.2552E 07	3095.3	1.034	0.467
MAY	2211.3	222.0	58.0	0.6660E 07	0.2637E 07	3553.7	0.915	0.570
JUN	2350.0	138.2	61.0	0.4146E 07	0.2552E 07	3750.2	0.867	0.708
JUL	2322.5	110.2	61.8	0.3306E 07	0.2637E 07	3660.4	0.889	0.787
AUG	2052.6	91.2	62.4	0.2736E 07	0.2637E 07	3287.3	0.983	0.819
SEP	1701.2	75.6	63.4	0.2268E 07	0.2552E 07	2698.9	1.153	0.835
OCT	1212.0	151.3	60.4	0.4539E 07	0.2637E 07	2037.5	1.383	0.572
NOV	822.2	307.4	54.6	0.9222E 07	0.2552E 07	1510.1	1.613	0.281
DEC	647.0	493.0	49.1	0.1479E 08	0.2637E 07	1279.6	1.725	0.158
TOTAL		3145.4		0.9436E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.399

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	202.53
COLLECTOR TILT ANGLE (DEG) .....>>>	35.27
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0634
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0698
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1347
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9750
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.0411
HEAT EXCHANGER LENGTH (FT)	38.08
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0648
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0065
COLLECTOR SIDE REYNOLDS NUMBER	0.481E 05
STORAGE SIDE REYNOLDS NUMBER	0.183E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0440
FLOW PARAMETER Z2(GCP/FRUL).....	9.7676
FLOW PARAMETER Z1(GCP/FRPUL).....	9.26

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.205E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.466E 05
COLLECTOR SIDE CONVECTION COEFF	1075.9285
STORAGE SIDE CONVECTION COEFFICIENT	3792.2302
COLLECTOR SIDE FLOW RATE (GPM)	4.2100
STORAGE SIDE FLOW RATE (GPM)	93.8330
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4623
HEAT EXCHANGER EFFECTIVENESS.....	0.9262
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.500E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.125E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3988
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.217E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	314.20
TOTAL INSTALLATION COST ($)	6083.24
COLLECTOR FLOW FACTOR(FPP).....	0.5479

SOLOAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9112
IMOD-1 LWK AUGUST 1979

LOCATION	OAKLAND CALIF.	COLLECTOR SOLARMETICS		STUDY APPROACH	ANALYSIS
				ECONOMIC ESTIMATES	
LOCATION INDEX.....	9	COLLECTOR TEST RESULTS,			
LATITUDE,DEGREES....	37.73	SLOPE:			
MEAN TEMPERATURE....	56.59	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1535.21	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HOD.....	3145.40	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

130

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR PLATE CONDUCTIVITY(BTU/HR*FT*F)	0.3370
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/APEAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9112

OMCL-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	767.9	518.2	48.3	0.1057E 08	0.2637E 07	1407.4	1.641	0.171
FEB	1017.4	376.5	51.7	0.7681E 07	0.2382E 07	1838.5	1.449	0.277
MAR	1456.3	370.3	53.1	0.7554E 07	0.2637E 07	2458.1	1.223	0.376
APR	1922.1	291.5	55.3	0.5947E 07	0.2552E 07	3095.3	1.033	0.481
MAY	2211.3	222.0	58.0	0.4529E 07	0.2637E 07	3553.7	0.915	0.575
JUN	2350.0	138.2	61.0	0.2819E 07	0.2552E 07	3750.2	0.866	0.696
JUL	2322.5	110.2	61.8	0.2248E 07	0.2637E 07	3660.4	0.888	0.764
AUG	2052.6	91.2	62.4	0.1860E 07	0.2637E 07	3287.3	0.982	0.788
SEP	1701.2	75.6	63.4	0.1542E 07	0.2552E 07	2698.9	1.153	0.798
OCT	1212.0	151.3	60.4	0.3087E 07	0.2637E 07	2037.5	1.384	0.564
NOV	822.2	307.4	54.6	0.6271E 07	0.2552E 07	1510.1	1.614	0.292
DEC	647.0	453.0	49.1	0.1006E 08	0.2637E 07	1279.6	1.727	0.166
TOTAL		3145.4		0.6417E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.413

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	158.46
COLLECTOR TILT ANGLE (DEG) .....>>>	35.39
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0614
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0697
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1242
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.4350
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.6264
HEAT EXCHANGER LENGTH (FT)	70.69
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0545
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0082
COLLECTOR SIDE REYNOLDS NUMBER.....	0.282E 05
STORAGE SIDE REYNOLDS NUMBER	0.144E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0457
FLOW PARAMETER Z2(GCP/FPUL).....	9.6064
FLOW PARAMETER Z1(GCP/FRPUL).....	9.10

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.158E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.346E 05
COLLECTOR SIDE CONVECTION COEFF.....	522.3081
STORAGE SIDE CONVECTION COEFFICIENT	3654.8933
COLLECTOR SIDE FLOW RATE (GPM)	3.2395
STORAGE SIDE FLOW RATE (GPM)	69.4442
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0204
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4382
HEAT EXCHANGER EFFECTIVENESS.....	0.9186
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.393E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.952E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4129
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.173E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	299.13
TOTAL INSTALLATION COST ($)	4759.10
COLLECTOR FLOW FACTOR(FPP).....	0.9470

08/31/79 20.01.11

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9113
IMOD-1 LWK AUGUST 1979

LOCATION	OAKLAND CALIF.	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	9	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.73	SLOPE:			
MEAN TEMPERATURE....	56.59	PARAMETER,FRUL....	1.03E0		
INSOL(BTU/DAY FT**2)	1535.21	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,FDD.....	3145.40	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3)	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9113
OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.5597E 07	0.2637E 07	1407.4	1.635	0.204
FEB	1117.4	376.5	51.7	0.4066E 07	0.2382E 07	1838.5	1.445	0.321
MAR	1456.3	370.3	53.1	0.3995E 07	0.2637E 07	2458.1	1.222	0.427
APR	1922.1	291.5	55.3	0.3148E 07	0.2552E 07	3095.3	1.035	0.530
MAY	2211.3	222.0	58.0	0.2398E 07	0.2637E 07	3553.7	0.917	0.610
JUN	2350.0	138.2	61.0	0.1493E 07	0.2552E 07	3750.2	0.869	0.702
JUL	2322.5	110.2	61.8	0.1190E 07	0.2637E 07	3660.4	0.891	0.752
AUG	2052.6	91.2	62.4	0.9850E 06	0.2637E 07	3287.3	0.984	0.762
SEP	1701.2	75.6	63.4	0.8165E 06	0.2552E 07	2698.9	1.153	0.762
OCT	1212.0	151.3	60.4	0.1634E 07	0.2637E 07	2037.5	1.381	0.570
NOV	822.2	307.4	54.6	0.3320E 07	0.2552E 07	1510.1	1.609	0.325
DEC	647.0	453.0	49.1	0.5324E 07	0.2637E 07	1279.6	1.721	0.199
TOTAL		3145.4		0.3397E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.456

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) >>>	120.16	COLLECTOR SIDE CAPACITY (BTU/HR F)	0.121E 04
COLLECTOR TILT ANGLE (DEG) >>>	34.94	STORAGE SIDE CAPACITY (BTU/HR F)	0.320E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0453	COLLECTOR SIDE CONVECTION COEFF	1287.5952
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0535	STORAGE SIDE CONVECTION COEFFICIENT	3399.4219
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)	0.1164	COLLECTOR SIDE FLOW RATE (GPM)	2.4765
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)	3.4241	STORAGE SIDE FLOW RATE (GPM)	64.3116
STORAGE SIDE FLUID VELOCITY (FT/SEC)	17.0305	NORMALIZED COLLECTOR FLOW (GPM/AREAC)	0.0206
HEAT EXCHANGER LENGTH (FT)	70.63	NORMALIZED STORAGE FLOW (GPM/AREAC)	0.5352
////////////////CONSTRAINTS///////////////		HEAT EXCHANGER EFFECTIVENESS	0.9306
HEX ANNULAR DIAMETER DIFFERENCE (FT)	0.0028	SOLAR ENERGY DELIVERED (BTU/YEAR)	0.297E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT)	0.0083	TOTAL ENERGY DEMAND (BTU/YEAR)	0.650E 08
COLLECTOR SIDE REYNOLDS NUMBER	0.396E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4561
STORAGE SIDE REYNOLDS NUMBER	0.152E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT >>>	0.128E 04
CAPACITY RATIO (CMIN/CMAX)	0.0377	HEX COEFFICIENT (BTU/HR F FT**2)	328.61
FLOW PARAMETER Z2(GCP/FRUL)	9.6843	TOTAL INSTALLATION COST ($)	3607.13
FLOW PARAMETER Z1(GCP/FRPUL)	9.13	COLLECTOR FLOW FACTOR(FPP)	0.9474

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9213
IMCD-1 LWK AUGUST 1979

LOCATION	OAKLAND	CALIF.
LOCATION INDEX.....		9
LATITUDE,DEGREES....		37.73
MEAN TEMPERATURE....		56.59
INSOL(BTU/DAY FT**2)		1535.21
LOAD FACTOR,HDD.....		3145.40
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRLL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.58

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	1.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/GAL)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LARGE COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.00

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                      *
*       RESULTS OF ANALYSIS FOR OAKLAND   CALIF.                        *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO.  9213
                                  OMCD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.5597E 07	0.2637E 07	1407.4	1.668	0.316
FEB	1017.4	376.5	51.7	0.4066E 07	0.2382E 07	1838.5	1.464	0.476
MAR	1456.3	370.3	53.1	0.3999E 07	0.2637E 07	2458.1	1.225	0.610
APR	1922.1	291.5	55.3	0.3148E 07	0.2552E 07	3095.3	1.025	0.728
MAY	2211.3	222.0	58.0	0.2398E 07	0.2637E 07	3553.7	0.900	0.808
JUN	2350.0	138.2	61.0	0.1493E 07	0.2552E 07	3750.2	0.850	0.893
JUL	2322.5	110.2	61.8	0.1190E 07	0.2637E 07	3660.4	0.872	0.937
AUG	2052.6	91.2	62.4	0.9850E 06	0.2637E 07	3287.3	0.971	0.947
SEP	1701.2	75.6	63.4	0.8165E 06	0.2552E 07	2698.9	1.151	0.951
OCT	1212.0	151.3	60.4	0.1634E 07	0.2637E 07	2037.5	1.395	0.775
NOV	822.2	307.4	54.6	0.3320E 07	0.2552E 07	1510.1	1.639	0.484
DEC	647.0	493.0	49.1	0.5324E 07	0.2637E 07	1279.6	1.759	0.310
TOTAL		3145.4		0.3397E 08	0.3109E 08	>>>WEIGHTED AVERAGE		0.621

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	192.13	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.195E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	37.79	STORAGE SIDE CAPACITY (BTU/HR F).....	0.365E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0573	COLLECTOR SIDE CONVECTION COEFF.....	1238.0464
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0630	STORAGE SIDE CONVECTION COEFFICIENT	3488.8645
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1250	COLLECTOR SIDE FLOW RATE (GPM)	4.0042
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.4578	STORAGE SIDE FLOW RATE (GPM)	73.3488
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.8283	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
HEAT EXCHANGER LENGTH (FT)	81.71	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3818
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9060
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0620	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.404E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0057	TOTAL ENERGY DEMAND (BTU/YEAR)	0.650E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.506E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6210
STORAGE SIDE REYNOLDS NUMBER	0.156E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.383E 04
CAPACITY RATIO (CMIN/CMAX).....	0.3535	HEX COEFFICIENT (BTU/HR F FT**2).....	324.59
FLOW PARAMETER Z2(GCP/FPUL).....	9.7934	TOTAL INSTALLATION COST ($)	4723.78
FLOW PARAMETER Z1(GCP/FNPUL).....	9.28	COLLECTOR FLOW FACTOR(FPP).....	0.9480

S O L I A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9221
IMOD-1 LWK AUGUST 1979

LOCATION	OAKLAND CALIF.	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	9	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.73	SLOPE:			
MEAN TEMPERATURE....	56.39	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1535.21	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,FLE.....	3145.40	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.090
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.110

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	140000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(HW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3370
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX FLUID CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KW#/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA RATIO.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.33
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SOLAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH YC INDEX ID NO. 9221
SOLAD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	918.2	48.3	0.1559E 08	0.2637E 07	1407.4	1.693	0.283
FEB	1017.4	876.5	51.7	0.1130E 08	0.2382E 07	1838.5	1.478	0.449
MAR	1456.3	870.3	53.1	0.1111E 08	0.2637E 07	2458.1	1.225	0.580
APR	1922.1	731.5	55.3	0.8745E 07	0.2552E 07	3095.3	1.015	0.708
MAY	2211.3	622.0	58.0	0.5660E 07	0.2637E 07	3553.7	0.884	0.811
JUN	2350.0	438.2	61.0	0.4146E 07	0.2552E 07	3750.2	0.831	0.925
JUL	2322.3	440.2	61.8	0.3306E 07	0.2637E 07	3660.4	0.854	0.975
AUG	2052.6	491.2	62.4	0.2736E 07	0.2637E 07	3287.3	0.958	0.953
SEP	1701.2	575.6	63.4	0.2268E 07	0.2552E 07	2698.9	1.147	1.000
OCT	1212.0	751.3	60.4	0.4033E 07	0.2637E 07	2037.5	1.405	0.827
NOV	822.6	907.4	54.6	0.9222E 07	0.2552E 07	1510.1	1.663	0.474
DEC	667.0	993.0	49.1	0.1479E 08	0.2637E 07	1279.6	1.790	0.281
TOTAL		8145.4		0.9436E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.584

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	421.04
COLLECTOR TILT ANGLE (DEG) .....>>>	40.29
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0700
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0840
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1432
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.9445
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.4922
HEAT EXCHANGER EFFECT (FT)	38.10
////////////////COEFFICIENTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0641
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER	0.1956E 05
STORAGE SIDE REYNOLDS NUMBER	0.1776E 05
CAPACITY RATIO (STO/COL MAX).....	0.0831
FLOW PARAMETER 2/3(GPM/FT**2).....	9.6773
FLOW PARAMETER 2/3(GPM/FT**2).....	9.17

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.424E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.510E 05
COLLECTOR SIDE CONVECTION COEFF	1269.9515
STORAGE SIDE CONVECTION COEFFICIENT	3577.7405
COLLECTOR SIDE FLOW RATE (GPM)	8.6478
STORAGE SIDE FLOW RATE (GPM)	102.3435
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0206
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2428
HEAT EXCHANGER EFFECTIVENESS.....	0.8031
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.748E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.128E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.584
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.788E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	328.73
TOTAL INSTALLATION COST ($)	7600.09
COLLECTOR FLOW FACTOR(FPP).....	0.9974

09/02/79 18.09.09

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9222
IMOD-1 LWK AUGUST 1979

LOCATION	OAKLAND	CALIF.
LOCATION INDEX.....		9
LATITUDE,DEGREES....		37.73
MEAN TEMPERATURE....		56.59
INSOL(BTU/DAY FT**2)		1535.21
LOAD FACTOR,FLD.....		3143.40
MEAN GROUND TEMP....		55.00

COLLECTOR AMERICAN SUN	
COLLECTOR TEST RESULTS, SLOPE:	
PARAMETER,FRUL....	1.0350
INTERCEPT:	
PARAMETER,FRTA....	0.6380
BASE COST,$/FT**2...	6.55

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.20($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR * FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	2039.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9222

JMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	767.9	518.2	48.3	0.1057E 08	0.2637E 07	1407.4	1.688	0.305
FEB	1017.4	376.5	51.7	0.7681E 07	0.2382E 07	1838.5	1.476	0.471
MAR	1456.3	370.3	53.1	0.7554E 07	0.2637E 07	2458.1	1.225	0.668
APR	1922.1	291.5	55.3	0.5947E 07	0.2552E 07	3095.3	1.017	0.733
MAY	2211.3	222.0	58.0	0.4529E 07	0.2637E 07	3553.7	0.887	0.825
JUN	2356.0	138.2	61.0	0.2819E 07	0.2552E 07	3750.2	0.835	0.924
JUL	2322.5	110.2	61.8	0.2248E 07	0.2637E 07	3660.4	0.858	0.970
AUG	2052.6	91.2	62.4	0.1860E 07	0.2637E 07	3287.3	0.961	0.984
SEP	1701.2	75.6	63.4	0.1542E 07	0.2552E 07	2698.9	1.148	0.993
OCT	1214.3	151.3	60.4	0.3087E 07	0.2637E 07	2037.5	1.403	0.824
NOV	822.2	307.4	54.6	0.6271E 07	0.2552E 07	1510.1	1.659	0.493
DEC	647.0	493.0	49.1	0.1006E 08	0.2637E 07	1279.6	1.784	0.301
TOTAL		3145.4		0.6417E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.611

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	333.73	
COLLECTOR TILT ANGLE (DEG) .....>>>	39.80	
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0716	
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0766	
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1364	
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.8357	
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.5490	
HEAT EXCHANGER LENGTH (FT)	82.58	
////////////////CONSTRAINTS////////////////		
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0018	
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	
COLLECTOR SIDE REYNOLDS NUMBER.....	0.701E 05	
STORAGE SIDE REYNOLDS NUMBER	0.162E 06	
CAPACITY RATIO (CMIN/CMAX).....	0.0782	
FLOW PARAMETER ZZ(GCP/FCUL).....	9.7506	
FLOW PARAMETER ZI(GCP/FPPUL).....	9.25	

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.338E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.432E 05
COLLECTOR SIDE CONVECTION COEFF.....	1286.5342
STORAGE SIDE CONVECTION COEFFICIENT	3565.4451
COLLECTOR SIDE FLOW RATE (GPM)	6.9361
STORAGE SIDE FLOW RATE (GPM)	86.8246
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2602
HEAT EXCHANGER EFFECTIVENESS.....	0.8213
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.582E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.952E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6111
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.625E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	327.82
TOTAL INSTALLATION COST ($)	6024.39
COLLECTOR FLOW FACTOR(FPP).....	0.9478

SOLTAB-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9223
MOD-1 LWK AUGUST 1979

LOCATION	OAKLAND CALIF.	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	9	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.73	SLOPE:			
MEAN TEMPERATURE....	56.59	PARAMETER,FRUL	1.0390		
INSOL(BTU/DAY FT**2)	1535.21	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDL.....	3145.40	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	1.20($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	1.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10777.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0100

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                               *
*                        S O L O A D - 1                        *
*                                                               *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN              *
*       RESULTS OF ANALYSIS FOR OAKLAND   CALIF.                *
*                                                               *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                >>>>>DATA MATCH TO INPUT ID NO.  9223
                                  OMCU-L LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.5597E 07	0.2637E 07	1407.4	1.680	0.341
FEB	1017.4	376.5	51.7	0.4066E 07	0.2382E 07	1838.5	1.471	0.512
MAR	1456.3	370.3	53.1	0.3999E 07	0.2637E 07	2458.1	1.225	0.650
APR	1922.1	291.5	55.3	0.3148E 07	0.2552E 07	3095.3	1.020	0.765
MAY	2211.3	222.0	58.0	0.2398E 07	0.2637E 07	3553.7	0.893	0.839
JUN	2350.0	138.2	61.0	0.1493E 07	0.2552E 07	3750.2	0.841	0.914
JUL	2322.5	110.2	61.8	0.1190E 07	0.2637E 07	3660.4	0.864	0.952
AUG	2052.6	91.2	62.4	0.9850E 06	0.2637E 07	3287.3	0.965	0.961
SEP	1701.2	75.6	63.4	0.8155E 06	0.2552E 07	2693.9	1.149	0.966
OCT	1212.0	151.3	60.4	0.1634E 07	0.2637E 07	2037.5	1.400	0.809
NOV	822.2	307.4	54.6	0.3320E 07	0.2552E 07	1510.1	1.651	0.519
DEC	647.0	493.0	49.1	0.5324E 07	0.2637E 07	1279.6	1.774	0.334
TOTAL		3145.4		0.3397E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.650

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	239.14	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.2466E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	38.96	STORAGE SIDE CAPACITY (BTU/HR F).....	0.4444E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0705	COLLECTOR SIDE CONVECTION COEFF.....	1026.0834
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0731	STORAGE SIDE CONVECTION COEFFICIENT	3691.3235
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1386	COLLECTOR SIDE FLOW RATE (GPM)	5.0462
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.8797	STORAGE SIDE FLOW RATE (GPM)	89.1481
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.3069	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0211
HEAT EXCHANGER LENGTH (FT)	70.73	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3728
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8514
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0004	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.423E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0026	TOTAL ENERGY DEMAND (BTU/YEAR)	0.650E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.518E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6498
STORAGE SIDE REYNOLDS NUMBER	0.105E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.459E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0554	HEX COEFFICIENT (BTU/HR F FT**2).....	309.07
FLOW PARAMETER Z2(GCP/EPUL).....	9.9061	TOTAL INSTALLATION COST ($)	+328.74
FLOW PARAMETER Z1(GCP/EPPUL).....	9.40	COLLECTOR FLOW FACTOR(EPP).....	0.9486

SOLTAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9231
1400-1 LWK AUGUST 1975

LOCATION	OAKLAND CALIF.
LOCATION INDEX.....	9
LATITUDE,DEGREES....	37.73
MEAN TEMPERATURE....	56.59
INSOL(BTU/DAY FT**2)	1555.21
LOAD FACTOR,HDD.....	3145.40
MEAN GROUND TEMP....	55.00

COLLECTOR FEDERAL PRISON I. D	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	0.8830
INTERCEPT:	
PARAMETER,FRTA....	0.6270
BASE COST,$/FT**2...	9.40

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DAY USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KW/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9231

MOD-1 DAK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.1555E 08	0.2637E 07	1407.4	1.653	0.274
FEB	1017.4	376.5	51.7	0.1130E 08	0.2382E 07	1838.5	1.478	0.425
MAR	1455.3	370.3	53.1	0.1111E 08	0.2637E 07	2458.1	1.225	0.553
APR	1922.1	291.5	55.4	0.8745E 07	0.2552E 07	3095.3	1.015	0.580
MAY	2211.3	222.0	58.0	0.6660E 07	0.2637E 07	3553.7	0.884	0.788
JUN	2351.0	138.2	61.0	0.4146E 07	0.2552E 07	3750.2	0.831	0.919
JUL	2322.5	110.2	61.8	0.3306E 07	0.2637E 07	3660.4	0.855	0.983
AUG	2052.6	91.2	62.4	0.2736E 07	0.2637E 07	3287.3	0.958	1.000
SEP	1701.2	75.2	63.4	0.2268E 07	0.2552E 07	2698.9	1.147	1.000
OCT	1214.0	151.3	60.4	0.4539E 07	0.2637E 07	2037.5	1.405	0.814
NOV	822.2	307.4	54.6	0.9224E 07	0.2552E 07	1510.1	1.663	0.456
DEC	647.0	493.0	49.1	0.1479E 08	0.2637E 07	1279.6	1.789	0.272
TOTAL		3145.4		0.9436E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.571

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) >>>	374.83	COLLECTOR SIDE CAPACITY (BTU/HR F)	0.331E 04
COLLECTOR TILT ANGLE (DEG) >>>	40.27	STORAGE SIDE CAPACITY (BTU/HR F)	0.433E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0763	COLLECTOR SIDE CONVECTION COEFF	1127.8250
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0829	STORAGE SIDE CONVECTION COEFFICIENT	3647.3504
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)	0.1410	COLLECTOR SIDE FLOW RATE (GPM)	6.7873
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)	3.3053	STORAGE SIDE FLOW RATE (GPM)	66.8515
STORAGE SIDE FLUID VELOCITY (FT/SEC)	18.9565	NORMALIZED COLLECTOR FLOW (GPM/AREAC)	0.0181
HEAT EXCHANGER LENGTH (FT)	90.39	NORMALIZED STORAGE FLOW (GPM/AREAC)	0.2318
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS	0.8627
HEX ANNULAR DIAMETER DIFFERENCE (FT)	0.0531	SOLAR ENERGY DELIVERED (BTU/YEAR)	0.716E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT)	0.0066	TOTAL ENERGY DEMAND (BTU/YEAR)	0.125E 09
COLLECTOR SIDE REYNOLDS NUMBER	0.644E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.5705
STORAGE SIDE REYNOLDS NUMBER	0.155E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT >>>	0.728E 04
CAPACITY RATIO (COLL/STOR)	0.0765	HEX COEFFICIENT (BTU/HR F FT**2)	317.12
FLOW PARAMETER 1 (GPM/FT**2)	10.0023	TOTAL INSTALLATION COST ($)	7838.76
FLOW PARAMETER 2 (GPM/FT**2)	3.47	COLLECTOR FLOW FACTOR(FPF)	0.9401

09/04/79 16.19.18

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 9232
IMDC-1 LWK AUGUST 1979

LOCATION	OAKLAND CALIF.	COLLECTOR FEDERAL PRISON I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	5	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.73	SLOPE:			
MEAN TEMPERATURE....	56.59	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1535.21	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HLL.....	3145.60	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	500.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR OAKLAND CALIF.

>>>>>DATA MATCH TO INPUT ID NO. 9252
OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	707.9	518.2	48.3	0.1057E 08	0.2637E 07	1407.4	1.684	0.296
FEB	1017.4	376.5	51.7	0.7681E 07	0.2382E 07	1838.5	1.473	0.455
MAR	1456.3	370.3	53.1	0.7554E 07	0.2637E 07	2458.1	1.225	0.587
APR	1922.1	291.5	55.3	0.5947E 07	0.2552E 07	3055.3	1.019	0.712
MAY	2211.3	222.0	58.0	0.4529E 07	0.2637E 07	3553.7	0.890	0.812
JUN	2350.0	138.2	61.0	0.2819E 07	0.2552E 07	3750.2	0.838	0.925
JUL	2322.5	110.2	61.8	0.2248E 07	0.2637E 07	3660.4	0.861	0.981
AUG	2052.6	91.2	62.4	0.1860E 07	0.2637E 07	3287.3	0.963	1.000
SEP	1701.2	75.6	63.4	0.1542E 07	0.2552E 07	2698.9	1.149	1.000
OCT	1212.0	151.3	60.4	0.3087E 07	0.2637E 07	2037.5	1.402	0.816
NOV	822.2	307.4	54.6	0.6271E 07	0.2552E 07	1510.1	1.654	0.479
DEC	647.0	493.0	49.1	0.1006E 08	0.2637E 07	1279.6	1.778	0.293
TOTAL		3145.4		0.6417E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.602

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	301.78
COLLECTOR TILT ANGLE (DEG) .....>>>	39.34
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0518
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0687
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1324
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.9225
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.8640
HEAT EXCHANGER LENGTH (FT)	33.38
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0637
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0069
COLLECTOR SIDE REYNOLDS NUMBER.....	0.619E 05
STORAGE SIDE REYNOLDS NUMBER	0.161E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0641
FLOW PARAMETER Z1(GCP/EPPUL).....	9.6726
FLOW PARAMETER Z2(GCP/EPUL).....	9.16

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.258E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.402E 05
COLLECTOR SIDE CONVECTION COEFF.....	1349.0156
STORAGE SIDE CONVECTION COEFFICIENT	3463.4609
COLLECTOR SIDE FLOW RATE (GPM)	5.2845
STORAGE SIDE FLOW RATE (GPM)	80.6978
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0175
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2674
HEAT EXCHANGER EFFECTIVENESS.....	0.8557
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.573E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.952E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6020
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.581E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	331.58
TOTAL INSTALLATION COST ($)	6302.05
COLLECTOR FLOW FACTOR(FPP).....	0.9474

08/30/79 19.30.33

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10111
IMOD-1 LWK AUGUST 1979

LOCATION — ERYCE CANYON UT

LOCATION INDEX.....	10
LATITUDE,DEGREES....	37.70
MEAN TEMPERATURE....	40.27
INSOL(BTU/DAY FT**2)	1739.77
LOAD FACTOR,HDD.....	9044.29
MEAN GROUND TEMP....	55.00

COLLECTOR SOLARNETICS

COLLECTOR TEST RESULTS,..	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH — ANALYSIS

ECONOMIC ESTIMATES

SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLJAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON LT

>>>>>DATA MATCH TO INPUT ID NO. 10111

JMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.4236E 08	0.2637E 07	1408.9	1.879	0.246
FEB	1230.0	1186.0	23.2	0.3558E 08	0.2382E 07	1839.9	1.578	0.308
MAR	1685.0	1114.0	29.1	0.3342E 08	0.2637E 07	2459.2	1.256	0.389
APR	2133.0	821.4	37.6	0.2464E 08	0.2552E 07	3095.9	1.001	0.488
MAY	2454.0	542.0	47.5	0.1626E 08	0.2637E 07	3553.9	0.850	0.649
JUN	2655.0	249.0	56.9	0.7470E 07	0.2552E 07	3750.1	0.788	0.925
JUL	2424.0	76.9	63.2	0.2307E 07	0.2637E 07	3660.5	0.819	1.000
AUG	2157.0	144.4	60.6	0.4332E 07	0.2637E 07	3287.7	0.934	1.000
SEP	1520.0	370.0	52.7	0.1110E 08	0.2552E 07	2699.9	1.159	0.825
OCT	1465.0	710.0	42.1	0.2130E 08	0.2637E 07	2038.8	1.491	0.568
NOV	1016.0	1066.0	29.6	0.3180E 08	0.2552E 07	1511.6	1.816	0.337
DEC	818.2	1358.6	21.2	0.4076E 08	0.2637E 07	1281.1	1.987	0.238
TOTAL		9044.3		0.2713E 09	0.3165E 08		>>>WEIGHTED AVERAGE	0.431

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	487.11
COLLECTOR TILT ANGLE (DEG) .....>>>	44.63
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0956
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.1008
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1765
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1178
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	23.7328
HEAT EXCHANGER LENGTH (FT)	125.79
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0757
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.760E 05
STORAGE SIDE REYNOLDS NUMBER	0.255E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0559
FLOW PARAMETER Z2(GCP/ERUL).....	9.6848
FLOW PARAMETER Z1(GCP/ERUL).....	7.18

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.490E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.377E 05
COLLECTOR SIDE CONVECTION COEFF.....	1028.8706
STORAGE SIDE CONVECTION COEFFICIENT	4185.7383
COLLECTOR SIDE FLOW RATE (GPM)	10.0398
STORAGE SIDE FLOW RATE (GPM)	176.0220
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0206
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3614
HEAT EXCHANGER EFFECTIVENESS.....	0.9018
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.130E 09
TOTAL ENERGY DEMAND (BTU/YEAR)	0.302E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4311
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.650E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	311.52
TOTAL INSTALLATION COST ($)	14605.08
COLLECTOR FLOW FACTOR(FPP).....	0.9474

08/31/79 16.29.39

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10112
IMOD-1 LWK AUGUST 1979

LOCATION BRYCE CANYON UT

LOCATION INDEX.....	10
LATITUDE,DEGREES....	37.70
MEAN TEMPERATURE....	40.27
INSOL(BTU/DAY FT**2)	1739.77
LOAD FACTOR,HDD.....	9044.29
MEAN GROUND TEMP....	55.00

COLLECTOR SOLARNETICS

COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH ANALYSIS

ECONOMIC ESTIMATES

SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (ETU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON LT

>>>>>DATA MATCH TO INPUT ID NO. 10112
MOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.2880E 08	0.2637E 07	1408.5	1.875	0.252
FEB	1236.0	1186.0	23.2	0.2419E 08	0.2382E 07	1839.9	1.576	0.315
MAR	1685.0	1114.0	29.1	0.2273E 08	0.2637E 07	2459.2	1.256	0.397
APR	2133.0	821.4	37.6	0.1676E 08	0.2552E 07	3095.9	1.003	0.454
MAY	2454.0	542.0	47.5	0.1106E 08	0.2637E 07	3553.9	0.853	0.648
JUN	2655.0	249.0	56.9	0.5080E 07	0.2552E 07	3750.1	0.792	0.906
JUL	2424.0	76.9	63.2	0.1569E 07	0.2637E 07	3660.5	0.823	1.000
AUG	2157.0	144.4	60.6	0.2946E 07	0.2637E 07	3287.7	0.937	1.000
SEP	1920.0	370.0	52.7	0.7548E 07	0.2552E 07	2695.5	1.160	0.818
OCT	1465.0	710.0	42.1	0.1448E 08	0.2637E 07	2038.8	1.490	0.571
NOV	1016.0	1060.0	29.6	0.2162E 08	0.2552E 07	1511.6	1.812	0.343
DEC	818.2	1358.6	21.2	0.2772E 08	0.2637E 07	1281.1	1.982	0.243
TOTAL		9044.3		0.1845E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.442

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	351.69
COLLECTOR TILT ANGLE (DEG) .....>>>	44.21
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0817
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0873
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1523
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.0556
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	21.4669
HEAT EXCHANGER LENGTH (FT)	95.55
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT).....	0.0653
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0056
COLLECTOR SIDE REYNOLDS NUMBER.....	0.637E 05
STORAGE SIDE REYNOLDS NUMBER	0.197E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0599
FLOW PARAMETER Z2(GCP/FRUL).....	9.6175
FLOW PARAMETER Z1(GCP/FRUL).....	9.11

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.351E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.587E 05
COLLECTOR SIDE CONVECTION COEFF.....	1044.5513
STORAGE SIDE CONVECTION COEFFICIENT	3965.6694
COLLECTOR SIDE FLOW RATE (GPM)	7.1982
STORAGE SIDE FLOW RATE (GPM)	117.7682
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3349
HEAT EXCHANGER EFFECTIVENESS.....	0.8780
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.952E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.216E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4416
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.517E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	311.95
TOTAL INSTALLATION COST ($)	16928.49
COLLECTOR FLOW FACTOR(FPP).....	0.9471

08/31/79 20.27.02

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10113
IMOD-1 LWK AUGUST 1979

LOCATION	ERYCE CANYON UT	COLLECTOR SOLARMETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	5044.25	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

150

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.00
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3660
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.38
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON UT

>>>>>DATA MATCH TO INPUT ID NO. 10113
DMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.1525E 08	0.2637E 07	1408.9	1.862	0.284
FEB	1236.0	1186.0	23.2	0.1281E 08	0.2382E 07	1839.5	1.570	0.354
MAR	1685.0	1114.0	29.1	0.1203E 08	0.2637E 07	2459.2	1.257	0.442
APR	2133.0	821.4	37.6	0.8871E 07	0.2552E 07	3095.9	1.010	0.540
MAY	2454.0	542.0	47.5	0.5854E 07	0.2637E 07	3553.9	0.863	0.682
JUN	2655.0	249.0	56.5	0.2689E 07	0.2552E 07	3750.1	0.803	0.898
JUL	2424.0	76.9	63.2	0.8309E 06	0.2637E 07	3660.5	0.833	1.000
AUG	2157.0	144.4	60.6	0.1560E 07	0.2637E 07	3287.7	0.944	0.968
SEP	1920.0	370.0	52.7	0.3996E 07	0.2552E 07	2659.5	1.163	0.826
OCT	1465.0	710.0	42.1	0.7668E 07	0.2637E 07	2038.8	1.486	0.608
NOV	1016.0	1060.0	29.6	0.1145E 08	0.2552E 07	1511.6	1.800	0.379
DEC	818.2	1358.6	21.2	0.1467E 08	0.2637E 07	1281.1	1.966	0.273
TOTAL		9044.3		0.9768E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.488

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	230.38
COLLECTOR TILT ANGLE (DEG) .....>>>	42.95
COLLECTOR SIDE TUBE LINER DIA. (FT)	0.0638
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0706
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1372
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2870
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.1926
HEAT EXCHANGER LENGTH (FT)	92.29
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0666
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0068
COLLECTOR SIDE REYNOLDS NUMBER.....	0.535E 05
STORAGE SIDE REYNOLDS NUMBER	0.190E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0470
FLOW PARAMETER Z2(GCP/FRPUL).....	9.6287
FLOW PARAMETER Z1(GCP/FRPUL).....	9.12

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.230E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.490E 05
COLLECTOR SIDE CONVECTION COEFF	1163.5361
STORAGE SIDE CONVECTION COEFFICIENT	3800.2976
COLLECTOR SIDE FLOW RATE (GPM)	4.7209
STORAGE SIDE FLOW RATE (GPM)	98.4401
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4273
HEAT EXCHANGER EFFECTIVENESS.....	0.5184
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.623E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.129E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4883
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.346E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	321.34
TOTAL INSTALLATION COST ($)	6911.36
COLLECTOR FLOW FACTOR(FPP).....	0.9471

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10213
IMOD-1 LWK AUGUST 1979

LOCATION	ERYCE CANYON UT	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	9044.29	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USE/OF (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0100
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.00

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                      *
*     ---   -          -        -                                       *
*       RESULTS OF ANALYSIS FOR BRYCE CANYON  UT                        *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 10213
                                    SMOD-1 LVK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.1525E 08	0.2637E 07	1408.9	1.914	0.419
FEB	1236.0	1186.0	23.2	0.1281E 08	0.2382E 07	1839.9	1.593	0.506
MAR	1685.0	1114.0	29.1	0.1203E 08	0.2637E 07	2459.2	1.249	0.605
APR	2133.0	821.4	37.6	0.8871E 07	0.2552E 07	3095.9	0.978	0.703
MAY	2454.0	542.0	47.5	0.5854E 07	0.2637E 07	3553.9	0.819	0.835
JUN	2655.0	249.0	56.9	0.2689E 07	0.2552E 07	3750.1	0.754	0.957
JUL	2424.0	76.9	63.2	0.8305E 06	0.2637E 07	3660.5	0.787	1.000
AUG	2157.0	144.4	60.6	0.1560E 07	0.2637E 07	3287.7	0.908	1.000
SEP	1920.0	370.0	52.7	0.3996E 07	0.2552E 07	2699.9	1.145	0.982
OCT	1465.0	710.0	42.1	0.7668E 07	0.2637E 07	2038.8	1.499	0.803
NOV	1116.0	1060.0	29.6	0.1145E 08	0.2552E 07	1511.6	1.846	0.543
DEC	818.2	1358.6	21.2	0.1467E 08	0.2637E 07	1281.1	2.029	0.406
TOTAL		9044.3		0.9768E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.632

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	355.55	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.383E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	48.50	STORAGE SIDE CAPACITY (BTU/HR F).....	0.466E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0719	COLLECTOR SIDE CONVECTION COEFF.....	1411.7432
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0769	STORAGE SIDE CONVECTION COEFFICIENT	3581.1611
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1416	COLLECTOR SIDE FLOW RATE (GPM)	7.8504
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.3116	STORAGE SIDE FLOW RATE (GPM)	93.6463
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.7959	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0221
HEAT EXCHANGER LENGTH (FT)	90.70	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2634
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8204
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0647	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.814E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.129E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.790E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6322
STORAGE SIDE REYNOLDS NUMBER	0.172E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.858E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0821	HEX COEFFICIENT (BTU/HR F FT**2).....	335.52
FLOW PARAMETER Z2(GCP/FRPUL).....	10.3750	TOTAL INSTALLATION COST ($)	8708.16
FLOW PARAMETER Z1(GCP/FRPUL).....	9.87	COLLECTOR FLOW FACTOR(FPP).....	0.9510

09/07/15 21.56.15

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10221
IMCD-1 LNK AUGUST 1979

LOCATION	BRYCE CANYON UT	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HOD.....	5044.29	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE INDEX	ENERGY TYPE	BASE EFFICIENCY	COST	HEATING VALUE
				OIL
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON UT

>>>>>DATA MATCH TO INPUT ID NO. 10221

DMOD-1 LWK AUGUST 1978

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.4236E 08	0.2637E 07	1408.9	1.925	0.453
FEB	1236.0	1186.0	23.2	0.3558E 08	0.2382E 07	1839.9	1.557	0.546
MAR	1685.0	1114.0	29.1	0.3342E 08	0.2637E 07	2459.2	1.246	0.553
APR	2133.0	821.4	37.6	0.2464E 08	0.2552E 07	3095.9	0.970	0.780
MAY	2454.0	542.0	47.5	0.1626E 08	0.2637E 07	3553.9	0.808	0.898
JUN	2655.0	249.0	56.9	0.7470E 07	0.2552E 07	3750.1	0.742	1.000
JUL	2424.0	76.9	63.2	0.2307E 07	0.2637E 07	3660.5	0.776	1.000
AUG	2157.0	144.4	60.6	0.4332E 07	0.2637E 07	3267.7	0.898	1.000
SEP	1920.0	370.0	52.7	0.1110E 08	0.2552E 07	2699.9	1.140	1.000
OCT	1465.0	710.0	42.1	0.2130E 08	0.2637E 07	2038.8	1.501	0.871
NOV	1016.0	1060.0	29.6	0.3180E 08	0.2552E 07	1511.6	1.855	0.593
DEC	818.2	1358.6	21.2	0.4076E 08	0.2637E 07	1281.1	2.042	0.440
TOTAL		9044.3		0.2713E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.656

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	1106.59
COLLECTOR TILT ANGLE (DEG) .....>>>	49.45
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.1318
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.1375
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.2310
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.6510
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	26.3040
HEAT EXCHANGER LENGTH (FT)	148.52
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0935
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0057
COLLECTOR SIDE REYNOLDS NUMBER.....	0.123E 06
STORAGE SIDE REYNOLDS NUMBER	0.347E 06
CAPACITY RATIO (CM)/(CM)MAX).....	0.0685
FLOW PARAMETER Z2(GPM/FRPUL).....	9.4802
FLOW PARAMETER Z1(GPM/FRPUL).....	8.97

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.109E 05
STORAGE SIDE CAPACITY (BTU/HR F).....	0.159E 06
COLLECTOR SIDE CONVECTION COEFF.....	1094.7612
STORAGE SIDE CONVECTION COEFFICIENT	4364.8516
COLLECTOR SIDE FLOW RATE (GPM)	22.3473
STORAGE SIDE FLOW RATE (GPM)	319.6243
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2888
HEAT EXCHANGER EFFECTIVENESS.....	0.8224
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.198E 09
TOTAL ENERGY DEMAND (BTU/YEAR)	0.302E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6555
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.219E 05
HEX COEFFICIENT (BTU/HR F FT**2).....	317.89
TOTAL INSTALLATION COST ($)	19975.96
COLLECTOR FLOW FACTOR(FPP).....	0.9463

S C L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10222
IMCD-1 LNK AUGUST 1979

LOCATION	ERYCE CANYON UT	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HOD.....	9044.29	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L J A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON LT

>>>>>DATA MATCH TO INPUT IO NO. 10222
OMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.2380E 08	0.2637E 07	1408.5	1.925	0.455
FEB	1236.0	1186.0	23.2	0.2419E 08	0.2382E 07	1839.9	1.597	0.552
MAR	1683.0	1114.0	29.1	0.2273E 08	0.2637E 07	2455.2	1.248	0.658
APR	2133.0	821.4	37.6	0.1676E 08	0.2552E 07	3095.9	0.970	0.760
MAY	2454.0	542.6	47.5	0.1106E 08	0.2637E 07	3553.9	0.808	0.892
JUN	2655.0	249.0	56.9	0.5080E 07	0.2552E 07	3750.1	0.742	1.000
JUL	2424.6	76.9	63.2	0.1565E 07	0.2637E 07	3660.5	0.776	1.000
AUG	2157.0	144.4	60.6	0.2946E 07	0.2637E 07	3287.7	0.898	1.000
SEP	1520.0	370.0	52.7	0.7548E 07	0.2552E 07	2695.5	1.140	1.000
OCT	1465.0	710.0	42.1	0.1448E 08	0.2637E 07	2038.8	1.501	0.869
NOV	1016.0	1060.0	29.6	0.2162E 08	0.2552E 07	1511.6	1.855	0.597
DEC	818.2	1358.6	21.2	0.2772E 08	0.2637E 07	1281.1	2.042	0.445
TOTAL		9044.3		0.1845E 09	0.3105E 08	>>>WEIGHTED AVERAGE		0.663

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	783.71	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.775E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	49.65	STORAGE SIDE CAPACITY (BTU/HR F).....	0.949E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.1032	COLLECTOR SIDE CONVECTION COEFF.....	1137.3516
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.1142	STORAGE SIDE CONVECTION COEFFICIENT	4073.5055
STORAGE SIDE TUBE(HEX) PITCH DIA. (FT)..	0.1908	COLLECTOR SIDE FLOW RATE (GPM)	15.8794
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.8469	STORAGE SIDE FLOW RATE (GPM)	150.6151
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	23.1366	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	136.11	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2432
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8425
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0766	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.143E 09
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0060	TOTAL ENERGY DEMAND (BTU/YEAR)	0.216E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	1.106E 06	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6634
STORAGE SIDE REYNOLDS NUMBER	6.250E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.161E 05
CAPACITY RATIO (CMIN/CMAX).....	0.0816	HEX COEFFICIENT (BTU/HR F FT**2).....	323.83
FLOW PARAMETER Z2(GCP/(PDUL).....	9.5093	TOTAL INSTALLATION COST ($)	14164.61
FLOW PARAMETER Z1(GCP/(PDUL).....	9.00	COLLECTOR FLOW FACTOR(FPP).....	0.9464

CS/C2/75 14.28.17

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10223
IMOD-1 LWK AUGUST 1979

LOCATION	ERYCE CANYON UT	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	5044.29	PARAMETER,FRTA....	0.8380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L T A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR BRYCE CANYON  UT                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 10223
                                  DMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.1525E 08	0.2637E 07	1408.9	1.917	0.468
FEB	1236.0	1186.0	23.2	0.1281E 08	0.2382E 07	1839.9	1.554	0.562
MAR	1685.0	1114.0	29.1	0.1203E 08	0.2637E 07	2459.2	1.248	0.666
APR	2133.0	821.4	37.6	0.8871E 07	0.2552E 07	3055.9	0.976	0.762
MAY	2454.0	542.0	47.5	0.5854E 07	0.2637E 07	3553.9	0.816	0.880
JUN	2655.0	249.0	56.9	0.2689E 07	0.2552E 07	3750.1	0.751	1.000
JUL	2424.0	76.9	63.2	0.8305E 06	0.2637E 07	3660.5	0.784	1.000
AUG	2157.0	144.4	60.6	0.1560E 07	0.2637E 07	3287.7	0.905	1.000
SEP	1920.0	370.0	52.7	0.3996E 07	0.2552E 07	2655.5	1.144	1.000
OCT	1465.0	710.0	42.1	0.7668E 07	0.2637E 07	2038.8	1.500	0.859
NOV	1016.0	1060.0	29.6	0.1145E 08	0.2552E 07	1511.6	1.848	0.601
DEC	818.2	1358.6	21.2	0.1467E 08	0.2637E 07	1281.1	2.033	0.453
TOTAL		9044.3		0.9768E 08	0.3105E 08	>>> WEIGHTED AVERAGE		0.679

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) ..... >>>	460.19	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.461E 04
COLLECTOR TILT ANGLE (DES) ..... >>>	48.85	STORAGE SIDE CAPACITY (BTU/HR F).....	0.707E 05
COLLECTOR SIDE TUBE LINER DIA. (FT)	0.0786	COLLECTOR SIDE CONVECTION COEFF.....	1395.5149
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0882	STORAGE SIDE CONVECTION COEFFICIENT	3810.0002
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1642	COLLECTOR SIDE FLOW RATE (GPM)	9.4548
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.3455	STORAGE SIDE FLOW RATE (GPM)	142.0402
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.9971	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
HEAT EXCHANGER LENGTH (FT)	108.47	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3087
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8479
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0760	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.874E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0096	TOTAL ENERGY DEMAND (BTU/YEAR)	0.129E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.871E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6790
STORAGE SIDE REYNOLDS NUMBER	0.225E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.102E 05
CAPACITY RATIO (CMIN/CMAX).....	0.0652	HEX COEFFICIENT (BTU/HR F FT**2).....	336.58
FLOW PARAMETER Z2(GCP/ERUL).....	9.6447	TOTAL INSTALLATION COST ($)	9313.32
FLOW PARAMETER Z1(GCP/ERPUL).....	9.14	COLLECTOR FLOW FACTOR(FPP).....	0.9472

09/03/79 15.19.50

S O L A R E - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10241
MOD-1 DWK AUGUST 1979

160

LOCATION	BRYCE CANYON UT	COLLECTOR FEDERAL PRISON I. C		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL	0.3830		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	9044.29	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/MCF)	100000.0(BTU/MCF)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD COLLECTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/DEG) ...	20.00
ESTIMATED DHW USERS (PER).....	2.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.91
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3690
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/SQFEAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/SQFEAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/SQFEAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.010

S O L T A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON UT

>>>>>DATA MATCH TO INPUT ID NO. 10231
MOD-1 LBL AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	17.5	0.4236E 08	0.2637E 07	1408.5	1.922	0.433
FEB	1236.0	1186.0	23.2	0.3556E 08	0.2382E 07	1839.9	1.596	0.522
MAR	1685.0	1114.0	29.1	0.3342E 08	0.2637E 07	2455.2	1.247	0.628
APR	2133.0	624.4	37.6	0.2464E 08	0.2552E 07	3095.9	0.972	0.740
MAY	2454.0	342.0	47.5	0.1626E 08	0.2637E 07	3553.5	0.811	0.856
JUN	2655.0	249.0	56.9	0.7470E 07	0.2552E 07	3750.1	0.746	1.000
JUL	2424.0	76.9	63.2	0.2307E 07	0.2637E 07	3660.5	0.779	1.000
AUG	2157.0	144.4	60.6	0.4332E 07	0.2637E 07	3287.7	0.901	1.000
SEP	1920.0	370.0	52.7	0.1110E 08	0.2552E 07	2699.9	1.141	1.000
OCT	1405.0	710.0	42.1	0.2130E 08	0.2637E 07	2038.8	1.501	0.855
NOV	1016.0	1060.0	29.6	0.3180E 08	0.2552E 07	1511.6	1.852	0.570
DEC	813.2	1358.6	21.2	0.4076E 08	0.2637E 07	1281.1	2.038	0.422
TOTAL		9044.3		0.2713E 09	0.3165E 08			
						>>>WEIGHTED AVERAGE		0.638

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	995.72
COLLECTOR TILT ANGLE (DEG) .....>>>	49.46
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.1143
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.1143
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.2517
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.7335
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	23.765+
HEAT EXCHANGER LENGTH (FT)	127.90
////////////////////OUTPUTS////////////////////	
HEX ARITHMETIC DIAMETRAL DIFFERENCE (FT)....	0.0819
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0000
COLLECTOR SIDE REYNOLDS NUMBER	0.100E 06
STORAGE SIDE REYNOLDS NUMBER	0.270E 06
CAPACITY RATIO (CMIN/CMAX).....	0.777)
FLOW PARAMETER 2 (GPM/FT**2).....	9.6265
FLOW PARAMETER 1 (GPM/FT**2).....	7.12

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.346E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.110E 06
COLLECTOR SIDE CONVECTION COEFF.....	1145.5925
STORAGE SIDE CONVECTION COEFFICIENT	4116.7852
COLLECTOR SIDE FLOW RATE (GPM)	17.352F
STORAGE SIDE FLOW RATE (GPM)	226.6711
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0174
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2216
HEAT EXCHANGER EFFECTIVENESS.....	0.8124
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.193E 09
TOTAL ENERGY DEMAND (BTU/YEAR)	0.302E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION)	0.638)
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.200E 05
HEX COEFFICIENT (BTU/HR F FT**2).....	320.86
TOTAL INSTALLATION COST ($)	20765.62
COLLECTOR FLOW FACTOR(FPP).....	0.9471

09/04/79 17.00.32

S O L C A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10232
IMCL-1 LWK AUGUST 1979

LOCATION	ERYCE CANYON UT	COLLECTOR	FEDERAL PRISON I. D	STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	10	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.70	SLOPE:			
MEAN TEMPERATURE....	40.27	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1739.77	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HOD.....	3044.29	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	500.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L J A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR BRYCE CANYON  UT                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 10232
                                  1400-1 LAK ALGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.2886E 08	0.2637E 07	1408.9	1.921	0.441
FEB	1236.0	1186.0	23.2	0.2419E 08	0.2382E 07	1839.9	1.596	0.531
MAR	1685.0	1114.0	29.1	0.2273E 08	0.2637E 07	2459.2	1.247	0.635
APR	2133.0	821.4	37.6	0.1676E 08	0.2552E 07	3055.9	0.973	0.743
MAY	2454.0	542.0	47.5	0.1106E 08	0.2637E 07	3553.5	0.812	0.891
JUN	2655.0	249.0	56.9	0.5083E 07	0.2552E 07	3750.1	0.747	1.000
JUL	2424.0	76.9	63.2	0.1569E 07	0.2637E 07	3666.5	0.780	1.000
AUG	2157.0	144.4	60.6	0.2946E 07	0.2637E 07	3287.7	0.901	1.000
SEP	1920.0	370.0	52.7	0.7548E 07	0.2552E 07	2699.9	1.142	1.000
OCT	1465.0	710.0	42.1	0.1448E 08	0.2637E 07	2038.6	1.501	0.855
NOV	1016.0	1060.0	29.6	0.2162E 08	0.2552E 07	1511.6	1.852	0.576
DEC	818.2	1358.6	21.2	0.2772E 08	0.2637E 07	1281.1	2.038	0.429
TOTAL		9044.3		0.1345E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.648

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	707.92	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.603E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	47.37	STORAGE SIDE CAPACITY (BTU/HR F).....	0.845E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0949	COLLECTOR SIDE CONVECTION COEFF.....	1230.5281
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0999	STORAGE SIDE CONVECTION COEFFICIENT	3967.5757
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1770	COLLECTOR SIDE FLOW RATE (GPM)	12.3644
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.8929	STORAGE SIDE FLOW RATE (GPM)	169.5895
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	22.3075	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0175
HEAT EXCHANGER LENGTH (FT)	120.65	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2396
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8465
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0777	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.140E 09
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.216E 09
COLLECTER SIDE REYNOLDS NUMBER	0.943E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6482
STORAGE SIDE REYNOLDS NUMBER	0.242E 05	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.148E 05
CAPACITY RATIO (MIN/MAX).....	0.0714	HEX COEFFICIENT (BTU/HR F FT**2).....	326.46
FLOW PARAMETER 2 (GPM/FPUL).....	9.6476	TOTAL INSTALLATION COST ($)	14780.37
FLOW PARAMETER 21(GPM/FPUL).....	9.14	COLLECTOR FLOW FACTOR(FPP).....	0.5472

SOLTRAC-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 10233
1980-1 LWK AUGUST 1979

LOCATION: BRYCE CANYON UT

LOCATION INDEX.....	10
LATITUDE,DEGREES....	37.70
MEAN TEMPERATURE....	40.27
INSOL(BTU/DAY FT**2)	1739.77
LOAD FACTOR,ANN.....	9044.25
MEAN SPECIFIED TEMP....	55.00

COLLECTOR: FEDERAL PRISM I. C

COLLECTOR TEST RESULTS,

SLOPE:	
PARAMETER,FRUL	0.8830
INTERCEPT:	
PARAMETER,ETA....	0.6270
BASE COST,$/FT**2...	9.40

STUDY APPROACH: ANALYSIS

ECONOMIC ESTIMATES

SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.0900
INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10720.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS, (PER).....	5.00
ESTIMATED STORAGE FOR LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.21
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR PLATE CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/SQFEET)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/SQFEET).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA REFL.	0.93
ESTIMATED INSTALL/LABOR COST ($/SQFEET)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SOLCAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

RESULTS OF ANALYSIS FOR BRYCE CANYON UT

>>>>>DATA MATCH TO INPUT ID NO. 10233
SMOD-1 LNK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	914.0	1412.0	19.5	0.1525E 08	0.2637E 07	1408.5	1.915	0.456
FEB	1236.0	1186.0	23.2	0.1281E 08	0.2382E 07	1829.9	1.555	0.546
MAR	1685.0	1114.0	29.1	0.1203E 08	0.2637E 07	2459.2	1.248	0.648
APR	2134.0	821.4	37.6	0.8871E 07	0.2552E 07	3055.5	0.974	0.746
MAY	2454.0	542.0	47.5	0.5354E 07	0.2537E 07	3553.9	0.814	0.876
JUN	2655.0	249.0	56.9	0.2689E 07	0.2552E 07	3750.1	0.749	1.000
JUL	2424.0	76.9	63.2	0.8305E 06	0.2637E 07	3666.5	0.782	1.000
AUG	2157.0	144.4	60.6	0.1560E 07	0.2637E 07	3287.7	0.903	1.000
SEP	1929.0	370.0	52.7	0.3996E 07	0.2552E 07	2655.5	1.143	1.000
OCT	1465.0	710.0	42.1	0.7663E 07	0.2637E 07	2038.8	1.500	0.849
NOV	1016.0	1060.0	29.6	0.1145E 08	0.2552E 07	1511.6	1.850	0.586
DEC	813.2	1353.0	21.2	0.1467E 08	0.2637E 07	1281.1	2.035	0.442
TOTAL		9044.5		0.9763E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.663

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	417.21
COLLECTOR TILT ANGLE (DEG) .....>>>	49.13
COLLECTOR SIDE TUBE INER DIA. (FT)	0.0730
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0800
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1540
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.0824
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	20.4372
HEAT EXCHANGER LENGTH (FT)	121.14
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0760
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0070
COLLECTOR SIDE REYNOLDS NUMBER	0.7608E 05
STORAGE SIDE REYNOLDS NUMBER	0.2148 06
CAPACITY RATIO (C11/CMIN)	0.0602
FLOW PARAMETER 2 (GPM/FT**2).....	10.1471
FLOW PARAMETER 2(C) (GPM/FT**2).....	9.64

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.3748 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.6218 05
COLLECTOR SIDE CONVECTION COEFF.....	1347.2422
STORAGE SIDE CONVECTION COEFFICIENT	3759.4312
COLLECTOR SIDE FLOW RATE (GPM)	7.6643
STORAGE SIDE FLOW RATE (GPM)	124.7847
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0184
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2991
HEAT EXCHANGER EFFECTIVENESS.....	0.9078
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.6468 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.1298 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6680
OBJECTIVE: MOV OF SOLAR INVESTMENT ..>>>	0.9496 04
HEX COEFFICIENT (BTU/HR F FT**2).....	333.32
TOTAL INSTALLATION COST ($)	8743.49
COLLECTOR FLOW FACTOR(FFF).....	0.9499

08/30/79 19.44.22

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 11111
IMCD-1 LWK AUGUST 1979

LOCATION	DODGE CITY KAN	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
		COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LOCATION INDEX.....	11	SLOPE:			
LATITUDE,DEGREES....	37.77	PARAMETER,FRUL....	1.0380		
MEAN TEMPERATURE....	54.31	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
INSOL(BTU/DAY FT**2)	1558.71	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
LOAD FACTOR,HDD.....	5284.10	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050
MEAN GROUND TEMP....	55.00				

166

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLAR - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR DODGE CITY KAN

>>>>>DATA MATCH TO INPUT ID NO. 11111

DMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.3327E 08	0.2637E 07	1405.3	1.803	0.091
FEB	1122.0	875.3	34.0	0.2626E 08	0.2382E 07	1636.6	1.529	0.125
MAR	1477.0	739.2	41.2	0.2218E 08	0.2637E 07	2456.6	1.228	0.172
APR	1886.0	354.7	53.7	0.1064E 08	0.2552E 07	3094.4	1.002	0.318
MAY	2070.0	128.2	64.0	0.3846E 07	0.2637E 07	3553.5	0.868	0.562
JUN	2358.0	15.4	74.0	0.4620E 06	0.2552E 07	3750.3	0.812	0.934
JUL	2296.0	1.4	79.0	0.4200E 05	0.2637E 07	3660.4	0.837	0.996
AUG	2055.0	1.9	77.5	0.5700E 05	0.2637E 07	3280.7	0.945	0.997
SEP	1687.0	70.9	67.5	0.2127E 07	0.2552E 07	2697.6	1.141	0.738
OCT	1301.0	275.4	57.1	0.8262E 07	0.2637E 07	2035.7	1.438	0.383
NOV	893.6	701.0	41.7	0.2103E 08	0.2552E 07	1508.0	1.728	0.142
DEC	731.9	1011.7	32.4	0.3035E 08	0.2637E 07	1277.5	1.894	0.090
TOTAL		5284.1		0.1585E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.217

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	162.13
COLLECTOR TILT ANGLE (DEG) .....>>>	42.70
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0625
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0724
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1217
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.4313
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.6000
HEAT EXCHANGER LENGTH (FT)	53.82
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0493
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0099
COLLECTOR SIDE REYNOLDS NUMBER.....	0.388E 05
STORAGE SIDE REYNOLDS NUMBER	0.123E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0552
FLOW PARAMETER Z2(GCP/FPUL).....	9.7027
FLOW PARAMETER Z1(GCP/FPPUL).....	9.19

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.163E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.296E 05
COLLECTOR SIDE CONVECTION COEFF.....	918.0244
STORAGE SIDE CONVECTION COEFFICIENT	3532.7219
COLLECTOR SIDE FLOW RATE (GPM)	3.3477
STORAGE SIDE FLOW RATE (GPM)	59.3792
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0206
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3663
HEAT EXCHANGER EFFECTIVENESS.....	0.8460
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.411E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.190E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2168
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.193E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	298.11
TOTAL INSTALLATION COST ($)	4849.16
COLLECTOR FLOW FACTOR(FPP).....	0.9475

08/31/79 16.52.29

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT TO NO. 11112
IMID-1 LWK AUGUST 1979

LOCATION	DODGE CITY KAN	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	11	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.77	SLOPE:			
MEAN TEMPERATURE....	54.31	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1558.71	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	5284.10	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

168

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*      ---   -          -        -                                     *
*        RESULTS OF ANALYSIS FOR DODGE CITY   KAN                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 11112
                                  OMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.2262E 08	0.2637E 07	1405.3	1.791	0.123
FEB	1122.0	875.3	34.0	0.1786E 08	0.2382E 07	1836.6	1.523	0.169
MAR	1477.0	739.2	41.2	0.1508E 08	0.2637E 07	2456.6	1.229	0.225
APR	1886.0	354.7	53.7	0.7236E 07	0.2552E 07	3094.4	1.008	0.403
MAY	2070.0	128.2	64.0	0.2615E 07	0.2637E 07	3553.5	0.876	0.646
JUN	2358.0	15.4	74.0	0.3142E 06	0.2552E 07	3750.3	0.821	0.949
JUL	2296.0	1.4	79.0	0.2856E 05	0.2637E 07	3660.4	0.846	0.996
AUG	2055.0	1.9	77.5	0.3376E 05	0.2637E 07	3286.7	0.951	0.995
SEP	1687.0	70.9	67.9	0.1446E 07	0.2552E 07	2697.6	1.144	0.799
OCT	1301.0	275.4	57.1	0.5618E 07	0.2637E 07	2035.7	1.434	0.469
NOV	893.6	701.0	41.7	0.1430E 08	0.2552E 07	1508.0	1.718	0.189
DEC	731.9	1011.7	32.4	0.2064E 08	0.2637E 07	1277.5	1.880	0.121
TOTAL		5284.1		0.1078E 09	0.3165E 08			
						>>>WEIGHTED AVERAGE		0.281

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	155.19	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.159E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	41.55	STORAGE SIDE CAPACITY (BTU/HR F).....	0.385E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0599	COLLECTOR SIDE CONVECTION COEFF.....	970.1899
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0679	STORAGE SIDE CONVECTION COEFFICIENT	3675.6736
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1272	COLLECTOR SIDE FLOW RATE (GPM)	3.2587
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.5776	STORAGE SIDE FLOW RATE (GPM)	77.3898
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.9825	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0209
HEAT EXCHANGER LENGTH (FT)	73.77	NORMALIZED STORAGE FLOW (GPM/APEAC) ...	0.4955
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9246
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0593	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.35CE C8
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0080	TOTAL ENERGY DEMAND (BTU/YEAR)	0.139E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.394E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2811
STORAGE SIDE REYNOLDS NUMBER	0.159E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.174E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0412	HEX COEFFICIENT (BTU/HR F FT**2).....	304.15
FLOW PARAMETER Z2 (GCP/FRPUL).....	9.8035	TOTAL INSTALLATION COST ($)	4693.60
FLOW PARAMETER Z1(GCP/FRPUL).....	9.29	COLLECTOR FLOW FACTOR(FPP).....	0.9481

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 11113
IMOD-1 LWK AUGUST 1979

LOCATION — DODGE CITY KAN

LOCATION INDEX.....	11
LATITUDE,DEGREES....	37.77
MEAN TEMPERATURE....	54.31
INSOL(BTU/DAY FT**2)	1558.71
LOAD FACTOR,HDD.....	5284.10
MEAN GROUND TEMP....	55.00

COLLECTOR SOLARNETICS

COLLECTOR TEST RESULTS, SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH — ANALYSIS

ECONOMIC ESTIMATES

SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                   *
*                        S O L O A D - 1                            *
*                                                                   *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                  *
*     ---   -          -        -                                   *
*       RESULTS OF ANALYSIS FOR DODGE CITY   KAN                    *
*                                                                   *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 11113
                                  OMCD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.1198E 08	0.2637E 07	1405.3	1.778	0.160
FEB	1122.0	875.3	34.0	0.9453E 07	0.2382E 07	1836.6	1.516	0.217
MAR	1477.0	739.2	41.2	0.7983E 07	0.2637E 07	2456.6	1.229	0.288
APR	1886.0	354.7	53.7	0.3831E 07	0.2552E 07	3094.4	1.013	0.466
MAY	2070.0	128.2	64.0	0.1385E 07	0.2637E 07	3553.5	0.885	0.656
JUN	2358.0	15.4	74.0	0.1663E 06	0.2552E 07	3750.3	0.831	0.875
JUL	2296.0	1.4	79.0	0.1512E 05	0.2637E 07	3660.4	0.855	0.909
AUG	2055.0	1.9	77.5	0.2052E 05	0.2637E 07	3266.7	0.958	0.908
SEP	1687.0	70.9	67.9	0.7657E 06	0.2552E 07	2697.6	1.146	0.768
OCT	1301.0	275.4	57.1	0.2974E 07	0.2637E 07	2035.7	1.430	0.517
NOV	893.6	701.0	41.7	0.7571E 07	0.2552E 07	1508.0	1.706	0.235
DEC	731.9	1011.7	32.4	0.1093E 08	0.2637E 07	1277.5	1.865	0.156
TOTAL		5284.1		0.5707E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.349

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	121.97
COLLECTOR TILT ANGLE (DEG) .....>>>	40.34
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0491
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0541
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1120
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9489
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.0047
HEAT EXCHANGER LENGTH (FT)	49.79
////////////////CONSTRAINTS/////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0580
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.369E 05
STORAGE SIDE REYNOLDS NUMBER	0.131E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0451
FLOW PARAMETER Z2(GCP/ERUL).....	9.6419
FLOW PARAMETER Z1(GCP/ERPUL).....	9.13

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.122E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.271E 05
COLLECTOR SIDE CONVECTION COEFF.....	1124.3823
STORAGE SIDE CONVECTION COEFFICIENT	3251.7253
COLLECTOR SIDE FLOW RATE (GPM)	2.5028
STORAGE SIDE FLOW RATE (GPM)	54.3385
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4455
HEAT EXCHANGER EFFECTIVENESS.....	0.8545
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.307E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.881E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3485
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.143E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	314.54
TOTAL INSTALLATION COST ($)	3646.53
COLLECTOR FLOW FACTOR(FPP).....	0.9472

09/09/79 10.14.53

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN                     *
*      ---                                                              *
*            DESIGN DATA OPTIONS/INPUTS SUMMARY                         *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO OUTPUT ID NO. 11221
                                  LAST-1 DAY AUGUST 1979
```

LOCATION	BOISE CITY KAN	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
		COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LOCATION INDEX.....	11	SLOPE:			
LATITUDE,DEGREES....	37.77	PARAMETER,FRUL....	1.0390		
MEAN TEMPERATURE....	54.31	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
INSOL(BTU/DAY FT**2)	1558.71	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
LOCAL FACTOR,FOO....	5284.10	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100
MEAN GROUND TEMP....	55.00				

172

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TANK EFFECTIVENESS..	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR PLATE CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.00
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3900
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA FACD.	0.95
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR DODGE CITY KAN

>>>>>DATA MATCH TO INPUT ID NO. 11221
JMCJ-L LNK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.3327E 08	0.2637E 07	1405.3	1.670	0.277
FEB	1122.3	875.3	34.0	0.2626E 08	0.2382E 07	1836.6	1.559	0.363
MAR	1477.0	733.2	41.2	0.2218E 08	0.2637E 07	2456.6	1.211	0.462
APR	1886.0	354.7	53.7	0.1064E 08	0.2552E 07	3094.4	0.954	0.722
MAY	2070.1	128.2	64.0	0.3846E 07	0.2637E 07	3553.5	0.805	0.941
JUN	2358.0	15.4	74.0	0.4620E 06	0.2552E 07	3750.3	0.742	1.000
JUL	2296.0	1.4	79.0	0.4200E 05	0.2637E 07	3669.4	0.769	1.000
AUG	2055.0	1.9	77.5	0.5700E 05	0.2637E 07	3286.7	0.889	1.000
SEP	1687.0	70.9	67.5	0.2127E 07	0.2552E 07	2697.6	1.111	1.000
OCT	1331.0	275.4	57.1	0.8262E 07	0.2637E 07	2035.7	1.451	0.849
NOV	893.6	701.0	41.7	0.2103E 08	0.2552E 07	1508.0	1.784	0.411
DEC	731.9	1011.7	32.4	0.3035E 08	0.2637E 07	1277.5	1.975	0.275
TOTAL		5284.1		0.1585E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.467

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	575.06	
COLLECTOR TILT ANGLE (DEG) .....>>>	50.96	
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0247	
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0277	
STORAGE SIDE TUBE(HEX) TUBE DIA. (FT)..	0.1679	
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.7248	
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	21.3183	
HEAT EXCHANGER LENGTH (FT)	114.51	
////////////////DISPLACEMENTS//////////////		
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0662	
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0030	
COLLECTOR SIDE REYNOLDS NUMBER	0.900E 05	
STORAGE SIDE REYNOLDS NUMBER	0.209E 06	
CAPACITY RATIO (CR)(MAX).....	0.3841	
FLOW PARAMETER 2 (CCP/FRPUL).....	9.6676	
FLOW PARAMETER 1 (CCP/FRPUL).....	7.10	

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.574E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.683E 05
COLLECTOR SIDE CONVECTION COEFF.....	1188.4792
STORAGE SIDE CONVECTION COEFFICIENT	3905.0862
COLLECTOR SIDE FLOW RATE (GPM)	11.7686
STORAGE SIDE FLOW RATE (GPM)	137.0885
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2384
HEAT EXCHANGER EFFECTIVENESS.....	0.8393
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.835E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.179E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4669
OBJECTIVE: PPV OF SOLAR INVESTMENT ..>>>	0.816E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	322.96
TOTAL INSTALLATION COST ($)	10391.44
COLLECTOR FLOW FACTOR(FPP).....	0.9470

09/02/79 18.34.35

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 11222
IMOD-1 LWK AUGUST 1975

LOCATION	DODGE CITY KAN	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	11	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.77	SLOPE:			
MEAN TEMPERATURE....	54.31	PARAMETER,FRUL	1.0390		
INSOL(BTU/DAY FT**2)	1558.71	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDL.....	5284.10	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	3.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20359.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L A D - 1                                *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR DODGE CITY   KAN                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 11222
                                  JMOD-1 CWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.2262E 08	0.2637E 07	1405.3	1.866	0.281
FEB	1122.0	875.3	34.0	0.1780E 08	0.2382E 07	1836.6	1.554	0.367
MAR	1477.0	729.2	41.2	0.1508E 08	0.2637E 07	2456.6	1.213	0.464
APR	1836.0	354.7	53.7	0.7236E 07	0.2552E 07	3094.4	0.958	0.709
MAY	2070.0	128.2	64.0	0.2615E 07	0.2637E 07	3553.5	0.809	0.916
JUN	2358.0	15.4	74.0	0.3142E 06	0.2552E 07	3750.3	0.747	1.000
JUL	2296.0	1.4	79.0	0.2856E 05	0.2637E 07	3660.4	0.774	1.000
AUG	2055.0	1.9	77.5	0.3876E 05	0.2637E 07	3286.7	0.893	1.000
SEP	1687.0	70.9	67.9	0.1446E 07	0.2552E 07	2657.6	1.114	1.000
OCT	1361.0	275.4	57.1	0.5618E 07	0.2637E 07	2035.7	1.451	0.827
NOV	893.0	701.0	41.7	0.1430E 08	0.2552E 07	1508.0	1.781	0.410
DEC	731.9	1011.7	32.4	0.2064E 08	0.2637E 07	1277.5	1.971	0.277
TOTAL		5264.1		0.1078E 09	0.3105E 08	>>>WEIGHTED	AVERAGE	0.482

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	416.70	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.416E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	50.40	STORAGE SIDE CAPACITY (BTU/HR F).....	0.456E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0757	COLLECTOR SIDE CONVECTION COEFF.....	1373.8562
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0807	STORAGE SIDE CONVECTION COEFFICIENT	3614.0764
STORAGE SIDE TUBE(MAX) INNER DIA. (FT)..	0.1424	COLLECTOR SIDE FLOW RATE (GPM)	8.5305
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	4.2221	STORAGE SIDE FLOW RATE (GPM)	91.6591
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.9100	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
HEAT EXCHANGER LENGTH (FT)	78.09	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2200
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.7594
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0616	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.669E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.139E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.819E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4817
STORAGE SIDE REYNOLDS NUMBER	0.165E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.655E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0911	HEX COEFFICIENT (BTU/HR F FT**2).....	333.51
FLOW PARAMETER Z2(GCP/EPUL).....	9.0103	TOTAL INSTALLATION COST ($)	7499.21
FLOW PARAMETER Z1(GCP/EPUL).....	9.10	COLLECTOR FLOW FACTOR(FFP).....	0.9470

05/02/79 14.47.11

SOLCAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 11223
IMOD-1 LWK AUGUST 1979

LOCATION	DODGE CITY KAN	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	11	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.77	SLOPE:			
MEAN TEMPERATURE....	54.31	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1558.71	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	5284.10	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FCR TAU ALPHA RECD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR DODGE CITY KAN

>>>>>DATA MATCH TO INPUT ID NO. 11223

DMCD-1 LMK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.1193E 08	0.2637E 07	1405.3	1.860	0.322
FEB	1122.0	875.3	34.6	0.9453E 07	0.2382E 07	1836.6	1.552	0.415
MAR	1477.0	739.2	41.2	0.7983E 07	0.2637E 07	2456.6	1.215	0.514
APR	1886.0	354.7	53.7	0.3331E 07	0.2552E 07	3094.4	0.964	0.733
MAY	2070.0	128.2	64.0	0.1385E 07	0.2637E 07	3553.5	0.817	0.890
JUN	2358.0	15.4	74.0	0.1553E 06	0.2552E 07	3750.3	0.756	1.000
JUL	2296.0	1.4	79.6	0.1512E 05	0.2637E 07	3660.4	0.783	1.000
AUG	2055.0	1.9	77.5	0.2052E 05	0.2637E 07	3286.7	0.900	1.000
SEP	1667.0	70.9	67.9	0.7657E 06	0.2552E 07	2697.6	1.118	0.993
OCT	1301.0	275.4	57.1	0.2974E 07	0.2637E 07	2035.7	1.450	0.829
NOV	893.6	701.0	41.7	0.7571E 07	0.2552E 07	1508.0	1.776	0.452
DEC	731.9	1011.7	32.4	0.1093E 08	0.2637E 07	1277.5	1.963	0.316
TOTAL		5284.1		0.5707E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.547

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	280.51	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.285E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	49.42	STORAGE SIDE CAPACITY (BTU/HR F).....	0.414E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0723	COLLECTOR SIDE CONVECTION COEFF.....	1090.6305
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0778	STORAGE SIDE CONVECTION COEFFICIENT	3574.9036
STORAGE SIDE TUBE(PEX) INNER DIA. (FT)..	0.1371	COLLECTOR SIDE FLOW RATE (GPM)	5.8465
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1329	STORAGE SIDE FLOW RATE (GPM)	83.1904
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.5024	NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0208
HEAT EXCHANGER LENGTH (FT)	78.32	NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2966
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8494
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0534	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.482E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.881E 08
COLLECTOR SIDE REYNOLDS NUMBER	0.581E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.5467
STORAGE SIDE REYNOLDS NUMBER	0.155E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.508E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0588	HLA COEFFICIENT (BTU/HR F FT**2).....	313.52
FLOW PARAMETER Z2(GPM/FPUL).....	9.7841	TOTAL INSTALLATION COST ($)	5075.35
FLOW PARAMETER Z1(GPM/FPUL).....	9.28	COLLECTOR FLOW FACTOR(FPP).....	0.9480

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 11232
IMSD-1 LNK AUGUST 1979

LOCATION	DODGE CITY KAN	COLLECTOR FEDERAL PRISM I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	11	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE, DEGREES....	37.77	SLOPE:			
MEAN TEMPERATURE....	54.31	PARAMETER, FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1958.71	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR, HDD.....	5284.10	PARAMETER, FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.50	BASE COST, $/FT**2...	9.40	INFLATION RATE.....	0.1100

178

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE FOR LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED COLLECTOR FRR TAU ALPHA PROD.	0.92
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR DODGE CITY KAN

>>>>>DATA MATCH TO INPUT ID NO. 11232
SMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	827.0	1109.0	29.2	0.2262E 08	0.2637E 07	1405.3	1.861	0.258
FEB	1122.0	875.3	34.0	0.1736E 08	0.2382E 07	1836.6	1.553	0.336
MAR	1477.0	739.2	41.2	0.1508E 08	0.2637E 07	2456.6	1.215	0.429
APR	1886.0	354.7	53.7	0.7236E 07	0.2552E 07	3094.4	0.962	0.673
MAY	2070.0	128.2	64.0	0.2615E 07	0.2637E 07	3553.5	0.815	0.914
JUN	2358.0	15.4	74.0	0.3142E 06	0.2552E 07	3750.3	0.753	1.000
JUL	2256.0	1.4	79.0	0.2850E 05	0.2637E 07	3660.4	0.780	1.000
AUG	2055.0	1.9	77.5	0.3876E 05	0.2637E 07	3286.7	0.898	1.000
SEP	1687.0	70.9	67.9	0.1446E 07	0.2552E 07	2697.6	1.117	1.000
OCT	1301.0	275.4	57.1	0.5613E 07	0.2637E 07	2035.7	1.450	0.793
NOV	893.6	701.0	41.7	0.1430E 08	0.2552E 07	1508.0	1.777	0.379
DEC	731.5	1011.7	32.4	0.2064E 08	0.2637E 07	1277.5	1.965	0.256
TOTAL		5284.1		0.1078E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.457

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	360.70
COLLECTOR TILT ANGLE (DEG) .....>>>	49.71
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0732
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0782
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1329
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.3052
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.1044
HEAT EXCHANGER LENGTH (FT)	63.16
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0547
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.613E 05
STORAGE SIDE REYNOLDS NUMBER	0.140E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0831
FLOW PARAMETER Z2(GCP/ERPUL).....	9.5707
FLOW PARAMETER Z1(GCP/ERPUL).....	9.06

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.305E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.367E 05
COLLECTOR SIDE CONVECTION COEFF.....	1137.0083
STORAGE SIDE CONVECTION COEFFICIENT	3551.4089
COLLECTOR SIDE FLOW RATE (GPM)	6.2496
STORAGE SIDE FLOW RATE (GPM)	73.6801
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0173
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2043
HEAT EXCHANGER EFFECTIVENESS.....	0.7658
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.634E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.139E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4567
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.584E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	317.05
TOTAL INSTALLATION COST ($)	7511.69
COLLECTOR FLOW FACTOR(FPP).....	0.9468

08/30/79 20.00.18

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12111
IMOD-1 LWK AUGUST 1979

LOCATION		STUDY APPROACH	
LOCATION	RICHMOND VA		ANALYSIS
LOCATION INDEX.....	12	ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.50		
MEAN TEMPERATURE....	57.26	SYSTEM LIFE(YEARS)..	20.00
INSOL(BTU/DAY FT**2)	1247.82	DISCOUNT RATE	0.1150
LOAD FACTOR,HDD.....	4071.20	INFLATION RATE.....	0.1050
MEAN GROUND TEMP....	55.00		

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SCLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR RICHMOND VA

>>>>>DATA MATCH TO INPUT ID NO. 12111

OMCD-1 LNK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	OHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.9	0.2609E 08	0.2637E 07	1419.3	1.570	0.039
FEB	876.0	722.9	39.4	0.2169E 08	0.2382E 07	1845.5	1.390	0.059
MAR	1210.2	572.7	46.6	0.1718E 08	0.2637E 07	2466.7	1.186	0.102
APR	1566.0	255.9	57.7	0.7677E 07	0.2552E 07	3100.2	1.021	0.216
MAY	1762.0	76.3	65.8	0.2289E 07	0.2637E 07	3554.9	0.918	0.432
JUN	1872.4	7.6	73.3	0.2280E 06	0.2552E 07	3749.4	0.877	0.665
JUL	1774.4	0.0	76.9	0.0	0.2637E 07	3660.6	0.897	0.688
AUG	1660.6	0.6	75.5	0.1800E 05	0.2637E 07	3290.7	0.975	0.671
SEP	1347.9	36.4	69.0	0.1092E 07	0.2552E 07	2706.3	1.120	0.498
OCT	1032.7	241.2	58.0	0.7236E 07	0.2637E 07	2047.8	1.332	0.190
NOV	733.0	500.6	48.4	0.1502E 08	0.2552E 07	1521.8	1.549	0.080
DEC	566.8	787.4	39.6	0.2362E 08	0.2637E 07	1291.6	1.637	0.038
TOTAL		4071.2		0.1221E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.133

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	34.76
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0487
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0587
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1212
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.4164
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.7066
HEAT EXCHANGER LENGTH (FT)	58.82
////////////////CONSTRAINTS/////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0625
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.300E 05
STORAGE SIDE REYNOLDS NUMBER	0.166E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0266
FLOW PARAMETER Z2(GCP/ERUL).....	9.5092
FLOW PARAMETER Z1(GCP/ERPUL).....	9.00

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.987E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.371E 05
COLLECTOR SIDE CONVECTION COEFF.....	960.0593
STORAGE SIDE CONVECTION COEFFICIENT	3654.1084
COLLECTOR SIDE FLOW RATE (GPM)	2.0237
STORAGE SIDE FLOW RATE (GPM)	14.4714
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.7447
HEAT EXCHANGER EFFECTIVENESS.....	0.9345
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.204E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.153E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1335
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.367E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	304.01
TOTAL INSTALLATION COST ($)	3005.69
COLLECTOR FLOW FACTOR(FPP).....	0.9464

08/31/79 16.57.44

SOLOAC-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12112
IMCD-1 LAK AUGUST 1979

LOCATION	RICHMOND	VA
LOCATION INDEX.....		12
LATITUDE,DEGREES....		37.50
MEAN TEMPERATURE....		57.26
INSOL(BTU/DAY FT**2)		1247.82
LOAD FACTOR,HDD.....		4071.20
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

182

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR RICHMOND       VA                    *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                  >>>>>DATA MATCH TO INPUT ID NO. 12112
                        MOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.9	0.1774E 08	0.2637E 07	1419.3	1.579	0.055
FEB	876.0	722.9	39.4	0.1475E 08	0.2382E 07	1849.5	1.395	0.083
MAR	1210.2	572.7	46.6	0.1168E 08	0.2637E 07	2466.7	1.187	0.138
APR	1566.0	255.9	57.7	0.5220E 07	0.2552E 07	3100.2	1.016	0.276
MAY	1762.0	76.3	65.8	0.1557E 07	0.2637E 07	3554.9	0.914	0.488
JUN	1872.4	7.6	73.3	0.1550E 06	0.2552E 07	3749.4	0.872	0.673
JUL	1774.4	0.0	76.5	0.0	0.2637E 07	3660.6	0.891	0.684
AUG	1600.6	0.6	75.5	0.1224E 05	0.2637E 07	3295.7	0.971	0.669
SEP	1347.9	36.4	69.0	0.7426E 06	0.2552E 07	2706.3	1.119	0.537
OCT	1032.7	241.2	58.0	0.4920E 07	0.2637E 07	2047.8	1.335	0.243
NOV	733.0	500.6	48.4	0.1021E 08	0.2552E 07	1521.8	1.558	0.109
DEC	566.8	787.4	39.6	0.1606E 08	0.2637E 07	1291.6	1.648	0.054
TOTAL		4071.2		0.8305E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.176

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.552E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	35.63	STORAGE SIDE CAPACITY (BTU/HR F).....	0.350E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0455	COLLECTOR SIDE CONVECTION COEFF.....	1090.5000
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0555	STORAGE SIDE CONVECTION COEFFICIENT	3528.3804
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1191	COLLECTOR SIDE FLOW RATE (GPM)	2.0343
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.7354	STORAGE SIDE FLOW RATE (GPM)	70.3113
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.9663	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	60.70	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.7031
////////////////CONSTRAINTS////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9333
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0636	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.201E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.010)	TOTAL ENERGY DEMAND (BTU/YEAR)	0.114E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.328E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1764
STORAGE SIDE REYNOLDS NUMBER	0.161E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.316E 03
CAPACITY RATIO (CMIN/CMAX).....	0.0283	HEX COEFFICIENT (BTU/HR F FT**2).....	315.47
FLOW PARAMETER Z2(GCP/FRPUL).....	9.5591	TOTAL INSTALLATION COST ($)	3033.76
FLOW PARAMETER Z1(GCP/FRPUL).....	1.05	COLLECTOR FLOW FACTOR(FPP).....	0.9467

08/31/79 21.58.51

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S T L I A C - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*      ---                 -                -                          *
*            DESIGN DATA OPTIONS/INPUTS SUMMARY                         *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO OUTPUT ID NO. 12113
                                    IMOD-1 LWK AUGUST 1978
```

LOCATION	RICHMOND	VA	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		12	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		37.50	SLOPE:			
MEAN TEMPERATURE....		57.26	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)		1247.82	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		4071.20	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.20($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWF/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR RICHMOND VA

>>>>>DATA MATCH TC INPUT ID NC. 12113
DMOD-1 LWK AUGUST 1975

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.5	0.9392E 07	0.2637E 07	1419.3	1.577	0.092
FEB	876.0	722.9	39.4	0.7307E 07	0.2382E 07	1849.5	1.395	0.136
MAR	1210.2	572.7	46.6	0.6185E 07	0.2637E 07	2466.7	1.186	0.217
APR	1566.0	255.9	57.7	0.2764E 07	0.2552E 07	3100.2	1.018	0.383
MAY	1762.0	76.3	65.8	0.8240E 06	0.2637E 07	3554.9	0.914	0.565
JUN	1872.4	7.6	73.3	0.8206E 05	0.2552E 07	3749.4	0.873	0.686
JUL	1774.4	0.0	76.9	0.0	0.2637E 07	3660.6	0.892	0.685
AUG	1600.6	0.6	75.5	0.6480E 04	0.2637E 07	3290.7	0.972	0.671
SEP	1347.9	36.4	69.0	0.3931E 06	0.2552E 07	2706.3	1.119	0.583
OCT	1032.7	241.2	58.0	0.2605E 07	0.2637E 07	2047.8	1.335	0.335
NOV	733.0	500.6	48.4	0.5406E 07	0.2552E 07	1521.8	1.556	0.169
DEC	566.8	787.4	39.6	0.8504E 07	0.2637E 07	1291.6	1.646	0.089
TOTAL		4071.2		0.4397E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.261

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	35.48
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0385
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0485
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1353
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.8840
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	24.7299
HEAT EXCHANGER LENGTH (FT)	66.83
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0868
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.382E 05
STORAGE SIDE REYNOLDS NUMBER	0.303E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0143
FLOW PARAMETER Z2(GCP/FRUL).....	9.5337
FLOW PARAMETER Z1(GCP/FRUL).....	9.03

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.990E 03
STORAGE SIDE CAPACITY (BTU/HR F).....	0.692E 05
COLLECTOR SIDE CONVECTION COEFF.....	1471.1946
STORAGE SIDE CONVECTION COEFFICIENT	4486.1680
COLLECTOR SIDE FLOW RATE (GPM)	2.0302
STORAGE SIDE FLOW RATE (GPM)	138.9749
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.3897
HEAT EXCHANGER EFFECTIVENESS.....	0.9398
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.196E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.750E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2612
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.232E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	347.60
TOTAL INSTALLATION COST ($)	3000.24
COLLECTOR FLOW FACTOR(FFP).....	0.9466

09/05/79 Pg.53.5C

SOLJAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12221
IMCE-1 LWK AUGUST 1979

LOCATION	RICHMOND VA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	12	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.50	SLOPE:			
HEAT TEMPERATURE....	57.26	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1247.82	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	4071.20	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USE SF (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.03
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SOLJAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR RICHMOND VA

>>>>>DATA MATCH TO INPUT ID NO. 12221
JMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	831.5	861.0	36.5	0.2639E 08	0.2637E 07	1419.3	1.640	0.107
FEB	876.0	722.9	39.4	0.2169E 08	0.2382E 07	1849.5	1.427	0.157
MAR	1210.2	572.7	46.6	0.1718E 08	0.2637E 07	2466.7	1.184	0.254
APR	1566.0	255.9	57.7	0.7677E 07	0.2552E 07	3100.2	0.969	0.483
MAY	1752.1	74.3	65.8	0.2289E 07	0.2637E 07	3554.9	0.870	0.791
JUN	1872.4	7.6	73.3	0.2280E 06	0.2552E 07	3749.4	0.823	0.955
JUL	1771.4	0.0	76.5	0.0	0.2637E 07	3660.6	0.845	0.963
AUG	1600.5	0.0	75.5	0.1800E 05	0.2637E 07	3290.7	0.936	0.959
SEP	1347.9	36.4	69.0	0.1092E 07	0.2552E 07	2706.3	1.105	0.879
OCT	1032.7	241.2	58.0	0.7236E 07	0.2637E 07	2047.8	1.356	0.454
NOV	733.0	503.6	48.4	0.1502E 08	0.2552E 07	1521.8	1.615	0.211
DEC	566.8	787.4	39.7	0.2362E 08	0.2637E 07	1291.6	1.720	0.106
TOTAL		4071.2		0.1221E 09	0.3105E 08		>>>WEIGHTED AVERAGE	0.278

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	305.53
COLLECTOR TILT ANGLE (DEG) .....>>>	42.52
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0723
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0773
STORAGE SIDE TUBE(PIPE) INNER DIA. (FT)..	0.1395
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.3592
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.2508
HEAT EXCHANGER LENGTH (FT)	60.49
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0617
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER	0.625E 05
STORAGE SIDE REYNOLDS NUMBER	0.165E 06
CAPACITY RATIO (CAP1/CMAX).....	0.3078
FLOW PARAMETER Z2(GPM/FPDL).....	0.6755
FLOW PARAMETER Z1(GPM/FPPH).....	7.17

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/FT F).....	0.307E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.453E 05
COLLECTOR SIDE CONVECTION COEFF	1155.5226
STORAGE SIDE CONVECTION COEFFICIENT	3472.9561
COLLECTOR SIDE FLOW RATE (GPM)	6.2971
STORAGE SIDE FLOW RATE (GPM)	90.5582
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0206
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2978
HEAT EXCHANGER EFFECTIVENESS.....	0.8418
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.425E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.153E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2780
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.336E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	319.40
TOTAL INSTALLATION COST ($)	5522.50
COLLECTOR FLOW FACTOR(FPP).....	0.5474

09/02/79 13.47.54

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12222
IMOD-1 LWK AUGUST 1979

LOCATION	RICHMOND VA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	12	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	37.50	SLOPE:			
MEAN TEMPERATURE....	57.20	PARAMETER,FRUL....	1.0350		
INSOL(BTU/DAY FT**2)	1247.82	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	4071.20	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

188

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

SOLAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

RESULTS OF ANALYSIS FOR RICHMOND VA

>>>>>DATA MATCH TO INPUT ID NO. 12222

OMED-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.9	0.1774E 08	0.2637E 07	1419.3	1.636	0.126
FEB	876.0	722.9	39.4	0.1475E 08	0.2382E 07	1845.5	1.425	0.184
MAR	1210.2	572.7	46.6	0.1168E 08	0.2637E 07	2406.7	1.185	0.292
APR	1566.0	255.9	57.7	0.5220E 07	0.2552E 07	3100.2	0.991	0.526
MAY	1762.0	76.3	65.8	0.1557E 07	0.2637E 07	3554.9	0.874	0.793
JUN	1872.4	7.6	73.3	0.1550E 06	0.2552E 07	3749.4	0.827	0.933
JUL	1774.4	0.0	76.9	0.0	0.2637E 07	3660.6	0.849	0.939
AUG	1600.6	0.6	75.5	0.1224E 05	0.2637E 07	3290.7	0.939	0.834
SEP	1347.9	36.4	69.0	0.7426E 06	0.2552E 07	2706.3	1.107	0.851
OCT	1032.1	241.2	58.0	0.4920E 07	0.2637E 07	2047.8	1.355	0.490
NOV	733.0	500.6	48.4	0.1021E 08	0.2552E 07	1521.8	1.611	0.242
DEC	566.8	787.4	39.6	0.1606E 08	0.2637E 07	1291.6	1.715	0.124
TOTAL		4071.2		0.8305E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.322

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	257.91
COLLECTOR TILT ANGLE (DEG) .....>>>	41.98
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0683
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0742
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1370
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2666
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.8748
HEAT EXCHANGER LENGTH (FT)	84.74
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0628
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0059
COLLECTOR SIDE REYNOLDS NUMBER	0.569E 05
STORAGE SIDE REYNOLDS NUMBER	0.176E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0566
FLOW PARAMETER Z2(GCP/ERUE).....	9.7798
FLOW PARAMETER Z1(GCE/ERRUL).....	9.27

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.262E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.463E 05
COLLECTOR SIDE CONVECTION COEFF.....	1142.1814
STORAGE SIDE CONVECTION COEFFICIENT	3769.5505
COLLECTOR SIDE FLOW RATE (GPM)	5.3729
STORAGE SIDE FLOW RATE (GPM)	92.9791
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3605
HEAT EXCHANGER EFFECTIVENESS.....	0.8825
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.367E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.114E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3217
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.259E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	319.23
TOTAL INSTALLATION COST ($)	4674.96
COLLECTOR FLOW FACTOR(FPP).....	0.9480

09/02/79 15.14.23

S O L O A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12223
IMOD-1 LWK AUGUST 1979

LOCATION	RICHMOND	VA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS	
LOCATION INDEX.....		12	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES		
LATITUDE,DEGREES....		37.50	SLOPE:				
MEAN TEMPERATURE....		57.26	PARAMETER,FRUL....	1.0390			
INSOL(BTU/DAY FT**2)		1247.82	INTERCEPT:		SYSTEM LIFE(YEARS)..		20.00
LOAD FACTOR,HDD.....		4071.20	PARAMETER,FRTA....	0.6380	DISCOUNT RATE		0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....		0.1100

190

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	3.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00


SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.05
MAINTENANCE (% INSTALLED COST/YR).....	0.0010


AD-A076 836 NAVAL POSTGRADUATE SCHOOL MONTEREY CA F/G 3/2
SOLAR ENERGY DESIGN IMPROVEMENT: A METHODOLOGY FOR HYDRONIC FLA--ETC(U)
SEP 79 L W KOZOYED

UNCLASSIFIED NL

3 OF 3
AD
A076836

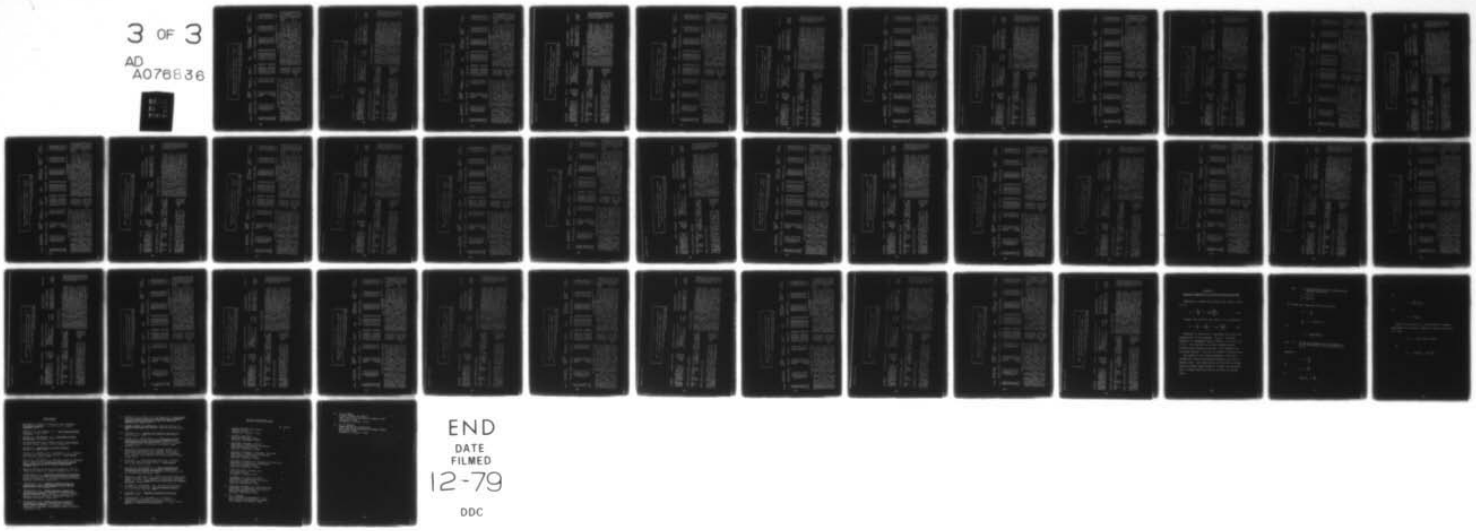

END
DATE
FILMED
12-79
DDC

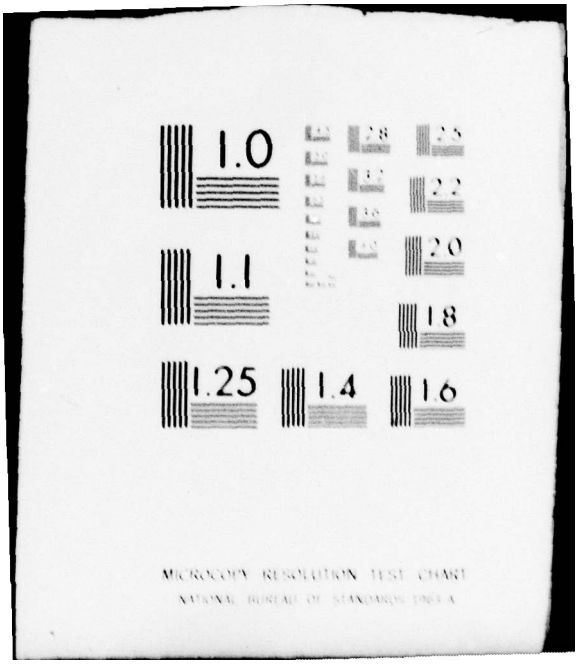
1.0
1.1
1.25
1.4
2.8
2.5
2.2
2.0
1.8
1.6
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A

SOLAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR RICHMOND VA

>>>>>DATA MATCH TO INPUT ID NO. 12223

DMOD-1 LWK AUGUST 1975

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.9	0.9392E 07	0.2637E 07	1419.3	1.619	0.164
FEB	876.0	722.9	39.4	0.7807E 07	0.2382E 07	1849.5	1.416	0.238
MAR	1210.2	572.7	46.6	0.6185E 07	0.2637E 07	2466.7	1.186	0.366
APR	1566.0	255.9	57.7	0.2764E 07	0.2552E 07	3100.2	1.001	0.555
MAY	1762.0	76.3	65.8	0.8240E 06	0.2637E 07	3554.9	0.888	0.792
JUN	1872.4	7.6	73.3	0.8208E 05	0.2552E 07	3749.4	0.843	0.894
JUL	1774.4	0.0	76.9	0.0	0.2637E 07	3660.6	0.864	0.895
AUG	1600.6	0.6	75.5	0.6480E 04	0.2637E 07	3250.7	0.951	0.887
SEP	1347.9	36.4	69.0	0.3931E 06	0.2552E 07	2706.3	1.112	0.816
OCT	1032.1	241.2	58.0	0.2605E 07	0.2637E 07	2047.8	1.350	0.542
NOV	733.0	500.6	48.4	0.5406E 07	0.2552E 07	1521.8	1.595	0.256
DEC	566.8	787.4	39.6	0.8504E 07	0.2637E 07	1291.6	1.695	0.160
TOTAL		4071.2		0.4397E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.400

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	207.20
COLLECTOR TILT ANGLE (DEG) .....>>>	39.86
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0630
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0702
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1301
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.0781
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.2643
HEAT EXCHANGER LENGTH (FT)	71.22
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0539
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0072
COLLECTOR SIDE REYNOLDS NUMBER.....	0.495E 05
STORAGE SIDE REYNOLDS NUMBER	0.155E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0546
FLOW PARAMETER Z2(GCP/EPUL).....	9.7700
FLOW PARAMETER Z1(GCP/EPUL).....	9.26

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.210E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.385E 05
COLLECTOR SIDE CONVECTION COEFF.....	1106.7686
STORAGE SIDE CONVECTION COEFFICIENT	3550.4507
COLLECTOR SIDE FLOW RATE (GPM)	4.3123
STORAGE SIDE FLOW RATE (GPM)	77.3069
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3731
HEAT EXCHANGER EFFECTIVENESS.....	0.8709
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.300E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.750E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3998
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.251E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	315.27
TOTAL INSTALLATION COST ($)	3753.37
COLLECTOR FLOW FACTOR(FPP).....	0.9479

09/04/79 19.34.25

S O L A D - L

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 12232
MOD-1 LWK AUGUST 1979

LOCATION	RICHMOND	VA	COLLECTOR FEDERAL PRISON I. D			STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		12	COLLECTOR TEST RESULTS,			ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		37.50	SLOPE:				
MEAN TEMPERATURE....		57.26	PARAMETER,FRUL....		3.8830		
INSOL(BTU/DAY FT**2)		1247.82	INTERCEPT:			SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		4071.20	PARAMETER,FRTA....		0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...		9.40	INFLATION RATE.....	0.1100

192

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.03($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PERS ...	20.00
ESTIMATED DHW USERS (PERS).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L D A D - 1                              *
*                                                                       *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                      *
*       RESULTS OF ANALYSIS FOR RICHMOND        VA                    *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 12232
                                  DMOD-1 LNK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	631.9	869.6	36.9	0.1774E 08	0.2637E 07	1415.3	1.624	0.126
FEB	876.0	722.9	39.4	0.1475E 08	0.2382E 07	1849.5	1.419	0.181
MAR	1210.2	572.7	46.6	0.1168E 08	0.2637E 07	2466.7	1.186	0.286
APR	1566.0	255.9	57.7	0.5220E 07	0.2552E 07	3100.2	0.999	0.520
MAY	1762.0	76.3	65.8	0.1557E 07	0.2637E 07	3554.9	0.884	0.802
JUN	1872.4	7.6	73.3	0.1550E 06	0.2552E 07	3745.4	0.839	0.961
JUL	1774.4	0.0	76.9	0.0	0.2637E 07	3660.6	0.860	0.968
AUG	1600.6	0.6	75.5	0.1224E 05	0.2637E 07	3250.7	0.948	0.960
SEP	1347.9	36.4	69.0	0.7420E 06	0.2552E 07	2706.3	1.111	0.863
OCT	1032.7	241.2	58.0	0.4920E 07	0.2637E 07	2047.8	1.352	0.481
NOV	733.0	500.6	48.4	0.1021E 08	0.2552E 07	1521.8	1.559	0.237
DEC	566.8	787.4	39.6	0.1606E 08	0.2637E 07	1291.6	1.700	0.125
TOTAL		4071.2		0.8305E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.322

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	237.34
COLLECTOR TILT ANGLE (DEG) .....>>>	40.42
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0610
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0683
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1336
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1115
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.0761
HEAT EXCHANGER LENGTH (FT)	93.43
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0053
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0073
COLLECTOR SIDE REYNOLDS NUMBER.....	0.484E 05
STORAGE SIDE REYNOLDS NUMBER	0.176E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0452
FLOW PARAMETER Z1(GCP/EPUL).....	9.5067
FLOW PARAMETER Z2(GSP/EPUL).....	9.00

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.159E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.641E 05
COLLECTOR SIDE CONVECTION COEFF.....	1123.6265
STORAGE SIDE CONVECTION COEFFICIENT	3644.0984
COLLECTOR SIDE FLOW RATE (GPM)	4.0847
STORAGE SIDE FLOW RATE (GPM)	38.5919
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0172
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3733
HEAT EXCHANGER EFFECTIVENESS.....	0.9372
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.367E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.114E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.321R
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.270E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	317.38
TOTAL INSTALLATION COST ($)	4984.42
COLLECTOR FLOW FACTOR(FPP).....	0.9464

08/30/79 21.35.06

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 13111
IMOD-1 LWK AUGUST 1979

LOCATION	MONTEREY CALIF	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	13	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.60	SLOPE:			
MEAN TEMPERATURE....	56.40	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1505.83	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3140.00	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.58	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

SOLOAD-1

RESULTS OF ANALYSIS FOR MONTEREY CALIF

>>>>>DATA MATCH TO INPUT ID NO. 13111

UMCD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	720.0	434.0	51.4	0.1302E 08	0.2637E 07	1465.7	1.558	0.182
FEB	930.0	336.0	52.5	0.1008E 08	0.2382E 07	1892.2	1.383	0.265
MAR	1410.0	372.0	52.9	0.1116E 08	0.2637E 07	2500.1	1.155	0.346
APR	1930.0	333.0	53.9	0.9990E 07	0.2552E 07	3118.9	1.034	0.442
MAY	2210.0	282.0	55.9	0.8460E 07	0.2637E 07	3558.9	0.927	0.515
JUN	2320.0	201.0	58.3	0.6030E 07	0.2552E 07	3745.8	0.883	0.612
JUL	2240.0	174.0	59.4	0.5220E 07	0.2637E 07	3660.6	0.903	0.659
AUG	2020.0	136.0	60.6	0.4080E 07	0.2637E 07	3303.8	0.988	0.723
SEP	1650.0	84.0	62.2	0.2520E 07	0.2552E 07	2734.8	1.136	0.796
OCT	1180.0	136.0	60.6	0.4080E 07	0.2637E 07	2088.0	1.333	0.575
NOV	790.0	258.0	56.4	0.7740E 07	0.2552E 07	1567.5	1.516	0.266
DEC	620.0	394.0	52.3	0.1182E 08	0.2637E 07	1338.6	1.602	0.164
TOTAL		3140.0		0.9420E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.405

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	209.47
COLLECTOR TILT ANGLE (DEG) .....>>>	31.99
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0643
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0718
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1352
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.9100
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.9917
HEAT EXCHANGER LENGTH (FT)	87.56
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0034
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0075
COLLECTOR SIDE REYNOLDS NUMBER.....	0.477E 05
STORAGE SIDE REYNOLDS NUMBER	0.171E 06
CAPACITY RATIO (CMIN/CMAX).....	0.3649
FLOW PARAMETER Z2(GCP/EPUL).....	9.3093
FLOW PARAMETER Z1(GCE/EPUL).....	9.00

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.207E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.460E 05
COLLECTOR SIDE CONVECTION COEFF.....	1054.0122
STORAGE SIDE CONVECTION COEFFICIENT	3789.6920
COLLECTOR SIDE FLOW RATE (GPM)	4.2391
STORAGE SIDE FLOW RATE (GPM)	92.4648
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4414
HEAT EXCHANGER EFFECTIVENESS.....	0.9259
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.507E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.125E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4046
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.207E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	312.38
TOTAL INSTALLATION COST ($)	6289.45
COLLECTOR FLOW FACTOR(FPP).....	0.9464

08/31/79 17.07.16

S O L O A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 13112
MOD-1 LWK AUGUST 1979

LOCATION	MONTEREY CALIF	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	13	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.60	SLOPE:			
MEAN TEMPERATURE....	56.40	PARAMETER,FRUL	1.0380		
INSOL(BTU/DAY FT**2)	1505.83	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3140.00	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	2039.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE F) LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FCR TAU ALPHA FREC.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        ---     -          -        -                                 *
*        RESULTS OF ANALYSIS FOR MONTEREY   CALIF                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 13112
                                    DMCD-1 LNK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	720.0	434.0	51.4	0.8854E 07	0.2637E 07	1465.7	1.557	0.155
FEB	980.0	336.0	52.5	0.6854E 07	0.2382E 07	1892.2	1.383	0.280
MAR	1410.0	372.0	52.9	0.7589E 07	0.2637E 07	2500.1	1.155	0.366
APR	1530.0	333.0	53.5	0.6793E 07	0.2552E 07	3118.9	1.035	0.463
MAY	2210.0	282.0	55.5	0.5753E 07	0.2637E 07	3558.5	0.927	0.533
JUN	2320.0	201.0	58.3	0.4100E 07	0.2552E 07	3745.8	0.883	0.620
JUL	2240.0	174.0	59.4	0.3550E 07	0.2637E 07	3660.6	0.904	0.661
AUG	2020.0	136.0	60.6	0.2774E 07	0.2637E 07	3303.8	0.988	0.714
SEP	1650.0	84.0	62.2	0.1714E 07	0.2552E 07	2734.8	1.136	0.788
OCT	1180.0	136.0	60.6	0.2774E 07	0.2637E 07	2088.0	1.332	0.567
NOV	790.0	258.0	56.4	0.5263E 07	0.2552E 07	1567.5	1.516	0.256
DEC	620.0	394.0	52.3	0.8038E 07	0.2637E 07	1338.6	1.601	0.174
TOTAL		3140.0		0.6408E 08	0.3105E 08			
						>>>WEIGHTED	AVERAGE	0.420

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	165.31	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.164E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	31.93	STORAGE SIDE CAPACITY (BTU/HR F).....	0.399E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0600	COLLECTOR SIDE CONVECTION COEFF.....	590.5626
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0700	STORAGE SIDE CONVECTION COEFFICIENT	3737.6292
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1289	COLLECTOR SIDE FLOW RATE (GPM)	3.3584
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.6478	STORAGE SIDE FLOW RATE (GPM)	80.0289
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.3912	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	7.40	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4841
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9345
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0589	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.400E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.951E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.405E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4201
STORAGE SIDE REYNOLDS NUMBER	0.161E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.162E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0411	HEX COEFFICIENT (BTU/HR F FT**2).....	306.80
FLOW PARAMETER Z2(GCP/FPUL).....	9.5466	TOTAL INSTALLATION COST ($)	4969.24
FLOW PARAMETER Z1(GCP/FPUL).....	9.04	COLLECTOR FLOW FACTOR(FPP).....	0.9467

09/02/79 15.26.30

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 13223
IMOD-1 LWK AUGUST 1979

LOCATION	MONTEREY CALIF	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	13	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.60	SLOPE:			
MEAN TEMPERATURE....	56.40	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1505.83	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3140.00	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER ARE/(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10799.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR MONTEREY    CALIF                    *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                        >>>>>DATA MATCH FC INPUT ID NO. 13223
                        .P400-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	720.0	434.0	51.4	0.4687E 07	0.2637E 07	1465.7	1.593	0.374
FEB	980.0	336.0	52.9	0.3629E 07	0.2382E 07	1892.2	1.403	0.507
MAR	1410.0	372.0	52.5	0.4018E 07	0.2637E 07	2500.1	1.200	0.633
APR	1930.0	333.0	53.9	0.3596E 07	0.2552E 07	3118.5	1.025	0.755
MAY	2210.0	282.0	55.9	0.3040E 07	0.2637E 07	3558.9	0.909	0.816
JUN	2320.0	201.0	58.3	0.2171E 07	0.2552E 07	3745.8	0.862	0.877
JUL	2240.0	174.0	59.4	0.1879E 07	0.2637E 07	3668.6	0.884	0.901
AUG	2020.0	136.0	60.6	0.1469E 07	0.2637E 07	3303.8	0.975	0.931
SEP	1650.0	84.0	62.2	0.9072E 06	0.2552E 07	2734.8	1.135	0.945
OCT	1180.0	136.0	60.6	0.1469E 07	0.2637E 07	2088.0	1.348	0.759
NOV	790.0	258.0	56.4	0.2786E 07	0.2552E 07	1567.5	1.548	0.510
DEC	620.0	394.0	52.3	0.4255E 07	0.2637E 07	1338.6	1.641	0.332
TOTAL		3140.0		0.3391E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.560

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	249.27
COLLECTOR TILT ANGLE (DEG) .....>>>	35.10
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0749
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0799
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1392
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.6721
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.0354
HEAT EXCHANGER LENGTH (FT)	76.22
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0593
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.511E 05
STORAGE SIDE REYNOLDS NUMBER	0.159E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0594
FLOW PARAMETER Z2(GCP/ERPUL).....	9.9583
FLOW PARAMETER Z1(GCP/ERPUL).....	9.45

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.258E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.434E 05
COLLECTOR SIDE CONVECTION COEFF	954.7553
STORAGE SIDE CONVECTION COEFFICIENT	3654.8030
COLLECTOR SIDE FLOW RATE (GPM)	5.2880
STORAGE SIDE FLOW RATE (GPM)	87.1953
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0212
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3498
HEAT EXCHANGER EFFECTIVENESS.....	0.8682
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.429E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.650E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6599
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.451E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	301.67
TOTAL INSTALLATION COST ($)	4520.15
COLLECTOR FLOW FACTOR(FPP).....	0.9489

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 13232

IMED-1 LWK AUGUST 1979

LOCATION	MONTEREY CALIF	COLLECTOR FEDERAL PRISON I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	13	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	35.60	SLOPE:			
MEAN TEMPERATURE....	56.40	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1505.33	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HOD.....	3140.00	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	5.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20379.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEST(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/SQFEAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/SQFEAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA RELD.	0.93
ESTIMATED INSTALLABLE COST ($/SQFEAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/CF STORED)	0.00
MAINTENANCE (% INSTALLED COST/YR).....	0.0110

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S P L O A D - 1                              *
*                                                                       *
*     SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                      *
*     ---   -          -                                              *
*       RESULTS OF ANALYSIS FOR MONTEREY   CALIF                        *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                  >>>>>DATA MATCH TO INPUT ID NO. 13232
                        SPLD-1 LWK AUGUST 1975
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	720.0	434.0	51.4	0.8854E 07	0.2638E 07	1465.7	1.589	0.345
FEB	940.0	336.0	52.9	0.6854E 07	0.2382E 07	1892.2	1.401	0.474
MAR	1410.0	372.0	52.9	0.7585E 07	0.2638E 07	2500.1	1.199	0.592
APR	1930.0	333.0	53.9	0.6793E 07	0.2552E 07	3118.9	1.026	0.717
MAY	2210.0	282.0	55.5	0.5753E 07	0.2637E 07	3558.9	0.912	0.795
JUN	2320.0	201.0	58.3	0.4100E 07	0.2552E 07	3745.8	0.865	0.884
JUL	2240.0	174.0	59.4	0.3550E 07	0.2637E 07	3666.6	0.887	0.921
AUG	2020.0	136.0	60.6	0.2774E 07	0.2637E 07	3303.8	0.977	0.967
SEP	1650.0	84.0	62.2	0.1714E 07	0.2552E 07	2734.8	1.135	1.000
OCT	1180.0	136.0	60.6	0.2774E 07	0.2637E 07	2088.0	1.346	0.833
NOV	790.0	258.0	56.4	0.5263E 07	0.2552E 07	1567.5	1.544	0.496
DEC	620.0	394.0	52.3	0.8038E 07	0.2637E 07	1338.6	1.636	0.313
TOTAL		3140.0		0.6406E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.637

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2)	332.01	COLLECTOR SIDE CAPACITY (BTU/HR FT.....	0.279E 04
COLLECTOR TILT ANGLE (DEG)	36.67	STORAGE SIDE CAPACITY (BTU/HR FT.....	0.378E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0709	COLLECTOR SIDE CONVECTION COEFF	1122.7029
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0768	STORAGE SIDE CONVECTION COEFFICIENT	3456.7009
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1335	COLLECTOR SIDE FLOW RATE (GPM)	5.7145
COLLECTER SIDE FLUID VELOCITY (FT/SEC)..	3.2208	STORAGE SIDE FLOW RATE (GPM)	75.6878
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.8303	NORMALIZED COLLECTOR FLOW (GPM/SQFEET)...	0.0172
HEAT EXCHANGER LENGTH (FT)	74.55	NORMALIZED STORAGE FLOW (GPM/SQFEET) ...	0.2280
////////////////// DISTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8300
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0571	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.606E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0059	TOTAL ENERGY DEMAND (BTU/YEAR)	0.951E 08
COLLECTER SIDE REYNOLDS NUMBER.....	0.583E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.6370
STORAGE SIDE REYNOLDS NUMBER	1.144E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.585E 04
CAPACITY RATIO (COLL/LOAD MAX).....	0.3737	HEX COEFFICIENT (BTU/HR F FT**2).....	315.70
FLOW PARAMETER ZZ(GPM/FPUL).....	9.5075	TOTAL INSTALLATION COST ($)	6930.39
FLOW PARAMETER ZI(GPM/FPUL).....	9.00	COLLECTOR FLOW FACTOR(FPP).....	0.5464

08/30/79 21.58.23

S O L O A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 14111
IMOD-1 LWK AUGUST 1979

LOCATION	FRESNO	CALIF	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		14	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		36.77	SLOPE:			
MEAN TEMPERATURE....		61.85	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)		1710.81	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		2826.40	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LESS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR FRESNO CALIF

>>>>>DATA MATCH TO INPUT ID NO. 14111

OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	657.0	640.7	44.3	0.1922E 08	0.2637E 07	1456.9	1.571	0.063
FEB	1012.0	442.4	49.3	0.1327E 08	0.2382E 07	1884.2	1.425	0.130
MAR	1566.0	349.7	53.8	0.1049E 08	0.2637E 07	2493.8	1.222	0.241
APR	2093.0	187.0	59.6	0.5610E 07	0.2552E 07	3115.4	1.028	0.409
MAY	2484.0	55.6	67.5	0.1668E 07	0.2637E 07	3558.2	0.901	0.718
JUN	2733.0	5.3	75.3	0.1590E 06	0.2552E 07	3746.5	0.846	0.951
JUL	2685.0	0.0	81.1	0.0	0.2637E 07	3660.6	0.871	0.992
AUG	2423.0	0.3	78.7	0.9000E 04	0.2637E 07	3301.4	0.977	0.995
SEP	1585.0	4.1	73.2	0.1230E 06	0.2552E 07	2729.5	1.165	0.953
OCT	1429.0	105.3	63.2	0.3159E 07	0.2637E 07	2080.5	1.416	0.522
NOV	888.6	394.3	51.9	0.1183E 08	0.2552E 07	1558.9	1.616	0.150
DEC	574.1	641.7	44.3	0.1925E 08	0.2637E 07	1329.8	1.624	0.053
TOTAL		2826.4		0.8479E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.256

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	112.47
COLLECTOR TILT ANGLE (DEG) .....>>>	36.30
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0504
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0575
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1129
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.5788
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.1631
HEAT EXCHANGER LENGTH (FT)	46.52
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0554
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0071
COLLECTOR SIDE REYNOLDS NUMBER.....	0.332E 05
STORAGE SIDE REYNOLDS NUMBER	0.126E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0421
FLOW PARAMETER Z2(GCP/FRUL).....	9.6521
FLOW PARAMETER Z1(GCP/FRPUL).....	9.14

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.113E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.268E 05
COLLECTOR SIDE CONVECTION COEFF.....	1004.5793
STORAGE SIDE CONVECTION COEFFICIENT	3282.9099
COLLECTOR SIDE FLOW RATE (GPM)	2.3102
STORAGE SIDE FLOW RATE (GPM)	53.7832
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.4782
HEAT EXCHANGER EFFECTIVENESS.....	0.8574
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.297E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.116E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2563
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.153E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	305.11
TOTAL INSTALLATION COST ($)	5364.13
COLLECTOR FLOW FACTOR(FPP).....	0.9473

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 14112
IMOD-1 LWK AUGUST 1979

LOCATION	FRESNO	CALIF
LOCATION INDEX.....		14
LATITUDE,DEGREES....		36.77
MEAN TEMPERATURE....		61.85
INSOL(BTU/DAY FT**2)		1710.81
LOAD FACTOR,HDD.....		2826.40
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.58

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR FRESNO CALIF

>>>>>DATA MATCH TO INPUT ID NO. 14112

OMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	657.0	640.7	44.3	0.1307E 08	0.2637E 07	1456.9	1.569	0.080
FEB	1012.0	442.4	49.3	0.9025E 07	0.2382E 07	1884.2	1.424	0.163
MAR	1566.0	349.7	53.8	0.7134E 07	0.2637E 07	2493.8	1.222	0.255
APR	2093.0	187.0	59.6	0.3815E 07	0.2552E 07	3115.4	1.029	0.474
MAY	2484.0	55.6	67.5	0.1134E 07	0.2637E 07	3558.2	0.903	0.745
JUN	2733.0	5.3	75.3	0.1081E 06	0.2552E 07	3746.5	0.848	0.930
JUL	2685.0	0.0	81.1	0.0	0.2637E 07	3660.6	0.873	0.964
AUG	2423.0	0.3	78.7	0.6120E 04	0.2637E 07	3301.4	0.978	0.967
SEP	1985.0	4.1	73.2	0.8364E 05	0.2552E 07	2729.5	1.166	0.930
OCT	1429.0	105.3	63.2	0.2148E 07	0.2637E 07	2060.5	1.415	0.573
NOV	888.6	394.3	51.9	0.3044E 07	0.2552E 07	1558.9	1.613	0.186
DEC	574.1	641.7	44.3	0.1309E 08	0.2637E 07	1329.8	1.621	0.068
TOTAL		2826.4		0.5766E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.312

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	104.22
COLLECTOR TILT ANGLE (DEG) .....>>>	36.03
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0477
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0577
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1143
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.6980
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.3024
HEAT EXCHANGER LENGTH (FT)	33.74
////////////////CONSTRAINTS/////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0565
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER	0.329E 05
STORAGE SIDE REYNOLDS NUMBER	0.130E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0380
FLOW PARAMETER Z2(GCP/FPUL).....	9.7746
FLOW PARAMETER Z1(GCP/FPPUL).....	9.27

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.105E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.278E 05
COLLECTOR SIDE CONVECTION COEFF.....	1052.9441
STORAGE SIDE CONVECTION COEFFICIENT	3296.7952
COLLECTOR SIDE FLOW RATE (GPM)	2.1680
STORAGE SIDE FLOW RATE (GPM)	55.8983
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0208
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.5363
HEAT EXCHANGER EFFECTIVENESS.....	0.9090
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.277E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.887E 08
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3117
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.144E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	310.45
TOTAL INSTALLATION COST ($)	3126.48
COLLECTOR FLOW FACTOR(FPP).....	0.5479

09/02/79 15.47.06

SOLAR - I

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 14223
IHDO-I LWK AUGUST 1978

LOCATION	FRESNO	CALIF	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		14	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		36.77	SLOPE:			
MEAN TEMPERATURE....		61.85	PARAMETER,FRUL	1.0390		
INSOL(BTU/DAY FT**2)		1710.81	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDL.....		2826.40	PARAMETER,FTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	0.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	1077.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE F LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L J A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR FRESNO      CALIF                      *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                  >>>>>DATA MATCH TO INPUT ID NO. 14223
                                  JMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	657.0	640.7	44.3	0.6920E 07	0.2637E 07	1456.5	1.630	0.176
FEB	1012.0	442.4	49.3	0.4778E 07	0.2382E 07	1884.2	1.458	0.332
MAR	1560.0	349.7	53.8	0.3777E 07	0.2637E 07	2493.8	1.221	0.536
APR	2093.0	187.0	59.6	0.2020E 07	0.2552E 07	3115.4	0.996	0.726
MAY	2484.0	55.6	67.5	0.6005E 06	0.2637E 07	3558.2	0.851	0.911
JUN	2733.0	5.3	75.3	0.5724E 05	0.2552E 07	3746.5	0.789	1.000
JUL	2685.0	0.0	81.1	0.0	0.2637E 07	3660.6	0.816	1.000
AUG	2423.0	0.3	78.7	0.3240E 04	0.2637E 07	3301.4	0.937	1.000
SEP	1985.0	4.1	73.2	0.4423E 05	0.2552E 07	2729.5	1.153	1.000
OCT	1429.0	105.3	63.2	0.1137E 07	0.2637E 07	2060.5	1.445	0.825
NOV	888.6	394.3	51.9	0.4258E 07	0.2552E 07	1558.9	1.679	0.374
DEC	574.1	641.7	44.3	0.6930E 07	0.2637E 07	1329.8	1.891	0.150
TOTAL		2826.4		0.3053E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.509

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	159.23	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.160E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	43.41	STORAGE SIDE CAPACITY (BTU/HR F).....	0.288E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0510	COLLECTOR SIDE CONVECTION COEFF.....	1301.8782
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0575	STORAGE SIDE CONVECTION COEFFICIENT	3251.1172
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1161	COLLECTOR SIDE FLOW RATE (GPM)	3.2776
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.5760	STORAGE SIDE FLOW RATE (GPM)	57.8095
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.1076	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0206
HEAT EXCHANGER LENGTH (FT)	52.36	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3630
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8114
HEX ANNULUS DIAMETER DIFFERENCE (FT)....	0.0536	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.313E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0065	TOTAL ENERGY DEMAND (BTU/YEAR)	0.616E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.465E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.5091
STORAGE SIDE REYNOLDS NUMBER	0.133E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.377E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0555	HEX COEFFICIENT (BTU/HR F FT**2).....	327.35
FLOW PARAMETER Z2(GCP/FPUL).....	9.6628	TOTAL INSTALLATION COST ($)	4872.16
FLOW PARAMETER Z1(GCP/FPUL).....	9.15	COLLECTOR FLOW FACTOR(FFF).....	0.9473

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        RESULTS OF ANALYSIS FOR FRESNO     CALIF                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 14232
                                  SMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	657.0	640.7	44.3	0.1307E 08	0.2637E 07	1456.5	1.640	0.142
FEB	1012.0	442.4	49.3	0.9025E 07	0.2382E 07	1884.2	1.463	0.270
MAR	1566.0	349.7	53.8	0.7134E 07	0.2637E 07	2453.8	1.219	0.452
APR	2093.0	187.0	59.6	0.3815E 07	0.2552E 07	3115.4	0.987	0.666
MAY	2484.0	55.6	67.5	0.1134E 07	0.2637E 07	3558.2	0.839	0.937
JUN	2733.0	5.3	75.3	0.1081E 06	0.2552E 07	3746.5	0.775	1.000
JUL	2685.0	0.0	81.1	0.0	0.2637E 07	3660.6	0.803	1.000
AUG	2423.0	0.3	78.7	0.6120E 04	0.2637E 07	3301.4	0.926	1.000
SEP	1985.0	4.1	73.2	0.8364E 05	0.2552E 07	2729.5	1.149	1.000
OCT	1429.0	105.3	63.2	0.2148E 07	0.2637E 07	2080.5	1.449	0.821
NOV	888.5	394.3	51.9	0.8044E 07	0.2552E 07	1558.9	1.690	0.313
DEC	574.1	641.7	44.3	0.1309E 08	0.2637E 07	1329.8	1.703	0.122
TOTAL		2826.4		0.5766E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.420

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	188.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.1638E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	45.00	STORAGE SIDE CAPACITY (BTU/HR F).....	0.3128E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0340	COLLECTOR SIDE CONVECTION COEFF	1193.5864
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0590	STORAGE SIDE CONVECTION COEFFICIENT	3328.1152
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1185	COLLECTOR SIDE FLOW RATE (GPM)	3.3397
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2338	STORAGE SIDE FLOW RATE (GPM)	62.5827
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.6628	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0178
HEAT EXCHANGER LENGTH (FT)	59.43	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.3328
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8537
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0549	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.3726E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0350	TOTAL ENERGY DEMAND (BTU/YEAR)	0.8887E 08
COLLECTOR SIDE REYNOLDS NUMBER	0.448E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4196
STORAGE SIDE REYNOLDS NUMBER	0.141E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.355E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0523	HEX COEFFICIENT (BTU/HR F FT**2).....	320.14
FLOW PARAMETER #2(GPM/FPUL).....	9.3099	TOTAL INSTALLATION COST ($)	3928.72
FLOW PARAMETER #1(GPM/FPUL).....	9.30	COLLECTOR FLOW FACTOR(FPP).....	0.9481

08/31/79 08.56.17

```
*********************************************
*                                           *
*                 S O L O A D - 1           *
*                                           *
*   SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN *
*                                           *
*        DESIGN DATA OPTIONS/INPUTS SUMMARY *
*                                           *
*********************************************
```

>>>>>DATA MATCH TO OUTPUT ID NO. 15111
IMOD-1 LWK AUGUST 1979

LOCATION	TULSA	OKLAHOMA	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		15	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		36.20	SLOPE:			
MEAN TEMPERATURE....		59.81	PARAMETER,FRUL	1.0380		
INSOL(BTU/DAY FT**2)		1373.47	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HLL.....		3804.40	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.50($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	30000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3840
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR TULSA OKLAHOMA

>>>>>DATA MATCH TO INPUT ID NO. 15111
JMOD-1 LWK AUGUST 1975

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	732.0	906.7	35.8	0.2720E 08	0.2637E 07	1486.3	1.591	0.050
FEB	978.0	681.3	40.9	0.2044E 08	0.2382E 07	1911.1	1.396	0.076
MAR	1306.0	513.7	48.8	0.1541E 08	0.2637E 07	2514.7	1.182	0.126
APR	1603.0	180.3	60.8	0.5409E 07	0.2552E 07	3126.9	1.008	0.282
MAY	1822.0	45.0	68.9	0.1350E 07	0.2637E 07	3568.5	0.905	0.534
JUN	2021.0	1.8	77.0	0.5400E 05	0.2552E 07	3744.0	0.861	0.748
JUL	2031.0	0.3	82.2	0.9000E 04	0.2637E 07	3660.4	0.880	0.781
AUG	1865.0	0.1	80.7	0.3000E 04	0.2637E 07	3309.3	0.966	0.785
SEP	1473.0	21.5	72.7	0.6450E 06	0.2552E 07	2747.3	1.115	0.615
OCT	1164.0	163.0	61.9	0.4890E 07	0.2637E 07	2105.7	1.339	0.293
NOV	827.4	490.8	48.8	0.1472E 08	0.2552E 07	1587.8	1.558	0.100
DEC	659.3	799.9	39.2	0.2400E 08	0.2637E 07	1359.5	1.660	0.051
TOTAL		3804.4		0.1141E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.160

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	102.70
COLLECTOR TILT ANGLE (DEG) .....>>>	35.81
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0518
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0618
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1203
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.1878
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.1121
HEAT EXCHANGER LENGTH (FT)	55.24
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0584
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.2816E 05
STORAGE SIDE REYNOLDS NUMBER	0.1496E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0299
FLOW PARAMETER Z2(CCP/ERUL).....	9.4779
FLOW PARAMETER Z1(CCP/ERPUL).....	8.97

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.101E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.338E 05
COLLECTOR SIDE CONVECTION COEFF	875.8982
STORAGE SIDE CONVECTION COEFFICIENT	3562.8655
COLLECTOR SIDE FLOW RATE (GPM)	2.0714
STORAGE SIDE FLOW RATE (GPM)	67.9400
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.6614
HEAT EXCHANGER EFFECTIVENESS.....	0.5234
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.232E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.145E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1600
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.746E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	294.31
TOTAL INSTALLATION COST ($)	3085.23
COLLECTOR FLOW FACTOR(FPP).....	0.9463

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 15112
IMOD-1 LWK AUGUST 1979

LOCATION	TULSA	OKLAHOMA
LOCATION INDEX.....		15
LATITUDE,DEGREES....		36.20
MEAN TEMPERATURE....		59.81
INSOL(BTU/DAY FT**2)		1373.47
LOAD FACTOR,HDD.....		3804.40
MEAN GROUND TEMP....		55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS,	
SLOPE:	
PARAMETER,FRUL....	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3040
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

S O L O A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR TULSA OKLAHOMA

>>>>>DATA MATCH TO INPUT ID NO. 15112
IMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	732.0	906.7	35.8	0.1850E 08	0.2637E 07	1486.3	1.600	0.069
FEB	978.0	681.3	40.9	0.1390E 08	0.2382E 07	1911.1	1.401	0.103
MAR	1306.0	513.7	48.8	0.1048E 08	0.2637E 07	2514.7	1.182	0.166
APR	1603.0	180.3	60.8	0.3678E 07	0.2552E 07	3126.5	1.005	0.341
MAY	1822.0	45.0	68.9	0.9180E 06	0.2637E 07	3560.5	0.900	0.568
JUN	2021.0	1.8	77.0	0.3672E 05	0.2552E 07	3744.0	0.855	0.735
JUL	2031.0	0.3	82.2	0.6120E 04	0.2637E 07	3664.4	0.874	0.766
AUG	1665.0	0.1	80.7	0.2040E 04	0.2637E 07	3309.3	0.962	0.771
SEP	1473.0	21.5	72.7	0.4386E 06	0.2552E 07	2747.3	1.114	0.632
OCT	1164.0	163.0	61.9	0.3325E 07	0.2637E 07	2105.7	1.342	0.352
NOV	827.4	490.8	48.8	0.1001E 08	0.2552E 07	1587.8	1.566	0.133
DEC	659.3	799.9	39.2	0.1632E 08	0.2637E 07	1359.5	1.670	0.070
TOTAL		3804.4		0.7761E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.206

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.987E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	36.67	STORAGE SIDE CAPACITY (BTU/HR F).....	0.360E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0479	COLLECTOR SIDE CONVECTION COEFF.....	989.6692
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0579	STORAGE SIDE CONVECTION COEFFICIENT	3577.6553
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1207	COLLECTOR SIDE FLOW RATE (GPM)	2.0237
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.4993	STORAGE SIDE FLOW RATE (GPM)	72.3214
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.3064	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
HEAT EXCHANGER LENGTH (FT)	60.57	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.7232
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9380
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0627	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.224E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.109E 09
COLLECTOR SIDE REYNOLDS NUMBER..... 0.306E 05		ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2062
STORAGE SIDE REYNOLDS NUMBER 0.162E 06		OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.690E 03
CAPACITY RATIO (CMIN/CMAX).....	0.0274	HEX COEFFICIENT (BTU/HR F FT**2).....	306.53
FLOW PARAMETER Z2(GCP/ERUL).....	9.5092	TOTAL INSTALLATION COST ($)	3006.30
FLOW PARAMETER Z1(GCP/ERPUL).....	9.00	COLLECTOR FLOW FACTOR(FFF).....	0.9454

09/02/79 16.02.29

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH ID OUTPUT ID NO. 15223
MOD-1 LAST AUGUST 1979

LOCATION	TULSA OKLAHOMA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	15	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.20	SLOPE:			
MEAN TEMPERATURE....	59.81	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1373.47	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3804.40	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	3.35($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	3.60($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	10759.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3873
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3940
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S I L O A D - 1                              *
*                                                                       *
*      SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                     *
*        ---      -                                                     *
*        RESULTS OF ANALYSIS FOR TULSA   OKLAHOMA                       *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                  >>>>>DATA MATCH TO INPUT ID NO. 15223
                                  DMCD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	732.0	906.7	35.8	0.9792E 07	0.2637E 07	1486.3	1.639	0.210
FEB	978.0	681.3	40.5	0.7358E 07	0.2382E 07	1911.1	1.420	0.293
MAR	1306.0	513.7	48.8	0.5548E 07	0.2637E 07	2514.7	1.179	0.434
APR	1603.0	180.3	60.8	0.1947E 07	0.2552E 07	3126.9	0.986	0.683
MAY	1822.0	45.0	68.9	0.4860E 06	0.2637E 07	3580.5	0.872	0.854
JUN	2021.0	1.8	77.0	0.1944E 05	0.2552E 07	3744.0	0.823	0.945
JUL	2031.0	0.3	82.2	0.3240E 04	0.2637E 07	3660.4	0.844	0.974
AUG	1865.0	0.1	80.7	0.1080E 04	0.2637E 07	3309.3	0.939	0.982
SEP	1473.0	21.5	72.7	0.2322E 06	0.2552E 07	2747.3	1.105	0.902
OCT	1164.0	163.0	61.5	0.1760E 07	0.2637E 07	2105.7	1.356	0.706
NOV	827.4	490.3	48.8	0.5301E 07	0.2552E 07	1587.8	1.602	0.363
DEC	659.3	799.9	39.2	0.8639E 07	0.2637E 07	1359.5	1.716	0.212
TOTAL		3804.4		0.4109E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.461

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	211.75	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.219E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	41.00	STORAGE SIDE CAPACITY (BTU/HR F).....	0.392E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0667	COLLECTOR SIDE CONVECTION COEFF	1000.6411
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0717	STORAGE SIDE CONVECTION COEFFICIENT	3584.2903
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1312	COLLECTOR SIDE FLOW RATE (GPM)	4.4805
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.5464	STORAGE SIDE FLOW RATE (GPM)	78.6355
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	18.4803	NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0212
HEAT EXCHANGER LENGTH (FT)	77.37	NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.3714
////////////////CONSTRAINTS////////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.8935
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0555	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.332E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0060	TOTAL ENERGY DEMAND (BTU/YEAR)	0.721E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.496E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.4606
STORAGE SIDE REYNOLDS NUMBER	0.155E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.313E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0553	HEX COEFFICIENT (BTU/HR F FT**2).....	311.38
FLOW PARAMETER Z2(GCP/FRHL).....	9.9329	TOTAL INSTALLATION COST ($)	3864.03
FLOW PARAMETER Z1(GCP/FRHL).....	9.42	COLLECTOR FLOW FACTOR(FPP).....	0.9488

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TI OUTPUT ID NO. 15232
INCO-1 LNK AUGUST 1979

LOCATION	TULSA OKLAHOMA	COLLECTOR FEDERAL PRESIN I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	15	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.20	SLOPE:			
MEAN TEMPERATURE....	59.81	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)	1373.47	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3804.40	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... HEL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/H* F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAL ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0110

SOLAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS TO DESIGN

RESULTS OF ANALYSIS FOR TULSA OKLAHOMA

>>>>>DATA MATCH TO INPUT ID NO. 15232

JMED-1 LNK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	732.0	906.7	35.8	0.1850E 08	0.2637E 07	1486.3	1.659	0.148
FEB	978.0	681.3	40.9	0.1390E 08	0.2382E 07	1911.1	1.429	0.208
MAR	1306.0	513.7	48.8	0.1048E 08	0.2637E 07	2514.7	1.176	0.315
APR	1603.0	180.3	60.8	0.3673E 07	0.2552E 07	3126.9	0.973	0.581
MAY	1822.0	45.0	68.9	0.9180E 06	0.2637E 07	3560.5	0.853	0.842
JUN	2021.0	1.8	77.0	0.3672E 05	0.2552E 07	3744.0	0.802	0.978
JUL	2031.0	0.3	82.2	0.6120E 04	0.2637E 07	3660.4	0.824	1.000
AUG	1865.0	0.1	80.7	0.2040E 04	0.2637E 07	3309.3	0.923	1.000
SEP	1473.0	21.5	72.7	0.4338E 06	0.2552E 07	2747.3	1.057	0.925
OCT	1104.0	163.0	61.9	0.3325E 07	0.2637E 07	2105.7	1.301	0.524
NOV	827.4	490.8	46.3	0.1001E 08	0.2552E 07	1587.8	1.620	0.269
DEC	659.3	759.9	39.2	0.1632E 08	0.2637E 07	1359.5	1.740	0.150
TOTAL		3804.4		0.7761E 08	0.3105E 08		>>>WEIGHTED AVERAGE	0.347

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	222.33
COLLECTOR TILT ANGLE (DEG) .....>>>	43.64
COLLECTOR SIDE TUBE LINER DIA. (FT)	0.0568
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0618
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1208
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.4420
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	17.1980
HEAT EXCHANGER LENGTH (FT)	66.71
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0591
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050
COLLECTOR SIDE REYNOLDS NUMBER.....	0.4981E 05
STORAGE SIDE REYNOLDS NUMBER	0.143E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0586
FLOW PARAMETER /2(CP/EPUL).....	9.7116
FLOW PARAMETER 2(CP/EPUL).....	9.20

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.1516 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.3266 05
COLLECTOR SIDE CONVECTION COEFF.....	1235.9021
STORAGE SIDE CONVECTION COEFFICIENT	3411.1858
COLLECTOR SIDE FLOW RATE (GPM)	3.9093
STORAGE SIDE FLOW RATE (GPM)	65.3802
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0176
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.2940
HEAT EXCHANGER EFFECTIVENESS.....	0.8581
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.377E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.109E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3473
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.329E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	323.69
TOTAL INSTALLATION COST ($)	4645.24
COLLECTOR FLOW FACTOR(FPP).....	0.9476

08/30/79 21.49.10

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 16111
IMCD-1 LWK AUGUST 1979

LOCATION	NORFOLK VIRGINIA	COLLECTOR SOLARNETICS		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	16	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.90	SLOPE:			
MEAN TEMPERATURE....	59.22	PARAMETER,FRUL....	1.0380		
INSOL(BTU/DAY FT**2)	1325.29	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3510.50	PARAMETER,FRTA....	0.6910	DISCOUNT RATE	0.1150
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	12.98	INFLATION RATE.....	0.1050

217

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.25
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	50000.00
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

```
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*                          S O L O A C - 1                              *
*                                                                       *
*        SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN                   *
*                                                                       *
*          RESULTS OF ANALYSIS FOR NORFOLK VIRGINIA                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
                    >>>>>DATA MATCH TO INPUT ID NO. 16111
                                    OMOD-1 LWK AUGUST 1979
```

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	679.6	764.4	40.3	0.2293E 08	0.2637E 07	1450.2	1.588	0.051
FEB	931.4	655.4	41.8	0.1966E 08	0.2382E 07	1878.0	1.400	0.072
MAR	1281.0	527.5	48.1	0.1583E 08	0.2637E 07	2489.0	1.188	0.118
APR	1676.7	248.0	57.9	0.7440E 07	0.2552E 07	3112.7	1.016	0.239
MAY	1887.5	71.7	66.2	0.2151E 07	0.2637E 07	3557.7	0.909	0.472
JUN	2000.3	4.9	74.1	0.1470E 06	0.2552E 07	3747.1	0.865	0.713
JUL	1853.2	0.0	77.7	0.0	0.2637E 07	3660.7	0.886	0.710
AUG	1680.2	0.1	76.7	0.3000E 04	0.2637E 07	3299.5	0.968	0.702
SEP	1395.6	10.1	71.5	0.3030E 06	0.2552E 07	2725.4	1.116	0.619
OCT	1083.0	153.5	61.2	0.4605E 07	0.2637E 07	2074.7	1.335	0.271
NOV	811.2	403.0	51.8	0.1209E 08	0.2552E 07	1552.3	1.578	0.114
DEC	623.8	671.9	43.3	0.2016E 08	0.2637E 07	1323.0	1.668	0.055
TOTAL		3510.5		0.1053E 09	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.161

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	100.00	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.991E 03
COLLECTOR TILT ANGLE (DEG) .....>>>	33.79	STORAGE SIDE CAPACITY (BTU/HR F).....	0.447E 05
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0426	COLLECTOR SIDE CONVECTION COEFF.....	1226.7756
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0526	STORAGE SIDE CONVECTION COEFFICIENT	3802.4253
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1246	COLLECTOR SIDE FLOW RATE (GPM)	2.0309
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.1742	STORAGE SIDE FLOW RATE (GPM)	89.6943
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.9255	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0203
HEAT EXCHANGER LENGTH (FT)	65.36	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.8965
////////////////CONSTRAINTS/////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.9424
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0720	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.22CE 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100	TOTAL ENERGY DEMAND (BTU/YEAR)	0.136E 09
COLLECTOR SIDE REYNOLDS NUMBER.....	0.345E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.1614
STORAGE SIDE REYNOLDS NUMBER	0.203E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.626E 03
CAPACITY RATIO (CMIN/CMAX).....	0.0222	HEX COEFFICIENT (BTU/HR F FT**2).....	328.02
FLOW PARAMETER Z2(GCP/ERUL).....	9.5433	TOTAL INSTALLATION COST ($)	3004.16
FLOW PARAMETER Z1(GCP/ERPUL).....	9.03	COLLECTOR FLOW FACTOR(FFF).....	0.9466

SOLCAD - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 16112
IMOD-1 LWK AUGUST 1975

LOCATION	NORFOLK VIRGINIA
LOCATION INDEX.....	16
LATITUDE,DEGREES....	36.90
MEAN TEMPERATURE....	59.22
INSOL(BTU/DAY FT**2)	1325.29
LOAD FACTOR,HDC.....	3510.50
MEAN GROUND TEMP....	55.00

COLLECTOR SOLARNETICS	
COLLECTOR TEST RESULTS, SLOPE:	
PARAMETER,FRUL	1.0380
INTERCEPT:	
PARAMETER,FRTA....	0.6910
BASE COST,$/FT**2...	12.98

STUDY APPROACH	ANALYSIS
ECONOMIC ESTIMATES	
SYSTEM LIFE(YEARS)..	20.00
DISCOUNT RATE	0.1150
INFLATION RATE.....	0.1050

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWE/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PRED.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.01

SOLOAD-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR NORFOLK VIRGINIA

>>>>>DATA MATCH TO INPUT ID NO. 16112
DMOD-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	879.0	764.4	40.3	0.1559E 08	0.2637E 07	1450.2	1.582	0.071
FEB	931.4	655.4	41.8	0.1337E 08	0.2382E 07	1878.0	1.357	0.099
MAR	1281.0	527.5	48.1	0.1076E 08	0.2637E 07	2489.0	1.188	0.160
APR	1676.7	248.0	57.9	0.5059E 07	0.2552E 07	3112.7	1.018	0.305
MAY	1887.5	71.7	66.2	0.1463E 07	0.2637E 07	3557.7	0.912	0.535
JUN	2000.3	4.9	74.1	0.9976E 05	0.2552E 07	3747.1	0.869	0.724
JUL	1853.2	0.0	77.7	0.0	0.2637E 07	3660.7	0.889	0.713
AUG	1680.2	0.1	76.7	0.2046E 04	0.2637E 07	3299.5	0.971	0.704
SEP	1395.6	10.1	71.5	0.2060E 06	0.2552E 07	2725.4	1.117	0.634
OCT	1083.0	153.5	61.2	0.3131E 07	0.2637E 07	2074.7	1.333	0.329
NOV	811.2	403.0	51.8	0.8221E 07	0.2552E 07	1552.3	1.572	0.152
DEC	623.8	671.9	43.3	0.1371E 08	0.2637E 07	1323.0	1.661	0.075
TOTAL		3510.5		0.7161E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.211

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	100.00
COLLECTOR TILT ANGLE (DEG) .....>>>	33.24
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0447
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0547
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1346
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	2.8701
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	21.6572
HEAT EXCHANGER LENGTH (FT)	66.28
////////////////CONSTRAINTS//////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0799
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0100
COLLECTOR SIDE REYNOLDS NUMBER.....	0.327E 05
STORAGE SIDE REYNOLDS NUMBER	0.244E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0172
FLOW PARAMETER Z2(GCP/FRUL).....	9.5092
FLOW PARAMETER Z1(GCP/FRPUL).....	9.00

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.987E 03
STORAGE SIDE CAPACITY (BTU/ER F).....	0.575E 05
COLLECTOR SIDE CONVECTION COEFF.....	1120.8818
STORAGE SIDE CONVECTION COEFFICIENT	4014.7375
COLLECTOR SIDE FLOW RATE (GPM)	2.0237
STORAGE SIDE FLOW RATE (GPM)	115.4498
NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0202
NORMALIZED STORAGE FLOW (GPM/AREAC) ...	1.1545
HEAT EXCHANGER EFFECTIVENESS.....	0.9498
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.217E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.103E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.2111
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.568E 03
HEX COEFFICIENT (BTU/HR F FT**2).....	320.90
TOTAL INSTALLATION COST ($)	3007.50
COLLECTOR FLOW FACTOR(FPP).....	0.9464

09/02/79 15.00.25

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 16222
IMCD-1 LWK AUGUST 1979

LOCATION	NORFOLK VIRGINIA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	16	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.90	SLOPE:			
MEAN TEMPERATURE....	59.22	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY F**2)	1325.29	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3510.50	PARAMETER,TRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN COINCIDENT TEMP....	55.00	BASE COST,$/FT**2...	6.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99.
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED OCCUPANTS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0016
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR NORFOLK VIRGINIA

>>>>>DATA MATCH TO INPUT ID NO. 16222
MOD-1 DWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	879.6	764.4	40.3	0.1559E 08	0.2637E 07	1450.2	1.645	0.162
FEB	931.4	655.4	41.8	0.1337E 08	0.2382E 07	1878.0	1.429	0.219
MAR	1281.0	527.5	48.1	0.1076E 08	0.2637E 07	2489.0	1.186	0.335
APR	1676.7	248.0	57.9	0.5059E 07	0.2552E 07	3112.7	0.989	0.575
MAY	1887.5	71.7	66.2	0.1463E 07	0.2637E 07	3557.7	0.868	0.842
JUN	2030.3	4.9	74.1	0.9996E 05	0.2552E 07	3747.1	0.819	0.965
JUL	1853.2	0.0	77.7	0.0	0.2637E 07	3660.7	0.843	0.958
AUG	1680.2	0.1	76.7	0.2040E 04	0.2637E 07	3299.5	0.935	0.958
SEP	1393.6	10.1	71.5	0.2060E 06	0.2552E 07	2725.4	1.104	0.923
OCT	1083.0	153.5	61.2	0.3131E 07	0.2637E 07	2074.7	1.355	0.628
NOV	811.2	403.0	51.8	0.8221E 07	0.2552E 07	1552.3	1.632	0.332
DEC	623.8	671.9	43.3	0.1371E 08	0.2637E 07	1323.0	1.737	0.172
TOTAL		3510.5		0.7161E 08	0.3105E 08	>>>WEIGHTED AVERAGE		0.379

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) >>>	280.32
COLLECTOR TILT ANGLE (DEG) >>>	42.13
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0695
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0745
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)	0.1321
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)	3.1561
STORAGE SIDE FLUID VELOCITY (FT/SEC)	18.3892
HEAT EXCHANGER LENGTH (FT)	69.90
////////////////CONSTRAINTS///////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)	0.0576
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT)	0.0050
COLLECTOR SIDE REYNOLDS NUMBER	0.559E 05
STORAGE SIDE REYNOLDS NUMBER	0.150E 06
CAPACITY RATIO (CAP/CMAX)	0.0681
FLOW PARAMETER Z2(GCP/FPPUL)	9.6783
FLOW PARAMETER Z1(GSP/FPPUL)	9.17

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F)	0.262E 04
STORAGE SIDE CAPACITY (BTU/HR F)	0.384E 05
COLLECTOR SIDE CONVECTION COEFF	1107.4634
STORAGE SIDE CONVECTION COEFFICIENT	3578.6917
COLLECTOR SIDE FLOW RATE (GPM)	5.3669
STORAGE SIDE FLOW RATE (GPM)	77.1474
NORMALIZED COLLECTOR FLOW (GPM/AREAC)	0.0206
NORMALIZED STORAGE FLOW (GPM/AREAC)	0.2964
HEAT EXCHANGER EFFECTIVENESS	0.8294
SOLAR ENERGY DELIVERED (BTU/YEAR)	0.389E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.103E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3787
OBJECTIVE: NPV OF SOLAR INVESTMENT >>>	0.343E 04
HEX COEFFICIENT (BTU/HR F FT**2)	315.00
TOTAL INSTALLATION COST ($)	4703.12
COLLECTOR FLOW FACTOR(FPP)	0.9474

09/02/79 16.19.16

SOLDAC-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 16223
IMOD-1 LWK AUGUST 1979

LOCATION	NORFOLK VIRGINIA	COLLECTOR AMERICAN SUN		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	16	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.90	SLOPE:			
MEAN TEMPERATURE....	59.22	PARAMETER,FRUL....	1.0390		
INSOL(BTU/DAY FT**2)	1325.29	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HLD.....	3510.50	PARAMETER,FRTA....	0.6380	DISCOUNT RATE	0.0900
MEAN GRCUND TEMP....	55.00	BASE COST,$/FT**2...	8.55	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.09
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	1079.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	0.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KW/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S O L A C - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

RESULTS OF ANALYSIS FOR NORFOLK VIRGINIA

>>>>>DATA MATCH TO INPUT ID NO. 16223

SOLAC-1 LWK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	679.6	764.4	40.3	0.8256E 07	0.2637E 07	1450.2	1.628	0.206
FEB	931.4	655.4	41.8	0.7078E 07	0.2382E 07	1878.0	1.421	0.279
MAR	1281.0	527.5	48.1	0.5697E 07	0.2637E 07	2485.0	1.188	0.410
APR	1676.7	248.0	57.9	0.2678E 07	0.2552E 07	3112.7	0.959	0.640
MAY	1887.5	71.7	66.2	0.7744E 06	0.2637E 07	3557.7	0.882	0.836
JUN	2000.3	4.9	74.1	0.5292E 05	0.2552E 07	3747.1	0.835	0.929
JUL	1853.2	0.0	77.7	0.0	0.2637E 07	3660.7	0.858	0.915
AUG	1680.2	0.1	76.7	0.1080E 04	0.2637E 07	3299.5	0.947	0.913
SEP	1395.6	10.1	71.5	0.1091E 06	0.2552E 07	2725.4	1.109	0.874
OCT	1083.0	153.5	61.2	0.1658E 07	0.2637E 07	2074.7	1.350	0.652
NOV	811.2	403.0	51.8	0.4352E 07	0.2552E 07	1552.3	1.616	0.390
DEC	623.8	671.9	43.3	0.7257E 07	0.2637E 07	1323.0	1.716	0.216
TOTAL		3510.5		0.3791E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.460

DESIGN VARIABLES/CONSTRAINTS		OTHER PARAMETERS	
COLLECTOR AREA (FT**2) .....>>>	207.96	COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.208E 04
COLLECTOR TILT ANGLE (DEG) .....>>>	40.03	STORAGE SIDE CAPACITY (BTU/HR F).....	0.304E 05
COLLECTOR SIDE TUBE INER DIA. (FT)	0.0567	COLLECTOR SIDE CONVECTION COEFF.....	1328.5417
COLLECTOR SIDE TUBE OTER DIA. (FT)	0.0617	STORAGE SIDE CONVECTION COEFFICIENT	3318.2532
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1194	COLLECTOR SIDE FLOW RATE (GPM)	4.2714
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.7667	STORAGE SIDE FLOW RATE (GPM)	60.9549
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	16.5628	NORMALIZED COLLECTOR FLOW (GPM/AREAC)...	0.0205
HEAT EXCHANGER LENGTH (FT)	58.21	NORMALIZED STORAGE FLOW (GPM/AREAC) ...	0.2931
////////////////CONSTRAINTS//////////////		HEAT EXCHANGER EFFECTIVENESS.....	0.7943
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0377	SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.317E 08
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0050	TOTAL ENERGY DEMAND (BTU/YEAR)	0.690E 08
COLLECTOR SIDE REYNOLDS NUMBER.....	0.545E 05	ANNUAL AVERAGE SOLAR LOAD FRACTION	0.456
STORAGE SIDE REYNOLDS NUMBER	0.135E 06	OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.289E 04
CAPACITY RATIO (CMIN/CMAX).....	0.0686	HEX COEFFICIENT (BTU/HR F FT**2).....	328.89
FLOW PARAMETER Z2(GCP/FRUL).....	9.0419	TOTAL INSTALLATION COST ($)	3748.17
FLOW PARAMETER Z1(GCP/FRUL).....	9.13	COLLECTOR FLOW FACTOR(FRP).....	0.9472

09/06/75 10.50.44

S O L A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO CLYPUS ID NO. 10232
MOD-1 LWK AUGUST 1975

LOCATION	NORFOLK VIRGINIA	COLLECTOR FEDERAL PRISM I. D		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....	16	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....	36.90	SLOPE:			
MEAN TEMPERATURE....	59.22	PARAMETER,FRUE	0.8830		
INSOL(BTU/DAY FT**2)	1325.29	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....	3510.50	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....	55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.30($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	1.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20399.99
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USEAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0500
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3970
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.05
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA EFFD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

S I L O A D - 1

SOLAR ENERGY OPTIMIZATION ANALYSIS OF DESIGN

RESULTS OF ANALYSIS FOR NORFOLK VIRGINIA

>>>>>DATA MATCH TO INPUT ID NO. 16232
OMED-1 LVK AUGUST 1979

MONTH	HORIZONTAL INSOLATION	HEATING DEGREE DAYS	AMBIENT TEMPERATURE	HEATING LOAD	DHW LOAD	EXTRA-TERRESTRIAL INSOLATION	COLLECTOR TILT FACTOR	SOLAR ENERGY FRACTION
	BTU/DAY FT**2	DEG DAY	DEG F	BTU/MONTH	BTU/MONTH	BTU/DAY FT**2		
JAN	679.6	764.4	40.3	0.1559E 08	0.2637E 07	1450.2	1.634	0.162
FEB	931.4	655.4	41.6	0.1337E 08	0.2382E 07	1878.0	1.423	0.216
MAR	1281.0	527.5	48.1	0.1076E 08	0.2637E 07	2485.0	1.187	0.329
APR	1676.7	248.0	57.9	0.5059E 07	0.2552E 07	3112.7	0.996	0.570
MAY	1887.5	71.7	66.2	0.1463E 07	0.2637E 07	3557.7	0.877	0.856
JUN	2000.3	4.9	74.1	0.3996E 05	0.2552E 07	3747.1	0.830	0.958
JUL	1853.2	0.0	77.7	0.0	0.2637E 07	3660.7	0.853	0.990
AUG	1680.2	0.1	76.7	0.2040E 04	0.2637E 07	3295.5	0.943	0.989
SEP	1395.6	10.1	71.5	0.2060E 06	0.2552E 07	2725.4	1.107	0.946
OCT	1083.0	153.5	61.2	0.3131E 07	0.2637E 07	2074.7	1.351	0.624
NOV	811.2	403.1	51.8	0.8221E 07	0.2552E 07	1552.3	1.622	0.326
DEC	623.8	671.9	43.3	0.1371E 08	0.2637E 07	1323.0	1.723	0.172
TOTAL		3510.5		0.7161E 08	0.3105E 08			
						>>>WEIGHTED AVERAGE		0.380

DESIGN VARIABLES/CONSTRAINTS

COLLECTOR AREA (FT**2) .....>>>	240.53
COLLECTOR TILT ANGLE (DEG) .....>>>	40.73
COLLECTOR SIDE TUBE INNER DIA. (FT)	0.0610
COLLECTOR SIDE TUBE OUTER DIA. (FT)	0.0684
STORAGE SIDE TUBE(HEX) INNER DIA. (FT)..	0.1342
COLLECTOR SIDE FLUID VELOCITY (FT/SEC)..	3.2015
STORAGE SIDE FLUID VELOCITY (FT/SEC) ..	19.6708
HEAT EXCHANGER LENGTH (FT)	35.07
////////////////CONSTRAINTS////////////////	
HEX ANNULAR DIAMETER DIFFERENCE (FT)....	0.0656
COLLECTOR SIDE TUBE DIA. DIFFERENCE(FT).	0.0067
COLLECTOR SIDE REYNOLDS NUMBER	0.503E 05
STORAGE SIDE REYNOLDS NUMBER	0.183E 06
CAPACITY RATIO (CMIN/CMAX).....	0.0454
FLOW PARAMETER Z2(GCP/EPUL).....	9.8493
FLOW PARAMETER Z1(GCP/EPSPUL).....	9.34

OTHER PARAMETERS

COLLECTOR SIDE CAPACITY (BTU/HR F).....	0.209E 04
STORAGE SIDE CAPACITY (BTU/HR F).....	0.461E 05
COLLECTOR SIDE CONVECTION COEFF	1147.2280
STORAGE SIDE CONVECTION COEFFICIENT	3732.0232
COLLECTOR SIDE FLOW RATE (GPM)	4.2888
STORAGE SIDE FLOW RATE (GPM)	92.5111
NORMALIZED COLLECTOR FLOW (GPM/AREA)...	0.0178
NORMALIZED STORAGE FLOW (GPM/AREA) ...	0.3846
HEAT EXCHANGER EFFECTIVENESS.....	0.5148
SOLAR ENERGY DELIVERED (BTU/YEAR).....	0.390E 08
TOTAL ENERGY DEMAND (BTU/YEAR)	0.103E 09
ANNUAL AVERAGE SOLAR LOAD FRACTION	0.3800
OBJECTIVE: NPV OF SOLAR INVESTMENT ..>>>	0.314E 04
HEX COEFFICIENT (BTU/HR F FT**2).....	315.71
TOTAL INSTALLATION COST ($)	5043.51
COLLECTOR FLOW FACTOR(FPP).....	0.9433

09/06/79 09.25.05

SOLOAC-1

SOLAR ENERGY OPTIMIZATION ANALYSIS OR DESIGN

DESIGN DATA OPTIONS/INPUTS SUMMARY

>>>>>DATA MATCH TO OUTPUT ID NO. 14232
IMOD-1 LWK AUGUST 1979

LOCATION	FRESNO	CALIF	COLLECTOR FEDERAL PRISM 1. 0		STUDY APPROACH	ANALYSIS
LOCATION INDEX.....		14	COLLECTOR TEST RESULTS,		ECONOMIC ESTIMATES	
LATITUDE,DEGREES....		36.77	SLOPE:			
MEAN TEMPERATURE....		61.85	PARAMETER,FRUL....	0.8830		
INSOL(BTU/DAY FT**2)		1710.81	INTERCEPT:		SYSTEM LIFE(YEARS)..	20.00
LOAD FACTOR,HDD.....		2826.40	PARAMETER,FRTA....	0.6270	DISCOUNT RATE	0.0900
MEAN GROUND TEMP....		55.00	BASE COST,$/FT**2...	9.40	INFLATION RATE.....	0.1100

ENERGY COMPARATIVE ESTIMATES

TYPE ENERGY BASE..... OIL

INDEX	TYPE	EFFICIENCY	COST	HEATING VALUE
1	OIL	0.70	0.90($/GAL)	142000.0(BTU/GAL)
2	ELE	0.99	0.05($/KWH)	3413.0(BTU/KWH)
3	GAS	0.70	0.40($/THM)	100000.0(BTU/THM)

HEAT LOAD CHARACTERISTICS

LOAD LOSS COEFFICIENT (BTU/HR F FT**2)..	0.17
LOAD SURFACE HEAT TRANSFER AREA(FT**2)..	5000.00
LOAD CONDUCTANCE (BTU/DEG F DAY).....	20397.79
DOMESTIC HOT WATER(DHW) DESIGN TEMP. ...	140.00
ESTIMATED DAILY DHW USAGE (GAL/PER) ...	20.00
ESTIMATED DHW USERS (PER).....	6.00
ESTIMATED STORAGE TO LOAD EFFECTIVENESS.	1.00

SELECTED PARAMETERS

COLLECTOR FLUID MEAN TEMPERATURE.....	176.00
COLLECTOR FLUID DENSITY(LB/FT**3).....	60.81
COLLECTOR FLUID SPECIFIC HEAT(BTU/LB*F).	1.0000
COLLECTOR FLUID CONDUCTIVITY(BTU/HR*FT*F)	0.3870
STORAGE FLUID MEAN TEMPERATURE	104.00
STORAGE FLUID DENSITY(LB/FT**3).....	62.09
STORAGE FLUID SPECIFIC HEAT(BTU/LB*F)...	1.0000
STORAGE FLUID CONDUCTIVITY(BTU/HR FT F).	0.3640
COLLECTOR SIDE FOULING FACTOR(HR F/BTU)	0.0010
STORAGE SIDE FOULING FACTOR(HR F/BTU)	0.0010
HEX TUBE CONDUCTIVITY(BTU/HR FT F).....	220.00
ESTIMATED OPTIMUM STORAGE(LB/AREAC)	15.30
ESTIMATED GROUND REFLECTANCE.....	0.20
ESTIMATED PUMPING POWER(KWH/AREAC).....	1.0000
ESTIMATED CORRECTION FOR TAU ALPHA PROD.	0.93
ESTIMATED INSTALL/LABOR COST ($/AREAC)..	10.00
ESTIMATED HEX COST ($/FT**2)	5.00
ESTIMATED STORAGE TANK COST($/LB STORED)	0.08
MAINTENANCE (% INSTALLED COST/YR).....	0.0010

APPENDIX E

POTENTIAL CORRELATION FOR OPTIMUM COLLECTOR FLOW RATE

Reference [2] defines the collector heat removal factor, F_r, as:

$$F_r = \frac{Gc_p}{U_L} \{1 - \exp(\frac{-F'U_L}{Gc_p})\} \quad \text{(B1)}$$

Further, the collector flow factor, F", is defined as,

$$F" = \frac{F_r}{F'} = \frac{Gc_p}{F'U_L} \{1 - \exp(\frac{-F'U_L}{Gc_p})\} \quad \text{(B2)}$$

Reference [2] shows that F" approaches the unity value asymptotically as the parameter Gc_p/U_LF' increases. Reference [3] recommends capacity rates of 10-15 lb/hr ft_c^2 (.0223 - .0334 Gpm/ft_c^2) as the best compromise among collector heat transfer coefficient, fluid pressure drop, and energy delivery. The unit ft_c refers to collector area.

The results of this thesis suggested a correlation between the collector performance parameter F_rU_L and the capacity rate. Once these results are verified by further testing including model changes to include fluid pressure drop, a simple correlation may be available and follows from:

Let, κ^* = The optimum flow factor determined from computer experiments.

$\zeta_1 = Gc_p/F'U_L$

$\zeta_2 = Gc_p/F_rU_L$

It follows from equations (B1) and (B2) that:

$$F'' = \frac{1}{\zeta_2}$$

$$\frac{1}{\zeta_2} = 1 - \exp(-1/\zeta_1)$$

or,

$$\zeta_1 = \frac{1}{-\ln(1 - 1/\zeta_2)}$$

Let, ζ_1^* = The optimum parameter which corresponds to κ^* and is obtained by solving equation (B2) for ζ_1

Therefore,

$$\kappa^* = \frac{\zeta_1^*}{\zeta_2}$$

or

$$\zeta_2 = \frac{\zeta_1^*}{\kappa^*}$$

or

$$Gc_p/F_rU_L = \frac{\zeta_1^*}{\kappa^*}$$

or,

$$G = \frac{\zeta_1^*}{\kappa^*} F_r U_L / c_p$$

or,

$$G = \kappa^{**} F_r U_L$$

Based on the results of a limited number of computer experiments all yielding an apparent invarient flow factor, F" = .948:

$$\kappa^{**} = .01955 \text{ (Gpm hr F/Btu)}$$

Or,

$$G = .01955 F_r U_L \quad (\text{Gpm}/\text{ft}_c^2)$$

BIBLIOGRAPHY

1. Department of energy, "A National Solar Strategy," The Energy Consumer, V. 1, No. 4, p. 2, August/ September 1979.

2. Duffie, J.A., and Beckman, W.A., Solar Energy Thermal Processes, Wiley, 1974.

3. Kreith, F., and Kreider, J.F., Principles of Solar Engineering, Hemisphere, 1978.

4. The International Solar Energy Society, Solar Energy, Pergamon Press, monthly, 1957 to present.

5. Daniels, F., Direct Use of the Sun's Energy, Ballantine Press, 1974.

6. Kline, S.A., Beckman, W.A., and Duffie, J.A., "A Design Procedure for Solar Heating Systems," Solar Energy, Vol. 18, pp. 113-127, 1976.

7. Hill, J.E., and Kesuda, T., National Bureau of Standards Report NBSIR 74-635, Methods of Testing for Rating Solar Collectors Based on Thermal Performance, December 1974.

8. American Society of Heating, Refrigerating, and Air Conditioning Engineers (ASHRAE) Standard 93-77, 1977.

9. Vanderplaats, G.N., Numerical Optimization Techniques, Class Notes for Graduate Course ME 4902-2, Automated Design Optimization, at the Naval Postgraduate School, Monterey, California, March 1977.

10. Vanderplaats, G.N., CONMIN-A FORTRAN Program for Constrained Function Minimization User's Manual, NASA TM X-62, 282, August 1977.

11. Vanderplaats, G.N., COPES-A Control Program for Engineering Synthesis, Prepared as a User's Manual and for Graduate Course ME 4902-2, Automated Design Optimization, at the Naval Postgraduate School, Monterey, CAlifornia, March 1977.

12. Vanderplaats, G.N., COPES-A Control Program For Engineering Synethesis, Prepared as a revised User's Manual together with example problems and forwarded to the Naval Postgraduate School, Monterey, California, 1979.

13. Hoecker, W.H., Cotton, G.F., and Hass, W.A., Solar Radiation and Climatic Data for Quasi-Homogeneous Climatic Regions of the United States, NOAA Air Resources Laboratories, April 1979.

14. ASHRAE Handbook of Fundamentals, American Society of Heating, Refrigerating, and Air Conditioning Engineers, 1967.

15. Threlkeld, J.L., Thermal Environmental Engineering, Prentice-Hall, 1970.

16. Hottel, H.C., and Whillier, A., Evaluation of Flat Plate Solar Collector Performance, Transactions of the Conference on the Use of Solar Energy II, Thermal Processes, 74-104, University of Arizona, Tempe, Arizona, 1955.

17. Naval Facilities Engineering Command (NAVFAC) Civil Engineering Laboratory, Port Hueneme, California, Solar Collector Test Results reported via telephone by E. Durlak, Solar Heating and Cooling System Project, August 1979.

18. de Winter, F., "Heat Exchanger Penalties in Double Loop Solar Water Heating Systems," Solar Energy, V. 17, pp. 335-338, 1976.

19. Liu, B.Y.H., and Jordan, R.C., Daily Insolation on Surfaces Tilted Towards the Equator, Transactions of the American Society of Heating, Refrigerating, and Air Conditioning Engineers, 1962.

20. Beck, E.J., and Field, R.L., Naval Facilities Engineering Command (NAVFAC) Civil Engineering Laboratory Technical Report No. R-835, Solar Heating of Buildings and Domestic Hot Water, January 1976.

21. Fletcher, R. and Reeves, C.M., "Function Minimization by Conjugate Directions," British Computer Journal, V. 7, n. 2, pp. 149-154, 1964.

22. Zoutendijk, G.G., Methods of Feasible Directions, Elsevier, 1960.

23. Vanderplaats, G.N. and Moses, F., "Structural Optimization by Methods of Feasible Directions," Journal of Computers and Structures, V. 3, pp. 739-755, 1973.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Documentation Center Cameron Station Alexandria, Virginia 22314	2
2.	Library, Code 0142 Naval Postgraduate School Monterey, California 93940	2
3.	Department Chairman, Code 69 Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	1
4.	Associate Professor M. Kelleher, Code 69Kk Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	1
5.	Assistant Professor G.N. Vanderplaats Code 69Vn Department of Mechanical Engineering Naval Postgraduate School Monterey, CAlifornia 93940	1
6.	LCDR Lawrence W. Kozoyed, USN 300 Snead Fairway Portsmouth, Virginia 23701	3
7.	Professor P.F. Pucci Code 69Pc Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	2
8.	Associate Professor R.H. Nunn Code 69Nn Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	1
9.	Mr. E. Durlak Civil Engineering Laboratory (L 63) Naval Facilities Engineering Command Port Hueneme, California 93043	1

10. Mr. W. Adams 1
Program Manager for Energy
Naval Facilities Engineering Command (032E)
200 Stoval Street
Alexandria, Virginia 22332

11. Mr. E. Watkins 1
Space Heating and Ventilation
Naval Facilities Engineering Command (0441F)
200 Stoval Street
Alexandria, Virginia 22332