

63 3 4

CATALOG STIA 40481
AS AD 110

THE UNIVERSITY OF CONNECTICUT

SCHOOL OF ENGINEERING

TECHNICAL REPORT NO. 2

THE MOTION OF A PLANE EVAPORATION

FRONT IN A SUPERHEATED LIQUID

by

R. S. BRAND


MECHANICAL ENGINEERING DEPARTMENT

This research was carried out under the
Bureau of Ships Fundamental Hydromechanics
Research Program S-RO09 01 01, administered
by the David Taylor Model Basin

Contract Nonr 3292 (01)

Reproduction in whole or in part is permitted
for any purpose of the United States Government

STORRS, CONNECTICUT



APRIL, 1963

The Motion of a Plane Evaporation Front in a
Superheated Liquid

R. S. Brand
Professor of Mechanical Engineering
University of Connecticut
Storrs, Connecticut

ABSTRACT

The velocity of the interface between liquid and vapor phases when a slightly superheated liquid changes to vapor is found. The temperature distribution in the liquid ahead of the evaporation front can then be determined by a numerical integration.

NOMENCLATURE

A	= length scale factor defined in equation (20)
b	= slope, dp/dt , of the saturation curve
c	= speed of sound in the liquid
$g(t)$	= position (i.e. x co-ordinate) of interface at time t
$g'(t)$	= velocity of interface
k	= thermal conductivity
L	= latent heat of evaporation
m	= mass rate of evaporation per unit area
p	= pressure
t	= time
T	= temperature
u	= fluid velocity
x	= space co-ordinate
y	= $x - g(t)$ = space co-ordinate measured from interface
α	= thermal diffusivity
η	= y/A = dimensionless distance from interface
θ	= dimensionless temperature defined in equation (9)
ρ	= density of liquid
ρ_v	= density of vapor
τ	= $\alpha t/A^2$ = dimensionless time
ϕ	= dimensionless velocity of interface defined in equation (14)

SUBSCRIPTS:

o , refers to conditions at interface, liquid side

s , refers to equilibrium saturation condition

The Motion of a Plane Evaporation Front in a
Superheated Liquid

R. S. Brand

Professor of Mechanical Engineering

University of Connecticut

Storrs, Connecticut

INTRODUCTION

This study is an attempt to solve the problem of the motion of a plane front in a fluid medium across which a change of phase takes place. In particular, we assume that an infinitely long tube is filled with a liquid at a uniform pressure, $p(\infty)$, and at a uniform temperature, $T(\infty)$, slightly above the saturation temperature corresponding to $p(\infty)$. The liquid is thus in an unstable state.

We assume that at some point in the tube ($x=0$) some vapor is formed, and that we then have an evaporation front moving into the superheated liquid. As fluid crosses this front it is converted into a vapor at equilibrium saturation conditions. The energy to supply the latent heat of evaporation is assumed to come by conduction through the liquid. Hence the liquid will be cooler at the interface than at infinity.

We let $x = g(t)$ be the location of the front and $g'(t)$ its velocity. The determination of this function, $g'(t)$, is the principal object of the investigation.

ANALYSIS

The temperature in the liquid must satisfy the one-dimensional diffusion equation in a moving substance,

$$\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} = \alpha \frac{\partial^2 T}{\partial x^2} \quad (1)$$

in the region $x \geq g(t)$, $t \geq 0$, subject to the boundary conditions:

$$\left. \frac{\partial T}{\partial x} \right|_{x=g(t)} = \frac{1}{k} m(t) \quad (2)$$

$$T(x, 0) = T(\infty) \quad (3)$$

$$T(\infty, t) = T(\infty) \quad (4)$$

In boundary condition (2), which expresses the fact that the latent heat of evaporation is supplied by conduction through the liquid, the functions $g(t)$ and $m(t)$ are unknown. If we assume that the moving front converts the liquid into stationary vapor, then

$$m(t) = \rho_v g'(t) = \rho [g'(t) - u_0] \quad (5)$$

from which $u_0 = \left(1 - \frac{\rho_v}{\rho}\right) g'(t) \quad (6)$

At 212°F, $\frac{\rho_v}{\rho} = 7.5 \times 10^{-4}$; hence it is permissible in considering the effect of motion of the liquid to take

$$u_0 = g'(t) \quad (7)$$

The curved boundary $x = g(t)$ can be removed by choosing a co-ordinate measured from the interface. That is, letting $y = x - g(t)$, equation (1) becomes

$$\frac{\partial T}{\partial t} + [u - g'(t)] \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \quad (8)$$

The temperature gradient will be large only near the boundary $y = 0$, and here $[u = g'(t)]$ is small because of (7). Hence the convective term in (8) is neglected.

The problem is reformulated in dimensionless quantities by writing

$$\eta = \frac{y}{A}, \quad \tau = \frac{\alpha t}{A^2}, \quad \Theta = \frac{T - T(\infty)}{T(\infty) - T_s(\infty)} \quad (9)$$

where $T_s(\infty)$ is the equilibrium saturation temperature corresponding to $p(\infty)$. We then have the standard diffusion equation

$$\Theta_\tau = \Theta_{\eta\eta} \quad (10)$$

(the subscripts denote partial differentiation) to be solved in the region $\eta \geq 0$, $\tau \geq 0$, with the boundary conditions:

$$\Theta(\eta, 0) = 0 \quad (11)$$

$$\Theta(\infty, \tau) = 0 \quad (12)$$

$$\Theta_\eta(0, \tau) = \phi(\tau) \quad (13)$$

The boundary function $\phi(\tau)$ in (13), still to be determined, is the dimensionless form of the velocity of the interface, $g'(t)$, as is seen from (2), (5), and (9).

$$\phi(\tau) = \frac{AL\rho_v g'(t)}{k[T(\infty) - T_s(\infty)]} \quad (14)$$

The boundary value problem, equations (10), (11), (12), (13), is most conveniently solved by applying the Fourier cosine transform on the variable η . Let the transform be denoted by

$$\bar{\Theta}(\lambda, \tau) = \sqrt{\frac{2}{\pi}} \int_0^\infty \Theta(\eta, \tau) \cos \lambda \eta \, d\eta$$

For the boundary conditions of the present problem the partial differential equation (10) transforms to

$$\frac{d\bar{\theta}}{d\tau} = -\frac{2}{\sqrt{\pi}} \phi(\tau) - \lambda^2 \bar{\theta}$$

with the solution

$$\bar{\theta} = -\frac{2}{\sqrt{\pi}} \int_0^{\tau} e^{-\lambda^2(\tau-s)} \phi(s) ds \quad (15)$$

It can be shown that the inversion of (15) is

$$\theta(\eta, \tau) = -\frac{1}{\sqrt{\pi}} \int_0^{\tau} e^{-\frac{\eta^2}{4(\tau-s)}} \phi(s) (\tau-s)^{-\frac{1}{2}} ds \quad (16)$$

giving the temperature distribution in terms of the motion of the interface.

From (16) we find the temperature at the interface to be

$$\theta_0 = \lim_{\eta \rightarrow 0} \theta(\eta, \tau) = -\frac{1}{\sqrt{\pi}} \int_0^{\tau} \frac{\phi(s)}{\sqrt{\tau-s}} ds \quad (17)$$

Since thermodynamic equilibrium is established at the evaporation front, the boundary temperature, $T_0(\tau) = T(0, \tau)$, given by (17), will determine the pressure at the interface $p_0(\tau)$. If the range of temperature variation is small enough, we can take the relationship between pressure and temperature at saturation to be linear. That is,

$$\begin{aligned} p_0 &= p(\infty) + b [T_0 - T_s(\infty)] \\ &= p(\infty) + b [T(\infty) - T_s(\infty)] \left[1 - \frac{1}{\sqrt{\pi}} \int_0^{\tau} \frac{\phi(s)}{\sqrt{\tau-s}} ds \right] \end{aligned} \quad (18)$$

We now assume that the evaporation front moving into the originally motionless liquid sends a wave into this liquid in which the fluid velocity and the pressure are related as in an acoustic medium.

$$p(x, t) = p(\infty) + \rho c u(x, t)$$

In particular, at $x = g(t)$

$$\begin{aligned} p_0 &= p(\infty) + \rho c g'(\tau) \\ &= p(\infty) + \frac{\rho c K [T(\infty) - T_s(\infty)] \phi(\tau)}{\rho_v L A} \end{aligned} \quad (19)$$

If we now choose our length scale Λ to be

$$\Lambda = \frac{\rho c K}{\rho_v L b} \quad (20)$$

equating (18) and (19) provides the following integral equation for the motion of the interface:

$$\phi(\tau) = 1 - \frac{1}{\sqrt{\pi}} \int_0^\tau \frac{\phi(s)}{\sqrt{\tau-s}} ds \quad (21)$$

Equation (21) is solved by an iterative technique in which

$$\phi_{n+1}(\tau) = 1 - \frac{1}{\sqrt{\pi}} \int_0^\tau \frac{\phi_n(s)}{\sqrt{\tau-s}} ds$$

with $\phi_1 = 1$, the iteration can be carried to any order with only elementary integrals being encountered. The result is the following power series:

$$\phi = (1 + \tau + \frac{1}{2}\tau^2 + \frac{1}{6}\tau^3 + \dots) - \frac{2}{\sqrt{\pi}} (\tau^{\frac{1}{2}} + \frac{2}{3}\tau^{\frac{3}{2}} + \frac{4}{15}\tau^{\frac{5}{2}} + \dots)$$

After some manipulation the series can be recognized as the expansion of

$$\phi = e^\tau \cdot \operatorname{erfc}(\tau^{\frac{1}{2}}) \quad (22)$$

where erfc denotes the complimentary error function defined by

$$\operatorname{erfc}(z) = 1 - \operatorname{erf}(z) = 1 - \frac{2}{\sqrt{\pi}} \int_0^z e^{-v^2} dv$$

RESULTS

Fig. 1 is a graph of equation (22). Fig. 2 shows some typical temperature distributions obtained by numerical evaluation of the integral in equation (16).

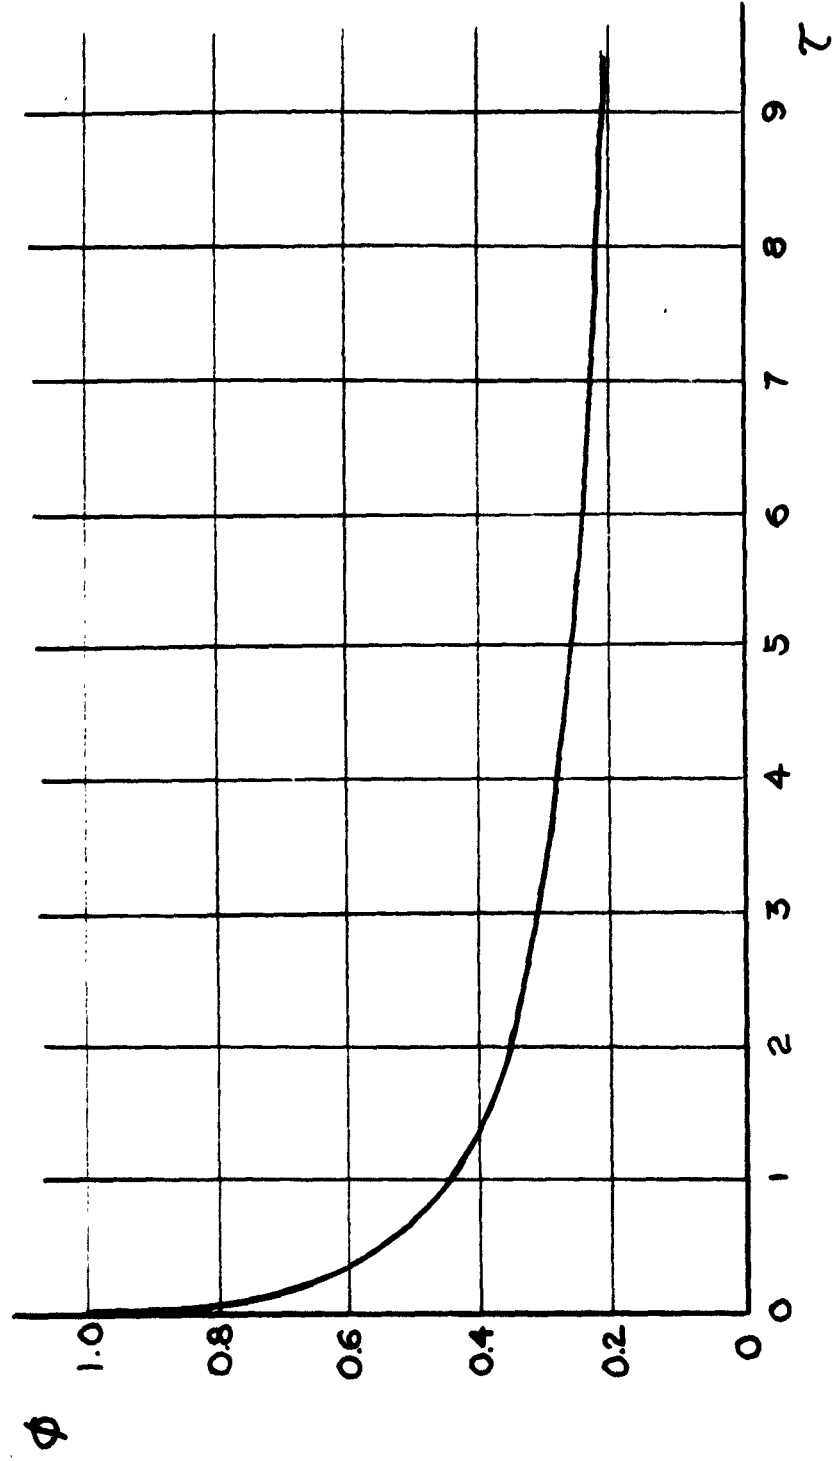


FIG. 1 VELOCITY OF INTERFACE VS. TIME

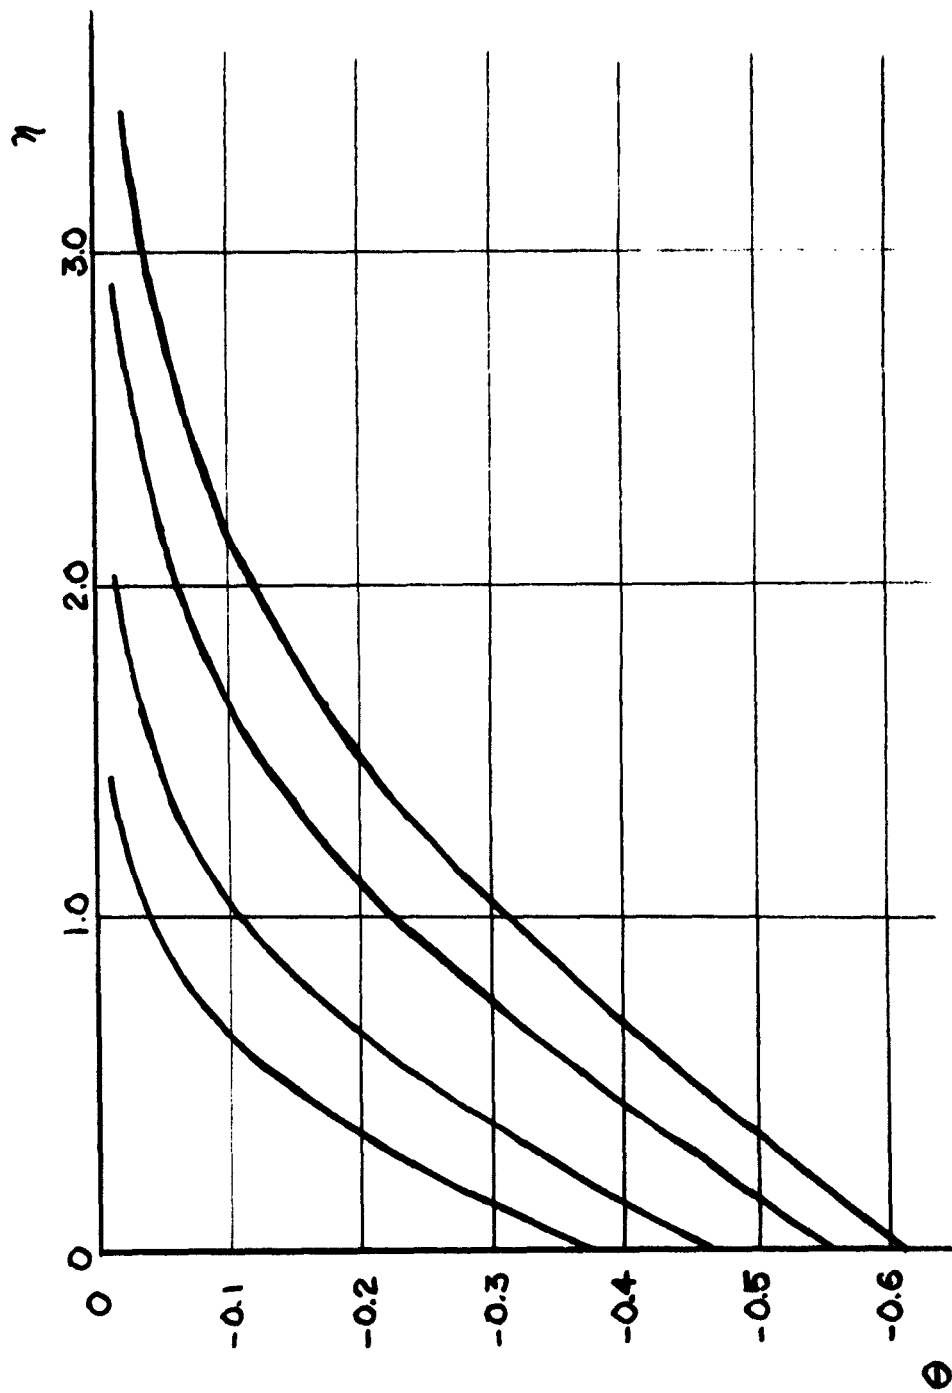


FIG. 2 TEMPERATURE DISTRIBUTION

DISTRIBUTION LIST

Copies

75 David Taylor Model Basin
Washington 7, D. C.
Attn: Contract Research - Code 513

7 Chief, Bureau of Ships
Department of the Navy
Washington 25, D. C.
Attn: (1) Technical Information -
Code 335
(1) Ship Silencing - Code 345
(1) Ship Design - Code 410
(1) Preliminary Design -
Code 420
(1) Hull Design - Code 440
(1) Laboratory Management -
Code 320
(1) Code 341B

1 Commanding Officer
Office of Naval Research Branch
Office
495 Summer Street
Boston 10, Massachusetts

1 Commanding Officer
Office of Naval Research Branch
Office
207 West 24th Street
New York 11, New York

1 Commanding Officer
Office of Naval Research Branch
Office
86 East Randolph Street
Chicago 1, Illinois

1 Commanding Officer
Office of Naval Research Branch
Office
1000 Geary Street
San Francisco 9, California

1 Commanding Officer
Office of Naval Research Branch
Office
1030 East Green Street
Pasadena, California

Copies

2 Director, Naval Research Laboratory
Washington 25, D. C.
Attn: Code 2021

2 Commander
Naval Ordnance Laboratory, White Oak
Silver Spring, Maryland
Attn: Library

2 National Aeronautics and Space
Administration
1512 H Street, N. W.
Washington 25, D. C.

1 National Aeronautics and Space
Administration
Lewis Research Center
21000 Brookpark Road
Cleveland 35, Ohio
Attn: Librarian

10 Astia Document Service Center
Arlington Hall Station
Arlington 12, Virginia

1 U.S. Naval Boiler and Turbine
Laboratory
Naval Base
Philadelphia 12, Pennsylvania

1 U.S. Naval Underwater Sound
Laboratory
New London, Connecticut

1 National Bureau of Standards
National Hydraulics Laboratory
Washington 25, D. C.

1 Boeing Company
Aero-Space Division
P.O. Box 3707
Seattle 24, Washington
Attn: Librarian

1 Brown University
Providence, Rhode Island
Attn: Division of Applied Mathematics

Copies

- 1 California Institute of Technology
Hydrodynamics Laboratory
Pasadena 4, California
- 1 University of California
College of Engineering
Berkeley 4, California
- 1 Carnegie Institute of Technology
Pittsburgh 13, Pennsylvania
- 1 Douglas Aircraft Company
El Segundo Division
827 Lapham Street
El Segundo, California
- 1 University of Florida
Engineering and Industrial
Experiment Station
Gainesville, Florida
- 1 Georgia Institute of Technology
Hydraulics Laboratory
Atlanta, Georgia
- 1 General Dynamics Corporation
Electric Boat Division -
Applied Mechanics Section
Groton, Connecticut
- 1 Harvard University
Acoustics Laboratory
Cambridge, Massachusetts
- 1 Hydronautics, Incorporated
200 Monroe Street
Rockville, Maryland
- 1 Illinois Institute of Technology
Applied Mechanics Department
Chicago, Illinois
- 1 University of Illinois
Department of Theoretical and
Applied Mechanics
Urbana, Illinois
- 1 Iowa Institute of Hydraulic Research
State University of Iowa
Iowa City, Iowa
- 1 Johns Hopkins University
Applied Physics Laboratory
Silver Spring, Maryland

Copies

- 1 Johns Hopkins University
School of Engineering
Baltimore 18, Maryland
- 1 University of Kansas
Department of Engineering Mechanics
Lawrence, Kansas
- 1 Lehigh University
Bethlehem, Pennsylvania
- 1 University of Maryland
Institute for Fluid Dynamics and
Applied Mathematics
College Park, Maryland
- 1 Massachusetts Institute of Technology
Department of Mechanical Engineering
Cambridge, Massachusetts
- 1 University of Michigan
Engineering Mechanics Department
Ann Arbor, Michigan
- 1 University of Minnesota
School of Engineering
Minneapolis, Minnesota
- 1 University of Nebraska
Department of Engineering Mechanics
Lincoln, Nebraska
- 1 New York University
College of Engineering
New York 53, New York
- 1 North Carolina State College
Department of Engineering Research
Raleigh, North Carolina
- 1 Northwestern University
The Technological Institute
Evanston, Illinois
- 1 University of Notre Dame
School of Engineering
Notre Dame, Indiana
- 1 Pennsylvania State University
Ordnance Research Laboratory
University Park, Pennsylvania

Copies

- 1 Purdue University
School of Mechanical Engineering
Lafayette, Indiana
- 1 University of Rhode Island
Mechanical Engineering Department
Kingston, Rhode Island
- 1 R.P.I. Graduate Center
South Windsor, Connecticut
- 1 Scripps Institution of Oceanography
La Jolla, California
- 1 Southwest Research Institute
San Antonio 6, Texas
- 1 Stanford University
Hydraulic Laboratory
Stanford, California
- 1 Stevens Institute of Technology
Davidson Laboratory
Hoboken, New Jersey
- 1 United Aircraft Corporation
Research Department
East Hartford, Connecticut
- 1 University of Washington
School of Engineering
Seattle 5, Washington
- 1 University of Wisconsin
School of Engineering
Madison, Wisconsin
- 1 Woods Hole Oceanographic Institution
Woods Hole, Massachusetts
- 1 Worcester Polytechnic Institute
Worcester 9, Massachusetts

Copies

- 1 Chief of Naval Research (438)
Department of the Navy
Washington 25, D. C.
- 1 Oceanics, Incorporated
Technical Industrial Park
Plainview, L. I., New York
Attn: Dr. P. Kaplan, President
- 1 Technical Research Group, Inc.
2 aerial Way
Syosset, New York
Attn: Dr. J. Kotik
- 1 Vidya
1450 Page Mill Road
Palo Alto, California
Attn: Dr. J. Nielsen