

UNCLASSIFIED

AD 404 640

*Reproduced
by the*

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA, VIRGINIA




UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-34

404640

①

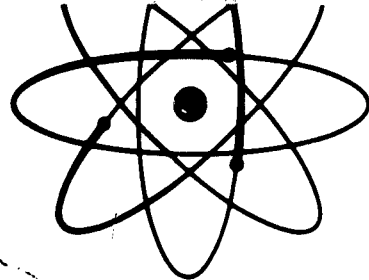

D D C
MAY 24 1963
RECEIVED
ATISIA A

GAMD-2257


Report Number



AD No.

THE COPY

United States Atomic Energy Commission
Division of Technical Information



350

36
A
1/60

101030

G-A
MAD
2257
2-3

GENERAL ATOMIC DIVISION
GENERAL DYNAMICS CORPORATION

John Jay Hopkins Laboratory for Pure and Applied Science
P.O. Box 609, San Diego 12, California

CAMD-2237
Copy No. 33

THE BEHAVIOR OF A THIN VISCIOUS FILM:
UNDER MECHANICAL AND THERMAL FORCE.

PERMANENT RETURN
DO NOT RETURN DOCUMENT
TO USA

Nuclear/Chemical Pulse Reaction Propulsion Project

Report written by:
T. Teichmann

This document, which was prepared primarily for internal use at General Atomic, may contain preliminary or incomplete data. It is informal and is subject to revision or correction. It does not, therefore, represent a final report.

Air Force Special Weapons Center
Contract AF33(601)-2207

Project 52
May 8, 1961

I. INTRODUCTORY REMARKS

The following treatment of the flow of a viscous, incompressible fluid over a flat plate under the influence of surface forces is designed to include at one time the presence of normal and tangential forces, and to deal with spatial and temporal behavior on an equivalent basis. It therefore serves to supplement and generalize the simpler, physically based account of Moffatt (referred to hereafter as "M"). While it does not seem to lead to substantially new results, it enables consideration of more general spatial and temporal variations, without special artifices, and it illuminates the nature of the underlying approximations and their range of valid application.

The additional consideration of heat conduction and evaporation carried out roughly in Section V; below, seems to offer a possible description of the experimental findings when combined with the viscous flow.

II. FORMULATION OF PROBLEM

The problem to be considered is that of a thin, uniform layer of a viscous, incompressible fluid (of initial thickness h_0) covering an infinite, flat, horizontal plate, ($y=0$), and is subjected to a cylindrically symmetric surface force. It is required to determine the motion of the surface:




Fig. 1 Geometric Configuration

* CAMD-2237

The basic hydrodynamic equations are

$$\frac{\partial \vec{v}}{\partial t} + (\vec{v} \cdot \nabla) \vec{v} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \vec{v} + \vec{g} \quad (2.1)$$

$$\nabla \cdot \vec{v} = 0 \quad (2.2)$$

where \vec{v} is the velocity vector, p the pressure, ρ the density, μ the viscosity, $\nu = \mu/\rho$ the kinematic viscosity, and \vec{g} the external force field.

Since the fluid layer is thin, and the applied forces large and of short duration, it is justifiable to neglect the external (gravitational) force field \vec{g} . (There is no appreciable motion of the fluid due to \vec{g} in the time of interest here.) In order to linearize the equations, the terms $(\vec{v} \cdot \nabla) \vec{v}$ will also be neglected; the validity of this will be considered later. The equations thus become

$$\frac{\partial \vec{v}}{\partial t} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \vec{v} \quad (2.3)$$

$$\nabla \cdot \vec{v} = 0 \quad (2.4)$$

Introducing cylindrical coordinates, and taking note of the (assumed) symmetry, the basic equations are

$$\frac{\partial u}{\partial t} = -\frac{1}{\rho} \frac{\partial p}{\partial r} + \nu (\nabla^2 u - \frac{u}{r^2}) \quad (2.5)$$

$$\frac{\partial v}{\partial t} = -\frac{1}{\rho} \frac{\partial p}{\partial z} + \nu \nabla^2 v \quad (2.6)$$

$$0 = \frac{\partial u}{\partial r} + \frac{u}{r} + \frac{\partial v}{\partial z} \quad (2.7)$$

where $u = v_r$, $v = v_z$, and

$$\nabla^2 = \frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{\partial^2}{\partial z^2}.$$

The boundary conditions are as follows:

At the plate, $z = 0$

$$u = v = 0. \quad (2.8)$$

At the free surface, $z = h(r, t)$

$$f_z = -p + 2\mu \frac{\partial v}{\partial z} \quad (2.9)$$

$$f_r = \mu \left(\frac{\partial v}{\partial r} + \frac{\partial u}{\partial z} \right) \quad (2.10)$$

where f_z , f_r are respectively the normal and tangential forces on the surface. The motion of the surface $z = h(r, t)$ is determined by

$$\frac{\partial h}{\partial t} = v \quad (2.11)$$

III. SOLUTION IN TERMS OF POTENTIALS

These equations are most easily solved by the introduction of two potentials ϕ , ψ , defined by the relations

$$u = -\frac{\partial \phi}{\partial r} - \frac{\partial \psi}{\partial z} \quad (3.1)$$

$$v = -\frac{\partial \phi}{\partial z} + \frac{\partial \psi}{\partial r} + \frac{v}{r} \quad (3.2)$$

Inserting these expressions into Eqs. (2.5), (2.6) and (2.7), one finds

$$\nabla^2 \phi = 0 \quad (3.3)$$

from Eq. (2.7), and

$$\frac{\partial}{\partial r} \left(\rho \frac{\partial \phi}{\partial r} \right) = -\nu \frac{\partial}{\partial r} \nabla^2 \phi - \nu \frac{\partial}{\partial z} \left[\nabla^2 \psi - \frac{v}{r} - \frac{1}{r} \frac{\partial v}{\partial z} \right]$$

$$\frac{\partial}{\partial z} \left(\rho \frac{\partial \phi}{\partial z} \right) = -\nu \frac{\partial}{\partial z} \nabla^2 \phi + \nu \left(\frac{\partial v}{\partial z} + \frac{v}{r} \right) (\nabla^2 \psi - \frac{v}{r} - \frac{1}{r} \frac{\partial v}{\partial z})$$

from Eqs. (2.5) and (2.6), respectively. Since one may also place

$$\frac{\partial \psi}{\partial t} = \beta \tag{3.4}$$

ψ must finally satisfy the equation

$$\nabla^2 \psi - \frac{\psi}{r^2} = \frac{1}{r} \frac{\partial \psi}{\partial t} \tag{3.5}$$

It is now convenient to introduce Laplace transforms in t , and Fourier-Bessel transforms in r . Writing

$$\tilde{\psi}(s; h, s) = \int_0^\infty dr \int_0^\infty dt r J_0(kr) e^{-st} \rho(s, r, t) \tag{3.6}$$

it follows that

$$\tilde{\psi}'' - k^2 \tilde{\psi} = 0 \tag{3.7}$$

$$s \tilde{\psi} = \frac{\tilde{\psi}}{\beta} \tag{3.8}$$

where primes denote differentiation with respect to s , and

$$\tilde{\rho}(s; h, s) = \int_0^\infty dr \int_0^\infty dt r J_0(kr) e^{-st} \rho(s, r, t) \tag{3.9}$$

Similarly, if

$$\tilde{\psi}(s; h, s) = \int_0^\infty dr \int_0^\infty dt r J_1(kr) e^{-st} \psi(s, r, t) \tag{3.10}$$

one finds

$$\tilde{\psi}'' - s^2 \tilde{\psi} = 0 \tag{3.11}$$

with

$$s^2 \tilde{\psi} = k^2 \tilde{\psi} \tag{3.12}$$

It should be noted that because of the structure of the original Eqs. (3.3) and (3.5), the F - B transform for ψ is taken with respect to J_0 , while that for ψ is taken with respect to J_1 .

In the same way, one writes

$$U(s; k, s) = \int_0^\infty dr \int_0^\infty dt r J_1(kr) e^{-st} u(s, r, t) \tag{3.13}$$

$$\tilde{u}(s; k, s) = \int_0^\infty dr \int_0^\infty dt r J_0(kr) e^{-st} u(s, r, t) \tag{3.14}$$

and since $J_0'(x) = -J_1(x)$,

$$\tilde{u}_1'(x) = x J_0'(x) - J_1(x),$$

U and \tilde{u} are found to be given by

$$U = k \tilde{\psi} - \tilde{\psi}' \tag{3.15}$$

$$\tilde{u} = -\tilde{\psi}' + k \tilde{\psi} \tag{3.16}$$

Solving Eqs. (3.7) and (3.11) subject to the boundary condition Eq. (2.8) yields

$$\tilde{\psi} = A \cosh ks + B \sinh ks \tag{3.17}$$

$$\tilde{\psi}' = B \cosh ks + \frac{k}{s} A \sinh ks \tag{3.18}$$

where $A = A(k, s)$, $B = B(k, s)$ are to be determined from the boundary conditions Eqs. (2.9) and (2.10). Thus, if

$$F_2(s; k, s) = \int_0^\infty dr \int_0^\infty dt r J_0(kr) e^{-st} f_2(s, r, t) \tag{3.19}$$

$$F_1(s; k, s) = \int_0^\infty dr \int_0^\infty dt r J_1(kr) e^{-st} f_1(s, r, t) \tag{3.20}$$

one finds

$$-(\epsilon + 2\gamma K^2) \frac{\delta}{\epsilon} + 2\gamma K^2 \frac{\delta}{\epsilon} = \frac{1}{\epsilon} F_z \quad (3.21)$$

$$2\gamma K^2 \frac{\delta}{\epsilon} - (\epsilon + 2\gamma K^2) \frac{\delta}{\epsilon} = \frac{1}{\epsilon} F_z \quad (3.22)$$

for $z = h$. Since h is ultimately a function of r and t , these equations are no longer linear (implicitly) and, in fact, their interpretation becomes obscure. However, if h is a smooth enough function of r and t , it is permissible to treat it as a constant and to regard the equations as linear. This point will be discussed further in the section of the validity of the various approximations. Inserting the expressions Eq. (3.17) and (3.18) in Eqs. (3.21) and (3.22) and solving the resulting linear equations for A and B , one finds

$$\rho \Delta A = - \left[-(\epsilon + 2\gamma K^2) \coth kh + 2\gamma K^2 \coth kh \right] F_z \\ - \left[-(\epsilon + 2\gamma K^2) \sinh kh + 2\gamma K^2 \sinh kh \right] F_x \quad (3.23)$$

$$\rho \Delta B = - \left[-(\epsilon + 2\gamma K^2) \frac{k}{\epsilon} \sinh kh - 2\gamma K^2 \sinh kh \right] F_z \\ + \left[-(\epsilon + 2\gamma K^2) \coth kh + 2\gamma K^2 \coth kh \right] F_x \quad (3.24)$$

where Δ is the determinant of the equations for A and B , and is given by

$$\Delta = -k\gamma K^2 (\epsilon + 2\gamma K^2) + (\epsilon + 2\gamma K^2)^2 \left[\coth kh \coth kh - \frac{k}{\epsilon} \sinh kh \sinh kh \right] \\ + k\gamma^2 K^4 \left[\coth kh \coth kh - \frac{k}{\epsilon} \sinh kh \sinh kh \right] \quad (3.25)$$

U and V are given in terms of A and B by

$$U = (-k \sinh kz + \frac{k^2}{\epsilon} \sinh kz) A + (-k \coth kz + k \coth kz) B \quad (3.26)$$

$$V = (k \coth kz - k \coth kz) A + (k \sinh kz - k \sinh kz) B \quad (3.27)$$

It is not necessary to carry these expressions further in this degree of exactness, since in all cases of interest $kh \ll 1$ and $\gamma K^2 \ll \epsilon$. In addition, $kh^2 \ll \nu$ for thin viscous films, and in most cases one even has $kh^2 < \nu$ for relatively thick viscous films. One may thus expand in series in terms of kh and $\gamma K^2/\epsilon$, and retain only the leading terms. In some cases kh^2/ν may be treated in the same way, but for many purposes it is useful to retain the more exact functional dependence, in order to examine certain aspects of the temporal behavior of the solution. The reason for not introducing these simplifications earlier was to illustrate the exact form of some of the expressions, and to utilize the explicit z dependence of Eq. (3.26) and (3.27) later for the examination of the validity of some of the approximations.

Thus one writes

$$\coth kh \approx 1 \\ \coth kh \approx \coth \sqrt{\frac{\nu}{\epsilon}} h = c(a)$$

$$\sinh kh \approx kh$$

$$\sinh kh \approx \sinh \sqrt{\frac{\nu}{\epsilon}} h = \sqrt{\frac{\nu}{\epsilon}} h \delta(a)$$

$$\Delta(a) \approx \epsilon^2 c(a) \quad (3.28)$$

$$A = \frac{1}{\rho \delta c(a)} \left[-c(a) F_z - kh(2\delta(a) - 1) F_x \right] \quad (3.29)$$

$$B = \frac{1}{\rho \delta c(a)} \left[kh \delta(a) F_z - F_x \right] \quad (3.30)$$

and eventually

$$u(h) = \frac{1}{\rho \delta c(a)} \left[[c(a) - \delta(a)] k^2 F_z - [c(a) - 1] k F_x \right] \quad (3.31)$$

$$v(h) = \frac{1}{\rho \delta c(a)} \left[(1 - c(a)) k F_z + \frac{\nu}{\epsilon} \delta(a) F_x \right] \quad (3.32)$$

If only leading terms in kh^2/ν are retained, these equations reduce to

$$u(h) = \frac{1}{\rho \delta} k^2 F_z - \frac{1}{\rho \delta} k F_x \quad (3.33)$$

$$v(h) = -\frac{\nu}{\rho \delta} k F_z + \frac{1}{\rho \delta} F_x \quad (3.34)$$

one finds

$$-(s + 2\gamma k^2)\bar{\phi} + 2\gamma k\bar{\psi} = \frac{1}{\beta} F_2 \quad (3.21)$$

$$2\gamma k\bar{\phi}' - (s + 2\gamma k^2)\bar{\psi} = \frac{1}{\beta} F_1 \quad (3.22)$$

for $s = h$. Since h is ultimately a function of r and t , these equations are no longer linear (implicitly) and, in fact, their interpretation becomes obscure. However, if h is a smooth enough function of r and t , it is permissible to treat it as a constant and to regard the equations as linear. This point will be discussed further in the section of the validity of the various approximations. Inserting the expressions Eqs. (3.17) and (3.18) in Eqs. (3.21) and (3.22) and solving the resulting linear equations for A and B , one finds

$$\rho\Delta A = - \left[-(s + 2\gamma k^2) \coth mh + 2\gamma k^2 \coth kh \right] F_2 \\ - \left[-(s + 2\gamma k^2) \sinh kh + 2\gamma km \sinh mh \right] F_1 \quad (3.23)$$

$$\rho\Delta B = - \left[-(s + 2\gamma k^2) \frac{k}{m} \sinh kh - 2\gamma k^2 \sinh kh \right] F_2 \\ + \left[-(s + 2\gamma k^2) \coth kh + 2\gamma k^2 \coth mh \right] F_1 \quad (3.24)$$

where Δ is the determinant of the equations for A and B , and is given by

$$\Delta = -k\gamma k^2 (s + 2\gamma k^2) + (s + 2\gamma k^2)^2 \left[\coth kh \coth mh - \frac{k}{m} \sinh kh \sinh mh \right] \\ + k\gamma k^2 \left[\coth kh \coth mh - \frac{m}{k} \sinh kh \sinh mh \right] \quad (3.25)$$

U and V are given in terms of A and B by

$$V = (-k \sinh ks + \frac{k^2}{m} \sinh ms) A + (-k \coth ks + k \coth ms) B \quad (3.26)$$

$$U = (k \coth ks - k \coth ms) A + (k \sinh ks - \frac{m}{k} \sinh ms) B \quad (3.27)$$

It is not necessary to carry these expressions further in this degree of exactness, since in all cases of interest $kh \ll 1$ and $\gamma k^2 \ll s$. In addition, $mh \ll \gamma$ for thin viscous films, and in most cases one even has $mh^2 \ll \gamma$ for relatively thick viscous films. One may thus expand in series in terms of kh and $\gamma k^2/s$, and retain only the leading terms. In some cases mh^2/γ may be treated in the same way, but for many purposes it is useful to retain the more exact functional dependence, in order to examine certain aspects of the temporal behavior of the solution. The reason for not introducing these simplifications earlier was to illustrate the exact form of some of the expressions, and to utilize the explicit s dependence of Eqs. (3.26) and (3.27) later for the examination of the validity of some of the approximations.

Thus one writes

$$\coth kh \approx 1$$

$$\coth mh \approx \coth \sqrt{\frac{s}{\gamma}} h = c(s)$$

$$\sinh kh \approx kh$$

$$\sinh mh \approx \sinh \sqrt{\frac{s}{\gamma}} h = \sqrt{\frac{s}{\gamma}} h s(s)$$

whence

$$\Delta(s) \approx s^2 c(s) \quad (3.28)$$

$$A = \frac{1}{\rho s c(s)} \left[-c(s) F_2 - kh(2s(s) - 1) F_1 \right] \quad (3.29)$$

$$B = \frac{1}{\rho s c(s)} \left[kh s(s) F_2 - F_1 \right] \quad (3.30)$$

and eventually

$$W(h) = \frac{1}{\rho s c(s)} \left[c(s) - s(s) \right] k^2 h F_2 - [c(s) - 1] k F_1 \quad (3.31)$$

$$U(h) = \frac{1}{\rho s c(s)} \left[(1 - c(s)) k F_2 + \frac{mh}{\gamma} s(s) F_1 \right] \quad (3.32)$$

If only leading terms in mh^2/γ are retained, these equations reduce to

$$W(h) = \frac{h^3}{3m} k^2 F_2 - \frac{h^2}{2m} k F_1 \quad (3.33)$$

$$U(h) = -\frac{h^2}{2m} k F_2 + \frac{h}{m} F_1 \quad (3.34)$$

with

$$P(h) = -Y_2 - kh Y_1 \tag{3.25}$$

It is now necessary to transform back to the variables r and t . In the first place, if

$$G(k) = \int_0^{\infty} dr r J_0(kr) g(r)$$

then

$$kG(k) = \int_0^{\infty} dr r J_1(kr) (-g'(r)) dr$$

$$k^2 G(k) = \int_0^{\infty} dr r J_0(kr) (-g'(r) - g''(r)) dr,$$

while if

$$\tilde{G}(k) = \int_0^{\infty} dr r J_1(kr) g(r)$$

then

$$k\tilde{G}(k) = \int_0^{\infty} dr r J_0(kr) (g'(r) + g''(r)).$$

Thus,

$$k^2 Y_2 \text{ transforms to } -\left(\frac{\partial^2 f_2}{\partial r^2} + \frac{1}{r} \frac{\partial f_2}{\partial r}\right)$$

$$k Y_1 \text{ transforms to } \frac{\partial f_1}{\partial r} + \frac{1}{r} f_1$$

$$k Y_2 \text{ transforms to } -\frac{\partial f_2}{\partial r}$$

$$Y_1 \text{ transforms to } f_1$$

The temporal transforms may be determined by reference to tables of Laplace transforms, and are as follows:

$$\frac{\partial f_1}{\partial t} \text{ transforms to } 1 - \frac{1}{s} \sum_{k=1}^{\infty} \frac{(-1)^k}{2k+1} e^{-s^2(k+\frac{1}{2})^2 t} \nu/h^2 = 1 - \alpha_1(t)$$

and $\frac{g(t)}{sC(s)}$ transforms to $1 - \frac{8}{\pi} \sum_{k=0}^{\infty} \frac{1}{(2k+1)^2} e^{-s^2(k+\frac{1}{2})^2 t} \nu/h^2 = 1 - \alpha_2(t)$

The functions $\alpha_1(t)$ and $\alpha_2(t)$ have the following properties:

$$\alpha_1(0) = \alpha_2(0) = 1$$

$$\alpha_1(\infty) = \alpha_2(\infty) = 0$$

For $t > h^2/\nu$

$$\alpha_1(t) = \frac{1}{\pi} \left[-\frac{s^2 t \nu}{h^2} \right]$$

$$\alpha_2(t) = \frac{8}{\pi} \left[-\frac{s^2 t \nu}{h^2} \right]$$

For small t

$$\alpha_1(t) \approx 1 - 2 \sqrt{\frac{s^2 t \nu}{h^2}} e^{-\frac{s^2 t \nu}{h^2}}$$

$$\alpha_2(t) \approx 1 - c \left(\frac{s^2 t \nu}{h^2}\right)^{\frac{3}{2}} e^{-\frac{s^2 t \nu}{h^2}} \quad (c \text{ constant})$$

If i_x and f_x are the product of spatial and temporal functions, q_x, \dot{q}_x , then for instance

$$w(h,t) = \frac{h}{\pi} (-f_2'' - \frac{1}{r} f_2') \int_0^t \alpha_2(\tau) q_2(t-\tau) d\tau - \frac{h}{\pi} (f_2' + \frac{1}{r} f_2) \int_0^t \alpha_1(\tau) q_2(t-\tau) d\tau \tag{3.36}$$

If the time of application of the surface forces is long compared to h^2/ν , then Eq. (3.33) applies, and this reduces to

$$w(h,t) = -\frac{3}{4\pi} (f_2'' + \frac{1}{r} f_2') q_2(t) - \frac{h}{2\pi} (f_2' + \frac{1}{r} f_2) q_2(t) \tag{3.37}$$

IV. VALIDITY OF APPROXIMATIONS

It is clear from Eqs. (3.31) through (3.34) that $|w(h)/u(h)| = O(kh)$ so that u (and hence v) is the predominant velocity component. (Here k is used interchangeably as a transformation variable and as a scale factor for radial variations, i.e., $u'(r)/u(r) \sim k$.) When f_z is predominant, one has

$$\left| \frac{u'}{u} \right|^2 \sim k^2 h^4 \frac{|f_z|^2}{\mu^2}$$

which is small except for unreasonably large values of $|f_z|$. If f_r is predominant, this becomes

$$h^2 \frac{|f_r|^2}{\mu^2 k}$$

which is small for modest values of f_r , but becomes large for large f_r . Similarly, one has

$$\frac{k|u|^2}{\mu} \left| \nabla^2 u - \frac{u}{r^2} \right| \sim k^2 h^4 \frac{|f_z|^2}{\mu^2}$$

which is again small except for extremely large values of $|f_z|$, (or

$$kh^2 \frac{|f_r|^2}{\mu^2}$$

if f_r is predominant), so that the non-linear terms are again negligible. Thus the neglect of the non-linear terms is certainly justified for the conditions which obtain for this problem.

Finally, the expressions given for b (Eqs. 3.39) through 3.41) indicate that the approximations made following Eq. (3.22) are valid provided either

- (1) t is small
- (2) b is small
- (3) f_z and f_r do not have abrupt discontinuities or violent oscillations.

In most cases $a_2(t)$ and $a_r(t)$ may be taken to be the same function. Taking note of Eq. (2.11), one therefore has

$$\frac{da}{dt} = -(h^3 a_z + h^2 a_r) \frac{a(t)}{\mu} \quad (3.38)$$

where

$$a_z = \frac{1}{3} (f'_z + \frac{1}{r} f_r)$$

and

$$a_r = \frac{1}{2} (f'_r + \frac{1}{r} f_r)$$

are functions of r only. The solution of Eq. (3.38), subject to the condition $a = b$ for $t = 0$, is found to be given by

$$\int_0^t \frac{a(t)dt}{\mu} = \frac{1}{a_z b} \left(\frac{b}{h} - 1 \right) - \frac{a_z}{a_r} \log \left[\frac{a_r}{a_r + a_z b} \left(\frac{b}{h} - 1 \right) + 1 \right] \quad (3.39)$$

In particular, for $a_r = 0$, this reduces to

$$\frac{1}{h} - \frac{1}{b} = 2 \int_0^t \frac{a(t)dt}{\mu}$$

i.e.,

$$\frac{b^2}{h^2} = 1 + 2b^2 a_z \int_0^t \frac{a(t)dt}{\mu} \quad (3.40)$$

On the other hand, if $a_z = 0$, the solution becomes

$$\frac{b}{h} = 1 + ba_r \int_0^t \frac{a(t)}{\mu} dt \quad (3.41)$$

From Eq. (3.38) or (3.39) it can be shown simply that

$$a_r(a_r + ba_z) \int_0^t \frac{a(t)dt}{\mu} z \frac{b}{h} - 1 \geq ba_r \int_0^t \frac{a(t)dt}{\mu}$$

The implications of these formulas will be discussed later.

Conditions (2) and (3) together are generally satisfied sufficiently to validate the procedure used, which is then analogous to "adiabatic" perturbation of the differential equations in both space and time.

V. DISCUSSION: VISCOUS EQUATIONS

It is not proposed to give a detailed numerical discussion of the basic formulae Eqs. (3.39) through (3.41), since this has been done comprehensively in the paper by Meats (M) cited earlier, which bears closely to the experimental situation. It does, however, seem desirable to correlate the final results given here with those in M, and to add a few additional comments about their general behavior.

The general equation (3.36) governing the surface motion (h) contains contributions from both normal and tangential forces. It may be noted that when one or the other of these forces is neglected, the resulting equation corresponds exactly to the continuity equation (M 3) (or M 16), with however the neglect of a term involving the spatial variation of h. This neglect is a consequence of the "adiabatic" approximation made following Eqs. (3.21) and (3.22) and discussed in the previous section, and seems justified for the situation of interest here. The resulting formulae

$$\frac{\partial^2}{\partial t^2} = 1 + 2\delta^2 \alpha_z \int_0^L \frac{g(z)}{h} dz \quad (3.40)$$

$$\frac{\partial}{\partial t} = 1 + \delta \alpha_z \int_0^L \frac{g(z)}{h} dz \quad (3.41)$$

which apply in the presence of normal or tangential forces respectively are the exact counterparts of (M 14) and (M 17), where

$$\alpha_z = \frac{1}{3} (r_z^2 + \frac{1}{2} r_z^2)$$

α_z being the normal force ($\alpha_z = g/4\pi r$), and

$$\alpha_z = \frac{1}{2} (r_z^2 + \frac{1}{2} r_z^2).$$

[$\alpha(t)$ has been taken identically 1 in M.]

It is of some interest to consider, at least briefly, the relation between these two cases. It is clear, first, that the film moves more rapidly under the influence of a tangential force than under a normal one. If one equates the surface height for the two conditions (normal and tangential force alone), and assumes a scale length L along the surface, so that $\alpha_z \sim r_z/L$, $\alpha_z \sim r_z/L^2$, one finds that for small times one must have

$$r_z \approx \frac{\delta}{L} r_z \quad (5.1)$$

for equal displacements, while for large times

$$r_z \approx \sqrt{\frac{2h}{L}} r_z \quad (5.2)$$

Formula (5.1) is understandable physically by noting that the tangential force need only move a thickness δ initially, while the normal force has to move an amount determined by its scale length L. The interpretation of (5.2) is not as clear. In both cases the greater sensitivity of the motion to tangential forces is clear.

The final correlation that need be made between the two approaches concerns the temporal decay of any disturbance. In this treatment the behavior follows directly from the functions $G_1(t)$ and $G_2(t)$ described following (3.35). It is immediately evident that the temporal part of the motion has the leading term

$$-\frac{h^2}{4g^2} t \quad (5.3)$$

in agreement with (M 21).

It is of significance to note that the fractional motion of the surface is very sensitive to the absolute value of the initial height. Thus, the "halving" time is

$$t \approx \frac{2h}{\alpha_z g^2} \quad (5.4)$$

$$t \sim \frac{\mu}{\rho_0 g} \quad (5.5)$$

in the case of a normal and a tangential force respectively, δ being the initial thickness. Taking the normal force case, with $t = 10^{-4}$ sec, $\mu = 10$ poise, peak pressure = 2×10^9 dynes/cm² and scale length 5 cm, one finds

$$\frac{\delta}{h} = 1.002 \quad \text{for} \quad \delta = 2 \times 10^{-3} \text{ cm}$$

$$\frac{\delta}{h} = 2.45 \quad \text{for} \quad \delta = 7 \times 10^{-2} \text{ cm}$$

This mechanism is therefore adequate to describe the substantial motion of a thick film in a short time, but indicates only a very small motion of a thin film in a similar time. Experimentally it has been found, however, that some portions of the film are sometimes completely removed. The position of these portions being reasonably correlated with the regions of major surface force variations as described by the functions ρ_2 (and ρ_1). This leads one to surmise that a combination of phenomena is taking place, of which the viscous flow is only one. The following section describes another effect, which together with the viscous flow seems adequate to describe the observed results, at least qualitatively.

VI. THERMAL CONDUCTION AND EVAPORATION

In the following it is supposed that the temperatures associated with the high surface forces are such as to cause at least partial evaporation of the viscous film, and a rough calculation is attempted to estimate the rate at which this may occur.

$$\begin{aligned} \text{---} & z = 0 & T = T_0 \\ \text{---} & z = \zeta & T = T_v \\ \text{---} & z = \infty & T = T_L \end{aligned}$$

The initial surface of the film is assumed at $z = 0$, while the liquid-vapor interface is at $z = \zeta$ (a function of time). It is assumed that the time scale is such that the vapor remains on top of the liquid as shown during the period in question, and that the liquid is infinite in extent. (These two points will be discussed below.)

$$\begin{aligned} \lambda &= \text{heat of vaporization} \\ \rho &= \text{density} \\ c &= \text{heat capacity} \\ k &= \text{thermal conductivity} \\ T_v &= \text{vaporization temperature} \\ T_L &= \text{liquid temperature (at one-plate)} \\ \rho_0 &= h/\rho c \end{aligned}$$

The subscript "1" refers to the vapor, "2" to the liquid.

The equations governing the temperature variation are

$$\begin{aligned} \frac{\partial T_1}{\partial t} &= \rho_1^{-1} \frac{\partial^2 T_1}{\partial z^2} & z < \zeta \quad (\text{vapor}) \\ \frac{\partial T_2}{\partial t} &= \rho_2^{-1} \frac{\partial^2 T_2}{\partial z^2} & z > \zeta \quad (\text{liquid}) \end{aligned} \quad (6.1)$$

The boundary conditions are

$$\begin{aligned} T_1 &= T_0 & z = 0 & (6.2) \\ T_1 &= T_2 = T_v & z = \zeta & (6.3) \\ -\lambda \rho \frac{\partial \zeta}{\partial t} &= (h_1 \frac{\partial T_1}{\partial z} - h_2 \frac{\partial T_2}{\partial z}) & z = \zeta & (6.3) \\ T_2 &= T_L & z = \infty & (6.5) \end{aligned}$$

The solutions have the form (cf "Die Differential und Integralgleichungen der Mathematik und Physik" by P. Frank and R. V. Mises, VII, p.565)

$$\tau_1 = A_1 + B_1 \operatorname{erf} \left(\frac{x}{2a_1 \sqrt{\zeta}} \right) \tag{6.6}$$

$$\tau_2 = A_2 + B_2 \operatorname{erf} \left(\frac{x}{2a_2 \sqrt{\zeta}} \right) .$$

Then

$$A_1 = \tau_0 \tag{6.7}$$

$$A_2 = \tau_0 = \tau_1 \tag{6.8}$$

$$A_1 + B_1 \sqrt{V_1} = A_2 + B_2 \sqrt{V_2} = \tau_1 \tag{6.9}$$

where

$$\sqrt{V_i} = \operatorname{erf} \left(\frac{x}{2a_i \sqrt{\zeta}} \right) \quad i = 1, 2$$

Since the boundary conditions are independent of t , one must have

$$\zeta = a \sqrt{\zeta} \tag{6.10}$$

and it remains to determine a .

It is clear that

$$\begin{aligned} B_1 &= - \frac{(\tau_0 - \tau_1)}{a_1 \sqrt{V_1}} \\ B_2 &= - \frac{(\tau_1 - \tau_2)}{a_2 \sqrt{V_2}} \\ A_2 = \tau_1 &= B_2 + \tau_1 = B_2 \sqrt{V_2} . \end{aligned}$$


The boundary condition (6.6) then leads to

$$A_1 + B_1 \sqrt{V_1} = \tau_0 = \tau_1 = B_2 \sqrt{V_2} + \tau_1 = B_2 \sqrt{V_2} + A_1 + B_1 \sqrt{V_1} .$$

For the conditions under which the vapor is highly compressed, it seems adequate, as an approximation, to take $a_1 = a_2$, $c_1 = c_2$, $\rho_1 = \rho_2$ (at least initially.) Writing $\beta = a/2a$, the determining equation for β becomes

$$- \frac{\sqrt{\pi} \lambda \beta}{c} = - \frac{\tau_0 - \tau_1}{\sqrt{V_1}} e^{-\beta^2} + \frac{\tau_1 - \tau_2}{1 - \sqrt{V_1}} e^{-\beta^2}$$

Multiplying through by $\sqrt{V_1} e^{\beta^2}$, one notes that the solution must lie between β_0 and β_1 as shown in the figure

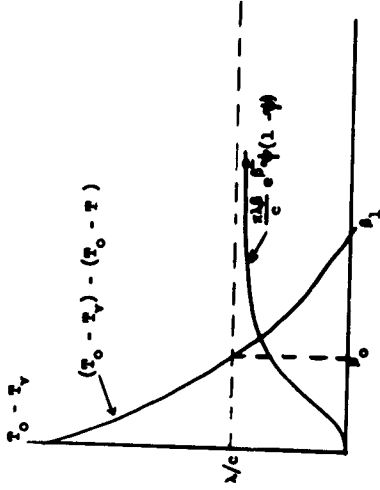

Since $\tau_1 - \tau_2 \ll \tau_0 - \tau_1$, while $\lambda/c(\tau_1 - \tau_2)$ is of the order of 1, one may easily convince oneself that it is permissible to use the asymptotic form of $\sqrt{V_1}$, i.e.,

$$1 - \sqrt{V_1} \approx a^{-2} \beta^2 / \sqrt{\pi} \beta .$$

Thus,

$$(\tau_0 - \tau_2) a^{-2} \beta^2 = \sqrt{\pi} \beta_1 (\tau_1 - \tau_2) \tag{6.12}$$

$$(\tau_0 - \tau_2) a^{-2} \beta_0^2 = \sqrt{\pi} \beta_0 [(\tau_1 - \tau_2) + \lambda/c] \tag{6.13}$$

It thus seems that for a thin film the combination of thermal flux and surface forces could result in the viscous liquid disappearing entirely in regions of high pressure variation.

18

$$T_v - T_f = .01 (T_0 - T_f) \quad (6.14)$$

see finds

$$1.65 < \beta < 1.65 \quad (6.15)$$

so that

$$\alpha = 3.5 \text{ m}$$

Putting

$$k = 10^{-3}$$

$$\rho = 1$$

$$c = .4$$

leads to

$$m = .05$$

and hence to

$$C = .18 \sqrt{\epsilon} \quad (6.16)$$

For $\epsilon = 10^{-4}$ this yields

$$C = 1.8 \times 10^{-3} \text{ cm} \quad (6.17)$$

so that nearly one mill of the liquid could be evaporated in this time!

It remains to discuss the approximations introduced initially. Taking the liquid to be infinitely deep is too optimistic an assumption. The presence of a supporting plate, possibly of high heat capacity, will tend to reduce the motion of (the liquid-vapor interface.) On the other hand, assuming the vapor to remain completely in place is much too pessimistic. The surface forces will tend to move the upper layer of the vapor and thus expose the liquid-vapor interface to a higher heat flux, tending to compensate for the presence of the supporting plate.

A final remark concerns the viscosity of the film which decreases with increasing temperature, resulting in some rapid motion under the surface forces.

END

19