

**UNCLASSIFIED**

**AD 404 894**

---

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**UNCLASSIFIED**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-35



Department of AERONAUTICS and ASTRONAUTICS  
STANFORD UNIVERSITY

404894

MAX ANLIKER  
and  
WEN-YI SHIH PI

# EFFECTS OF GEOMETRY AND UNIDIRECTIONAL BODY FORCES ON THE STABILITY OF LIQUID LAYERS

404 894

MAY 23 1963



MARCH  
1963

Technical Report No. 4  
Prepared for the Office of Naval Research of the U.S. Navy  
Under Contract Nonr-225 (30)  
Project NR 064-425

SUDAER  
NO. 150

Department of Aeronautics and Astronautics  
Stanford University  
Stanford, California

EFFECTS OF GEOMETRY AND UNIDIRECTIONAL BODY FORCES  
ON THE STABILITY OF LIQUID LAYERS

by

Max Anliker  
and  
Wen-Yi Shih Pi

SUDAER NO. 150  
March 1963

The work here presented was supported by the United States  
Navy under Contract NONR 225(30), monitored by the Mechanics  
Branch of the Office of Naval Research.

Reproduction in whole or in part  
is permitted for any purpose of  
the United States Government.

## SUMMARY

The stability of liquid layers with a prescribed interface geometry in the presence of surface tension and unidirectional body forces is investigated theoretically by means of a small vibration analysis. The fluid of the layers is assumed to be incompressible and inviscid and the flow irrotational. Particular emphasis is given to the effects of geometry and unidirectional body forces on the stability of such layers. They are studied by means of a semi-inverse method which allows the exact determination of particular eigenvibrations.

Following the classical method of investigating the stability of systems, we establish the equations of motion for small perturbations of the equilibrium configuration and formulate the boundary conditions for both two- and three-dimensional layers with interface surfaces having a constant mean curvature. We linearize the pertinent equations and express them in terms of the velocity potential. By separating the time and space variables, the vibration problem is reduced to an eigenvalue problem. Exact eigenvibrations are sought by considering solutions to Laplace's equation which contain a number of free parameters. The arbitrariness of these parameters is reduced by enforcing the solution to satisfy the interface boundary condition. Integrating the differential equation of the streamlines defined by such solutions and requiring the solid supporting surface to constitute a streamline, we arrive at rigorous vibration solutions. If we introduce sufficiently many free parameters we are in a position to review exact vibration solutions corresponding to a family of liquid layers with the same interface surface and different solid supporting surfaces and thus different thickness distributions.

The stability criteria of the layers are presented in terms of inequalities involving the magnitude of either the unidirectional body force,  $g$ , or the nondimensional stability parameter  $\mu = T/\rho g a^2$  in which  $T$  denotes the surface tension,  $\rho$  the fluid density and " $a$ " a characteristic length of the liquid layer. It is shown that the variation of the thickness of a fluid layer may significantly influence its stability, especially for body forces in the near-zero region. The

results also reveal that for some solid supporting surfaces, layers of the type considered are only stable if the body forces are larger than a certain positive value, while for other surfaces stability prevails as long as the body force exceeds a certain negative limit value. This fact may be utilized in the design of containers of fluid for near-zero gravity conditions in such a manner that the fluid adheres to a certain area of the container.

The interpretation of the results obtained in this analysis is subject to the restriction that the dimensions of the interface surface be large compared with the effective range of the contact forces, since no contact angle considerations have been introduced in explicit form.

## TABLE OF CONTENTS

|                                                                                                        | Page |
|--------------------------------------------------------------------------------------------------------|------|
| I. Introduction . . . . .                                                                              | 1    |
| II. Basic Equations . . . . .                                                                          | 3    |
| III. Semi-Inverse Method of Finding Exact Eigenvibrations . . .                                        | 5    |
| IV. Eigenvibrations and Stability of Two-Dimensional Layers<br>with Flat Interface . . . . .           | 6    |
| 4.1. Rigorous solutions to free vibration problem . . . .                                              | 6    |
| 4.2. Stability criteria . . . . .                                                                      | 11   |
| V. Eigenvibrations and Stability Criteria of Three-Dimensional<br>Layers with Flat Interface . . . . . | 14   |
| VI. On the Stability of Layers with Uniformly Curved Interface                                         |      |
| 6.1. Two-dimensional layers with curved interface . . . .                                              | 18   |
| 6.2. Two-dimensional layers with slightly curved interface                                             | 20   |
| 6.3. Three-dimensional layers with curved interface . . .                                              | 22   |
| 6.4. Three-dimensional layers with slightly curved<br>interface . . . . .                              | 24   |
| VII. Conclusion . . . . .                                                                              | 28   |
| References . . . . .                                                                                   | 29   |
| Figures . . . . .                                                                                      | 30   |

# NOTATION

|                       |                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| $A, B, C, D, E$       | Constant coefficients                                                                                                            |
| $A_n, B_n, D_n$       | Coefficients of infinite or finite series                                                                                        |
| $F(t)$                | Arbitrary function of time                                                                                                       |
| $F(r, z), X(x), Z(z)$ | Functions introduced to separate variables                                                                                       |
| $H$                   | Mean curvature $H = \frac{1}{2} \left( \frac{1}{R_1} + \frac{1}{R_2} \right)$                                                    |
| $J_m$                 | $m^{\text{th}}$ order Bessel function of first kind                                                                              |
| $P_{p_n}^m$           | Associated Legendre functions of degree $m$ and order $p_n$                                                                      |
| $R_1, R_2$            | Principal radii of curvature of the interface surface                                                                            |
| $S$                   | Bounding surface (interface surface equation $S_1 = 0$ ; rigid surface equation $S_2 = 0$ )                                      |
| $T$                   | Surface tension                                                                                                                  |
| $a$                   | Radius of equilibrium interface surface or nondimensional depth of fluid layer with flat interface surface at $x = 0$ or $r = 0$ |
| $b$                   | Half length of finite flat uniform fluid layer                                                                                   |
| $g$                   | Magnitude of body forces                                                                                                         |
| $h$                   | Characteristic length of layers                                                                                                  |
| $i$                   | $\sqrt{-1}$                                                                                                                      |
| $k, l, p, l_n, p_n$   | Constants used in separation of variables                                                                                        |
| $\vec{k}$             | Body force                                                                                                                       |
| $m, n$                | Integers                                                                                                                         |
| $\vec{n}$             | Unit vector normal to rigid surface $S_2$                                                                                        |
| $\bar{p}$             | Pressure in fluid                                                                                                                |
| $p_e$                 | Ambient pressure distribution at equilibrium interface surface                                                                   |

# Notation (cont'd)

|                    |                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $r, \theta$        | Polar coordinates                                                                                                                                                           |
| $r, z, \theta$     | Cylindrical coordinates                                                                                                                                                     |
| $r, \theta, \phi$  | Spherical coordinates                                                                                                                                                       |
| $r_0$              | Nondimensional radius of axially symmetric flat interface, also nondimensional radius at $\theta = 0$ of the rigid supporting surface $S_2$ of layers with curved interface |
| $t$                | Time                                                                                                                                                                        |
| $\vec{v}$          | Fluid velocity                                                                                                                                                              |
| $x, z$             | Rectangular coordinates                                                                                                                                                     |
| $\bar{x}, \bar{z}$ | Non-dimensional length parameters $\bar{x} = \frac{x}{h}$ , $\bar{z} = \frac{z}{h}$                                                                                         |
| $x_0$              | $2x_0$ = non-dimensional length of two-dimensional fluid layers with flat interface at $z = 0$                                                                              |
| $\phi$             | Velocity potential                                                                                                                                                          |
| $\psi$             | Potential function in terms of space variables                                                                                                                              |
| $\Omega$           | Potential of body forces                                                                                                                                                    |
| $\alpha$           | Largest angle subtended by layers with curved interface                                                                                                                     |
| $\alpha_n$         | Coefficient of infinite series                                                                                                                                              |
| $\beta$            | $\frac{\sigma h}{g}$ or $\frac{\sigma a}{g}$                                                                                                                                |
| $\zeta$            | First order small perturbation of interface surface                                                                                                                         |
| $\lambda$          | Free parameter                                                                                                                                                              |
| $\mu$              | Stability parameter $\mu \equiv \frac{T}{\rho g h^2}$ , or $\frac{T}{\rho g a^2}$                                                                                           |
| $\rho$             | Density of fluid                                                                                                                                                            |
| $\sigma$           | Frequency parameter (square of eigenfrequency)                                                                                                                              |

## I. INTRODUCTION

The significance of the phenomenon of interfacial instability of liquid layers in certain ablative heat protection problems, as well as in the behavior of fluids in containers under near-zero gravity conditions, has been repeatedly pointed out.<sup>(1-3)</sup> The theoretical analysis of this phenomenon has so far been largely restricted to layers of extremely simple geometry, in particular to layers with a uniform thickness.<sup>(4-11)</sup> In this investigation we consider layers with a non-uniform thickness and interface surfaces with a constant mean curvature. With the aid of the results of a recent study of the effects of curvature and unidirectional body forces on the stability of liquid layers<sup>(2)</sup> and the application of a semi-inverse method of finding exact solutions to the free oscillation problem of a fluid in a container<sup>(12)</sup> we derive stability criteria without resorting to approximate methods.

As in reference (2), the density of fluid separated by the interface from the layer under consideration is taken as zero while the fluid of the layer is assumed to be incompressible and inviscid and the flow irrotational. Moreover, we again define the equilibrium configuration of a liquid layer as stable whenever any initial disturbance of sufficiently small amplitudes and velocities leads to a motion in which the amplitudes and velocities remain arbitrarily small. Also we assume that the eigenfunctions corresponding to the free vibration problem are complete, which allows us to express the motion of the fluid due to any initial disturbance as a linear combination of the eigenvibrations. We therefore may deduce as the necessary and sufficient stability condition that all the eigenvalues (squares of the eigenfrequencies) be real and positive.

For layers of uniform thickness spread over various portions of the exterior or interior of cylinders and spheres the stability criteria could be presented in terms of inequalities involving the magnitude of either the unidirectional body force,  $g$ , or the nondimensional stability parameter

$$\mu = \frac{T}{\rho g a^2}$$

in which  $T$  denotes the surface tension,  $\rho$  the fluid density and  $a$  the radius of the equilibrium interface surface. With these layers it is consistently the first antisymmetric eigenvibration which leads to the stability criterion, since the corresponding eigenfrequency ceases first to be real when we vary the body force (or stability parameter) and start out with a value for which the equilibrium is stable. We anticipate that this fact also prevails in layers with a variable thickness and therefore limit ourselves to determining only the eigenfrequency of the first antisymmetric eigenvibration.

While exact analytical solutions to the small vibration problem of layers with a nonuniform thickness can in general not be obtained, it is nevertheless possible to determine rigorously one single eigenvibration in certain cases by means of a simple semi-inverse method.<sup>(12)</sup> By choosing to find the first antisymmetric free oscillation with the aid of this method and comparing the results for various layers, we can study the influence of the thickness variation on the stability.

## II. BASIC EQUATIONS

We consider layers of an incompressible liquid which are bounded by a rigid wetted surface  $S_2$  and an interface surface  $S_1$ . The interface  $S_1$  separates the fluid of the layer under consideration from a neighboring gas or fluid of zero density. Any motion of the liquid is assumed as irrotational, which allows the velocity  $\vec{v}$  to be expressed with the aid of a velocity potential  $\Phi$  as

$$\vec{v} = -\nabla\Phi \quad (1)$$

Denoting the Laplacian by  $\nabla^2$ , the equation of continuity has the form

$$\nabla^2\Phi = 0 \quad (2)$$

We consider the presence of a body force  $\vec{k}$  per unit mass which can be derived from a potential  $\Omega$  such that

$$\vec{k} = -\nabla\Omega \quad (3)$$

Assuming the fluid as inviscid and having a density  $\rho$ , a pressure  $\bar{p}$ , we may express the equilibrium in the sense of d'Alembert in the form

$$\nabla \left[ \bar{p} + \rho \left( \Omega - \frac{\partial\Phi}{\partial t} + \frac{1}{2} v^2 \right) \right] = 0 \quad (4)$$

Integrating Eq. (4) and denoting by  $F(t)$  an arbitrary function of time we obtain Euler's equation

$$\bar{p} + \rho \left( \Omega - \frac{\partial\Phi}{\partial t} + \frac{1}{2} v^2 \right) = F(t) \quad (5)$$

Without loss of generality we may include  $F(t)$  in the time variance of  $\Phi$ . In addition to this we may linearize (5) for small flow velocities by neglecting the term  $(1/2)\rho v^2$ , which reduces equation (5) to

$$\bar{p} = \rho \left( \frac{\partial\Phi}{\partial t} - \Omega \right) \quad (6)$$

The kinematic boundary condition of the fluid layer can be written in the form

$$\frac{DS}{Dt} = 0 \quad (7)$$

where

$$S = 0 \quad (8)$$

represents the equation of the bounding surface in question.

Denoting the surface tension by  $T$  and the external pressure by  $p_e$ , the dynamic equilibrium of the interface surface  $S_1$  can be expressed as

$$\bar{p} - p_e = T \left( \frac{1}{R_1} + \frac{1}{R_2} \right) \equiv 2TH \quad (9)$$

where  $R_1$  and  $R_2$  are the principal radii of curvature and  $H$  the mean curvature. (The radii of curvature are taken as positive if the center of curvature lies within the fluid.)

### III. SEMI-INVERSE METHOD OF FINDING EXACT EIGENVIBRATIONS

In investigating the problem of the free oscillations of an incompressible fluid in an axially symmetric container, considering exclusively flat interface surfaces and neglecting the effects of surface tension, B. A. Troesch<sup>(12)</sup> made use of a semi-inverse method which yields a rigorous solution for one of the eigenvibrations. We apply the basic idea of this method to our fluid layers in the following manner.

Instead of prescribing the geometry of a layer completely, we merely select the shape of the interface surface in a suitable manner. For appropriately chosen solutions to Laplace's equation which contain sufficiently many free parameters it is possible to satisfy the interface boundary conditions in the presence of surface tension and body forces. By establishing the streamlines defined by such solutions and requiring the solid supporting surface to constitute a streamline, we are in a position to review rigorous vibration solutions corresponding to a class of liquid layers with the same interface and different solid supporting surfaces and thus different thickness distributions.

It should be noted that the selection of the shape of the interface together with the body forces and surface tension define a certain ambient pressure distribution, the feasibility of which can be dealt with separately.

#### IV. EIGENVIBRATIONS AND STABILITY OF TWO-DIMENSIONAL LAYERS WITH FLAT INTERFACE

##### 4.1. Rigorous Solutions to Free Vibration Problem

We refer the layer to Cartesian coordinates  $(x, z)$  such that for static equilibrium the interface surface is characterized by  $z = 0$  (See Fig. 1). During the motion resulting from a small disturbance the interface surface  $S_1$  deviates from its equilibrium position by a small distance  $\xi(x, t)$  and the equation for  $S_1$  assumes the form

$$S_1(x, z, t) = z - \xi(x, t) = 0 \quad (10)$$

With Eq. (10) the mean curvature  $H$  of the interface surface is given by

$$2H = \frac{1}{R_2(x, t)} = - \frac{\frac{\partial^2 \xi}{\partial x^2}}{\left[1 + \left(\frac{\partial \xi}{\partial x}\right)^2\right]^{3/2}} \quad (11)$$

We assume that  $\xi(x, t)$  as well as its derivatives are of first order small and neglect all terms which are of second or higher order small. Thus Eq. (11) reduces to

$$2H = - \frac{\partial^2 \xi(x, t)}{\partial x^2} \quad (12)$$

We shall restrict ourselves for the present to unidirectional body forces with the potential

$$\Omega = gz \quad (13)$$

Substituting Eqs. (12), (13) and (6) into the dynamic boundary condition (9) we obtain

$$\rho \left[ \frac{\partial \Phi}{\partial t} (x, z, t) - gz \right] - p_e(x) = -T \frac{\partial^2 \xi(x, t)}{\partial x^2} \quad (14)$$

With Eqs. (1) and (10) the kinematic boundary condition (7) can be written in linearized form as

$$\frac{\partial \phi}{\partial z} = - \frac{\partial \xi}{\partial t} \quad (15)$$

By differentiating (14) with respect to time and making use of (15) we can combine the kinematic and dynamic boundary conditions at the interface surface into a relation for the velocity potential

$$\rho \left( \frac{\partial^2 \phi}{\partial t^2} + g \frac{\partial \phi}{\partial z} \right) = T \frac{\partial^3 \phi}{\partial x^2 \partial z}$$

With the aid of Eq. (2) we can write this combined boundary condition also in the form

$$\rho \left( \frac{\partial^2 \phi}{\partial t^2} + g \frac{\partial \phi}{\partial z} \right) + T \frac{\partial^3 \phi}{\partial z^3} = 0 \quad (16)$$

Neglecting consistently terms which are of second and higher order small, we may require (16) to be satisfied at the equilibrium interface  $z = 0$ , rather than at the disturbed interface  $z = \xi(x, t)$ .

Since we are seeking solutions in the form of harmonic oscillations we separate the space and time variables according to

$$\phi(x, z, t) = \psi(x, z) e^{i\sqrt{\sigma} t} \quad (17)$$

and thereby reduce the initial-boundary value to an eigenvalue problem with  $\psi(x, z)$  as eigenfunction and  $\sigma$  as eigenvalue. By substituting (17) into (2) and (16) we find

$$\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial z^2} = 0 \quad (18)$$

and

$$\left[ \rho \left( -\sigma \psi + g \frac{\partial \psi}{\partial z} \right) + T \frac{\partial^3 \psi}{\partial z^3} \right]_{z=0} = 0 \quad (19)$$

We note that the eigenvalue problem for  $\psi$  is of a special type since the eigenvalue appears exclusively in the boundary condition and not in the differential equation and since the boundary condition (19) contains derivatives of higher order than does the differential equation. With the transformations

$$\bar{x} = \frac{x}{h}, \quad \bar{z} = \frac{z}{h}$$

where  $h$  is a characteristic length of the layer, we can rewrite Eqs. (18) and (19) in terms of nondimensional space parameters

$$\frac{\partial^2 \psi}{\partial \bar{x}^2} + \frac{\partial^2 \psi}{\partial \bar{z}^2} = 0 \quad (18')$$

$$\left[ -\beta \psi + \frac{\partial \psi}{\partial \bar{z}} + \mu \frac{\partial^3 \psi}{\partial \bar{z}^3} \right]_{\bar{z}=0} = 0 \quad (19')$$

where

$$\beta = \frac{\sigma h}{g} \quad \text{and} \quad \mu = \frac{T}{\rho g h^2} \quad (20)$$

For the sake of convenience we replace again  $\bar{x}$  by  $x$  and  $\bar{z}$  by  $z$  with the understanding that  $x$  and  $z$  are now nondimensional length parameters. The eigenvalue problem can thus be presented in the form

$$\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial z^2} = 0 \quad (18)$$

$$\left[ -\beta \psi + \frac{\partial \psi}{\partial z} + \mu \frac{\partial^3 \psi}{\partial z^3} \right]_{z=0} = 0 \quad (19'')$$

We consider now the class of exact solutions for  $\psi$  which can be obtained by separating the space variables:

$$\psi(x, z) = X(x) \cdot Z(z) \quad (21)$$

By substituting (21) into (18) we deduce

$$\frac{X''}{X} = -\frac{Z''}{Z} = k^2 \quad (22)$$

whereby  $k^2$  may assume positive as well as negative values. We consider first  $k \neq 0$ . According to (22)  $\psi$  must be of the form

$$\psi(x, z) = [A \sinh(kx) + B \cosh(kx)] [C \sin(kz) + \cos(kz)] \quad (23)$$

if  $k \neq 0$ . By requiring expression (23) to satisfy the interface boundary condition (19'') we obtain

$$-\beta + k(1 - \mu k^2)C = 0 \quad (24)$$

Since the solid supporting surface  $S_2$  of the layer must constitute a streamline,  $S_2$  is given by

$$\nabla \psi \cdot \vec{n} = 0 \quad (25)$$

or

$$\frac{\partial \psi}{\partial x} dz - \frac{\partial \psi}{\partial z} dx = 0 \quad (26)$$

where  $\vec{n}$  is the normal vector of the surface. Integrating (26) by making use of Eqs. (21), (22) and (23), we find

$$\begin{aligned} S_2(x, z) &= X'(x) \cdot Z'(z) - E \\ &= k^2 [A \cosh(kx) + B \sinh(kx)] \cdot [C \cos(kz) - \sin(kz)] - E = 0 \end{aligned} \quad (27)$$

where  $E$  is a constant.

If we restrict ourselves to layers which are symmetric with respect to the  $z$ -axis, we have

$$B = 0$$

Hence the eigenfunction and the solid surface  $S_2$  are given by

$$\psi(x, z) = A \sinh(kx) [C \sin(kz) + \cos(kz)] \quad (28)$$

and

$$S_2(x, z) = \cosh(kx) [C \cos(kz) - \sin(kz)] - E = 0 \quad (29)$$

where  $E$  is a new constant. We specifically consider the following three cases:

(a)  $E = 0$

In this case the layer is of uniform depth and bounded by the solid surfaces  $x = \pm x_0$  and  $z = -a$  as illustrated in Fig. 2. The corresponding value for  $k$  is purely imaginary

$$k = i\ell \quad (30)$$

and

$$x_0 = \frac{2n - 1}{2\ell} \pi, \quad \ell > 0, \quad n = \text{integer} \quad (31)$$

$$C = -1 \tanh(\ell a) \quad (32)$$

Substituting (30) and (32) into (24) and (28) we obtain a simple relation for the eigenvalue  $\sigma$  and the corresponding eigenfunction:

$$\beta = \frac{\sigma h}{g} = \ell(1 + \mu\ell^2) \tanh(\ell a) \quad (33)$$

$$\Psi(x, z) = D \sin(\ell x) \cosh[\ell(a + z)] \quad (34)$$

(b)  $E \neq 0$

The parameters  $C$  and  $E$  in Eqs. (29) may be determined for example by requiring the surface  $S_2$  to pass through the points  $(0, -a)$  and  $(x_0, 0)$ . Thus we find for an arbitrary  $k$  (real or imaginary)

$$\beta = \frac{\sigma h}{g} = k(1 - \mu k^2) \frac{\sin(ka)}{\cosh(kx_0) - \cos(ka)} \quad (35)$$

$$S_2(x, z) = \cosh(kx) \left[ \cos(kz) - \frac{\cosh(kx_0) - \cos(ka)}{\sin(ka)} \sin(kz) \right] - \cosh(kx_0) = 0$$

$$\Psi(x, z) = D \sinh(kx) [\cos k(a + z) - \cos(kz) \cosh(kx_0)] \quad (36)$$

Representative layers corresponding to various values of  $k$  are shown in Fig. 3.

(c)  $k = 0$

In this case the solution to (18) is of the form

$$\Psi(x, z) = (Ax + B)(Cz + D) \quad (37)$$

and the interface boundary condition (19") is satisfied if

$$C = \beta D \quad (38)$$

Considering only layers which are symmetric with respect to  $x = 0$ , we require

$$B = 0 \quad (39)$$

The integration of (26) leads to the expression

$$S_2(x, z) = \left(z + \frac{D}{C}\right)^2 - x^2 - E = 0 \quad (40)$$

Choosing the values of  $(D/C)$  and  $E$  such that the surface  $S_2$  contains the points  $(0, -a)$ ,  $(x_0, 0)$  we obtain

$$\frac{C}{D} = \beta = \frac{2a}{a^2 + x_0^2} \quad (41)$$

and layers as illustrated in Fig. 4.

#### 4.2. Stability Criteria

Assuming that the liquid layer under consideration has finite dimensions and a complete set of eigenfunctions  $\psi_1, \psi_2, \dots, \psi_n, \dots$ , we may express the motion of the fluid due to any initial disturbance in the form

$$\Phi = \sum_{n=1,2,\dots} \alpha_n \psi_n e^{i\sqrt{\sigma_n} t} \quad (42)$$

from which we immediately derive

$$\sigma_n \text{ real, } \sigma_n > 0, \quad n = 1, 2, \dots \quad (43)$$

as the necessary and sufficient stability criterion.

We apply this criterion to the eigenvibration obtained in a rigorous manner in the previous section and we consider again the three different cases:  $E = 0$ ,  $E \neq 0$ , and  $k = 0$ .

(a)  $E = 0$

Requiring  $\sigma > 0$  in (33), we deduce

$$g(1 + \mu^2) > 0 \quad (44)$$

With Eqs. (20), (31) and

$$x_0 = \frac{b}{h} \quad (45)$$

where  $2b$  is the width of the layer [See Fig. 2] we can reduce (44) to the classical result

$$\frac{\rho g}{T} > - \frac{\pi^2}{4b^2} \quad (46)$$

(b)  $E \neq 0$

From Eq. (35) follows

$$\sigma > 0 \text{ if } gk(1 - \mu k^2)\sin(ka) > 0 \quad (47)$$

We note that Eqs. (35) and (36) do not change if we replace  $k$  by  $-k$  and may therefore restrict ourselves to positive values of  $k$ . Since the slope of the solid surface  $S_2$  at  $x = x_0$ ,  $z = 0$  is given by

$$\left. \frac{dz}{dx} \right|_{\substack{x=x_0 \\ z=0}} = \frac{\sinh(kx_0)\sinh(ka)}{\cosh(kx_0)[\cosh(kx_0) - \cos(ka)]}$$

its sign is the same as that of  $\sin(ka)$ .

This means that we have a convex solid surface for  $\sin(ka) < 0$  and a concave one for  $\sin(ka) > 0$ . Hence considering positive as well as negative values for  $g$  we may restrict ourselves to  $\sin(ka) > 0$  without loss of generality. We obtain as stability condition

$$\sigma > 0 \quad \text{if} \quad \frac{\rho g}{T} > \frac{k^2}{h^2} [\sin(ka) > 0] \quad (48)$$

Similarly, we deduce for  $k = i\ell$

$$\sigma > 0 \quad \text{if} \quad \frac{\rho g}{T} > -\frac{\ell^2}{h^2} \quad (49)$$

(c)  $k = 0$

In this case it immediately follows from Eq. (41) that

$$\sigma > 0 \quad \text{if} \quad g > 0 \quad (50)$$

For a real  $k$  the layers are only stable if the body forces exceed a certain positive limit value while for an imaginary  $k$  the body forces may come close to a certain negative limit value before instability is reached. We conclude from this that the variation of the thickness of a liquid layer may significantly influence the stability criterion. Besides this, we may utilize this fact in designing containers of fluids for near-zero gravity conditions in such a manner that the fluid adheres to a certain area of the container.

# V. EIGENVIBRATIONS AND STABILITY CRITERIA OF THREE-DIMENSIONAL LAYERS WITH FLAT INTERFACE

As illustrated in Fig. 5, we refer the layer to cylinder coordinates  $z, r, \theta$  such that for equilibrium the interface surface  $S_1$  is defined by  $z = 0$ . Denoting the deviation of the interface from its equilibrium position by  $\xi(r, \theta, t)$  we may write for the surface  $S_1$

$$S_1(z, r, \theta, t) = z - \xi(r, \theta, t) = 0 \quad (51)$$

and its mean curvature in linearized form

$$2H = - \left( \frac{\partial^2 \xi}{\partial r^2} + \frac{1}{r} \frac{\partial \xi}{\partial r} + \frac{1}{r^2} \frac{\partial^2 \xi}{\partial \theta^2} \right) \quad (52)$$

As before, we assume the presence of body forces whose potential is defined by Eq. (13). The combination of the dynamic and kinematic boundary conditions leads to

$$\left[ \rho \left( \frac{\partial^2 \phi}{\partial t^2} + g \frac{\partial \phi}{\partial z} \right) + T \frac{\partial^3 \phi}{\partial z^3} \right]_{z=0} = 0 \quad (53)$$

We separate the time and space variables according to

$$\phi(z, r, \theta, t) = \psi(z, r, \theta) e^{i\sqrt{\sigma} t} \quad (54)$$

If we refer the length parameters again to a characteristic length  $h$  we may interpret  $z$  and  $r$  as nondimensional quantities and define the eigenvalue problem for  $\psi$  by

$$\frac{\partial^2 \psi}{\partial r^2} + \frac{1}{r} \frac{\partial \psi}{\partial r} + \frac{1}{r^2} \frac{\partial^2 \psi}{\partial \theta^2} + \frac{\partial^2 \psi}{\partial z^2} = 0 \quad (55)$$

$$\left[ \beta \psi - \frac{\partial \psi}{\partial z} - \mu \frac{\partial^3 \psi}{\partial z^3} \right]_{z=0} = 0 \quad (56)$$

Exact solutions for  $\psi$  can be obtained in the form

$$\psi(z, r, \theta) = F(z, r)e^{im\theta} \quad (57)$$

which requires  $F$  to satisfy the equations

$$\frac{\partial^2 F}{\partial r^2} + \frac{1}{r} \frac{\partial F}{\partial r} - \frac{m^2}{r^2} F + \frac{\partial^2 F}{\partial z^2} = 0 \quad (58)$$

$$\left[ \beta F - \frac{\partial F}{\partial z} - \mu \frac{\partial^3 F}{\partial z^3} \right]_{z=0} = 0 \quad (59)$$

Considering first such functions which permit an additional separation of variables, we find

$$F(z, r) = A[\cosh(kz) + B \sinh(kz)]J_m(kr) \quad (60)$$

where  $J_m(kr)$  denotes the  $m^{\text{th}}$  order Bessel function of the first kind and  $k$  the separation parameter. The substitution of (60) into (59) leads to

$$\beta = \frac{\sigma h}{g} = k(1 + \mu k^2)B$$

or

$$\sigma = \frac{g}{h} k(1 + \mu k^2)B \quad (61)$$

The stability conditions are

$$k > 0, \quad B > 0, \quad \frac{\rho g}{T} > -\frac{k^2}{h^2} \quad (62)$$

and the corresponding equation for  $S_2$

$$k > 0, \quad m > 0, \quad \ln[\sinh(kz) + B \cosh(kz)] - k^2 \int_0^r \frac{J_m(kr)}{\frac{\partial J_m(kr)}{\partial r}} dr + C = 0 \quad (63)$$

Layers with solid surfaces defined by (63) are illustrated in Figure 6.

We consider the following special cases

$$(a) \quad \underline{F_z = 0, \quad F_r = 0}$$

Requiring  $S_2$  to contain the points  $(0, -a)$  and  $(r_0, 0)$  we have in this case a layer of uniform thickness bounded by the surface  $z = -a$  and the cylinder  $r = r_0$  (See Fig. 7). The relation for the eigenfrequencies corresponding to mode shapes as defined by (60) is

$$\sigma = \frac{g}{h} k(1 + \mu k^2) \tanh(ka) \quad (64)$$

where the possible values of  $k$  are given by

$$J'_m(kr_0) = 0 \quad m = 1, 2, \dots \quad (65)$$

From (64) we find the stability condition

$$\frac{\rho g}{T} > - \frac{k^2}{h^2} \quad (66)$$

which indicates that the lowest value for  $k$  is most significant:  $m = 1$ ,  $kr_0 = 1.85$ .

$$(b) \quad \underline{k = 0}$$

In this case the velocity potential can be written in the form

$$\psi(r, z, \theta) = A r^m (z + B) e^{im\theta}, \quad m \neq 0 \quad (67)$$

The interface boundary condition (59) yields

$$B = \frac{1}{\beta} \quad (68)$$

and the equation of the solid surface  $S_2$  becomes

$$S_2 = m \left( \frac{1}{2} z^2 + Bz \right) - \frac{1}{2} r^2 + C = 0 \quad (69)$$

By requiring the surface  $S_2$  to pass through the points  $(r = 0, z = -a)$  and  $(r = r_0, z = 0)$  we find

$$B = \frac{a^2 m + r_0^2}{2ma} \quad (70)$$

and

$$S_2 = mz^2 + \frac{a^2m + r_0^2}{a} z + r_c^2 - r^2 = 0 \quad (71)$$

From (68) and (70) we obtain as stability condition

$$g > 0 \quad (72)$$

which holds independently of  $m$ ,  $r_0$  and  $a$ . Representative layers defined by (71) are shown in Fig. 8.

As in the two-dimensional case, we conclude that the variation of the thickness can markedly influence the stability of three-dimensional layers with a flat interface, particularly for body forces in the near-zero region. We also note that for some solid supporting surfaces  $S_2$  (container walls) layers of this type are stable if the body forces are larger than a certain negative limit value while for other surfaces  $S_2$  the body forces have to be positive for stability. Moreover, we may again suggest the feasibility of exploiting such a behavior in the design of fluid containers for near-zero gravity conditions.

## VI. ON THE STABILITY OF LAYERS WITH UNIFORMLY CURVED INTERFACE

### 6.1. Two-Dimensional Layers with Curved Interface

We refer the layer to cylindrical coordinates such that the equilibrium configuration is characterized by  $r = a$  as shown in Figure 9. In the presence of a disturbance the equation for the interface surface may be written in the form

$$S_1(r, \theta, t) = r - [a + \zeta(\theta, t)] = 0 \quad (73)$$

In terms of cylindrical coordinates, the uniaxial body forces are now defined by the potential

$$\Omega = gr \cos \theta \quad (74)$$

and the linearized mean curvature given by

$$2H = \frac{1}{R_2} = \frac{1}{a} \left[ 1 - \frac{\zeta(\theta, t)}{a} - \frac{1}{a} \frac{\partial^2}{\partial \theta^2} \zeta(\theta, t) \right] \quad (75)$$

By combining the dynamic and kinematic boundary conditions as before, we obtain

$$\rho \left[ \frac{\partial^2 \Phi}{\partial t^2} + g \frac{\partial \Phi}{\partial r} \cos \theta \right]_{r=a} = \frac{T}{a^2} \left[ \frac{\partial \Phi}{\partial r} + \frac{\partial^3 \Phi}{\partial r \partial \theta^2} \right]_{r=a} \quad (76)$$

We again separate the time and space variables according to

$$\Phi(r, \theta, t) = \Psi(r, \theta) e^{i\sqrt{\sigma} t} \quad (77)$$

and may interpret  $r$  as nondimensional length parameter by using "a" as the reference length. Thus we arrive at the eigenvalue problem for  $\Psi$  defined by

$$\frac{\partial^2 \Psi}{\partial r^2} + \frac{1}{r} \frac{\partial \Psi}{\partial r} + \frac{1}{r^2} \frac{\partial^2 \Psi}{\partial \theta^2} = 0 \quad (78)$$

$$\left[ \beta \Psi - \frac{\partial \Psi}{\partial r} \cos \theta + \mu \left( \frac{\partial \Psi}{\partial r} + \frac{\partial^3 \Psi}{\partial r \partial \theta^2} \right) \right]_{r=1} = 0 \quad (79)$$

where  $\beta$  and  $\mu$  now abbreviate

$$\mu = \frac{T}{\rho g a^2} \quad \text{and} \quad \beta = \frac{\sigma a}{g} \quad (80)$$

The streamlines can be obtained by integrating the relation

$$r \frac{\partial \Psi}{\partial r} d\theta = \frac{1}{r} \frac{\partial \Psi}{\partial \theta} dr \quad (81)$$

Any function of the form

$$\Psi(r, \theta) = \sum_{n=1}^N (r^{\ell_n} + A_n r^{-\ell_n}) [B_n \sin(\ell_n \theta) + D_n \cos(\ell_n \theta)] \quad (82)$$

with arbitrary  $\ell_n$  and  $N$  represents a solution to (78). In particular, we may choose  $\ell_n = n$  and  $N = 3$ :

$$\Psi(r, \theta) = \sum_{n=1}^3 (r^n + A_n r^{-n}) [B_n \sin(n\theta) + D_n \cos(n\theta)] \quad (83)$$

We require  $D_n = 0$ ,  $n = 1, 2, 3$  and thus restrict our attention again to the antisymmetric modes of oscillation. The substitution of

$$\Psi(r, \theta) = \sum_{n=1}^3 B_n [r^n + A_n r^{-n}] \sin(n\theta)$$

into the interface boundary condition (79) leads to the relations

$$\left. \begin{aligned}
 B_3/B_2 &= \lambda \\
 A_2 &= 1 - 2\beta\lambda \\
 B_1/B_2 &= \lambda + 2\beta[1 - \lambda(\beta + 6\mu)] \\
 A_1B_1/B_2 &= \lambda - 2\beta[1 - \lambda(\beta + 6\mu)] \\
 A_3 &= 1
 \end{aligned} \right\} \quad (84)$$

in which  $\lambda$  is an arbitrary parameter. If we select

$$\lambda = \frac{1}{\beta + 6\mu} \quad (85)$$

we limit our analysis to a family of layers for which we can readily derive a stability condition by replacing the abbreviations  $\beta$  and  $\mu$  in (85) by their original form and requiring  $\sigma$  to be positive. We deduce

$$\begin{aligned}
 a > 0, \quad g &> \frac{6\lambda T}{\rho a^2} \\
 a < 0, \quad g &< \frac{6\lambda T}{\rho a^2}
 \end{aligned} \quad (86)$$

With (85) the differential equation for the stream lines becomes

$$\frac{dr}{d\theta} = \frac{r\{\lambda(r - r^{-1})\sin \theta + 2[r^2 - (1 - 2\lambda\beta)r^{-2}]\sin 2\theta + 3\lambda(r^3 - r^{-3})\sin 3\theta\}}{\lambda(r + r^{-1})\cos \theta + 2[r^2 + (1 - 2\lambda\beta)r^{-2}]\cos 2\theta + 3\lambda(r^3 + r^{-3})\cos 3\theta} \quad (87)$$

Representative layers with such streamlines are illustrated in Figure 10.

## 6.2. Two-Dimensional Layers with Slightly Curved Interface

For such layers we may write

$$\cos \theta \approx 1 \quad (88)$$

and as interface condition

$$\left[ \beta \psi - \frac{\partial \psi}{\partial r} + \mu \left( \frac{\partial \psi}{\partial r} + \frac{\partial^3 \psi}{\partial r \partial \theta^2} \right) \right]_{r=1} = 0 \quad (89)$$

This condition is satisfied by

$$\psi(r, \theta) = B(r^\ell + Ar^{-\ell}) \sin \ell \theta \quad (90)$$

for arbitrary  $\ell$  if

$$A = \frac{\ell[1 + \mu(\ell^2 - 1)] - \beta}{\ell[1 + \mu(\ell^2 - 1)] + \beta} \quad (91)$$

The corresponding stream lines are given by

$$B[r^\ell - Ar^{-\ell}] \cos(\ell \theta) - C = 0 \quad (92)$$

where  $C$  denotes a constant. By choosing  $C = 0$  we arrive at a family of layers with uniform thickness and the same stability criteria as discussed in Ref. 2. For  $C \neq 0$  we may require the solid boundary to contain two prescribed points, e.g.

$$\theta = 0, \quad r = r_0; \quad \theta = \pm \alpha, \quad r = 1$$

which determines  $A$  and  $C/B$  in (92):

$$A = \frac{r_0^\ell - \cos(\ell \alpha)}{r_0^{-\ell} - \cos(\ell \alpha)} \quad (93)$$

$$\frac{C}{B} = \frac{r_0^{-\ell} - r_0^\ell}{r_0^{-\ell} - \cos(\ell \alpha)} \cos(\ell \alpha) \quad (94)$$

By comparing (93) and (91) we find the relation

$$\sigma = \frac{\ell}{a} \frac{1 - r_0^{2\ell}}{1 + r_0^{2\ell} - 2r_0^\ell \cos(\ell \alpha)} \left[ g + \frac{T}{\rho a^2} (\ell^2 - 1) \right] \quad (95)$$

from which we can deduce the stability conditions

$$a > 0 \quad r_0 < 1: \quad \frac{\rho g a^2}{T} > 1 - l^2$$

$$a < 0 \quad r_0 > 1: \quad \frac{\rho g a^2}{T} < 1 - l^2$$

As a special case we consider  $l = 1$  and  $A = 0$ . The substitution of (93) and (94) into (92) yields for the solid boundary

$$r \cos \theta = r_0 \quad (96)$$

i.e., a flat surface. The corresponding velocity potential is given by

$$\psi = Br \sin \theta \quad (97)$$

Specific examples of two-dimensional layers with a slightly curved interface are illustrated in Fig. 11.

### 6.3. Three-Dimensional Layers with Curved Interface

In terms of spherical coordinates we may define the disturbed interface by

$$S_1(r, \theta, \varphi, t) = r - [a + \zeta(\theta, \varphi, t)] = 0 \quad (98)$$

where  $r = a$  represents the equilibrium configuration as shown in Fig. 12. The potential of uniaxial body forces is again given by (74). For small  $\zeta$  the mean curvature may be written in the form<sup>(13)</sup>

$$2H = \frac{1}{a} \left[ 2 - \frac{1}{a} \left( 2\zeta + \frac{\partial \zeta}{\partial \theta} \cot \theta + \frac{\partial^2 \zeta}{\partial \theta^2} + \frac{1}{\sin^2 \theta} \frac{\partial^2 \zeta}{\partial \varphi^2} \right) \right] \quad (99)$$

A combination of the kinematic and dynamic boundary conditions for the interface leads to

$$\left[ \rho \left( \frac{\partial^2 \Phi}{\partial t^2} + g \frac{\partial \Phi}{\partial r} \cos \theta \right) - \frac{T}{a^2} \left( 2 \frac{\partial \Phi}{\partial r} + \cot \theta \frac{\partial^2 \Phi}{\partial r \partial \theta} + \frac{\partial^3 \Phi}{\partial r \partial \theta^2} + \frac{1}{\sin^2 \theta} \frac{\partial^3 \Phi}{\partial r \partial \varphi^2} \right) \right]_{r=a} = 0 \quad (100)$$

The physical nature of the problem suggests a separation of the variables according to

$$\Phi(r, \theta, \varphi, t) = \Psi(r, \theta) e^{im\varphi} e^{i\sqrt{\sigma} t} \quad (101)$$

in which  $m$  denotes an integer. We may again interpret  $r$  as the nondimensional length parameter, using the radius "a" of the equilibrium shape as reference length. The eigenvalue problem for  $\Psi$  is now defined by

$$\frac{\partial}{\partial r} \left( r^2 \frac{\partial \Psi}{\partial r} \right) + \frac{1}{\sin \theta} \frac{\partial}{\partial \theta} \left( \sin \theta \frac{\partial \Psi}{\partial \theta} \right) - \frac{m^2}{\sin^2 \theta} \Psi = 0 \quad (102)$$

and

$$\left[ \beta \Psi - \cos \theta \frac{\partial \Psi}{\partial r} - \mu \left( 4r \frac{\partial^2 \Psi}{\partial r^2} + r^2 \frac{\partial^3 \Psi}{\partial r^3} \right) \right]_{r=1} = 0 \quad (103)$$

The nondimensional quantities  $\beta$  and  $\mu$  are again defined by (80) and the stream lines by (81). Exact solutions to the eigenvalue problems are for example<sup>(14)</sup>.

$$\Psi(r, \theta) = \sum_n A_n [r^{p_n} + B_n r^{-(p_n+1)}] P_{p_n}^m(\cos \theta) \quad (104)$$

in which  $P_{p_n}^m$  represents the associated Legendre function of degree  $m$  and order  $p_n$ <sup>(15)</sup>. The order  $p_n$  is arbitrary while the degree  $m$  is integer.

We consider a particular family of layers to which (104) represents an exact solution by selecting

$$m = 1, \quad p_n = 1, 2$$

or

$$\Psi = A_1 [(r + B_1 r^{-2}) \sin \theta + A_2 (r^2 + B_2 r^{-3}) \sin \theta \cos \theta] \quad (105)$$

This function satisfies the interface condition if

$$B_1 = -1, \quad B_2 = \frac{2}{3}, \quad A_2 = \frac{9}{5\beta} \quad (106)$$

From (106) and (80) follows

$$\sigma = \frac{9}{5A_2} \frac{g}{a} \quad (107)$$

For  $A_2 > 0$ ,  $a > 0$  we find as the stability condition

$$g > 0$$

Layers representative for this family are shown in Fig. 13.

#### 6.4. Three-Dimensional Layers with Slightly Curved Interface

For such layers we have

$$\cos \theta \approx 1, \quad \sin \theta \approx \theta \quad (108)$$

and therefore as the continuity equation and the interface condition

$$\frac{\partial}{\partial r} \left( r^2 \frac{\partial \psi}{\partial r} \right) + \frac{1}{\theta} \frac{\partial}{\partial \theta} \left( \theta \frac{\partial \psi}{\partial \theta} \right) - \frac{m^2}{\theta^2} \psi = 0 \quad (109)$$

$$\left[ \beta \psi - \frac{\partial \psi}{\partial r} - \mu \left( 4r \frac{\partial^2 \psi}{\partial r^2} + r^2 \frac{\partial^3 \psi}{\partial r^3} \right) \right]_{r=1} = 0 \quad (110)$$

Solutions to Eq. (109) which satisfy the interface condition (110) can be written in the form

$$\psi(r, \theta) = [r^p + Ar^{-(p+1)}] J_m[\sqrt{p(p+1)} \theta] \quad (111)$$

where

$$A = \frac{-\beta + p\{1 + \mu[p(p+1) - 2]\}}{+\beta + (p+1)\{1 + \mu[p(p+1) - 2]\}} \quad (112)$$

and

$$p > 0.$$

The streamlines corresponding to (111) are

$$\ln \left[ r^{(p+1)} - A \left( \frac{p+1}{p} \right) r^{-p} \right] = \int_0^{\sqrt{p(p+1)}\theta} \frac{J_m(\lambda)}{J_m'(\lambda)} d\lambda + C \quad (m > 0) \quad (113)$$

with  $C$  denoting a constant.

For  $C = 0$  we have a family of three-dimensional layers of uniform thickness as illustrated in Fig. 14. By defining the solid surface as

$$r = r_0, \quad \theta = \pm \alpha \quad (\alpha \text{ small}) \quad (114)$$

and requiring

$$\frac{\partial \psi}{\partial r} = \frac{\partial \psi}{\partial \theta} = 0$$

we obtain

$$A = \frac{p}{p+1} r_0^{2p+1} \quad (115)$$

and

$$J_m' [\sqrt{p(p+1)} \alpha] = 0 \quad (116)$$

The comparison of (115) with (112) leads to

$$\sigma = \frac{1}{a} \frac{p(1 - r_0^{2p+1})}{1 + \frac{p}{p+1} r_0^{2p+1}} \left\{ g + \frac{T}{\rho a^2} [p(p+1) - 2] \right\} \quad (117)$$

with  $r_0 < 1$ , and  $p > 0$ , we have

$$g + \frac{T}{\rho a^2} [p(p+1) - 2] > 0$$

and therefore as stability condition

$$g > [2 - p(p+1)] \frac{T}{\rho a^2} \quad (118)$$

Similarly, we find for  $r_0 > 1$

$$g < [2 - p(p+1)] \frac{T}{\rho a^2} \quad (119)$$

It should be noted that for a given  $\alpha$  the parameter  $p$  is determined by (116). According to (118) and (119) we obtain the stability criterion with the smallest value of  $p$ . The latter is given by the smallest root of

$$J_1' [\sqrt{p(p+1)} \alpha] = 0 \quad (120)$$

The physical interpretation of this fact is that among all eigenvibrations the first antisymmetric oscillation leads to the stability criterion since the corresponding frequency approaches zero first in varying the parameters  $T$ ,  $\rho$  and  $g$ .

The stability criterion for an axially symmetric layer with a flat interface, a uniform thickness and a radius  $b$  as shown in Fig. 7 is

$$g > -13.7 \frac{T}{\rho(2b)^2}$$

while that of the slightly curved layer of uniform thickness and the same interface area (see Fig. 14) is

$$g > \left[ \frac{2}{a^2} - \frac{13.7}{(2b)^2} \right] \cdot \frac{T}{\rho}$$

As in the two-dimensional case<sup>(2)</sup> we observe that the curvature has a destabilizing effect.

If  $C \neq 0$  in Eq. (113), we can interpret (112) as the frequency equation for arbitrary values of  $p$  and  $A$ :

$$\sigma = \frac{1}{a} \frac{[p - (p+1)A]}{(1+A)} \left\{ g + \frac{T}{\rho a^2} [p(p+1) - 2] \right\} \quad (121)$$

For stability we deduce

$$\frac{p - (p+1)A}{1+A} > 0, \quad a \geq 0, \quad g \geq \frac{T}{\rho a^2} [2 - p(p+1)]$$

$$\frac{p - (p+1)A}{1+A} < 0, \quad a \geq 0, \quad g \leq \frac{T}{\rho a^2} [2 - p(p+1)] \quad (122)$$

Representative examples of slightly curved three-dimensional layers are illustrated in Fig. 15.

If we assume  $p(p+1)\theta \ll 1$ , we may obtain approximate solutions to the streamline Eq.(113) in the form

$$\int \frac{J_m(\lambda)}{J_m'(\lambda)} d\lambda \approx -(m+1) \ln \left[ 1 - \frac{\lambda^2}{2m(m+1)} \right]$$

For  $m = 1$  we have

$$\int_0^{\sqrt{p(p+1)}\theta} \frac{J_1(\lambda)}{J_1'(\lambda)} d\lambda = -2 \ln \left[ 1 - \frac{p(p+1)}{4} \theta^2 \right]$$

and thus

$$S_2 = \left[ r^{p+1} - A \frac{p+1}{p} r^{-p} \right] \left[ 1 - \frac{p(p+1)}{4} \theta^2 \right]^2 - c = 0 \quad (123)$$

Requiring the solid surface to contain the points  $(r = 1, \theta = \alpha)$  and  $(r = r_0, \theta = 0)$  we find

$$A \approx \frac{p \left\{ r_0^{p+1} - \left[ 1 - \frac{p(p+1)}{4} \alpha^2 \right]^2 \right\}}{(p+1) \left\{ r_0^{-p} - \left[ 1 - \frac{p(p+1)}{4} \alpha^2 \right]^2 \right\}} \quad (124)$$

and

$$S_2 \approx \left( r^{p+1} \left\{ r_0^{-p} - \left[ 1 - \frac{p(p+1)}{4} \alpha^2 \right]^2 \right\} - r^{-p} \left\{ r_0^{p+1} - \left[ 1 - \frac{p(p+1)}{4} \alpha^2 \right]^2 \right\} \right) \cdot \left[ 1 - \frac{p(p+1)}{4} \theta^2 \right]^2 - (r_0^{-p} - r_0^{p+1}) \left[ 1 - \frac{p(p+1)}{4} \alpha^2 \right]^2 = 0 \quad (125)$$

For  $p = 1$  and  $A = 0$  we have an approximation to the important case of a layer on a flat surface

$$r \cos \theta = r_0$$

as shown in Figure 15b.

## VII. CONCLUSION

The results of this study clearly indicate a strong dependence of the stability of all layers (two- and three-dimensional) on the thickness variation, especially in the realm of near-zero gravity conditions. Of particular significance is the fact that for certain solid supporting surfaces (container walls) the fluid layers are stable only if the unidirectional body force is either positive or exceeds a certain positive value, while for other surfaces stability prevails for limited negative values of the body force. By taking advantage of this fact in the design of containers of fluid for near-zero gravity conditions, it appears possible to enforce the permanent adherence of the fluid to a certain area of the container.

It should be noted that we have not introduced any contact angle considerations in explicit form in our analysis, and therefore we have to require that the dimensions of the interface surface be large compared with the effective range of the contact forces. Also, it should be pointed out that our stability criteria are conservative only if the "appropriately chosen" solution to Laplace's equation actually leads to the fundamental eigenvibration\* whose eigenfrequency ceases first to be real in varying the body force or stability parameter. Partial reassurance in this regard is offered by the fact that our results include as special cases the known stability criteria for layers of uniform thickness with either flat or uniformly curved interface surfaces.

---

\* Vibration with the lowest eigenfrequency.

## REFERENCES

1. Cheng, Sin-I., "On the Mechanisms of Atmospheric Ablation," Proceedings of the IXth International Astronautical Congress, Amsterdam, Aug. 1958, Springer-Verlag, Vienna, 1959.
2. Anliker, Max and Beam, R. M., "On the Stability of Liquid Layers Spread Over Simple Curved Bodies," J. Aerospace Sciences, Vol. 29, pp. 1196-1209, 1962.
3. Reynolds, W. C., "Hydrodynamic Considerations for the Design of Systems for Very Low Gravity Environments", Technical Report LG-1, Thermosciences Division, Dept. of Mech. Engineering, Stanford University, Sept. 1961.
4. Rayleigh, J. W. S., The Theory of Sound, 2nd Ed. revised, Vol. 2, Dover Publications, New York, 1945.
5. Lamb, Sir Horace, Hydrodynamics, 6th Ed., Dover Publications, New York, 1945.
6. Von Minkowski, H., "Physik", Vol. 5, Pt. 1, Encyklopädie der Mathematischen Wissenschaften, Ed. by A. Sommerfeld, pp. 559-622; Leipzig, 1903-1921.
7. Taylor, G. I., The Instability of Liquid Surfaces When Accelerated in a Direction Perpendicular to Their Planes, Proc. Roy. Soc. (London), Ser. A, Vol. 201, pp. 192-196, 1950.
8. Keller, J. B., and Kolodner, I., Instability of Liquid Surfaces and the Formation of Drops, J. App. Physics, Vol. 25, July 1954.
9. Emmons, H. W., Chang, C. T., and Watson, B. C., Taylor Instability of Finite Surface Waves, J. Fluid Mech., Vol. 7, Feb. 1960.
10. Bellman, R., and Pennington, R. H., Effects of Surface Tension and Viscosity on Taylor Instability, Quart. Appl. Math., Vol. 12, No. 2, July 1954.
11. Reid, W. H., The Effects of Surface Tension and Viscosity on the Stability of Two Superposed Fluids, Proc. Cambridge Phil. Soc., Vol. 57, Pt. 2, pp. 415-425, 1961.
12. Troesch, B. A., "Free Oscillations of a Fluid in a Container", Boundary Problems in Differential Equations, Ed. by R. E. Langer, pp. 279-299, University of Wisconsin Press, Madison, 1960.
13. Landau, L. D., and Lifshitz, E. M., Fluid Mechanics, p. 239; Pergamon Press, London, 1959.
14. Morse, P. M., and Feshbach, H., Methods of Theoretical Physics, Pt. II, P. 1264; McGraw-Hill Book Co., Inc., New York, 1953.
15. Robin, L., Fonctions sphériques de Legendre et fonctions sphéroïdales, Vol. II, Gauthier-Villars, Paris, 1958.

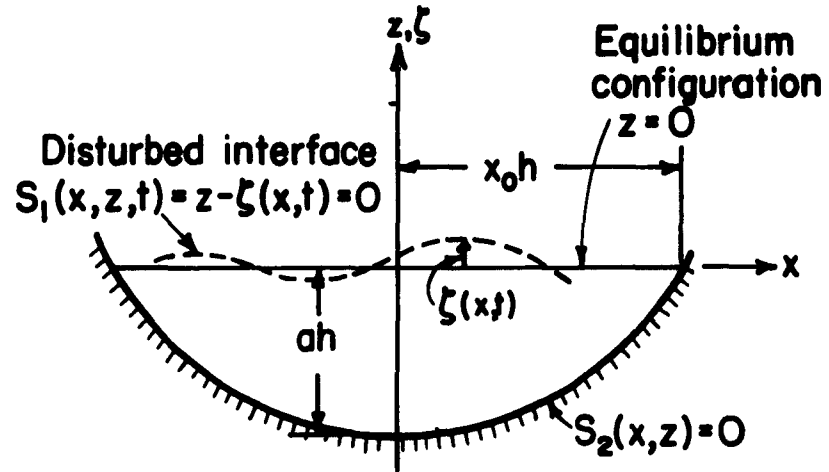


Fig. 1. Reference Frame for Two-Dimensional Layer with Flat Interface.

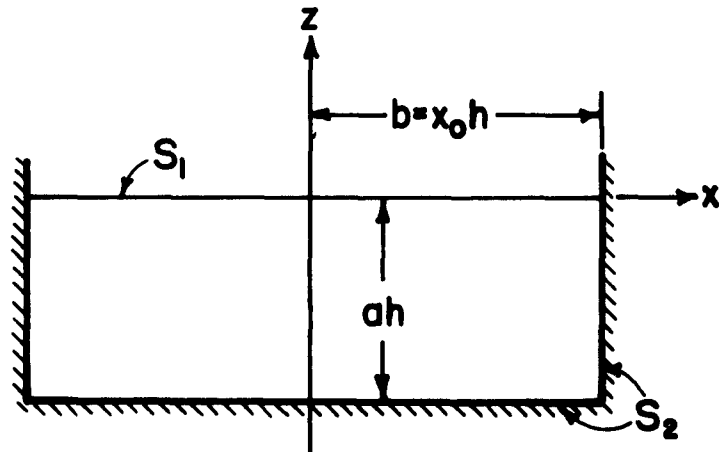


Fig. 2 Two-Dimensional Layer whose Free Oscillations have the Velocity Potential  $\Phi(x, z, t) = D \sin(\ell x) \cosh[\ell(a+z)] \cdot e^{i\sqrt{\sigma} t}$  where  $\ell = [(2n-1)/2] \pi (h/b)$ .

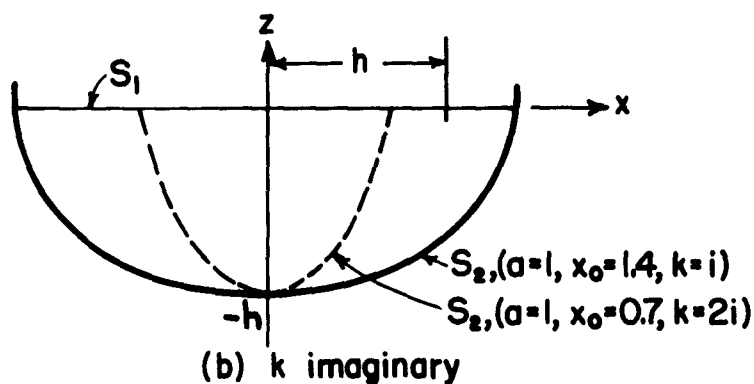
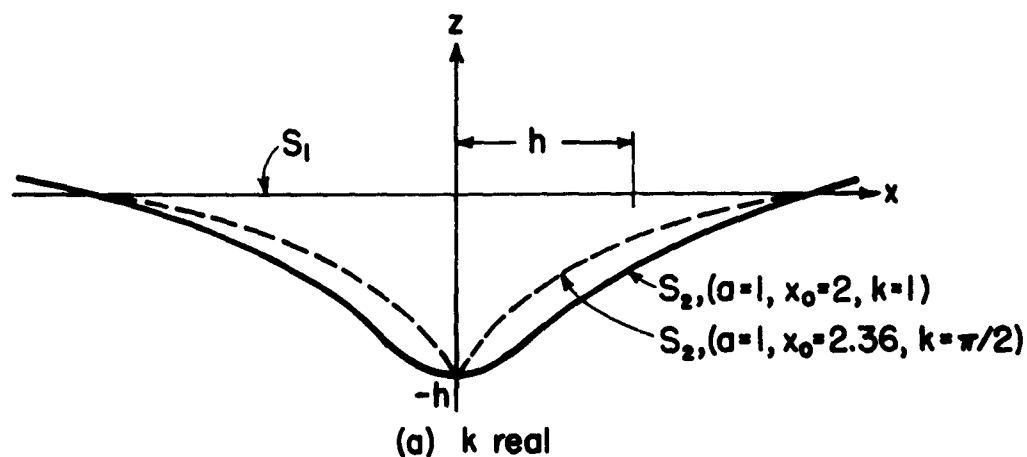


Fig. 3 Two-Dimensional Layers with Free Oscillations  
Defined by  $\Phi(x, z, t) = D \sinh(kx) [\cos k(a+z) - \cos(kz) \cosh(kx_0)] e^{i\sqrt{\sigma}t}$ ; (a)  $k$  real, (b)  $k$  imaginary.

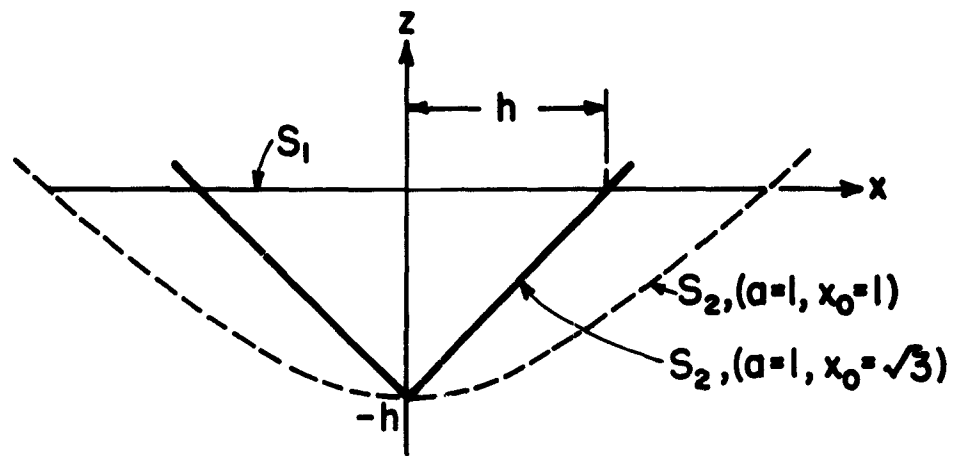


Fig. 4. Two-Dimensional Layers with Free Oscillations  
Defined by  $\Phi(x,z,t) = Ax\{1 + [2a/(a^2 + x_0^2)]z\}e^{i\sqrt{\sigma}t}$

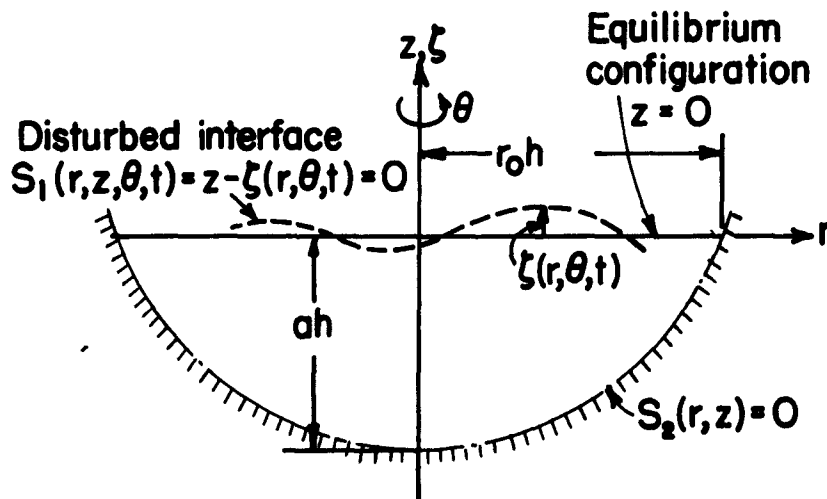


Fig. 5 Reference Frame for Three-Dimensional  
Layer with Flat Interface.

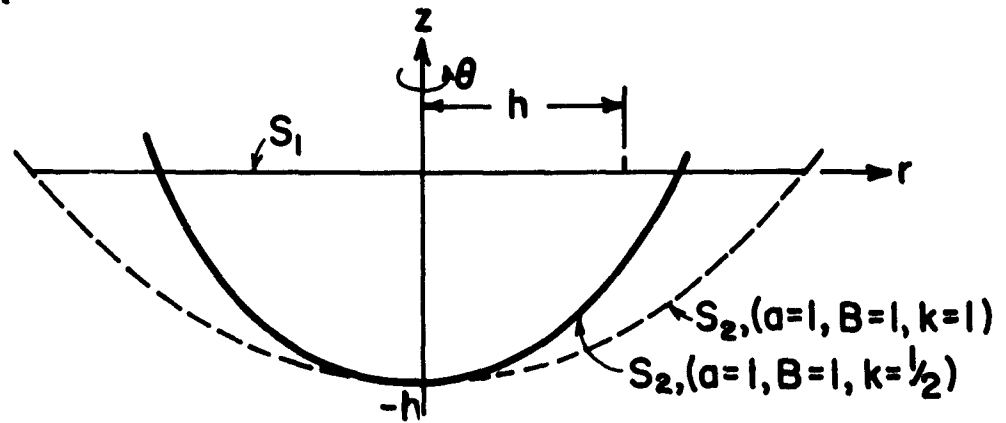


Fig. 6 Three-Dimensional Layers with Free Oscillations Defined by  
 $\Phi(r, z, \theta, t) = A [\cosh(kz) + B \sinh(kz)] J_1(kr) e^{i(\theta + \sqrt{\sigma} t)}$

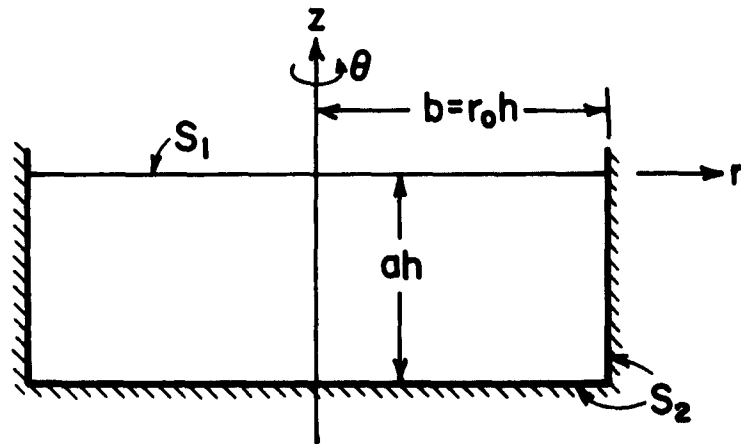


Fig. 7 Three-Dimensional Layer whose Free Oscillations can be Characterized by  
 $\Phi(r, z, \theta, t) = A \cosh(ka + kz) J_m(kr) e^{i(m\theta + \sqrt{\sigma} t)}$   
 where  $J_m(kr_0) = 0$

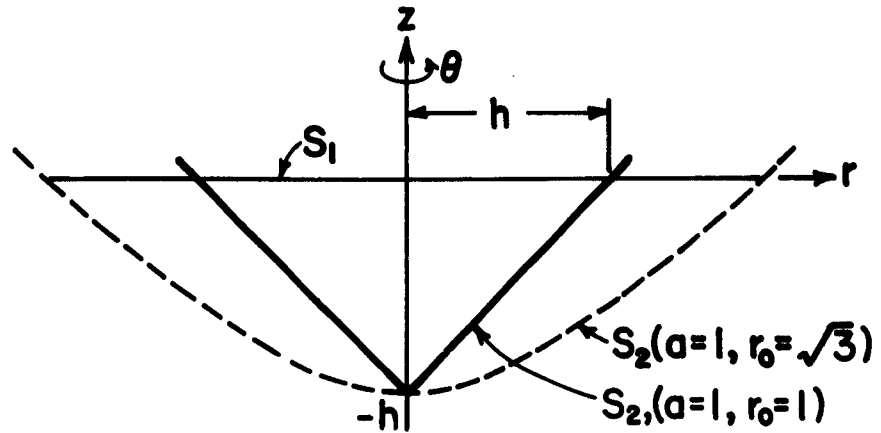


Fig. 8 Three-Dimensional Layers with Free Oscillations Defined by  
 $\Phi(r, z, \theta, t) = Ar[z + (a^2 + r_0^2)/2a]e^{i(\theta + \sqrt{\sigma}t)}$

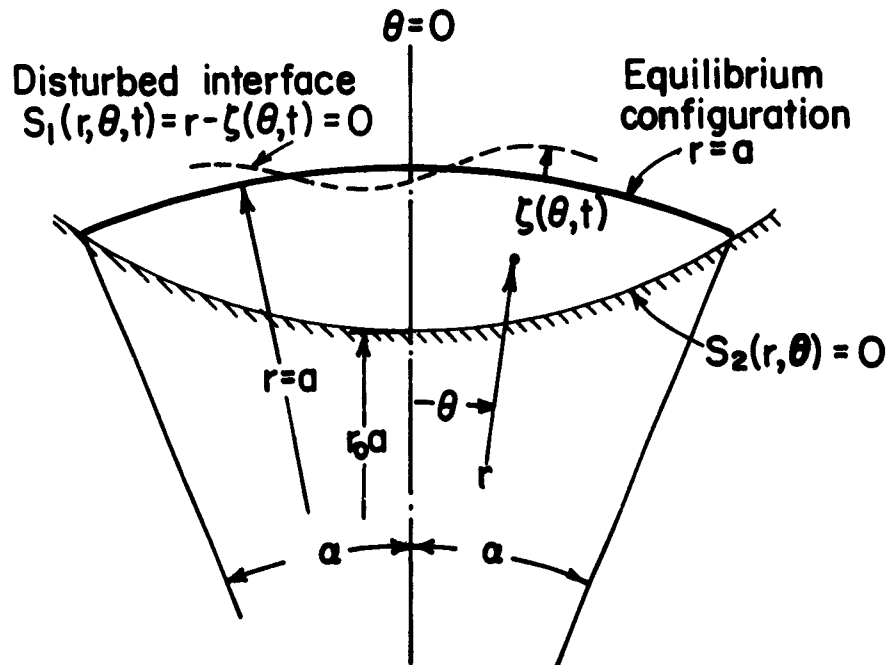


Fig. 9. Reference Frame for Two-Dimensional Layer with Curved Interface.

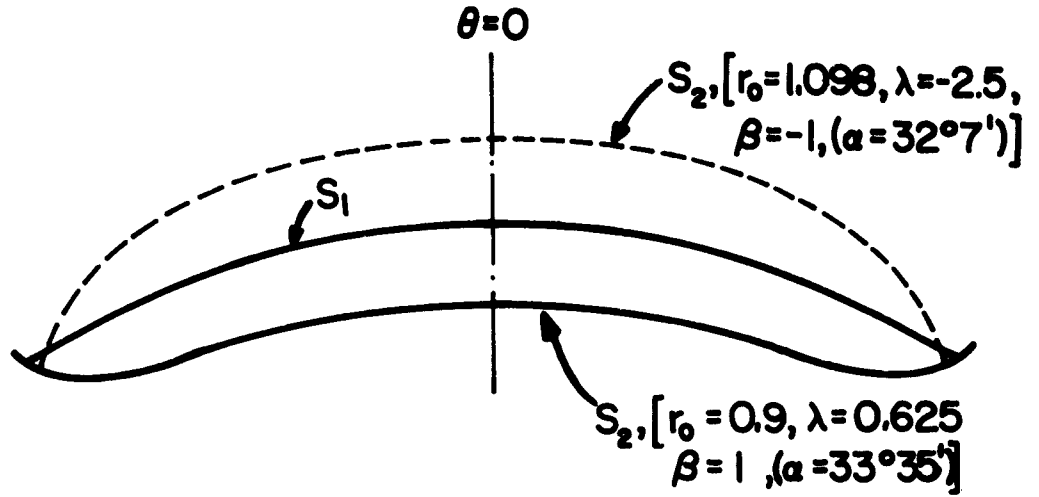


Fig. 10 Two-Dimensional Layers with Oscillations  
Defined by

$$\Phi(r, \theta, t) = B \left\{ \lambda \left( r + \frac{1}{r} \right) \sin \theta + \left[ r^2 + (1 - 2\beta\lambda)r^{-2} \right] \sin 2\theta + \lambda(r^3 + r^{-3}) \sin 3\theta \right\} e^{i\sqrt{\sigma}t} \text{ where } \lambda = \left\{ 1 / \left[ (\sigma a / g + 6(T / \rho g a^2)) \right] \right\}$$




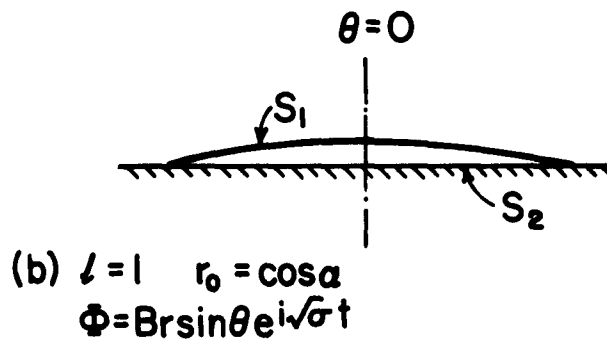


Fig. 11a,b. Two-Dimensional Layers with Slightly Curved Interface.

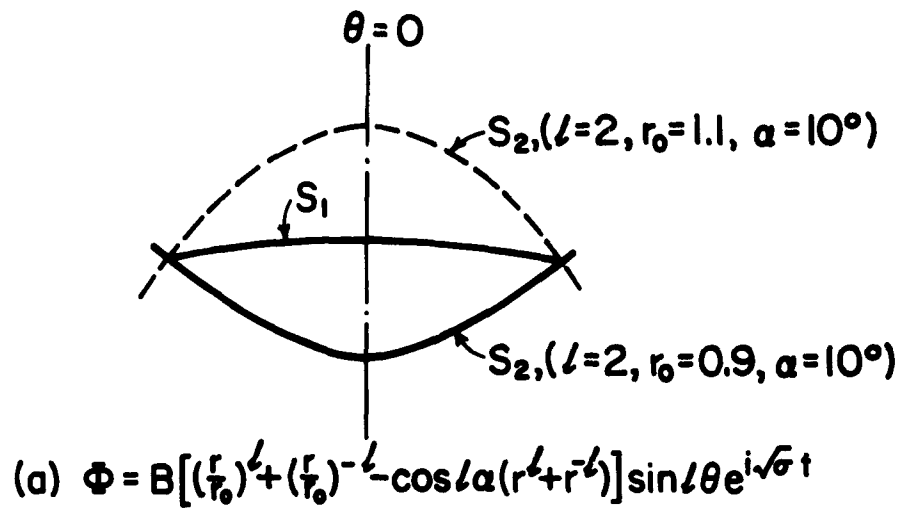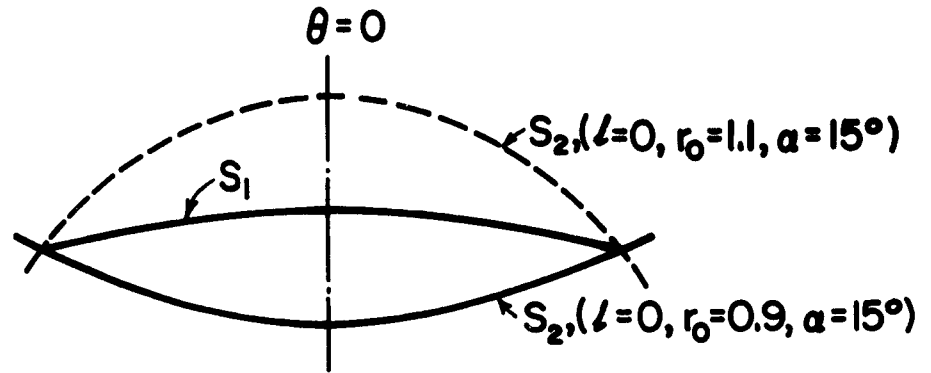

$$(c) \quad l=0 \quad \Phi = B\theta \left[ lnr - \frac{\alpha^2 + (lnr_0)^2}{2lnr_0} \right] e^{i\sqrt{\sigma}t}$$

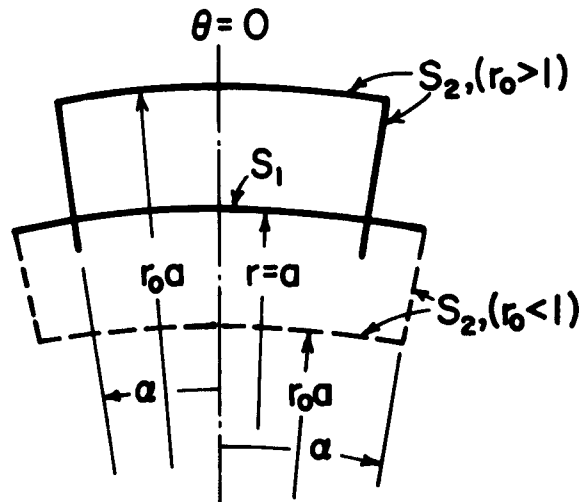

$$(d) \quad \Phi = B \left[ \left( \frac{r}{r_0} \right)^l + \left( \frac{r}{r_0} \right)^{-l} \right] \cos l\theta e^{i\sqrt{\sigma}t} \quad \text{where } l = \frac{n\pi}{\alpha} \text{ or}$$

$$\Phi = B \left[ \left( \frac{r}{r_0} \right)^l + \left( \frac{r}{r_0} \right)^{-l} \right] \sin l\theta e^{i\sqrt{\sigma}t} \quad \text{where } l = \frac{(2n+1)\pi}{2\alpha}$$

Fig. 11c,d. Two-Dimensional Layers with Slightly Curved Interface

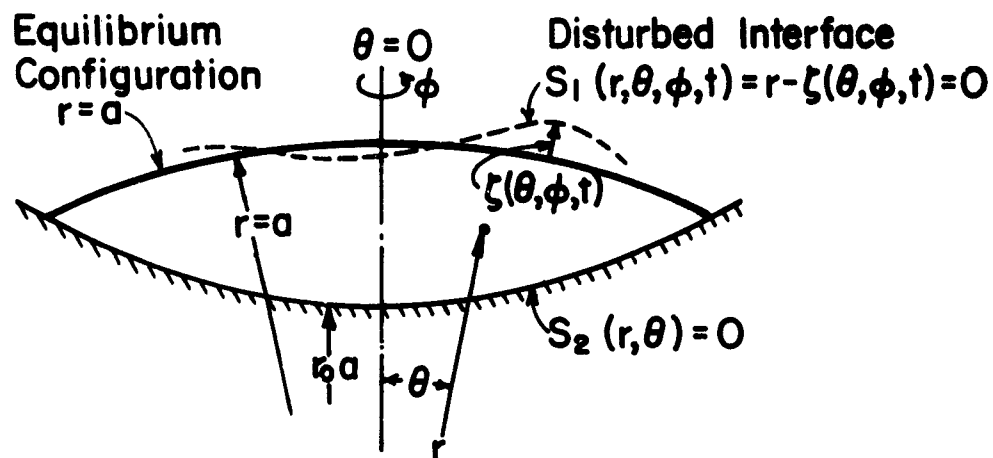


Fig. 12. Reference Frame for Three-Dimensional Layers with Curved Interface.

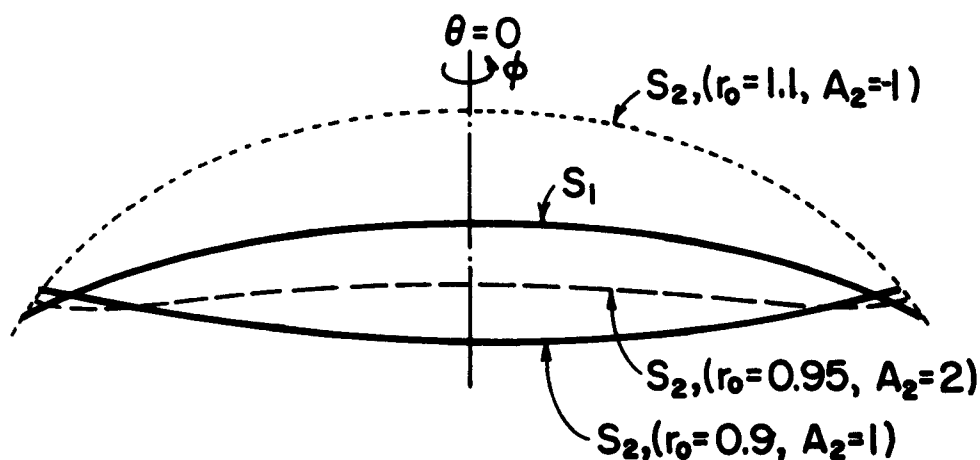


Fig. 13. Three-Dimensional Layers with Oscillations Defined by

$$\Phi = A[(r-r^{-2})\sin\theta + A_2(r^2 + \frac{2}{3}r^{-3})\sin\theta\cos\theta]e^{i(\phi + \sqrt{\sigma}t)}.$$


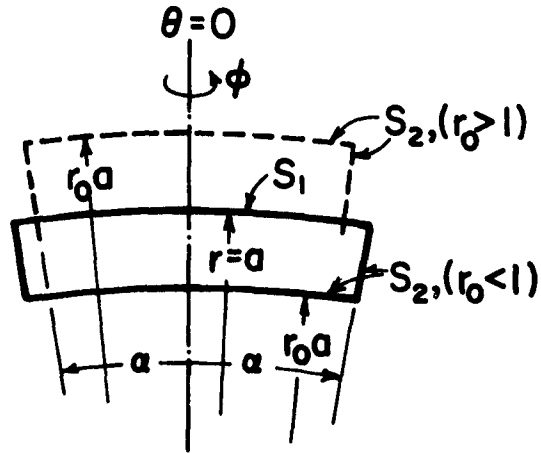



Fig. 14 Three-Dimensional Layers with Slightly Curved Interface and Uniform Thickness. The Fundamental Oscillation of such Layers is Characterized by

$$\Phi = B \left[ r^p + \frac{p}{p+1} r_0^{2p+1} r^{-(p+1)} \right] J_m \left[ \sqrt{p(p+1)} \theta \right] e^{i(m\phi + \sqrt{p(p+1)} t)}$$


where  $J'_m(\sqrt{p(p+1)} a) = 0$

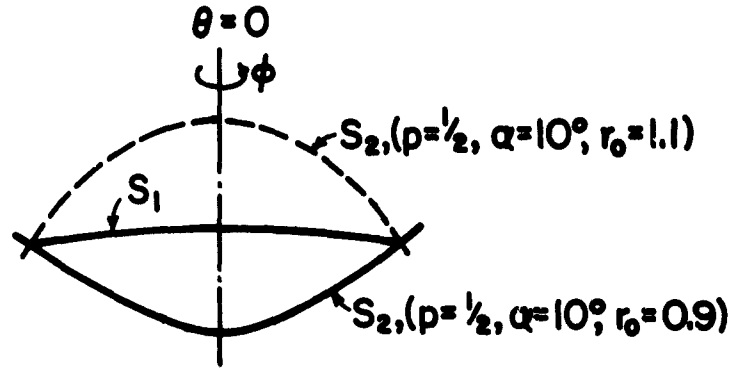

(a)  $\Phi = B[r^p + Ar^{-(p+1)}] J_1(\sqrt{p(p+1)}\theta) e^{i(\phi + \sqrt{\sigma}t)}$  where  
 $A \approx \frac{p\{r_0^{p+1} - [1 - \frac{p(p+1)}{4}\alpha^2]^2\}}{(p+1)\{r_0^p - [1 - \frac{p(p+1)}{4}\alpha^2]^2\}}$  and  $\sqrt{p(p+1)}\theta \ll 1$

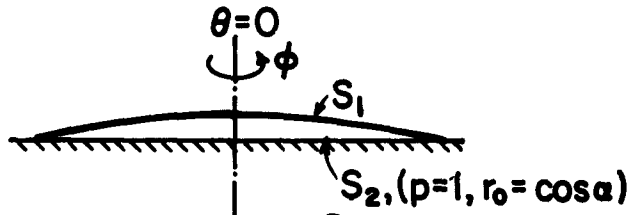

(b)  $\Phi = Br J_1(\sqrt{2}\theta) e^{i(\phi + \sqrt{\sigma}t)}$

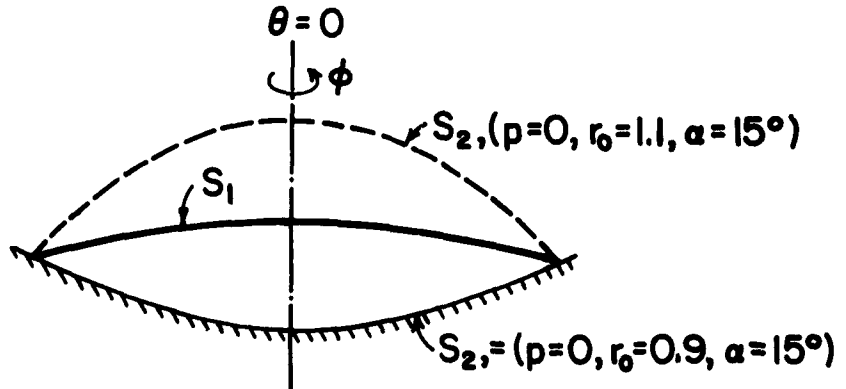

(c)  $p = 0 \quad \Phi = B\theta \left[ \frac{1}{r} + \frac{\ln r_0 - \frac{\alpha^2}{2}}{1 - r_0} \right] e^{i(\phi + \sqrt{\sigma}t)}$

Fig. 15. Three-Dimensional Layers with Slightly Curved Interface and Oscillations Defined as above.

Distribution List for Unclassified Technical Reports Issued Under Contract Nour-225(30), Task: NR 064-425

|                                                                                                                                                                                                                                                                                                                         |                                        |                                                                                                                                                                                                                                 |                                                                                                |                                                                                                                                                                                               |                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Chief of Naval Research<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: Code 439                                                                                                                                                                                                                             | (2)                                    | Commanding Officer<br>Engineer Research Development Laboratory<br>Fort Belvoir, Virginia                                                                                                                                        | (2)                                                                                            | Special Projects Office<br>Bureau of Naval Weapons<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: Missile Branch<br>Technical Director                                            | (2)<br>(1)                                    |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>495 Summer Street<br>Boston 10, Massachusetts                                                                                                                                                                                                        | (1)                                    | Office of the Chief of Ordnance<br>Department of the Army<br>Washington 25, D. C.<br>Attn: Research and Materials<br>Branch (Ord RandD Div.)                                                                                    | (1)                                                                                            | Chief, Bureau of Yards and Docks<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: Code D-302<br>Code D-302.3<br>Code D-220<br>Code D-222<br>Code D-410C<br>Code D-440<br>Code D-500 | (1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1) |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>John Crerar Library Building<br>86 E. Randolph Street<br>Chicago 11, Illinois                                                                                                                                                                        | (1)                                    | Office of the Chief Signal Officer<br>Department of the Army<br>Washington 25, D. C.<br>Attn: Engineering and Technical Division                                                                                                | (1)                                                                                            | Commanding Officer and Director<br>David Taylor Model Basin<br>Washington 7, D. C.<br>Attn: Code 140<br>Code 600<br>Code 700<br>Code 720<br>Code 725<br>Code 731<br>Code 740                  | (1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(2) |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>346 Broadway<br>New York 13, New York                                                                                                                                                                                                                | (1)                                    | Commanding Officer<br>Watertown Arsenal<br>Watertown, Massachusetts<br>Attn: Laboratory Division                                                                                                                                | (1)                                                                                            |                                                                                                                                                                                               |                                               |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>1030 E. Green Street<br>Pasadena, California                                                                                                                                                                                                         | (1)                                    | Office of Ordnance Research<br>2127 Myrtle Drive<br>Duke Station<br>Durham, North Carolina<br>Attn: Division of Engineering Sciences                                                                                            | (4)                                                                                            |                                                                                                                                                                                               |                                               |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>1000 Geary Street<br>San Francisco, California                                                                                                                                                                                                       | (1)                                    | Commanding Officer<br>Squier Signal Laboratory<br>Fort Monmouth, New Jersey<br>Attn: Components and Materials Branch                                                                                                            | (1)                                                                                            | Commander<br>U.S. Naval Ordnance Laboratory<br>White Oak, Maryland<br>Attn: Technical Library<br>DE<br>DR<br>K                                                                                | (2)<br>(1)<br>(1)<br>(1)                      |
| Commanding Officer<br>Office of Naval Research<br>Branch Office<br>Navy No. 100, Fleet Post Office                                                                                                                                                                                                                      | (25)                                   | Chief of Naval Operations<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: Op 81<br>Op 03EG                                                                                                                           | (1)<br>(1)                                                                                     | Director<br>Materials Laboratory<br>New York Naval Shipyard<br>Brooklyn 1, New York                                                                                                           | (1)                                           |
| Director<br>Naval Research Laboratory<br>Washington 25, D. C.<br>Attn: Tech. Info. Officer<br>Code 8200<br>Code 8205<br>Code 8250<br>Code 8260                                                                                                                                                                          | (6)<br>(1)<br>(1)<br>(1)<br>(1)        | Commandant, Marine Corps<br>Headquarters, U. S. Marine Corps<br>Washington 25, D. C.                                                                                                                                            | (1)                                                                                            | Commander<br>Portsmouth Naval Shipyard<br>Portsmouth, New Hampshire                                                                                                                           | (2)                                           |
| Armed Services Technical Information<br>Agency<br>Arlington Hall Station<br>Arlington 12, Virginia                                                                                                                                                                                                                      | (10)                                   | Commander<br>Wright Air Development Center<br>Wright-Patterson Air Force Base<br>Dayton, Ohio<br>Attn: Dynamics Branch<br>Aircraft Laboratory<br>WCLSY                                                                          | (1)<br>(1)<br>(1)                                                                              | Commander<br>Mare Island Naval Shipyard<br>Vallejo, California                                                                                                                                | (2)                                           |
| Office of Technical Services<br>Department of Commerce<br>Washington 25, D. C.                                                                                                                                                                                                                                          | (1)                                    | Commanding Officer<br>USNNOEU<br>Kirtland Air Force Base<br>Albuquerque, New Mexico<br>Attn: Code 20 (Dr. J. N. Brennan)                                                                                                        | (1)                                                                                            | Commanding Officer and Director<br>U.S. Naval Electronics Laboratory<br>San Diego 52, California                                                                                              | (1)                                           |
| Director of Defense Research and Engineering<br>The Pentagon<br>Washington 25, D. C.<br>Attn: Technical Library                                                                                                                                                                                                         | (1)                                    | Chief, Bureau of Ships<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: Code 106<br>Code 335<br>Code 345<br>Code 346<br>Code 420<br>Code 421<br>Code 423<br>Code 425<br>Code 440<br>Code 442<br>Code 443<br>Code 1500 | (1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(2)<br>(1)<br>(1)<br>(2)<br>(1)<br>(1)               | Officer-in-Charge<br>Naval Civil Engineering Research<br>and Evaluation Laboratory<br>U.S. Naval Construction Battalion Center<br>Port Hueneme, California                                    | (2)                                           |
| Chief, Defense Atomic Support Agency<br>The Pentagon<br>Washington 25, D. C.<br>Attn: Technical Information Division<br>Weapons Effects Division<br>Special Field Projects<br>Blast and Shock Branch                                                                                                                    | (2)<br>(1)<br>(1)<br>(1)               | Chief, Bureau of Naval Weapons<br>Department of the Navy<br>Washington 25, D. C.<br>Attn: RRMA<br>RAAV-34<br>RAAD<br>RAAD-2<br>RRSV-7<br>RRS-8<br>RSSH<br>DIL-3<br>R<br>RM<br>RV<br>RMLG<br>RMGA<br>RR                          | (1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1) | Officer-in-Charge<br>Underwater Explosion Research Division<br>Norfolk Naval Shipyard<br>Portsmouth, Virginia<br>Attn: Dr. H. M. Schauer                                                      | (2)                                           |
| Office of the Secretary of the Army<br>The Pentagon<br>Washington 25, D. C.<br>Attn: Army Library                                                                                                                                                                                                                       | (1)                                    | Commanding Officer<br>Frankford Arsenal<br>Bridgesburg Station<br>Philadelphia 37, Pennsylvania<br>Attn: Laboratory Division                                                                                                    | (1)<br>(1)<br>(1)<br>(1)                                                                       | Commander<br>U.S. Naval Proving Ground<br>Dahlgren, Virginia                                                                                                                                  | (1)                                           |
| Chief of Staff<br>Department of the Army<br>Washington 25, D. C.<br>Attn: Development Branch (RandD Div.)<br>Research Branch (RandD Div.)<br>Special Weapons Br. (RandD Div.)                                                                                                                                           | (1)<br>(1)<br>(1)<br>(1)               |                                                                                                                                                                                                                                 |                                                                                                | Supervisor of Shipbuilding, USN and<br>Naval Inspector of Ordnance<br>General Dynamics Corporation<br>Electric Boat Division<br>Groton, Connecticut                                           | (1)                                           |
| Office of the Chief of Engineers<br>Department of the Army<br>Washington 25, D. C.<br>Attn: ENG-HL Lib. Br., Adm. Ser. Div.<br>ENG-WD Planning Div. Civil Wks.<br>ENG-EB Port. Constr. Br., Eng.<br>Div., Mil. Constr.<br>ENG-EA Struc. Br., Eng. Div.,<br>Mil. Constr.<br>ENG-NB Special Engr. Br., Eng.<br>RandD Div. | (1)<br>(1)<br>(1)<br>(1)<br>(1)<br>(1) |                                                                                                                                                                                                                                 |                                                                                                | Supervisor of Shipbuilding, USN and<br>Naval Inspector of Ordnance<br>Ingalls Shipbuilding Corporation<br>Pascagoula, Mississippi                                                             | (1)                                           |

|                                                                                                                                                                        |     |                                                                                                                                                        |     |                                                                                                                                                                        |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Commanding Officer<br>U.S. Naval Administrative Unit<br>Massachusetts Institute of Technology<br>Cambridge 39, Massachusetts                                           | (1) | National Aeronautics and Space Administration<br>1512 H Street, N. W.<br>Washington 25, D. C.<br>Attn: Loads and Structures Division                   | (2) | Professor D. C. Drucker, Chairman<br>Division of Engineering<br>Brown University<br>Providence 12, Rhode Island                                                        | (1) |
| Officer-in-Charge<br>Postgraduate School for Naval Officers<br>Webb Institute of Naval Architecture<br>Crescent Beach Road<br>Glen Cove, Long Island, New York         | (1) | Director<br>National Aeronautics and Space Administration<br>Langley Research Center<br>Langley Field, Virginia<br>Attn: Structures Division           | (2) | Professor A.C. Eringen<br>Department of Aeronautical Engineering<br>Purdue University<br>Lafayette, Indiana                                                            | (1) |
| Superintendent<br>Naval Weapons Plant<br>Washington 25, D. C.                                                                                                          | (1) | Director, Forest Products Laboratory<br>Madison, Wisconsin                                                                                             | (1) | Professor J. Erickson<br>Mechanical Engineering Department<br>Johns Hopkins University<br>Baltimore 18, Maryland                                                       | (1) |
| Commander<br>Naval Ordnance Test Station<br>China Lake, California<br>Attn: Physics Division                                                                           | (1) | Federal Aviation Agency<br>Department of Commerce<br>Washington 25, D. C.<br>Attn: Chief, Aircraft Engineering Division                                | (1) | Professor W. Filgue<br>Department of Mechanical Engineering<br>Stanford University<br>Stanford, California                                                             | (1) |
| Attn: Mechanics Division                                                                                                                                               | (1) | Chief, Airframe and Equipment Branch                                                                                                                   | (1) |                                                                                                                                                                        |     |
| Commanding Officer<br>Naval Ordnance Test Station<br>Underwater Ordnance Division<br>3202 E. Foothill Boulevard<br>Pasadena 8, California<br>Attn: Structures Division | (1) | National Sciences Foundation<br>1520 H Street, N. W.<br>Washington, D. C.<br>Attn: Engineering Sci. Div.                                               | (1) | Mr. Martin Goland, President<br>Southwest Research Institute<br>8500 Culebra Road<br>San Antonio 6, Texas                                                              | (1) |
| Commanding Officer and Director<br>U.S. Naval Engineering Experiment Station<br>Annapolis, Maryland                                                                    | (1) | National Academy of Sciences<br>2101 Constitution Avenue<br>Washington 25, D. C.<br>Attn: Technical Director, Committee on<br>Ships' Structural Design | (1) | Professor J. N. Goodier<br>Department of Mechanical Engineering<br>Stanford University<br>Stanford, California                                                         | (1) |
| Superintendent<br>U.S. Naval Postgraduate School<br>Monterey, California                                                                                               | (1) | Executive Secretary, Committee on<br>Undersea Warfare                                                                                                  | (1) | Professor L. E. Goodman<br>Engineering Experiment Station<br>University of Minnesota<br>Minneapolis, Minnesota                                                         | (1) |
| Commandant<br>Marine Corps Schools<br>Quantico, Virginia<br>Attn: Director, Marine Corps Development<br>- Center                                                       | (1) | General Dynamics Corporation<br>Electric Boat Division<br>Groton, Connecticut                                                                          | (1) | Professor M. Hetenyi<br>The Technological Institute<br>Northwestern University<br>Evanston, Illinois                                                                   | (1) |
| Commanding General<br>U.S. Air Force<br>Washington 25, D. C.<br>Attn: Research and Development Division                                                                | (1) | Ingalls Shipbuilding Corporation<br>Pascagoula, Mississippi                                                                                            | (1) | Professor P. G. Hodge<br>Department of Mechanics<br>Illinois Institute of Technology<br>Chicago 16, Illinois                                                           | (1) |
| Commander<br>Air Material Command<br>Wright-Patterson Air Force Base<br>Dayton, Ohio<br>Attn: MCRX-B                                                                   | (1) | Professor Lynn S. Beedle<br>Fritz Engineering Laboratory<br>Lehigh University<br>Bethlehem, Pennsylvania                                               | (1) | Professor N. J. Hoff, Head<br>Division of Aeronautical Engineering<br>Stanford University<br>Stanford, California                                                      | (1) |
| Structures Division                                                                                                                                                    | (1) | Professor R. L. Bisplinghoff<br>Department of Aeronautical Engineering<br>Massachusetts Institute of Technology<br>Cambridge 39, Massachusetts         | (1) | Professor Bruce G. Johnston<br>University of Michigan<br>Ann Arbor, Michigan                                                                                           | (1) |
| Commander<br>U.S. Air Force Institute of Technology<br>Wright-Patterson Air Force Base<br>Dayton, Ohio<br>Attn: Chief, Applied Mechanics Group                         | (1) | Professor H. H. Bleich<br>Department of Civil Engineering<br>Columbia University<br>New York 27, New York                                              | (1) | Professor W. H. Hoppmann, II<br>Department of Mechanics<br>Rensselaer Polytechnic Institute<br>Troy, New York                                                          | (1) |
| Director of Intelligence<br>Headquarters, U.S. Air Force<br>Washington 25, D. C.<br>Attn: P.V. Branch (Air Targets Division)                                           | (1) | Professor B. A. Boley<br>Department of Civil Engineering<br>Columbia University<br>New York 27, New York                                               | (1) | Professor J. Kempner<br>Department of Aeronautical Engineering<br>and Applied Mechanics<br>Polytechnic Institute of Brooklyn<br>333 Jay Street<br>Brooklyn 1, New York | (1) |
| Commander<br>Air Force Office of Scientific Research<br>Washington 25, D. C.<br>Attn: Mechanics Division                                                               | (1) | Dr. John F. Brahtz<br>Department of Engineering<br>University of California<br>Los Angeles, California                                                 | (1) | Professor H. L. Langhaar<br>Department of Theoretical and Applied Mechanics<br>University of Illinois<br>Urbana, Illinois                                              | (1) |
| U.S. Atomic Energy Commission<br>Washington 25, D. C.<br>Attn: Director of Research                                                                                    | (2) | Dr. D. O. Brush<br>Structures Department 53-13<br>Lockheed Aircraft Corporation<br>Missile Systems Division<br>Sunnyvale, California                   | (1) | Professor B. J. Lazan, Director<br>Engineering Experiment Station<br>University of Minnesota<br>Minneapolis 14, Minnesota                                              | (1) |
| Director<br>National Bureau of Standards<br>Washington 25, D. C.<br>Attn: Division of Mechanics                                                                        | (1) | Professor B. Budiansky<br>Department of Mechanical Engineering<br>School of Applied Sciences<br>Harvard University<br>Cambridge 38, Massachusetts      | (1) | Professor E. H. Lee<br>Division of Applied Mathematics<br>Brown University<br>Providence 12, Rhode Island                                                              | (1) |
| Engineering Mechanics Section                                                                                                                                          | (1) | Professor G. F. Carrier<br>Pierce Hall<br>Harvard University<br>Cambridge 38, Massachusetts                                                            | (1) | Mr. S. Levy<br>General Electric Research Laboratory<br>3108 Chestnut Street<br>Philadelphia, Pennsylvania                                                              | (1) |
| Aircraft Structures                                                                                                                                                    | (1) | Professor Herbert Deresiewicz<br>Department of Civil Engineering<br>Columbia University<br>632 W. 128th Street<br>New York 27, New York                | (1) | Professor Paul Lieber<br>Geology Department<br>University of California<br>Berkeley 4, California                                                                      | (1) |
| Commandant<br>U.S. Coast Guard<br>1300 E. Street, N. W.<br>Washington 25, D. C.<br>Attn: Chief, Testing and Development Division                                       | (1) | Professor R. A. Di Taranto<br>Department of Mechanical Engineering<br>Drexel Institute<br>32nd and Chestnuts Streets<br>Philadelphia, Pennsylvania     | (1) | Newport News Shipbuilding and Dry Dock Co.<br>Newport News, Virginia                                                                                                   | (1) |
| U.S. Maritime Administration<br>General Administration Office Building<br>441 G Street, N. W.<br>Washington 25, D. C.<br>Attn: Chief, Division of Preliminary Design   |     |                                                                                                                                                        |     |                                                                                                                                                                        |     |

|                                                                                                                                                                                  |     |                                                                                                          |      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------|------|
| Professor Joseph Marin, Head<br>Department of Engineering Mechanics<br>College of Engineering and Architecture<br>Pennsylvania State University<br>University Park, Pennsylvania | (1) | Professor A. S. Velesos<br>Department of Civil Engineering<br>University of Illinois<br>Urbana, Illinois | (1)  |
| Professor R. D. Mindlin<br>Department of Civil Engineering<br>Columbia University<br>632 W. 125th Street<br>New York 27, New York                                                | (1) | Dr. E. Wenk, Senior Specialist<br>Science and Technology<br>Library of Congress<br>Washington 25, D. C.  | (1)  |
| Professor Paul M. Naghdi<br>Building T-7<br>College of Engineering<br>University of California<br>Berkeley 4, California                                                         | (1) | Professor Dana Young<br>Yale University<br>New Haven, Connecticut                                        | (1)  |
| Professor William A. Nash<br>Department of Engineering Mechanics<br>University of Florida<br>Gainesville, Florida                                                                | (1) | Project Staff                                                                                            | (10) |
| Professor N. M. Newmark, Head<br>Department of Civil Engineering<br>University of Illinois<br>Urbana, Illinois                                                                   | (1) | For your future distribution                                                                             | (10) |
| Professor E. Orowan<br>Department of Mechanical Engineering<br>Massachusetts Institute of Technology<br>Cambridge 39, Massachusetts                                              | (1) |                                                                                                          |      |
| Professor Aris Phillips<br>Department of Civil Engineering<br>15 Prospect Street<br>Yale University<br>New Haven, Connecticut                                                    | (1) |                                                                                                          |      |
| Professor W. Prager, Chairman<br>Physical Sciences Council<br>Brown University<br>Providence 12, Rhode Island                                                                    | (1) |                                                                                                          |      |
| Professor J. R. M. Radok<br>Department of Aeronautical Engineering and<br>Applied Mechanics<br>Polytechnic Institute of Brooklyn<br>333 Jay Street<br>Brooklyn 1, New York       | (1) |                                                                                                          |      |
| Professor E. Reiss<br>Institute of Mathematical Sciences<br>New York University<br>25 Waverly Place<br>New York 5, New York                                                      | (1) |                                                                                                          |      |
| Professor E. Reissner<br>Department of Mathematics<br>Massachusetts Institute of Technology<br>Cambridge 39, Massachusetts                                                       | (1) |                                                                                                          |      |
| Professor M. A. Sadowsky<br>Department of Mechanics<br>Rensselaer Polytechnic Institute<br>Troy, New York                                                                        | (1) |                                                                                                          |      |
| Dr. Hyman Serbin<br>Design Integration Department<br>Hughes Aircraft Company<br>Culver City, California                                                                          | (1) |                                                                                                          |      |
| Professor Bernard W. Shaffer<br>Department of Mechanical Engineering<br>New York University<br>University Heights<br>New York 53, New York                                       | (1) |                                                                                                          |      |
| Professor J. Stallmeyer<br>Department of Civil Engineering<br>University of Illinois<br>Urbana, Illinois                                                                         | (1) |                                                                                                          |      |
| Professor Eli Sternberg<br>Department of Mechanics<br>Brown University<br>Providence 12, Rhode Island                                                                            | (1) |                                                                                                          |      |
| Dr. T. Y. Thomas<br>Graduate Institute for Mathematics and Mechanics<br>Indiana University<br>Bloomington, Indiana                                                               | (1) |                                                                                                          |      |
| Professor S. P. Timoshenko<br>School of Engineering<br>Stanford University<br>Stanford, California                                                                               | (1) |                                                                                                          |      |