

UNCLASSIFIED

AD

405 935

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED


NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-3-6


USAEIRDOL Technical Report 2356

SOLID STATE S- AND X-BAND POWER SOURCES

V. Boxer



January 1963



UNITED STATES ARMY
ELECTRONICS RESEARCH AND DEVELOPMENT LABORATORY
FORT MONMOUTH, N.J.

405 935

405935

SOLID STATE S- AND X-BAND POWER SOURCES

V. Boxer

DA Task Nr. 3A99-21-003-03

ABSTRACT

It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, 2 watts of microwave power at S-band (3000 Mc) and 250 milliwatts at X-band can be obtained from such sources.

Sylvania Electronic Systems, Buffalo, New York, has fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at USAEIRDL as part of the model-evaluation program. Spurious responses are shown to be at least 24 db below the primary output; stability is better than 0.0001 per cent.

U. S. ARMY ELECTRONICS RESEARCH AND DEVELOPMENT LABORATORY
FORT MONMOUTH, NEW JERSEY

CONTENTS

	<u>Page</u>
Abstract	1
INTRODUCTION	1
CIRCUIT DESCRIPTION	1
CHARACTERISTICS	2
Electrical Characteristics	2
Spurious Response	3
Stability	3
Shock	4
INSTRUMENTATION	4
Frequency Measurement	4
SUMMARY AND CONCLUSION	4
FIGURES	
1. Schematic Harmonic Exciter Chain	6
1A. Under-Chassis View	7
1B. Module View	8
2. S-X Band Power Generators: Block Diagram	9
3. X-Band Power Generator	10
4. Varactor Doubling Efficiency vs Frequency	11
5. Third and Fourth Doublers	12
6. S to C Band Doubler	13
7. C to X Band Doubler	14
8. X Band Power Generator	15
9. Complete X Band Power Generator	16
10. X Band Solid-State Source	17
11. X Band Power Generator	18
12. Spectrum of Solid State Source Showing the Sideband Appearance While Changing the Supply Voltage	19

CONTENTS (cont)

	<u>Page</u>
13. Spectrum of Source with Supply Voltage Misadjusted	19
14. Spectrum of Source Showing Sideband Dispersion During Warmup (Approximately First Minute)	19
15. Carrier Suppressed with Low Supply Voltage	19
16. Spectrum During Warmup Showing Equal Sidebands	19
17. Peaked Carrier with Supply Voltage Change	20
18. Noisy Spectrum from High Supply Voltage	20
19. Noise from Klystron while being Tapped with Wooden Pencil	20
20. Noise from Solid-State Source while being Tapped with 2-Ounce Ball-Peen Hammer	20

SOLID STATE S- AND X-BAND POWER SOURCES

INTRODUCTION

Capability in the area of harmonic generation has been significantly increased as a result of application of the varactor diode to this task. It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, it is possible to obtain watts of microwave power at S-band (3000 Mc) and hundreds of milliwatts at X-band (9000 Mc) from such sources.

Sylvania Electronic Systems, Buffalo, New York, has developed and fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at the USAELRDL as part of the model-evaluation program. The circuit description and illustrated photographs of the circuit modules are included for completeness, and may also be found in the quarterly reports for the contractual program.

The objectives of the above development program were to provide relatively compact, stable, microwave power sources for S- and X-bands. The S-band unit was to be capable of providing two watts of CW rf power, while the X-band source would provide in excess of 200 milliwatts of similar rf power. This was accomplished by a series of frequency multipliers employing silicon transistors and varactor diodes in thermally compensated circuits driven by a crystal-controlled oscillator. The S-band unit consists of 10 such stages, whereas the X-band version uses 12.

CIRCUIT DESCRIPTION

The harmonically related VHF exciter chain, shown in Figs. 1, 1A, and 1B, common to both power sources, contains seven transistors, uses lumped circuits, and terminates at 140.6 Mc with a power output of 12 watts, and an overall efficiency of 43 percent. From that point on the multiplier stages employ varactor diodes in appropriate microwave mounting, biasing, and matching networks to complete the chain to the desired output frequency (Fig. 2). The actual doubling efficiency versus frequency is shown in Figs. 3 and 4.

The unit is approximately 6 inches high, 4-1/4 inches wide, 6-1/2 inches deep, and weighs 9.9 pounds with a volume of about 170 cubic inches. It could conceivably be packaged within 80 cubic inches at a maximum weight of four pounds by incorporating in it circuits where protective transistor breakers would not be required, and a maximum heat transfer could be effected by appropriate mounting in the chassis container.

At the present writing, solid-state varactors provide the most efficient means of converting the low frequency to the desired microwave frequency. The circuitry design of the solid-state generator takes into consideration maintenance of optimum power levels under conditions of temperature change. A thermistor in the base circuit of the power driver improves the output versus the temperature characteristics of the power amplifiers. The negative temperature coefficient of the thermistor element controls the resistance in the base circuit of the transistor, and thus controls the power gain of the amplifier. At low temperatures, the thermistor provides increased base

resistance which limits the power gain of the driver stage. As temperature increases, the base resistance decreases and provides increased drive power to the power amplifiers. Thus, the output from the power amplifiers remains constant over a temperature range determined by the thermistor characteristics and the high temperature characteristics of the power amplifier transistors.

For handling power input levels on the order of 12 watts, a balanced-pair varactor doubler with self-bias is used. This configuration is relatively insensitive to load variations and is able to minimize the stress levels imposed on the varactors. Phasing of signals may be controlled in such a way as to permit only even harmonics to be produced. Since the second harmonic is taken from the center tap of the balanced transformer, fundamental and third harmonic traps are not required. All the above advantages offset the requirements of two varactors per stage and make this circuit superior to the single varactor configuration.

The third, fourth, fifth and sixth doublers can be better understood, perhaps, by referencing their photographs in Figs. 5, 6 and 7. The input circuit for the third doubler consists of a π matching network and a coaxial capacitor. The output circuit consists of a single matching stub and a quarter wave resonant cavity. The input to the fourth doubler is matched to the output of the third doubler cavity through a double stub matching network, a coaxial capacitor, and a second harmonic trap. The short-circuit stub in the next doubler (S- and C-band), a quarter wavelength to the fundamental, located at the input side of the varactor, prevents a reflection of second harmonic power from passing back to the fundamental source. The open-circuit stub, also a quarter wavelength to the fundamental, located on the output side of the varactor, prevents fundamental power from passing on to the output. Double stub matching networks at the input and output of the multiplier insure a match to a 50-ohm impedance level. Although not shown clearly in the photographs, bias is applied to the varactor by a fine (high impedance) wire located between the open-circuit stub and the varactor. A capacitance blocking joint is inserted in the center conductor between the varactor and the double stub tuner to prevent the output double stub tuners from short circuiting the bias voltage. In the C- to X-band doubler, the varactor is located directly across a section of RG52/U waveguide. Second harmonic power is prevented from returning to the input by a short-circuit stub, a quarter wavelength to the fundamental, located at the input side of the varactor. The adjustable short circuit located at the output side of the varactor provides series tuning of the varactor at the fundamental frequency. Direct-current bias is applied to the center conductor of this circuit with an appropriate dc block located between the bias joint and the short circuit. Matching of the varactor to the waveguide is accomplished by an adjustable waveguide short circuit. A doubler stub tuner at the input to the multiplier provides matching to a 50-ohm input impedance. This completed unit is shown in Figs. 8 and 9.

CHARACTERISTICS

Electrical Characteristics

The electrical characteristics for both types of generators are listed below:

	<u>S-band</u>	<u>X-band</u>
Power Output	2 watts	250 mw
Frequency	2250 Mc	9001.25 Mc
Stability	0.0001%	0.0001%
Spurious Output	-30 db	-24 db or better
Efficiency:		
without circuit breakers	7.0%	0.9%
with circuit breakers	7.0%	0.7%
Input supply voltage	50 vdc	50 vdc

Spurious Response

A tunable X-band filter used in conjunction with an X-band frequency meter helped determine the magnitude and frequency of spurious responses. These turned out to be located at 9.865, 9.093 and 9.165 kMc. The one located nearest the desired frequency--the second mentioned, showed a power level below 0.01 mw in the test setup shown on the block diagram. The others indicated powers below 0.02 mw.

These potentially objectionable frequencies are a minimum of 24 db below the desired frequency.

Stability

The short-term checks performed with the source, counter and transfer oscillator indicate that the power generator is capable of maintaining a stability of 0.0001 percent. The curve on the graph of a number of 15 readings, levels off at a point to show a stability of 5 parts per 10 million for 45 seconds (Fig. 10). The curve for a series of readings over a five-hour period also delineates a pattern of terminal stability toward 75 parts per 10 million per hour (Fig. 11).

Since the stability is limited by that of the driving source, the generator could be improved at the cost of lowered efficiency by utilizing an oven-controlled crystal in the oscillator stage. The additional expenditure of a watt or two may be justified in the case where frequency stability is a critical requirement.

Frequency measurements conducted by the contractor with a special 46.877 Mc crystal indicated a stability of 0.0001 percent over a temperature range of 25° to 35°C. The long-term drift was less than 0.00003 percent (permanent change). Over a period of several hours, the oscillator maintained frequency within 5 cycles or 0.00001 percent at a temperature of 30 ± 1°C.

A delay of a minute or so is encountered from turn on to the time a stable CW signal with the minimum of spectrum clutter is obtained. During this time, the following sequence may be observed on a spectrum analyzer. First, noise alone is visible followed by a short interim in which the carrier plus sidebands are building up. This is followed by shifting and

diminishing sideband energy until the complete stabilization of the carrier occurs, and noise and clutter disappear.

Sideband energy can be affected by primary supply voltage variation. Figures 12 through 18 show changes in spectrum caused by voltage variations. Variations of from 3 to 5 volts resulted in the shifting of energy from the main carrier to the sidebands, even to the suppression of the main carrier. This is partially due to the fact that all circuits are supplied by one voltage source using suitable voltage dividers and diodes. Thus the latitude permitted by individual supplies is curtailed with one voltage source. Therefore, to present a good clean signal, a well-regulated supply is recommended.

Shock

While no attempts were made to evaluate this type of generator on a package tester, cursory operative tests in this Laboratory appear to establish the superior characteristics exhibited by the solid-state source (in this case--an X-band model) over its electron tube counterpart, the klystron.

A photograph taken from a display of spectrum analyzer (Fig. 19) shows the noise and frequency shift resulting from tapping a klystron with a wooden pencil approximately seven inches long. A similar photograph (Fig. 20) shows the relative insensitivity to shock when the solid-state source is tapped with a two-ounce ball-peen hammer.

INSTRUMENTATION

Frequency Measurement

The transfer oscillator generates a stable signal, adjustable in frequency from 100 to 200 megacycles, which is continuously monitored to 1 part per million accuracy by the frequency counter. Harmonics of the transfer oscillator are then compared in an internal mixer with the frequency to be measured, using a self-contained oscilloscope to observe the difference frequency. By suitable adjustment, a zero beat can be obtained between a transfer oscillator harmonic and any unknown frequency applied to the input. The unknown is then a determined multiple of the reading on the frequency counter which can be read as close as 2 parts per 10 million.

SUMMARY AND CONCLUSION

The feasibility of stable, reasonably compact, solid-state S- and X-band power sources has been demonstrated. The key criteria of stability, power, and reliability have been established for potential military use in such diverse applications as parametric amplifier pumps, local oscillators, beacons, portable transmitters, and airborne end items.

Where stability requirements are more stringent, the oven-controlled crystal oscillator may be employed. It is conceivable that techniques arising from this study may permit improved generators of considerably greater bandwidth in the immediate future.

Neglecting heating losses due to dissipation by the varactor spreading resistance and ionization effects in the semiconductor material, the power

handling capability of a varactor multiplier diode is proportional to the square of the reverse breakdown voltage of the varactor. The efficiency is proportional to the diode cutoff frequency or Q . The new 100-volt-high cutoff frequency varactors have considerably greater power handling capability than their 30-volt predecessors. This means that the high power output and efficiency previously available only in HF and UHF multipliers can now be realized at microwave frequencies up to the X-band region.

Varactor power handling limits have been raised steadily at a concomitant rate with high power, high frequency, transistor development. This combination will extend the present frequency limits, and permit rapid development of pulsed sources. Specific devices under current development include 10-watt and greater dissipation varactors, 100 Mc, 25-watt transistors, and pulsed sources of 10-watt capability at C-band.


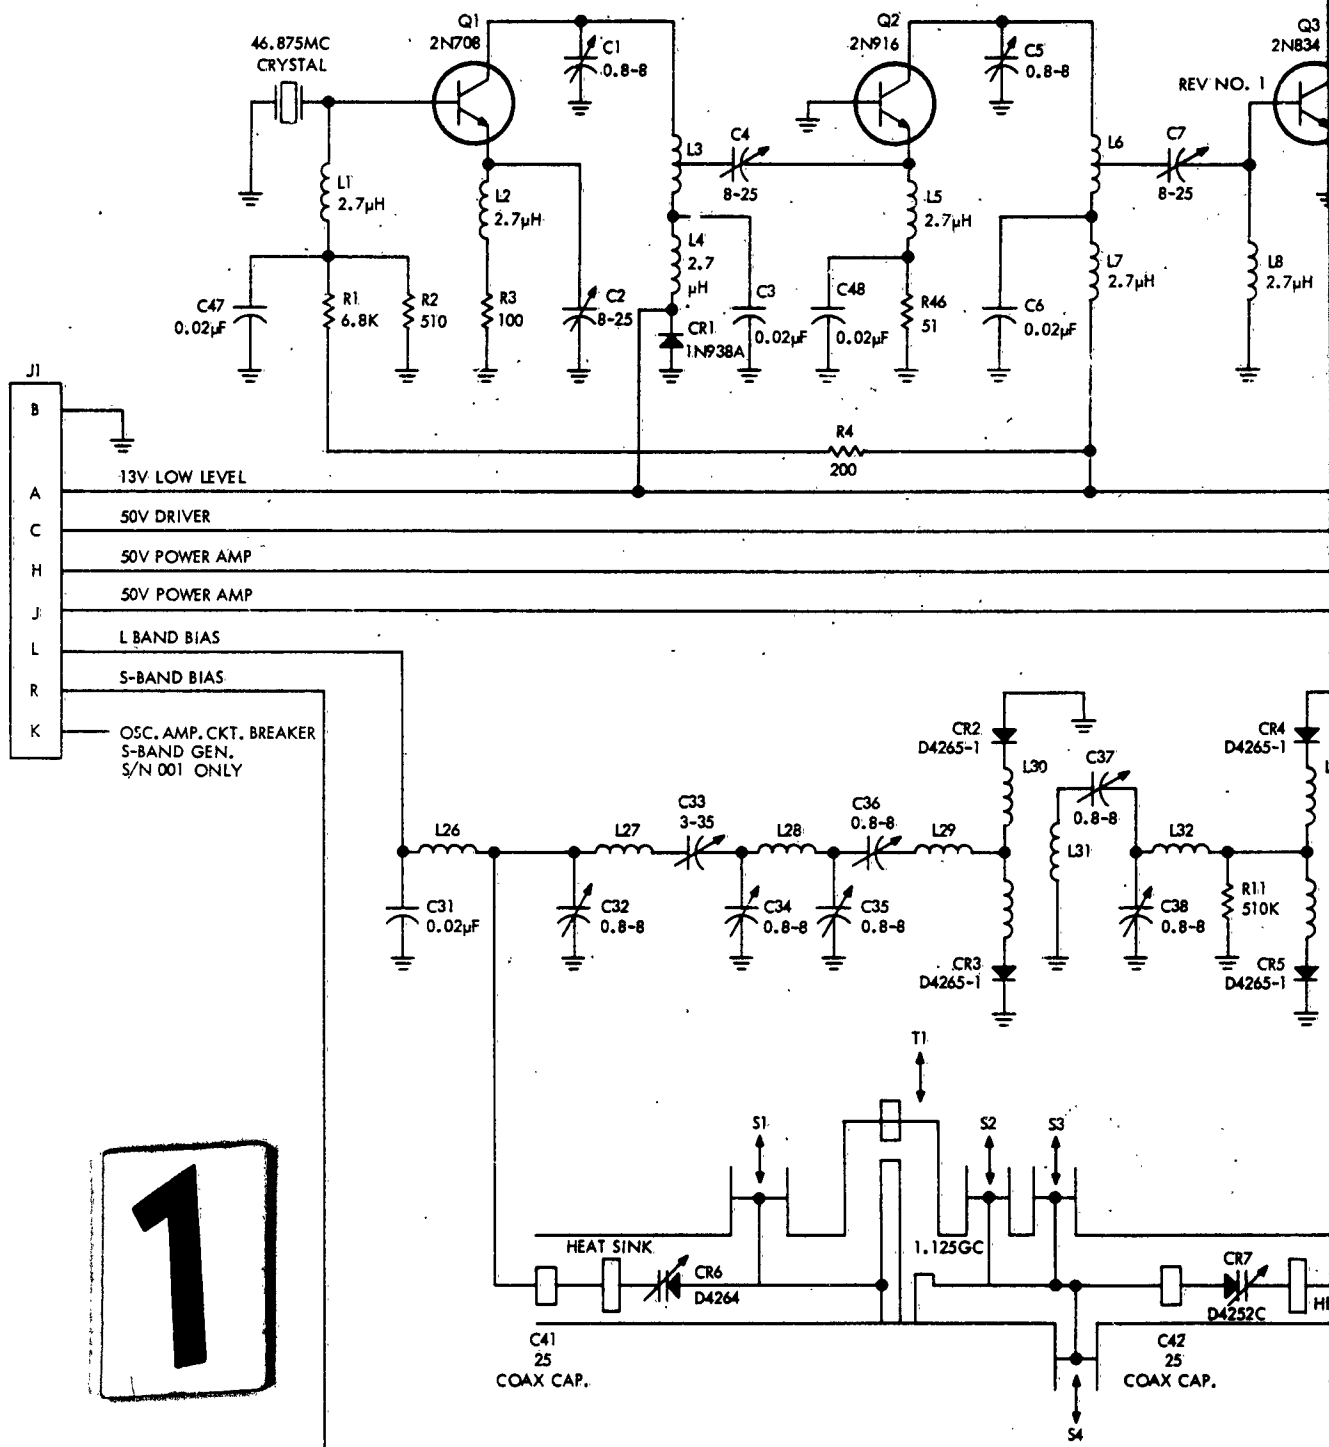


Fig. 1 SCHEMATIC HARMONIC EXCITER CHAIN

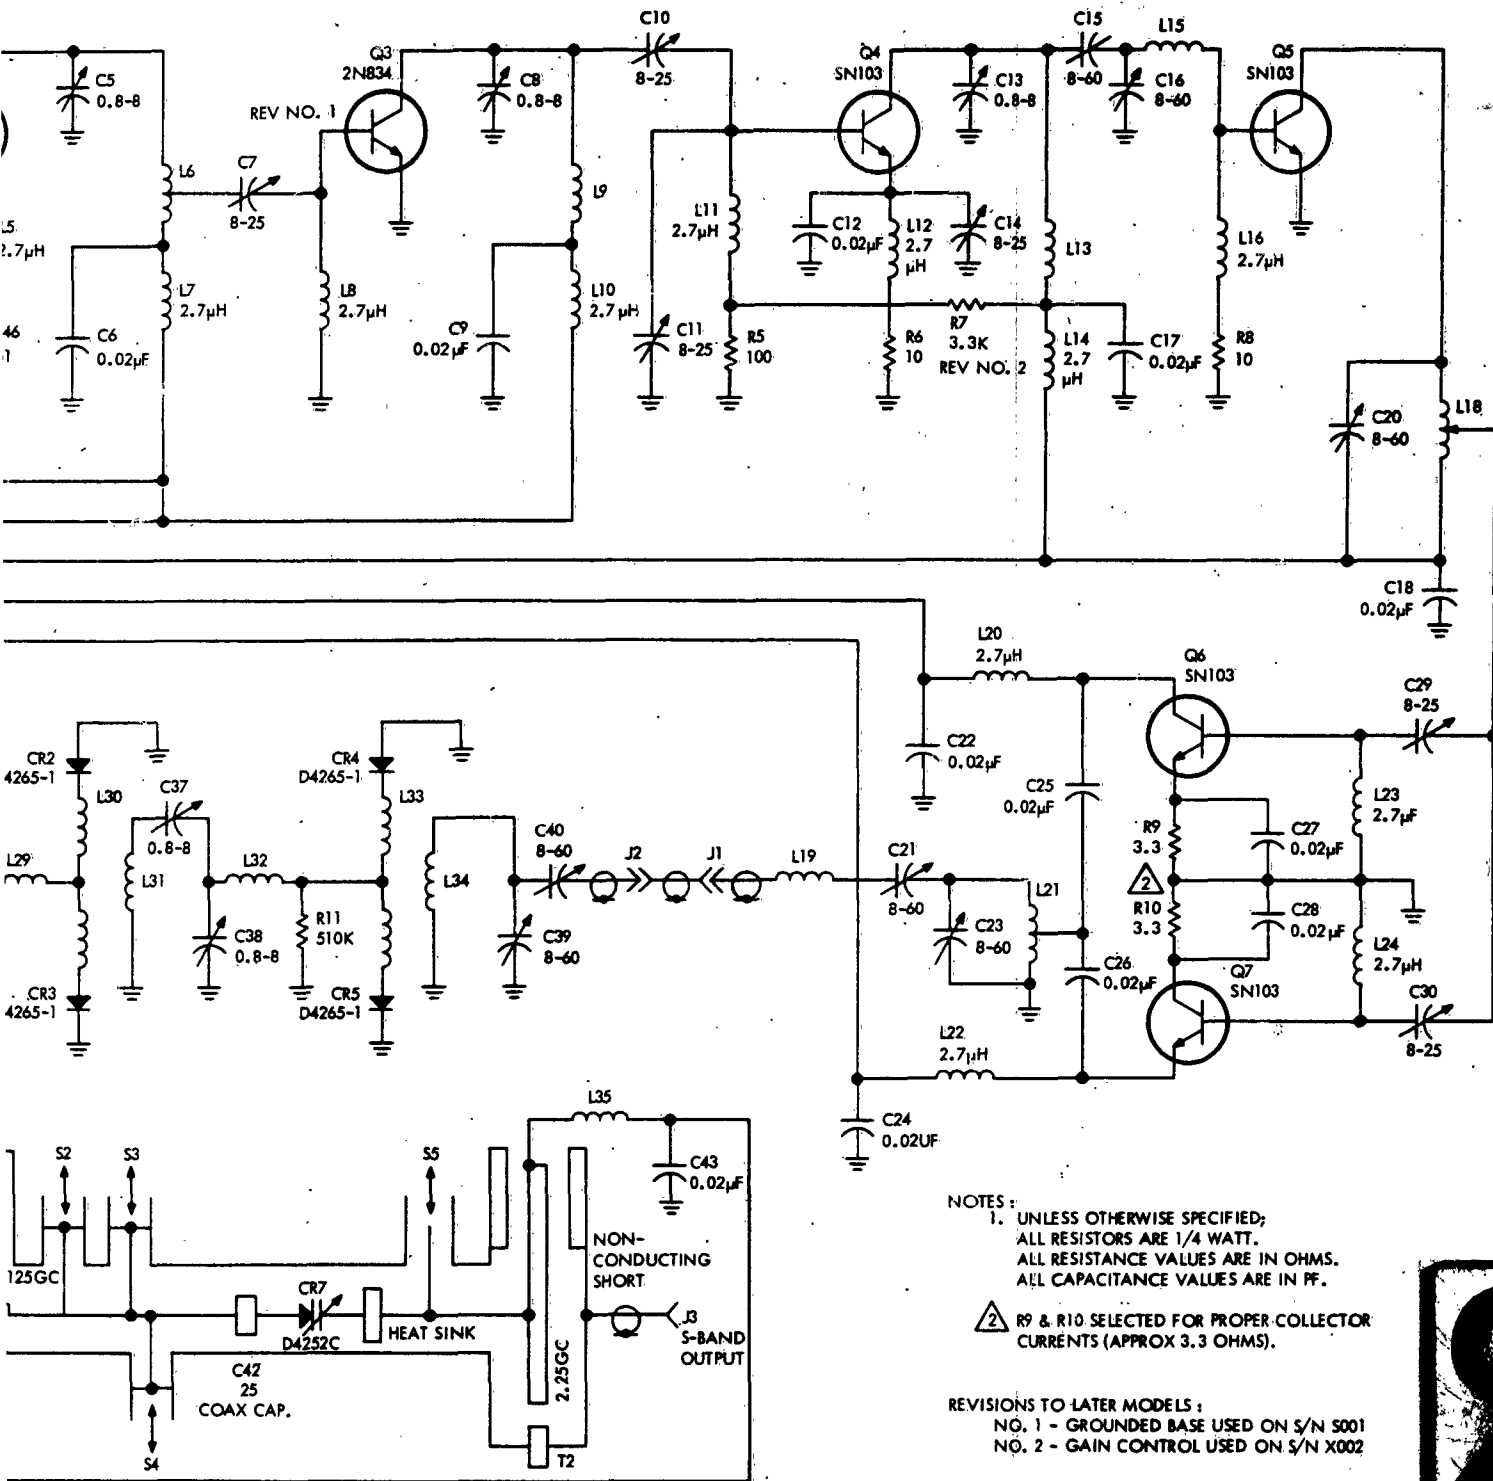

NOTES:


1. UNLESS OTHERWISE SPECIFIED;
ALL RESISTORS ARE 1/4 WATT.
ALL RESISTANCE VALUES ARE IN OHMS.
ALL CAPACITANCE VALUES ARE IN PF.

⚠ R9 & R10 SELECTED FOR PROPER COLLECTOR CURRENTS (APPROX 3.3 OHMS).

REVISIONS TO LATER MODELS:


- NO. 1 - GROUNDED BASE USED ON S/N S001
- NO. 2 - GAIN CONTROL USED ON S/N X002



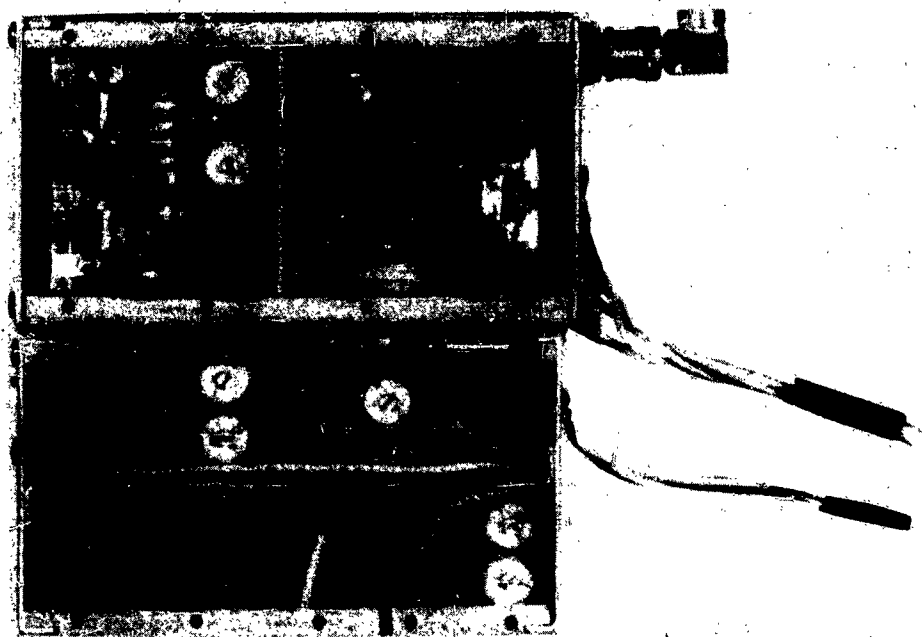


UNDER CHASSIS VIEW

FIG. 1A

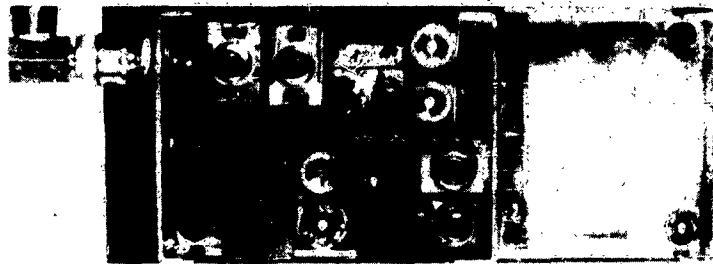

MODULE VIEW

FIG. 1B

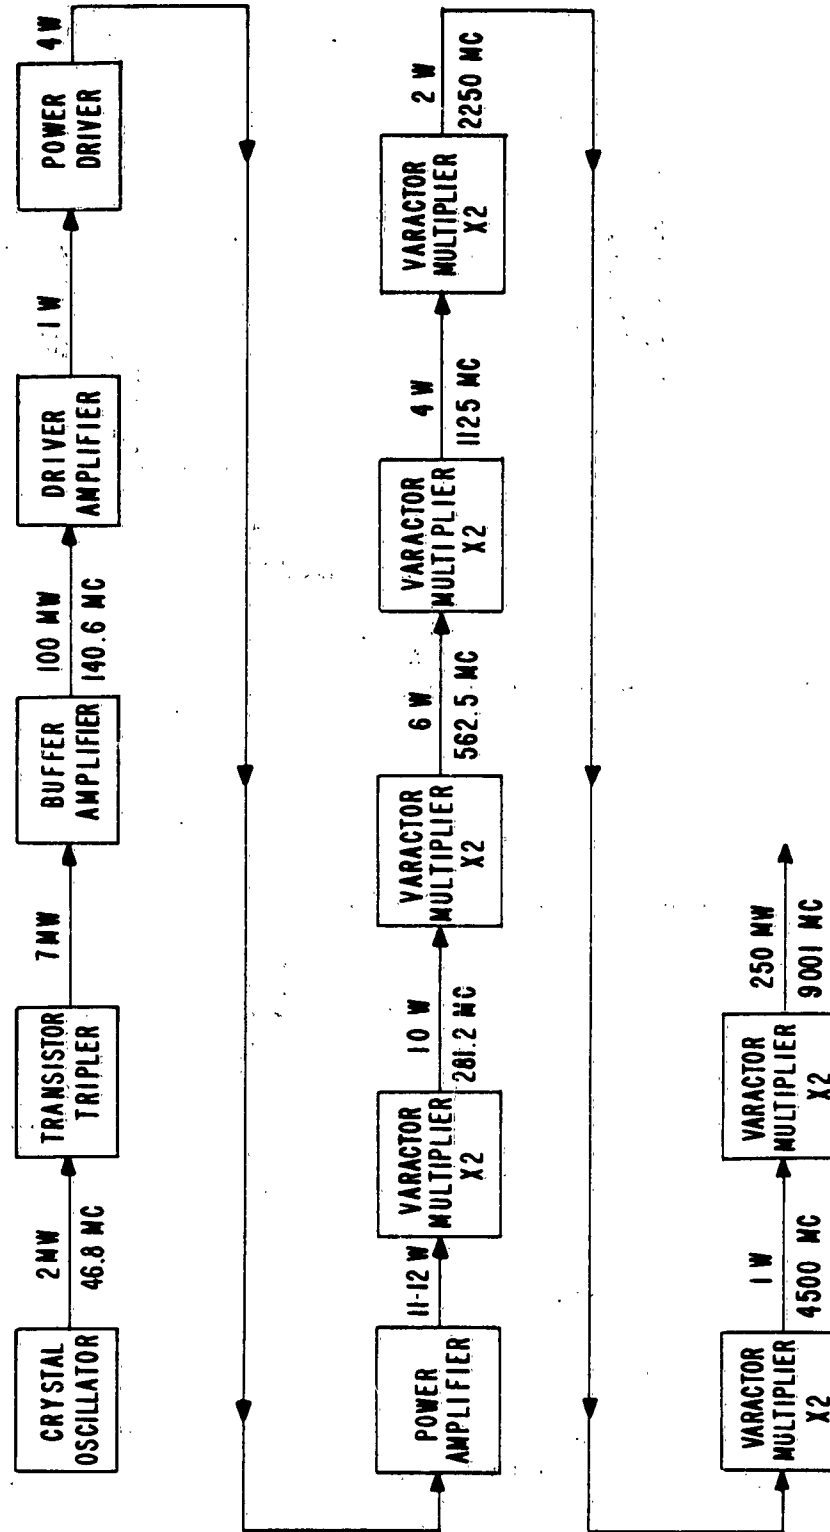

S-X BAND POWER GENERATORS
BLOCK DIAGRAM
FIG. 2



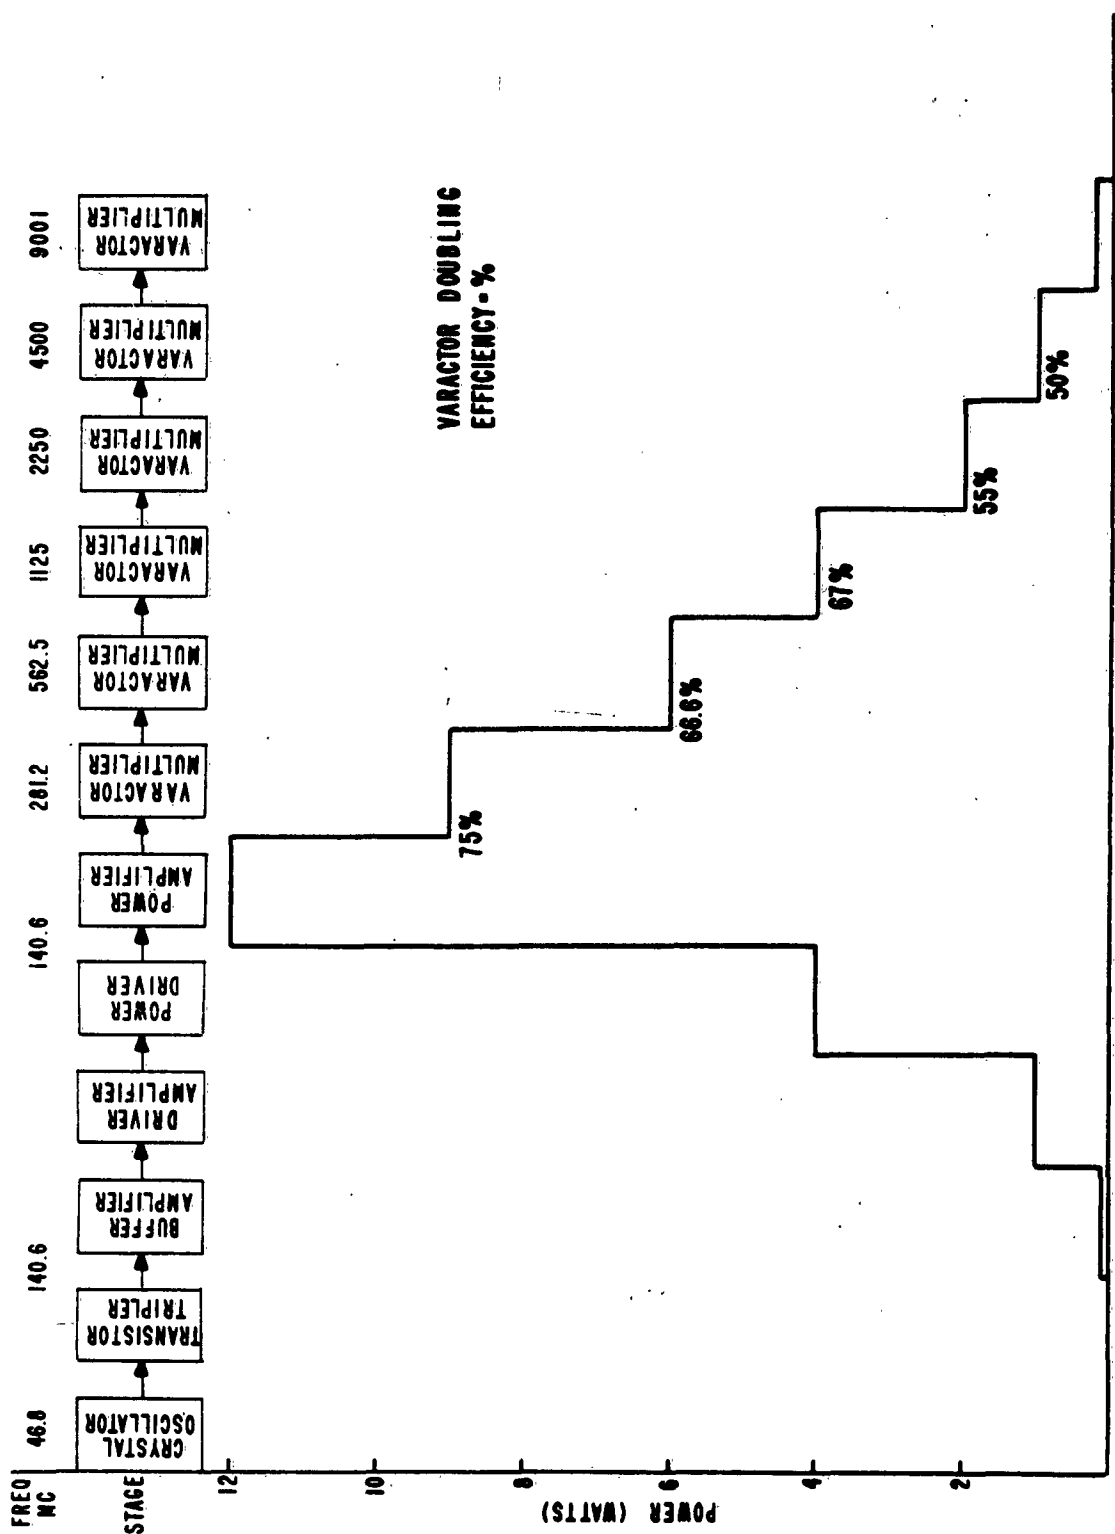


FIG. 3

VARACTOR DOUBLING EFFICIENCY VS FREQUENCY

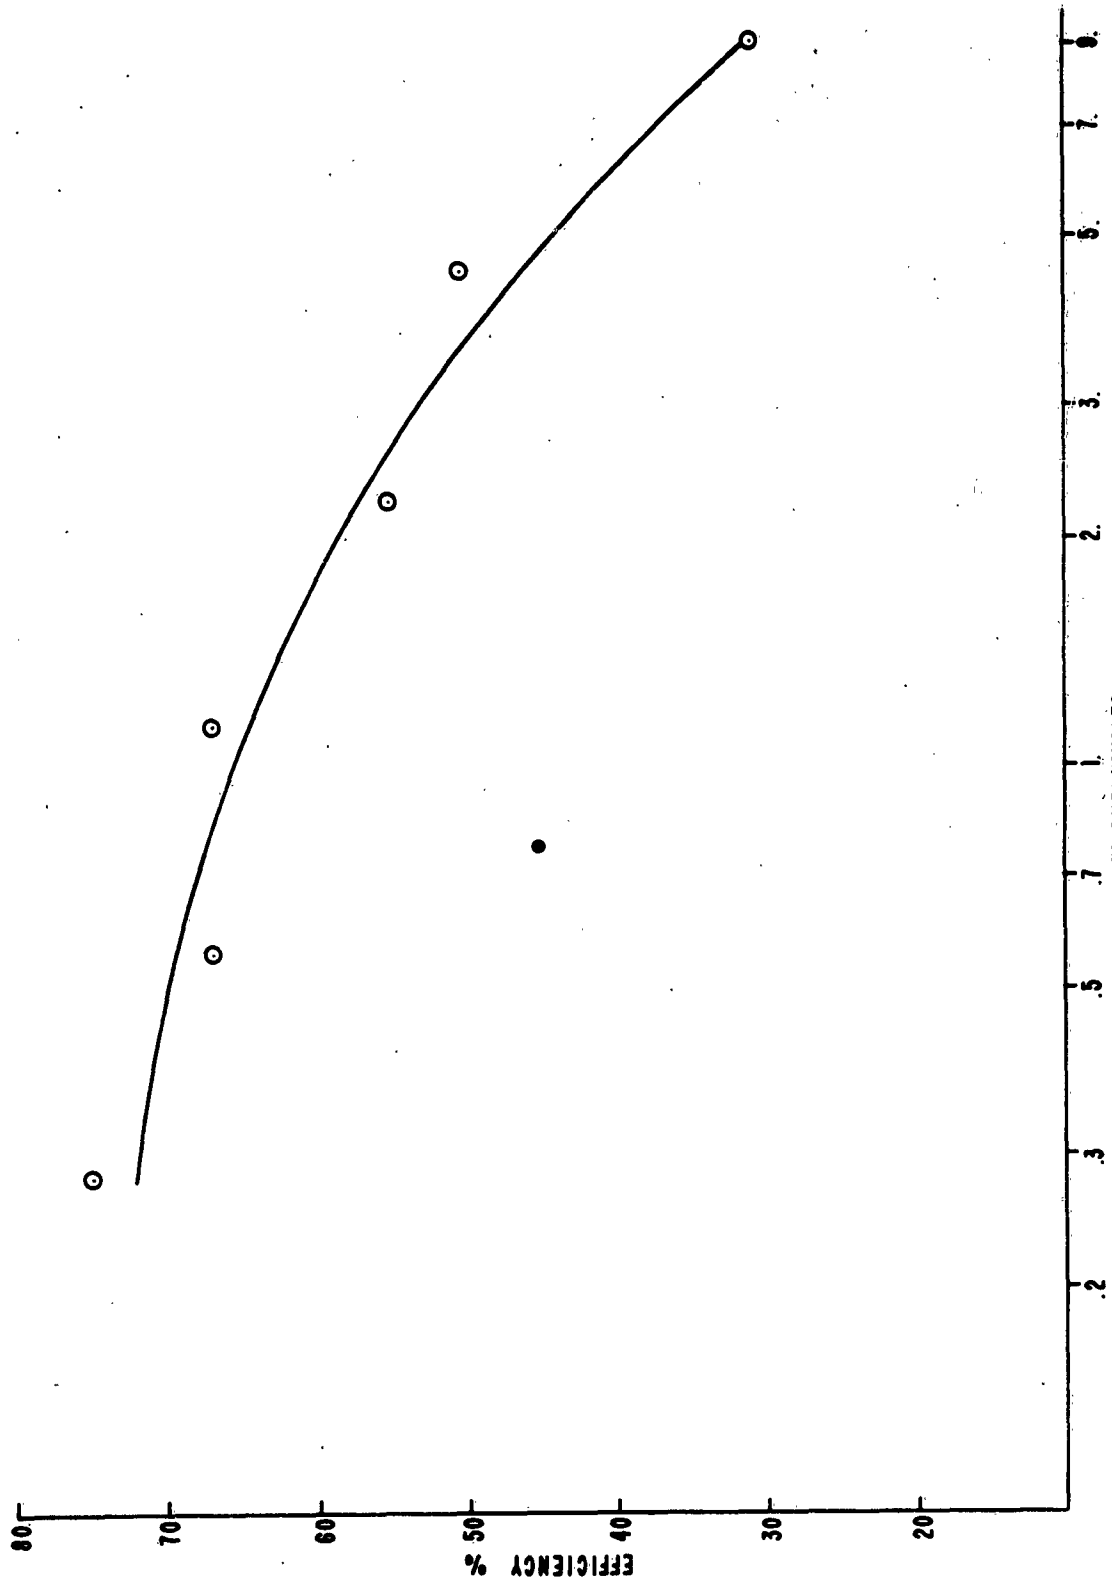


KILOMEGACYCLES
FIG. 4

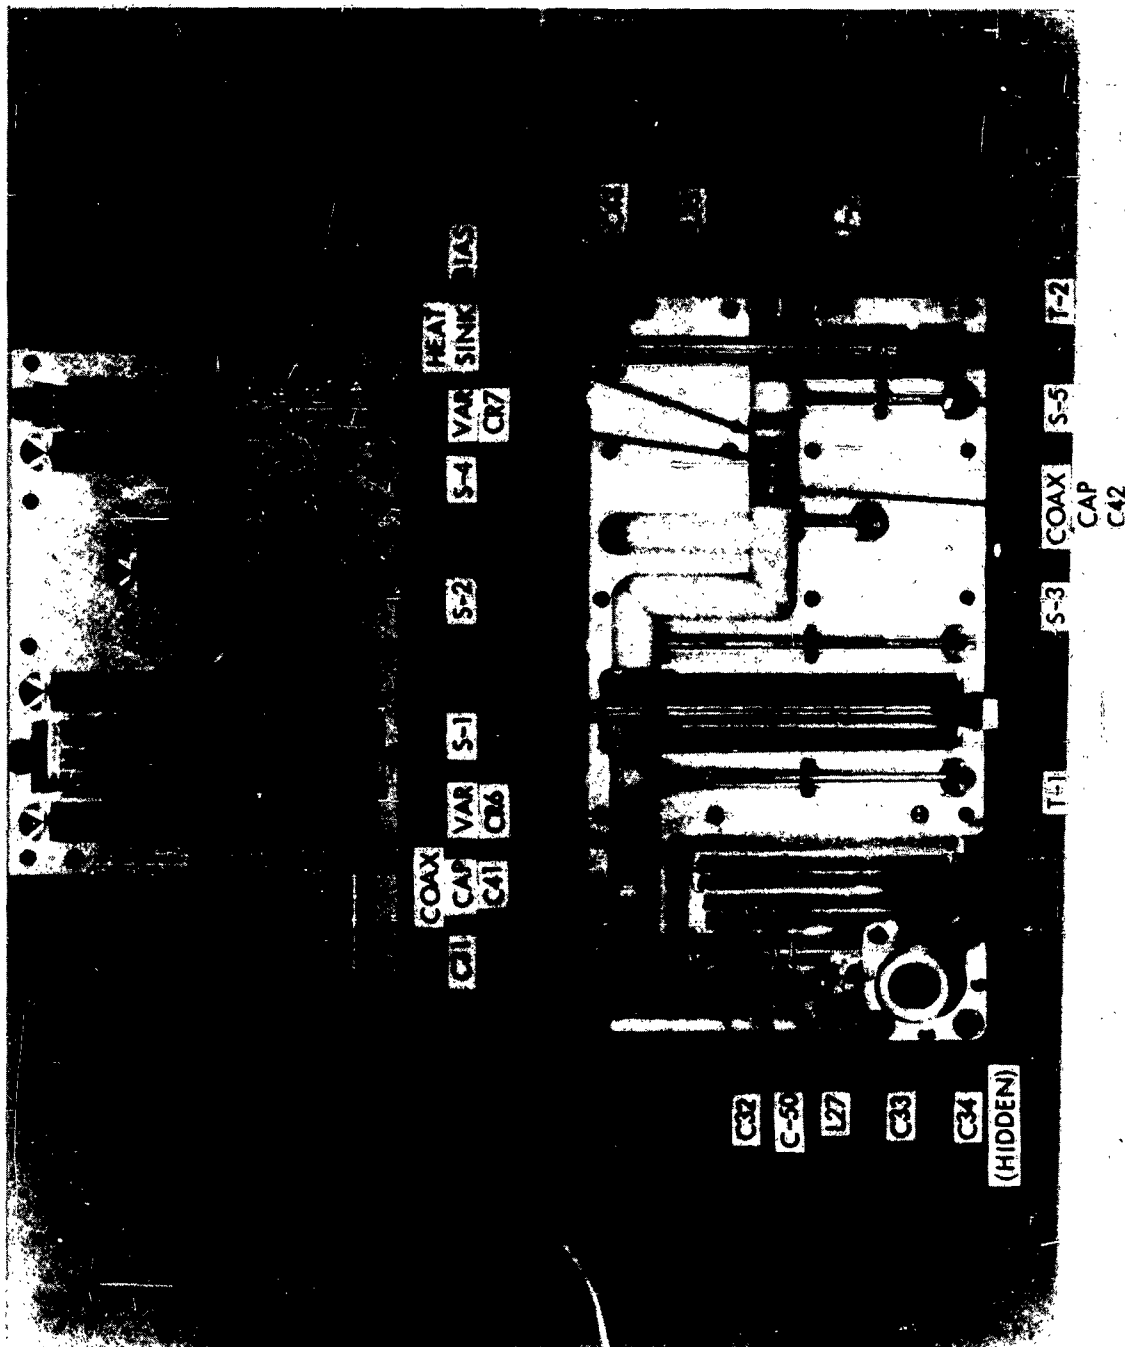


THIRD AND FOURTH DOUBLERS

FIG. 5

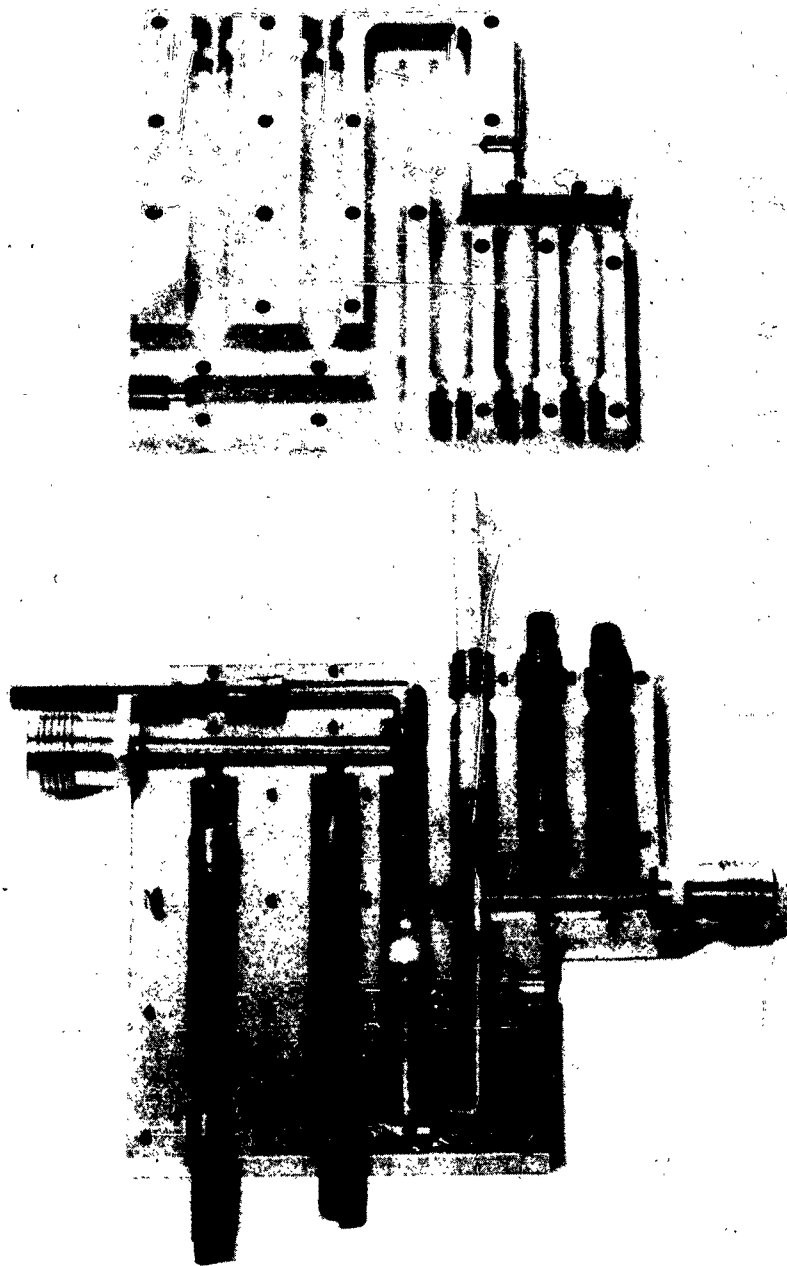

S TO C BAND DOUBLER

FIG. 6

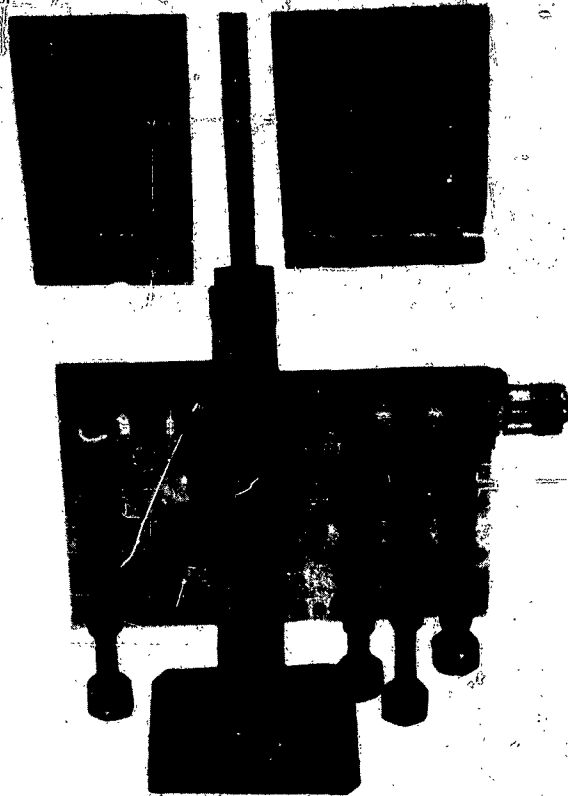

C TO X BAND DOUBLER

FIG. 7


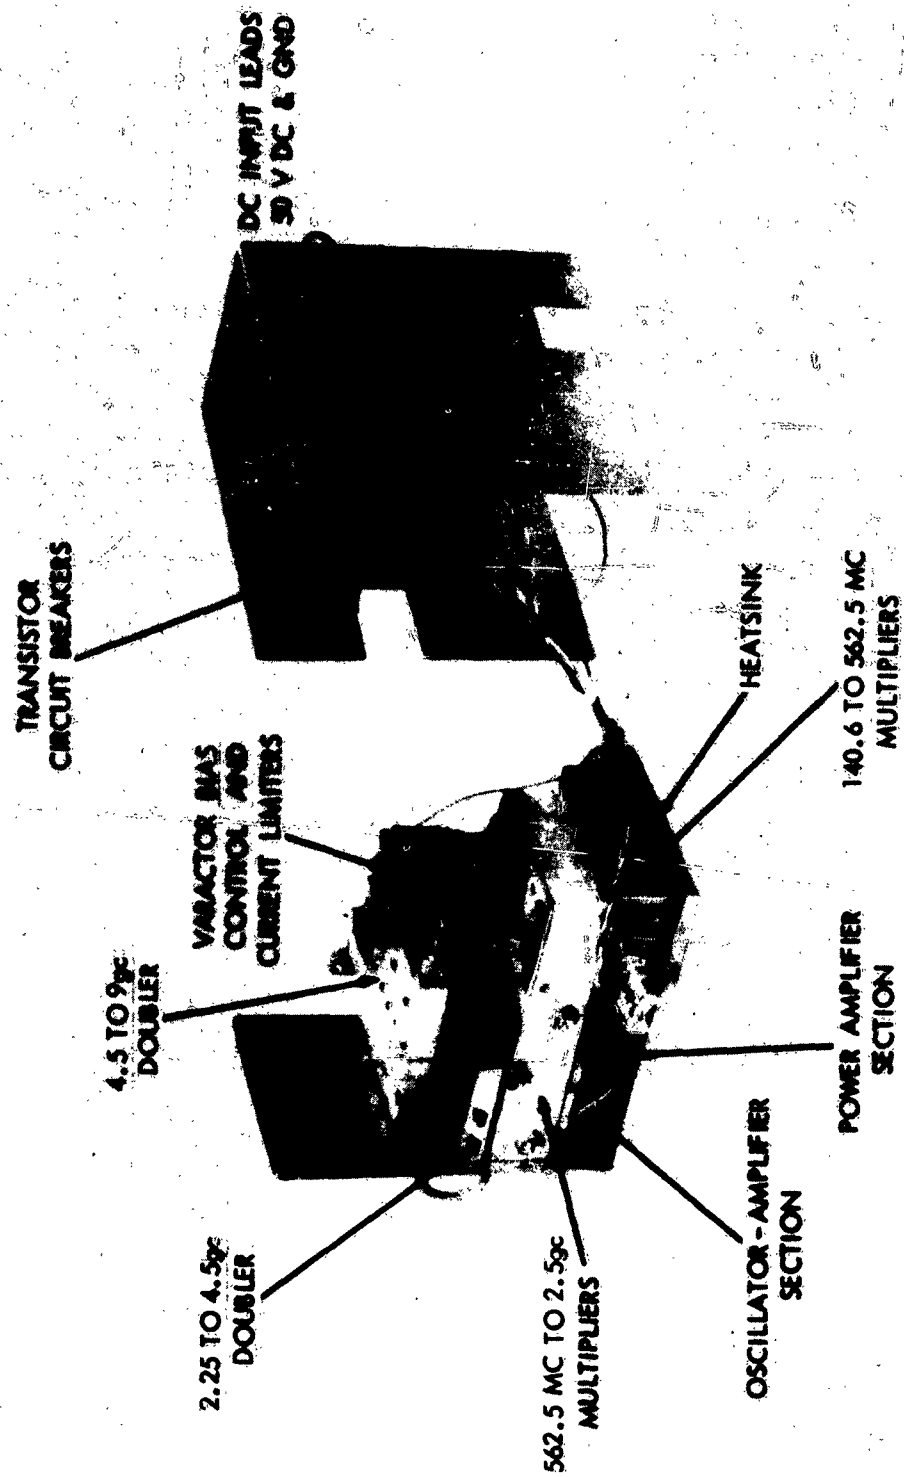


FIG. 8 X BAND POWER GENERATOR

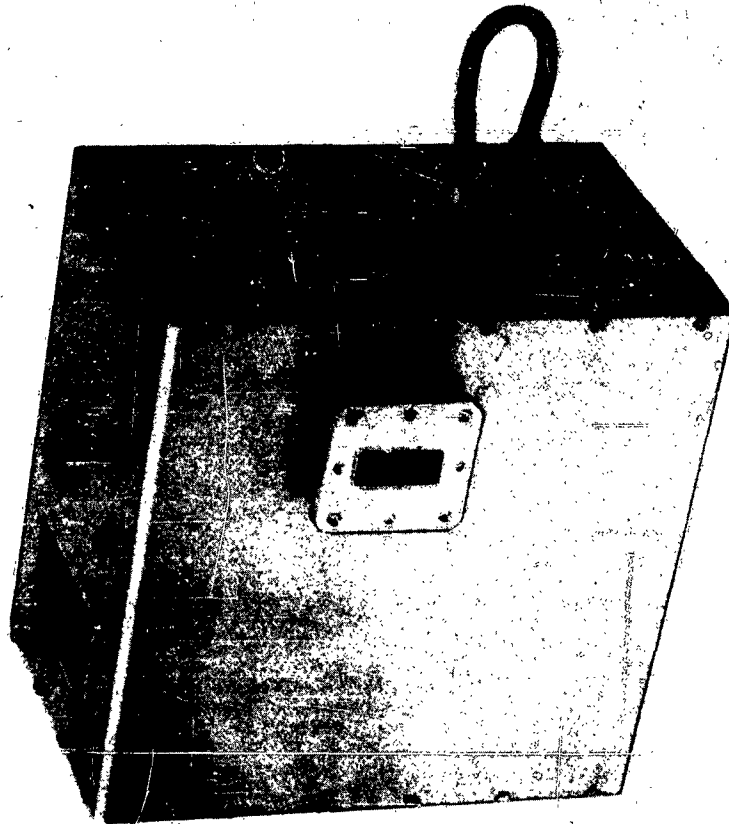

COMPLETE X BAND POWER GENERATOR

FIG. 9

X-BAND SOLID STATE SOURCE

STABILITY, SHORT TERM
COUNTER, TRANSFER OSC, SOURCE


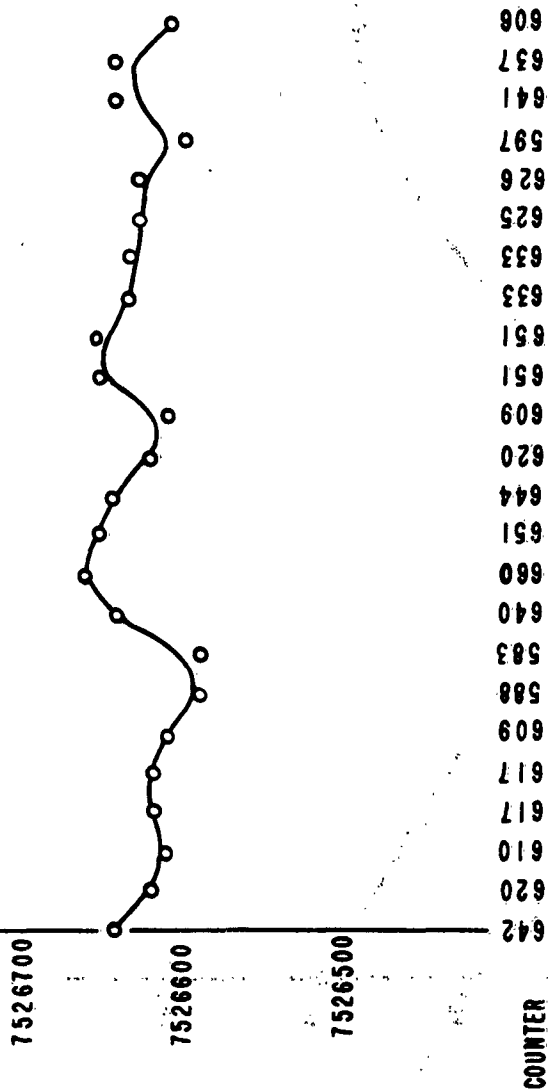


FIG. 10

X-BAND POWER GENERATOR

STABILITY
COUNTER, TRANS OSC, SOURCE

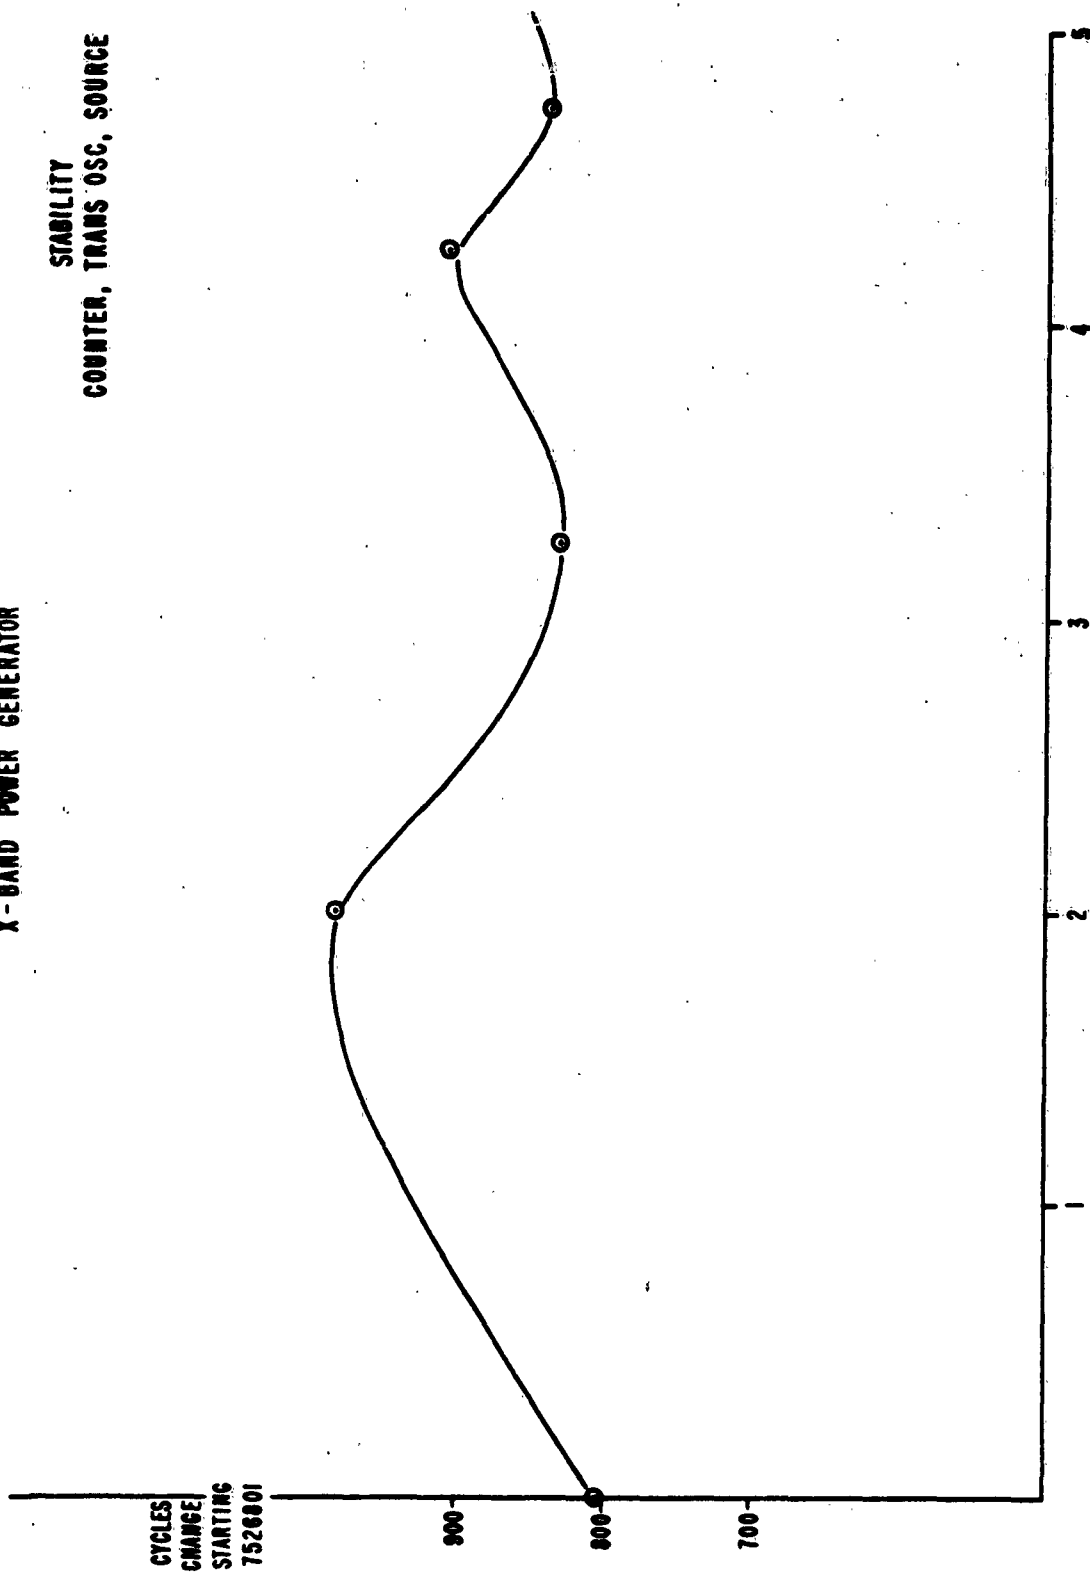

HOURS
FIG. II

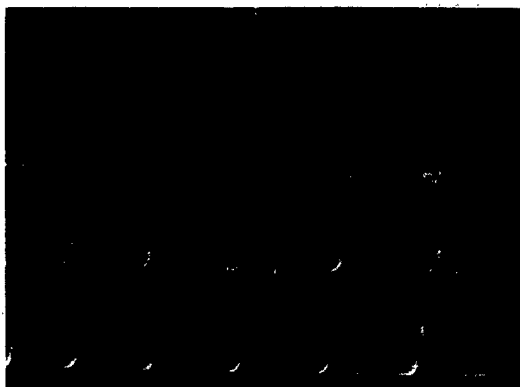


FIG. 12 SPECTRUM OF SOLID STATE SOURCE SHOWING THE SIDEBAND APPEARANCE WHILE CHANGING THE SUPPLY VOLTAGE

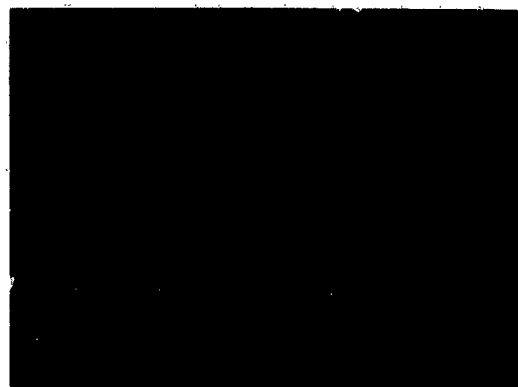


FIG. 13 SPECTRUM OF SOURCE WITH SUPPLY VOLTAGE MISADJUSTED

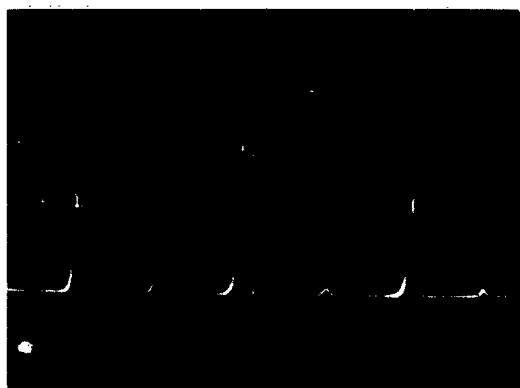


FIG. 14 SPECTRUM OF SOURCE SHOWING SIDEBAND DISPERSION DURING "WARMUP" (APPROXIMATELY FIRST MINUTE)

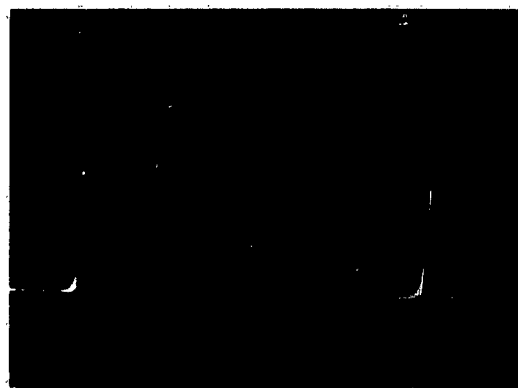


FIG. 15 CARRIER SUPPRESSED WITH LOW SUPPLY VOLTAGE



FIG. 16 SPECTRUM DURING "WARMUP" SHOWING EQUAL SIDEBANDS



FIG. 17 PEAKED CARRIER WITH SUPPLY VOLTAGE CHANGE

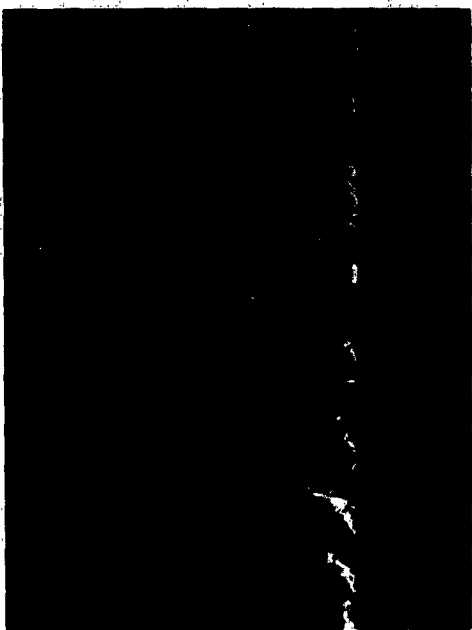


FIG. 18 NOISY SPECTRUM FROM HIGH SUPPLY VOLTAGE

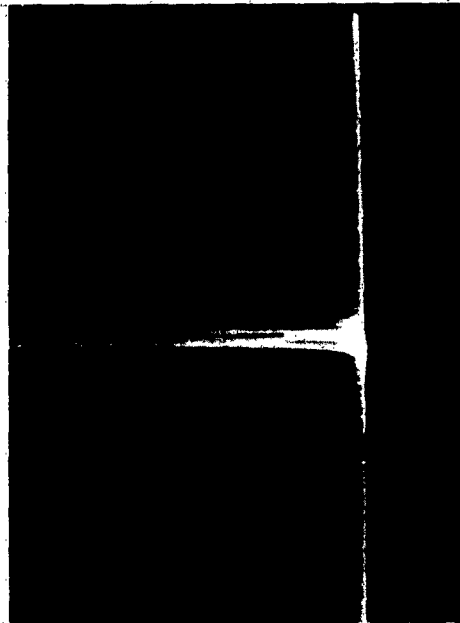


FIG. 19 NOISE FROM KLYSTRON WHILE BEING TAPPED WITH WOOD OFFICE PENCIL



FIG. 20 NOISE FROM SOLID STATE SOURCE WHILE BEING TAPPED WITH 2 OUNCE BALL PEEN HAMMER

DISTRIBUTION LIST

	<u>Copies</u>		<u>Copies</u>
Commanding General U. S. Army Electronics Command ATTN: AMSEL-AD Fort Monmouth, New Jersey	3	Commanding General U. S. Army Satellite Communications Agency ATTN: Technical Documents Center	1
Office of the Assistant Secretary of Defense (Research and Engineering) ATTN: Technical Library Room 3E1065, The Pentagon Washington 25, D. C.	1	Fort Monmouth, New Jersey	
Chief of Research and Development Department of the Army Washington 25, D. C.	2	Commanding Officer U. S. Army Engineer Research and Development Laboratories ATTN: Technical Documents Center	1
Chief, United States Army Security Agency ATTN: ACofS, G4 (Technical Library) Arlington Hall Station Arlington 12, Virginia	1	Fort Belvoir, Virginia	
Commanding Officer U. S. Army Electronics Research and Development Activity ATTN: Technical Library Fort Huachuca, Arizona	1	Commanding Officer U. S. Army Chemical Warfare Laboratories ATTN: Technical Library, Building 330 Army Chemical Center, Maryland	1
Commanding Officer U. S. Army Electronics Research and Development Activity ATTN: SELWS-AJ White Sands, New Mexico	1	Commanding Officer Harry Diamond Laboratories ATTN: Library, Building 92, Room 211 Washington 25, D. C.	1
Commanding Officer U. S. Army Electronics Research Unit P. O. Box 205 Mountain View, California	1	Headquarters, United States Air Force ATTN: AFCIN Washington 25, D. C.	2
Commanding Officer U. S. Army Electronics Materiel Support Agency ATTN: SELMS-ADJ Fort Monmouth, New Jersey	1	Rome Air Development Center ATTN: RAALD Griffiss Air Force Base New York	1
		Headquarters Ground Electronics Engineering Installation Agency ATTN: ROZMEL Griffiss Air Force Base New York	1
		Commanding General U. S. Army Materiel Command ATTN: R&D Directorate Washington 25, D. C.	2

Distribution List (Cont)

	<u>Copies</u>		<u>Copies</u>
Aeronautical Systems Division ATTN: ASAPRL Wright-Patterson Air Force Base Ohio	1	Chief, Bureau of Ships ATTN: Code 454 Department of the Navy Washington 25, D. C.	1
U. S. Air Force Security Service ATTN: ESD San Antonio, Texas	1	Chief, Bureau of Ships ATTN: Code 686B Department of the Navy Washington 25, D. C.	1
Headquarters Strategic Air Command ATTN: DOCE Offutt Air Force Base, Nebraska	1	Director U. S. Naval Research Laboratory ATTN: Code 2027 Washington 25, D. C.	1
Headquarters Research & Technology Division ATTN: RTH Bolling Air Force Base Washington 25, D. C.	1	Commanding Officer & Director U. S. Navy Electronics Laboratory ATTN: Library San Diego 52, California	1
Air Proving Ground Center ATTN: PGAPI Eglin Air Force Base, Florida	1	Commander U. S. Naval Ordnance Laboratory White Oak Silver Spring 19, Maryland	1
Air Force Cambridge Research Laboratories ATTN: CRXL-R L. G. Hanscom Field Bedford, Massachusetts	2	Commander Armed Services Technical Information Agency ATTN: TISIA Arlington Hall Station Arlington 12, Virginia	20
Headquarters Electronic Systems Division ATTN: ESAT L. G. Hanscom Field Bedford, Massachusetts	2	USAEIRDL Liaison Officer U. S. Army Tank-Automotive Center Detroit Arsenal Center Line, Michigan	1
AFSC Scientific/Technical Liaison Office U. S. Naval Air Development Center Johnsville, Pa.	1	USAEIRDL Liaison Officer Naval Research Laboratory ATTN: Code 1071 Washington 25, D. C.	1
Chief of Naval Research ATTN: Code 427 Department of the Navy Washington 25, D. C.	1	USAEIRDL Liaison Officer Massachusetts Institute of Technology Building 26, Room 131 77 Massachusetts Avenue Cambridge 39, Massachusetts	1
Bureau of Ships Technical Library ATTN: Code 312 Main Navy Building, Room 1528 Washington 25, D. C.	1		

Distribution List (Cont.)

	<u>Copies</u>		<u>Copies</u>
USAEIRD L Liaison Office	1	USACDC Liaison Office	2
Aeronautical Systems Division		SELRA/LNF, USAEIRD L	
ATTN: ASDL-9			
Wright-Patterson Air Force Base		Chief, Technical	6
Ohio		Information Division	
		Headquarters, USAEIRD L	
U. S. Army Research Liaison	1		
Office		USAEIRD L Technical	1
Lincoln Laboratory		Documents Center	
P. O. Box 73		SELRA/ADT, Hexagon	
Lexington, Massachusetts			
		Commanding Officer	1
USAEIRD L Liaison Officer	1	U. S. Army Security Agency	
Rome Air Development Center		Processing Center, Deal Area	
ATTN: RAOL			
Griffiss Air Force Base		Chief Scientist	1
New York		U. S. Army Electronics Command	
		ATTN: AMSEL-SC	
USAEIRD L Liaison Officer	1	Fort Monmouth, N. J.	
U. S. Army Combat Development			
Command, CDCLN-EL		Director, Institute for	1
Fort Belvoir, Virginia		Exploratory Research, USAEIRD L	
Chief, Bureau of Ships	1	Director, Applied Physics Div.,	1
ATTN: Semiconductor Group		Surveillance Dept., USAEIRD L	
Code 681A1A, Mr. A. H. Young			
Department of the Navy		Actg. Director, Electronic	2
Washington 25, D. C.		Components Dept., USAEIRD L	
USAEIRDA Liaison Engineer	1	Actg. Director, Solid State &	1
USASCAJ		Frequency Control Div., EC Dept.	
APO 343			
San Francisco, California		Dep. Director, Solid State &	1
		Frequency Control Div., EC Dept.	
Technical Dir., SELRA/CS	1		
Headquarters, USAEIRD L		Chief, Technical Staff, Solid	10
		State & Frequency Control Div.	
USAEIRDA-White Sands	1		
Liaison Office		Chief, Piezoelectric Crystal &	10
SELRA/LNW, USAEIRD L		Circuitry Br., Solid State	
		& Frequency Control Div.	
AFSC Scientific/Technical	1		
Liaison Office		Chief, Semiconductor & Micro-	10
SELRA/LNA, USAEIRD L		electronics Br., Solid State	
		& Frequency Control Div.	
Corps of Engineers	1		
Liaison Office		Chief, Microwave & Quantum	20
SELRA/LNE, USAEIRD L		Electronics Br., Solid State	
		& Frequency Control Div.	
Marine Corps Liaison Office	1		
SELRA/LNR, USAEIRD L		File Unit Nr. 1, Rm. 3D-116,	1
		Hexagon	

(3) Army-Ft Monmouth, NJ-MCN 1818-63

AD	Div.	UNCLASSIFIED	AD	Div.	UNCLASSIFIED	
Army Electronics Research and Development Laboratory, Fort Monmouth, New Jersey SOLID STATE S- and X-BAND POWER SOURCES by V. Boxer, January 1963, 20 p. incl. illus. (AEIRD Technical Report 2356) (DA Task 3499-21-003-03) Unclassified report It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, 2 watts of microwave power at S-band (3000 Mc) and 250 milliwatts at X-band can be obtained from such sources. Sylvania Electronic Systems, Buffalo, New York, has fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at USAERDOL as part of the model-evaluation program. Spurious responses are shown to be at least 24 db below the primary output; stability is better than 0.0001 percent.		1. Microwave Generator 2. Generator, Solid State 3. Frequency Multiplication I. Boxer, Victor II. Army Electronics Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-21-002-03		Army Electronics Research and Development Laboratory, Fort Monmouth, New Jersey SOLID STATE S- and X-BAND POWER SOURCES by V. Boxer, January 1963, 20 p. incl. illus. (AEIRD Technical Report 2356) (DA Task 3499-21-003-03) Unclassified report It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, 2 watts of microwave power at S-band (3000 Mc) and 250 milliwatts at X-band can be obtained from such sources. Sylvania Electronic Systems, Buffalo, New York, has fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at USAERDOL as part of the model-evaluation program. Spurious responses are shown to be at least 24 db below the primary output; stability is better than 0.0001 percent.		1. Microwave Generator 2. Generator, Solid State 3. Frequency Multiplication I. Boxer, Victor II. Army Electronics Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-21-002-03
AD Army Electronics Research and Development Laboratory, Fort Monmouth, New Jersey SOLID STATE S- and X-BAND POWER SOURCES by V. Boxer, January 1963, 20 p. incl. illus. (AEIRD Technical Report 2356) (DA Task 3499-21-003-03) Unclassified report It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, 2 watts of microwave power at S-band (3000 Mc) and 250 milliwatts at X-band can be obtained from such sources. Sylvania Electronic Systems, Buffalo, New York, has fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at USAERDOL as part of the model-evaluation program. Spurious responses are shown to be at least 24 db below the primary output; stability is better than 0.0001 percent.		1. Microwave Generator 2. Generator, Solid State 3. Frequency Multiplication I. Boxer, Victor II. Army Electronics Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-21-002-03		AD Army Electronics Research and Development Laboratory, Fort Monmouth, New Jersey SOLID STATE S- and X-BAND POWER SOURCES by V. Boxer, January 1963, 20 p. incl. illus. (AEIRD Technical Report 2356) (DA Task 3499-21-003-03) Unclassified report It is now possible to fabricate all semiconductor (devices) sources with usable microwave output power. Specifically, 2 watts of microwave power at S-band (3000 Mc) and 250 milliwatts at X-band can be obtained from such sources. Sylvania Electronic Systems, Buffalo, New York, has fabricated engineering models of these components under Contract DA36-039-SC-87330. This report describes electrical measurements made on an X-band model at USAERDOL as part of the model-evaluation program. Spurious responses are shown to be at least 24 db below the primary output; stability is better than 0.0001 percent.		1. Microwave Generator 2. Generator, Solid State 3. Frequency Multiplication I. Boxer, Victor II. Army Electronics Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-21-002-03