

UNCLASSIFIED

AD **406 154**

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

The findings in this report are not to be construed as an official Department of the Army position.

ASTIA AVAILABILITY NOTICE

Qualified requesters may obtain copies of this report from ASTIA

DISPOSITION INSTRUCTIONS

Destroy; do not return

AD

Shells, thin cylindrical
Applied mechanics

A METHOD OF SUCCESSIVE APPROXIMATION
APPLIED TO A CLASS OF SHELLS OF REVOLUTION
WITH REGIONS OF RAPIDLY VARYING THICKNESS

Technical Report WAL TR 893.3/4

by

Oscar L. Bowie

Date of Issue - March 1963

AMS Code 5011.11.838
Basic Research in Physical Sciences
D/A Project 1-A-O-10501-B-010

WATERTOWN ARSENAL
WATERTOWN 71, MASS.

WATERTOWN ARSENAL LABORATORIES

TITLE

A METHOD OF SUCCESSIONAL APPROXIMATION
APPLIED TO A CLASS OF SHELLS OF REVOLUTION
WITH REGIONS OF RAPIDLY VARYING THICKNESS


ABSTRACT

A plan of successive approximations is outlined for handling the equations of the three-dimensional problem in elasticity for shells of revolution with regions of rapidly varying thickness along the conceptual lines of a technique proposed by O. Göhner. Attention is confined to essentially cylindrical shells with regions of rapidly varying thickness, e.g., circumferential notches or grooves. For a restricted but useful class of loadings, plane biharmonic stress functions can be utilized. The first two orders of theory are explicitly formulated in the framework of analytic functions of a complex variable.



OSCAR L. BOWIE
Mathematician

APPROVED:



J. F. SULLIVAN
Director
Watertown Arsenal Laboratories

I. INTRODUCTION

Occasionally, the need arises for the analysis of moderately thick shells with rapidly varying wall thickness. Local stress concentration becomes the primary concern in certain cases rather than the averaged behavior approximated by conventional thin shell analysis. Clearly the determination of such information requires a careful consideration of the equations of three-dimensional elasticity theory.

In this report, we initially consider the class of moderately thick shells of revolution under axially symmetric loadings, i.e., the deformation will be axially symmetric. The local effects of geometrical irregularities in the wall thickness (e.g., circumferential grooves or nodes) will be of principal concern. Although the corresponding problem class in three-dimensional elasticity is well-known, for example Reference 1, exact solutions in general are extremely difficult to obtain. The plan of analysis therefore consists in utilizing the relative thinness of the shell to systematically approximate the three-dimensional equations.

A plan of successive approximations, conceptually due to O. Göhner,² is adopted. The choice of the order of approximation is obviously sensitive to the loadings considered. A particular choice is considered in this report leading to a structure permitting the use of plane biharmonic functions.

It is shown that this plan is suitable for handling a restricted but useful class of loadings of cylindrical shells with rapidly varying thickness. In particular, the zero'th order solution supports Neuber's assertion³ that when the shell is very thin for a class of applied loadings the problem can be considered as one of plane strain. The first two orders of solution can be explicitly formulated in the framework of analytic functions of a complex variable.

II. FORMULATION IN TERMS OF SUCCESSIVE APPROXIMATIONS

For the problem class of axially symmetric deformation, it will be convenient initially to review the formulation in terms of cylindrical coordinates (r, θ, z) where z is the axis of revolution. Assuming no body forces, it is well-known, e.g., Reference 1, that the equations of equilibrium are

$$\begin{aligned}\sigma_{r,r} + \tau_{rs,s} + (\sigma_r - \sigma_\theta)/r &= 0 \\ \tau_{rs,r} + \sigma_{s,s} + \tau_{rs}/r &= 0\end{aligned}\tag{1}$$

where an independent variable appearing as a subscript and following a comma denotes partial differentiation with respect to that variable. The compatibility equations for this case are

$$\begin{aligned}
\nabla^2 \sigma_r - 2(\sigma_r - \sigma_\theta)/r^2 + \Omega_{,rr}/(1 + \nu) &= 0, \\
\nabla^2 \sigma_\theta + 2(\sigma_r - \sigma_\theta)/r^2 + \Omega_{,r}/r(1 + \nu) &= 0, \\
\nabla^2 \sigma_z + \Omega_{,zz}/(1 + \nu) &= 0, \\
\nabla^2 \tau_{rz} - \tau_{rz}/r^2 + \Omega_{,rz}/(1 + \nu) &= 0;
\end{aligned} \tag{2}$$

where

$$\begin{aligned}
\nabla^2 &= \partial^2/\partial r^2 + (1/r)\partial/\partial r + \partial^2/\partial z^2, \\
\Omega &= (\sigma_r + \sigma_\theta + \sigma_z)/(1 + \nu),
\end{aligned}$$

and ν denotes Poisson's ratio.

The systems (1) and (2) can be replaced by a formulation in terms of a single stress function, ϕ , as proposed by Love,⁴ by defining

$$\begin{aligned}
\sigma_r &= [\nu \nabla^2 \phi - \phi_{,rr}]_z, \\
\sigma_\theta &= [\nu \nabla^2 \phi - \phi_{,r}/r]_z, \\
\sigma_z &= [(2 - \nu) \nabla^2 \phi - \phi_{,zz}]_z, \\
\tau_{rz} &= [(1 - \nu) \nabla^2 \phi - \phi_{,rz}]_r,
\end{aligned} \tag{3}$$

where

$$\nabla^2 \nabla^2 \phi = 0.$$

(In (3), subscript notation denotes partial differentiation of the stress function $\phi(r, z)$.)

Let us now introduce the new coordinates ξ, η defined by

$$\xi = r - R, \quad \eta = z, \tag{4}$$

where R is an appropriately chosen fixed radius of the shell. For the present problem class, i.e., cylinders of variable thickness, we consider R as independent of r and z . The previous systems can now be considered in terms of the ξ, η coordinates. For example, the equations of equilibrium and compatibility have the forms

$$\sigma_{\xi,\xi} + \tau_{\xi\eta,\eta} + (\sigma_\xi - \sigma_\theta)/(\xi + R) = 0, \tag{1'}$$

$$\Delta\sigma_{\xi} + \sigma_{\xi,\xi}/(\xi + R) - 2(\sigma_{\xi} - \sigma_{\theta})/(\xi + R)^2 + \Omega_{,\xi\xi}/(1 + \nu) = 0, \quad (2')$$

where

$$\Delta = \partial^2/\partial\xi^2 + \partial^2/\partial\eta^2.$$

Göhner's plan of successive approximations depends on the validity of the expressions

$$1/(\xi + R) = (1/R) \sum_{n=0}^{\infty} (-\xi/R)^n, \quad (5)$$

$$1/(\xi + R)^2 = (1/R)^2 \sum_{n=0}^{\infty} (n+1)(-\xi/R)^n.$$

We shall henceforth confine our attention to regions where the expansions (5) can be considered valid. Thus, the expansions (5) will be considered in (1') and (2') and a plan of successive approximations to the system will be defined. In particular, if σ is the generic symbol for the stresses, it is assumed that

$$\sigma = \sum_{n=0}^{\infty} \sigma^{(n)}, \quad (6)$$

where the superscript denotes the order of the approximation.

In the method of successive approximations, the plan of approximation is clearly not unique. Furthermore, a rigorous assessment of the validity of any given plan is generally unfeasible. On the other hand, several minimal requirements are obvious. The plan should lead to a systematic satisfaction of equilibrium and compatibility at least in an asymptotic sense. Furthermore, each order of solution should correspond to a well-defined mathematical system of equations. Finally, a reasonably accurate approximation of the prescribed load conditions should be possible.

We propose the following particular plan of successive approximation: For the n 'th order approximation with leading components $\sigma^{(n)}$, terms containing ξ^n/R^{n+1} explicitly in (1') and (2') will be neglected. Thus, the zero'th order approximation corresponds to the system

$$\sigma_{\xi,\xi}^{(0)} + \tau_{\xi\eta,\eta}^{(0)} = 0, \quad \tau_{\xi\eta,\xi}^{(0)} + \sigma_{\eta,\eta}^{(0)} = 0,$$

$$\Delta\sigma_{\xi}^{(0)} + \Omega_{,\xi\xi}^{(0)}/(1 + \nu) = 0, \quad \Delta\sigma_{\theta}^{(0)} = 0, \quad (7)$$

$$\Delta\sigma_{\eta}^{(0)} + \Omega_{,\eta\eta}^{(0)}/(1 + \nu) = 0, \quad \Delta\tau_{\xi\eta}^{(0)} + \Omega_{,\xi\eta}^{(0)}/(1 + \nu) = 0.$$

For $n = 1$, the corresponding system is

$$\sigma_{\xi\xi}^{(1)} + \tau_{\xi\eta,\eta}^{(1)} + (\sigma_{\xi\xi}^{(0)} - \sigma_{\theta\theta}^{(0)})/R = 0, \quad (8)$$

$$\tau_{\xi\eta,\xi}^{(1)} + \sigma_{\eta,\eta}^{(1)} + \tau_{\xi\eta}^{(0)}/R = 0,$$

etc.

The plan can be conveniently summarized in terms of stress functions. Guided by the structure of the stress function (3), it is a straightforward matter to determine a system of stress functions compatible with the preceding plan of successive approximation. In fact, the n 'th order approximation can be replaced by

$$\begin{aligned} \sigma_{\xi\xi}^{(n)} &= \left[\nu \Delta F^{(n)} - F_{\xi\xi}^{(n)} + (\nu/R) \sum_{j=1}^n F_{\xi}^{(j-1)} (-\xi/R)^{n-j} \right]_{\eta}, \\ \sigma_{\theta\theta}^{(n)} &= \left[\nu \Delta F^{(n)} - (1-\nu) \sum_{j=1}^n F_{\xi}^{(j-1)} (-\xi/R)^{n-j}/R \right]_{\eta}, \\ \sigma_{\eta\eta}^{(n)} &= \left[(1-\nu) \Delta F^{(n)} + F_{\xi\xi}^{(n)} + (2-\nu) \sum_{j=1}^n F_{\xi}^{(j-1)} (-\xi/R)^{n-j}/R \right]_{\eta}, \\ \tau_{\xi\eta}^{(n)} &= \left[F_{\xi\xi}^{(n)} - \nu \Delta F^{(n)} + (1-\nu) \sum_{j=1}^n F_{\xi}^{(j-1)} (-\xi/R)^{n-j}/R \right]_{\xi}, \end{aligned} \quad (9)$$

$$n = 0, 1, 2, \dots$$

where $F^{(i)}(\xi, \eta) = 0$ if $i < 0$ and

$$\begin{aligned} \Delta \Delta F^{(n)} + (2/R) \sum_{i=0}^{n-1} \Delta F_{\xi}^{(n-i-1)} (-\xi/R)^i \\ - (1/R^2) \sum_{i=0}^{n-2} (i+1) F_{\xi\xi}^{(n-i-2)} (-\xi/R)^i + (1/2R^2) \sum_{i=0}^{n-2} (i+2)(i+1) F_{\xi}^{(n-i-2)} (-\xi/R)^i = 0, \end{aligned} \quad (10)$$

$$n = 0, 1, 2, \dots$$

The plan of approximation is not yet complete. Although a procedure has been invented for the systematic consideration of equilibrium and compatibility, there is no assurance that each system is well-defined and that reasonable approximation of the applied loads can be realized. In order to study the complete structure of each system, it is necessary to consider the matter of boundary conditions to be imposed on the individual systems. Therefore the applied load or possible systematic approximations of the applied load must be investigated.

III. THE ZERO'TH ORDER THEORY

For $n = 0$, (9) and (10) yield

$$\begin{aligned}\sigma_{\xi}^{(0)} &= \left[\nu \Delta F^{(0)} - F_{\xi\xi}^{(0)} \right] \eta, \\ \sigma_{\theta}^{(0)} &= \nu \left[\sigma_{\xi}^{(0)} + \sigma_{\eta}^{(0)} \right], \\ \sigma_{\eta}^{(0)} &= \left[(1 - \nu) \Delta F^{(0)} + F_{\xi\xi}^{(0)} \right] \eta, \\ \tau_{\xi\eta}^{(0)} &= \left[F_{\xi\xi}^{(0)} - \nu \Delta F^{(0)} \right] \xi,\end{aligned}\tag{11}$$

where

$$\Delta \Delta F^{(0)} = 0.\tag{12}$$

Although this system is apparently consistent with the well-known problem of plane strain, such a conclusion cannot be immediately arrived at without further consideration of the applied load conditions.

In Figure 1, the force resultants $T_{\eta} ds$ and $T_{\xi} ds$ per unit of circumference acting on the arc ds is shown where it is assumed that the force is exerted by the material to the left on the material to the right proceeding from A' to B' .

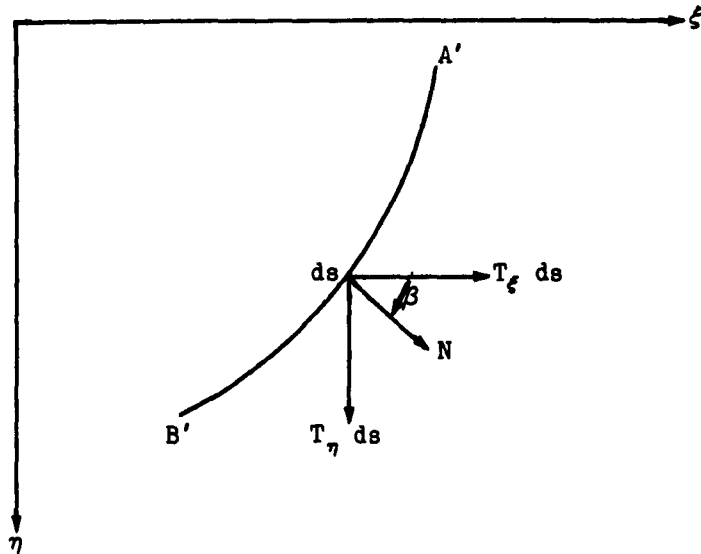


FIGURE 1.

From equilibrium,

$$T_{\eta} = \sigma_{\eta} \sin\beta + \tau_{\xi\eta} \cos\beta = -\sigma_{\eta} d\xi/ds + \tau_{\xi\eta} d\eta/ds, \quad (13)$$

$$T_{\xi} = \sigma_{\xi} \cos\beta + \tau_{\xi\eta} \sin\beta = \sigma_{\xi} d\eta/ds - \tau_{\xi\eta} d\xi/ds. \quad (14)$$

We now define as an additional part of our plan of successive approximations,

$$T_{\eta} = \sum_{j=0}^{\infty} T_{\eta}^{(j)}, \quad T_{\xi} = \sum_{j=0}^{\infty} T_{\xi}^{(j)}, \quad (15)$$

where

$$T_{\eta}^{(n)} = -\sigma_{\eta}^{(n)} d\xi/ds + \tau_{\xi\eta}^{(n)} d\eta/ds, \quad n = 0, 1, 2, \dots, \quad (16)$$

$$T_{\xi}^{(n)} = \sigma_{\xi}^{(n)} d\eta/ds - \tau_{\xi\eta}^{(n)} d\xi/ds, \quad n = 0, 1, 2, \dots$$

Thus,

$$T_{\eta}^{(0)} = -dF_{\xi\eta}^{(0)}/ds - (1 - \nu) \left[\Delta F_{\eta}^{(0)} d\xi/ds - \Delta F_{\xi}^{(0)} d\eta/ds \right], \quad (17)$$

$$T_{\xi}^{(0)} = -d \left[F_{\xi\xi}^{(0)} - \nu \Delta F^{(0)} \right] / ds. \quad (18)$$

Consider now the resultant forces, R_{η} and R_{ξ} acting on the surface generated by the arc $A'B'$. R_{ξ} vanishes by symmetry, whereas

$$R_{\eta} = 2\pi \int_{A'}^{B'} (R + \xi) T_{\eta} ds. \quad (19)$$

If the arc $A'B'$ is a closed contour with respect to the $\xi\eta$ -plane, then R_{η} should vanish as B' coincides with A' from a consideration of equilibrium. If T_{η} is approximated by $T_{\eta}^{(0)}$ and substituted in (19), it is easily shown that R_{η} does not vanish in general for a closed circuit. It is therefore clear that a meaningful definition of R_{η} must be given to each order of theory allowing for the order of approximation to the equilibrium state. A similar argument can be made for the displacements and the resultant moments.

A well-defined zero'th order theory will now be considered. We assume the stresses of the zero'th order theory are defined by (11) and (12). The function $F^{(0)}(\xi, \eta)$ and its fourth order partial derivatives are therefore assumed to exist at all interior points of the region described in the $\xi\eta$ -plane. Consider

$$P_{\eta}^{(0)} = \int_{A'}^{B'} T_{\eta}^{(0)} ds, \quad (20)$$

$$P_{\xi}^{(0)} = \int_A^{B'} T_{\xi}^{(0)} ds, \quad (21)$$

where $T_{\xi}^{(0)}$ and $T_{\eta}^{(0)}$ are defined by (17) and (18). For any closed contour $A'B'$ (bounding a simply connected region of the material in the $\xi\eta$ -plane), $p^{(0)}$ and $p_{\eta}^{(0)}$ vanish due to the continuity of $F^{(0)}$ and its third order partial derivatives. Thus, (11) and (12) coupled with (17) and (18) imply a system of applied loads whose resultant force vanishes from a plane point of view. A similar result follows when the resultant moment of the applied load is considered.

It has thus been shown that for the plan of successive approximation outlined above, the zero'th order approximation implies a system of applied loads which is *self-equilibrating in the plane sense*. It would be inconsistent therefore to attempt to use this particular plan of approximation for loading systems which violate this condition to the first order, e.g., internal pressure acting on a cylindrical shell. Therefore, we henceforth restrict the class of applied loads to those which are self-equilibrating in the plane sense to the first order.

Several details are still necessary to correlate the zero'th order theory with the original three-dimensional problem. The force resultant R_{η} defined by (19) will now be considered as

$$R_{\eta} = \sum_{j=0}^{\infty} R_{\eta}^{(j)}. \quad (22)$$

Therefore, a compatible definition of $R_{\eta}^{(0)}$ with the zero'th order theory is

$$R_{\eta}^{(0)} = 2\pi R \int_A^{B'} T_{\eta}^{(0)} ds. \quad (23)$$

Finally, we assume the radial and axial displacement components u and w can be expressed as

$$u = \sum_{j=0}^{\infty} u^{(j)}, \quad w = \sum_{j=0}^{\infty} w^{(j)}. \quad (24)$$

It will be recalled that for the zero'th order theory,

$$\sigma_{\theta}^{(0)} = \nu(\sigma_{\xi}^{(0)} + \sigma_{\eta}^{(0)}). \quad (25)$$

Therefore, from Hooke's law and the well-known strain-displacement relations in cylindrical coordinates,

$$\begin{aligned}
E \partial u^{(0)} / \partial \xi &= (1 - \nu^2) \sigma_{\xi}^{(0)} - \nu(1 + \nu) \sigma_{\eta}^{(0)}, \\
E \partial w^{(0)} / \partial \eta &= (1 - \nu^2) \sigma_{\eta}^{(0)} - \nu(1 + \nu) \sigma_{\xi}^{(0)}, \\
G(\partial u^{(0)} / \partial \eta + \partial w^{(0)} / \partial \xi) &= \tau_{\xi\eta}^{(0)},
\end{aligned} \tag{26}$$

where E is Young's modulus and $G = E/2(1 + \nu)$. Thus,

$$\begin{aligned}
2G \partial u^{(0)} / \partial \xi &= -F_{\xi\xi\eta}^{(0)}, \\
2G \partial w^{(0)} / \partial \eta &= (1 - 2\nu) \Delta F_{\eta}^{(0)} + F_{\xi\xi\xi}^{(0)}.
\end{aligned} \tag{27}$$

Apart from rigid body motions,

$$\begin{aligned}
2G u^{(0)} &= -F_{\xi\eta}^{(0)}, \\
2G w^{(0)} &= (1 - 2\nu) \Delta F^{(0)} + F_{\xi\xi\xi}^{(0)}.
\end{aligned} \tag{28}$$

IV. THE ORDER OF THEORY, $n = 1$

For orders of theory $n \geq 1$, the stress functions $F^{(n)}(\xi, \eta)$ are no longer plane biharmonic in general. On the other hand, the application of plane biharmonic functions can be preserved provided a particular integral of (10) is found for each order of theory. In general, the determination of the particular integrals requires a knowledge of the preceding orders of solution.

Fortunately, the particular integral for the order $n = 1$ can be found directly. In fact, for $n = 1$, $\{-\xi/R\}F^{(0)}/2$ is an integral of (10). Therefore, the function $G^{(1)}(\xi, \eta)$ is defined as

$$F^{(1)} = G^{(1)} - \xi F^{(0)} / 2R. \tag{29}$$

Then,

$$\begin{aligned}
 \sigma_{\xi}^{(1)} &= \left[\nu \Delta G^{(1)} - G_{\xi\xi}^{(1)} - \nu \xi \Delta F^{(0)} / 2R + \xi F_{\xi\xi}^{(0)} / 2R + F_{\xi}^{(0)} / R \right]_{,\eta}, \\
 \sigma_{\theta}^{(1)} &= \left[\nu \Delta G^{(1)} - \nu \xi \Delta F^{(0)} / 2R - F_{\xi}^{(0)} / R \right]_{,\eta}, \\
 \sigma_{\eta}^{(1)} &= \left[(1 - \nu) \Delta G^{(1)} + G_{\xi\xi}^{(1)} - (1 - \nu) \xi \Delta F^{(0)} / 2R - \xi F_{\xi\xi}^{(0)} / 2R \right]_{,\eta}, \\
 \tau_{\xi\eta}^{(1)} &= \left[G_{\xi\xi}^{(1)} - \nu \Delta G^{(1)} - \xi F_{\xi\xi}^{(0)} / 2R + \nu \xi \Delta F^{(0)} / 2R \right]_{,\xi},
 \end{aligned} \tag{30}$$

and

$$\Delta \Delta G^{(1)} = 0. \tag{31}$$

The corresponding stress resultants are

$$\begin{aligned}
 T_{\eta}^{(1)} &= -\sigma_{\eta}^{(1)} d\xi/ds + \tau_{\xi\eta}^{(1)} d\eta/ds \\
 &= -dG_{\xi\eta}^{(1)}/ds - (1 - \nu) \left[\Delta G_{\eta}^{(1)} d\xi/ds - \Delta G_{\xi}^{(1)} d\eta/ds \right]
 \end{aligned} \tag{32}$$

$$- \xi T_{\eta}^{(0)} / 2R - \left[F_{\xi\xi}^{(0)} - \nu \Delta F^{(0)} \right] d\eta / 2R ds,$$

$$T_{\xi}^{(1)} = \sigma_{\xi}^{(1)} d\eta/ds - \tau_{\xi\eta}^{(1)} d\xi/ds$$

$$= -d \left[G_{\xi\xi}^{(1)} - \nu \Delta G^{(1)} \right] / ds - \xi T_{\xi}^{(0)} / 2R \tag{33}$$

$$+ F_{\xi\eta}^{(0)} d\eta / R ds + \left[F_{\xi\xi}^{(0)} - \nu \Delta F^{(0)} \right] d\xi / 2R ds.$$

An interesting mathematical dilemma occurs from a consideration of the determinancy of the solution. In general, a logical definition of $T_{\eta}^{(1)}$ and $T_{\xi}^{(1)}$ would lead to a plane self-equilibrating set of prescribed loads. For example, if $T_{\xi}^{(0)} = T_{\xi}$ and $T_{\eta}^{(0)} = T_{\eta}$ on the boundary, the natural choice for the boundary conditions for the order of theory $n = 1$ would be $T_{\xi}^{(1)} = T_{\eta}^{(1)} = 0$ which corresponds, of course, to a plane self-equilibrating system of applied loads. On the other hand, it is a simple matter to show that in general $T_{\xi}^{(1)}$ and $T_{\eta}^{(1)}$ as defined by (32) and (33) are not self-equilibrating in the plane sense. Although the portions of (32) and (33) involving $G^{(1)}(\xi, \eta)$ correspond to a self-equilibrating load system in the plane sense by arguments similar to those of Section 3, it can easily be shown that the remaining portions involving the zero'th order solution in general violate the conditions of plane equilibrium. Since the flexibility

of the solution rests in the determination of $G^{(1)}(\xi, \eta)$, clearly from a precise standpoint, $G^{(1)}(\xi, \eta)$ is indeterminate.

The difficulty described above is common to most procedures which depend on systematic approximation of a system. The dilemma can be bypassed by introducing an additional approximation. If $G^{(1)}(\xi, \eta)$ is determined on the basis of ensuring prescribed loads over a portion of the boundary only, in many practical problems it can be argued that sufficient accuracy of solution in these regions is assured if the remaining portions of the boundary are handled in only an average sense.

To illustrate the argument above, we consider edge loading of the shell with load-free conditions on the lateral surfaces. It is a straightforward matter to show that $T_\eta^{(1)} + (\xi/R)T_\eta^{(0)}$ and $T_\xi^{(1)} + (\xi/R)T_\xi^{(0)}$ correspond to plane self-equilibrating load systems. On the lateral surfaces of the shell $T_\eta^{(0)}$ and $T_\xi^{(0)}$ vanish, and the conditions on $G^{(1)}(\xi, \eta)$ on the lateral surfaces can be found from (32) and (33). On the ends, $G^{(1)}(\xi, \eta)$ can be adjusted to satisfy the edge loading in an average sense. By appealing to Saint Venant's principle, this approximation should still yield a reliable estimate of the local behavior in the regions of rapidly varying thickness provided these regions are sufficiently removed from the edges.

The axial force resultant $R_\eta^{(1)}$ consistent with (22) for this order theory is defined as:

$$R_\eta^{(1)} = 2\pi R \int_A^B \left[T_\eta^{(1)} + (\xi/R)T_\eta^{(0)} \right] ds. \quad (34)$$

This definition of $R_\eta^{(1)}$, in addition to being consistent in form with our plan of successive approximation, enjoys the property of defining the same total resultant axial force independent of the cross section chosen. This last property requires that (34) be independent of path when considered a line integral. It is a straightforward matter to show that (34) meets these requirements.

The corresponding displacements $u^{(1)}$ and $w^{(1)}$ can be carried out in a direct manner; however, the details will not be included here.

V. REMARKS ON ORDERS OF THEORY, $n > 1$

For $n > 1$, the approximations can be analyzed in a manner similar to Sections III and IV. Again the problem for each order can be resolved into the determination of a biharmonic stress function along with a particular solution of (10) in terms of the preceding orders of solution. The determination of the particular solutions becomes increasingly difficult with increasing n . For example, for $n = 2$ the particular solution requires a solution of the Poisson type differential equation with a righthand side proportional to $F^{(0)}$.

The indeterminacy of each of the higher orders of solution resembles the case $n = 1$. Thus, the plan of enforcing boundary conditions only in the net sense over a portion of the boundary is again necessary in general.

VI. FORMULATION IN TERMS OF COMPLEX VARIABLES

Formulation of the stress functions in terms of analytic functions of a complex variable will now be carried out to enable use of some of the elegant techniques invented for plane problems. Since a departure from the Airy stress function is made, some modification of the conventional complex variable representation will be required. The two orders of solution, $n = 0$ and $n = 1$, will now be formulated in terms of the complex variable, $\zeta = \xi + i\eta$.

The biharmonic functions $F^{(0)}(\xi, \eta)$ and $G^{(1)}(\xi, \eta)$ defined in the preceding sections can be represented as

$$F^{(0)}(\xi, \eta) = \text{Im} \left\{ \bar{\zeta} \int^{\zeta} \phi^{(0)}(\zeta) d\zeta + \int^{\zeta} \psi^{(0)}(\zeta) d\zeta \right\}, \quad (35)$$

$$G^{(1)}(\xi, \eta) = \text{Im} \left\{ \bar{\zeta} \int^{\zeta} \phi^{(1)}(\zeta) d\zeta + \int^{\zeta} \psi^{(1)}(\zeta) d\zeta \right\}, \quad (36)$$

where $\phi^{(n)}(\zeta)$ and $\psi^{(n)}(\zeta)$ are analytic functions of ζ , "Im" denotes the imaginary part of the bracketed expression, and bars denote the complex conjugates. Equations 11 and 35 yield the relations

$$\begin{aligned} \sigma_{\xi}^{(0)} + \sigma_{\eta}^{(0)} &= 2[\phi_{\zeta}^{(0)} + \bar{\phi}_{\zeta}^{(0)}], \\ \sigma_{\xi}^{(0)} - \sigma_{\eta}^{(0)} - 2i\tau_{\xi\eta}^{(0)} &= -2[(3 - 4\nu)\phi_{\zeta}^{(0)} + \bar{\zeta}\phi_{\zeta\zeta}^{(0)} + \psi_{\zeta\zeta}^{(0)}], \\ \sigma_{\theta}^{(0)} &= \nu[\sigma_{\xi}^{(0)} + \sigma_{\eta}^{(0)}]. \end{aligned} \quad (37)$$

Similarly, from (30) and (36) along with (35),

$$\begin{aligned} \sigma_{\xi}^{(1)} + \sigma_{\eta}^{(1)} &= 2[\phi_{\zeta}^{(1)} + \bar{\phi}_{\zeta}^{(1)}] - (1/2R)[\zeta\phi_{\zeta}^{(0)} + \bar{\zeta}\bar{\phi}_{\zeta}^{(0)} - \psi_{\zeta}^{(0)} - \bar{\psi}_{\zeta}^{(0)}], \\ \sigma_{\xi}^{(1)} - \sigma_{\eta}^{(1)} - 2i\tau_{\xi\eta}^{(1)} &= -2[(3 - 4\nu)\phi_{\zeta}^{(1)} + \bar{\zeta}\phi_{\zeta\zeta}^{(1)} + \psi_{\zeta\zeta}^{(1)}] + [\zeta\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)}]/R \\ &\quad + (\zeta + \bar{\zeta})[(3 - 4\nu)\phi_{\zeta}^{(0)} + \bar{\zeta}\phi_{\zeta\zeta}^{(0)} + \psi_{\zeta\zeta}^{(0)}]/2R + (1 - 2\nu)(\phi^{(0)} - \bar{\phi}^{(0)})/R, \\ \sigma_{\theta}^{(1)} &= \nu(\sigma_{\xi}^{(1)} + \sigma_{\eta}^{(1)}) - (1 + \nu)[\zeta\bar{\phi}_{\zeta}^{(0)} + \bar{\zeta}\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)} + \bar{\psi}_{\zeta}^{(0)}]/2R. \end{aligned} \quad (38)$$

Curvilinear coordinates can now be introduced by introducing appropriate conformal mapping functions of a complex variable. Consider an auxiliary complex plane, the γ -plane, where $\gamma = \epsilon + i\delta$. Let

$$\zeta = \omega(\gamma) \quad (39)$$

denote a conformal mapping of a convenient region in the γ -plane into the region under consideration in the ζ -plane. Then the analyticity of $\phi^{(a)}(\zeta)$ and $\psi^{(a)}(\zeta)$ is preserved when considered as functions of γ due to the analyticity of $\omega(\gamma)$. The argument is well-known in the conventional complex variable formulation and the general details will not be reproduced here.

For reference we shall list several of the more useful relations. If on the arc A'B', we denote

$$d\zeta = ds e^{i\alpha} = ds e^{i(\pi/2+\beta)}, \quad (40)$$

then,

$$\begin{aligned} T_{\eta}^{(0)} + i T_{\xi}^{(0)} &= -e^{i\alpha} \left[(3-4\nu)\phi_{\zeta}^{(0)} + e^{-2i\alpha}(\phi_{\zeta}^{(0)} + \bar{\phi}_{\zeta}^{(0)}) + \zeta\phi_{\zeta\zeta}^{(0)} + \psi_{\zeta\zeta}^{(0)} \right], \\ T_{\eta}^{(1)} + i T_{\xi}^{(1)} &= -e^{i\alpha} \left[(3-4\nu)\phi_{\zeta}^{(1)} + e^{-2i\alpha}(\phi_{\zeta}^{(1)} + \bar{\phi}_{\zeta}^{(1)}) + \zeta\phi_{\zeta\zeta}^{(1)} + \psi_{\zeta\zeta}^{(1)} \right] \end{aligned} \quad (41)$$

$$\begin{aligned} &- (\zeta + \bar{\zeta})(T_{\eta}^{(0)} + i T_{\xi}^{(0)})/4R - e^{-i\alpha}(\zeta\bar{\phi}_{\zeta}^{(0)} + \zeta\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)} + \bar{\psi}_{\zeta}^{(0)})/4R \\ &+ e^{i\alpha} \left[(1-2\nu)(\phi^{(0)} - \bar{\phi}^{(0)}) + \zeta\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)} \right]/2R, \end{aligned} \quad (42)$$

$$R_{\eta}^{(0)} = -2\pi R \operatorname{Re} \left\{ 4(1-\nu)\phi^{(0)} + \zeta\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)} \right\}_A, \quad (43)$$

$$R_{\eta}^{(1)} = -2\pi R \operatorname{Re} \left\{ 4(1-\nu)\phi^{(1)} + \zeta\phi_{\zeta}^{(1)} + \psi_{\zeta}^{(1)} \right\}_A,$$

$$\begin{aligned} &+ (\pi/2) \operatorname{Re} \left\{ 2(3-4\nu) \int^{\zeta} \phi^{(0)} d\zeta - 4(1-\nu)\zeta\phi^{(0)} - 2(1-2\nu)\zeta\phi^{(0)} \right. \\ &\quad \left. + 2\psi^{(0)} - (\zeta + \bar{\zeta})(\zeta\phi_{\zeta}^{(0)} + \psi_{\zeta}^{(0)}) \right\}_A, \end{aligned} \quad (44)$$

$$2G(u^{(0)} + i w^{(0)}) = (3-4\nu)(\phi^{(0)} - \bar{\phi}^{(0)}) - \zeta\bar{\phi}_{\zeta}^{(0)} - \bar{\psi}_{\zeta}^{(0)}. \quad (45)$$

VII. SUMMARY

A plan of successive approximations for handling the equations of the three-dimensional elasticity problem for cylindrical shells with regions of rapidly varying thickness is proposed along the conceptual lines of O. Göhner. It is shown that for a restricted but useful class of loadings, the utilization of plane biharmonic functions can be made; thus, many of the tools of complex variable theory can be introduced.

The argument carried out in the preceding sections points up the requirement for relaxing the precise loading conditions over portions of the shell. This matter is common to all approximate theories of this type, leading to the well-known separation of solution into the so-called interior solutions and boundary layer effects.

Finally, although the generally more difficult three-dimensional problem has been reduced to the determination of plane biharmonic functions, the latter matter can provide considerable difficulties in itself.

REFERENCES

1. TIMOSHENKO, S., and GOODIER, J.N., Theory of Elasticity, 2nd Ed. McGraw-Hill, 1951.
2. GÖHNER, O., Ingenieur-Archiv, v. 1, 1930, p. 619; v. 2, p. 1 and 381; v. 9, 1938, p. 355.
3. NEUBER, H., Kerbspannungslehre; Grundlagen für Genaue Spannungsrechnung, J. Springer, Berlin, 1937.
4. LOVE, A.E.H., Mathematical Theory of Elasticity, Cambridge University Press, 4th Ed., 1927, p. 274.

WATERTOWN ARSENAL
WATERTOWN 72, MASSACHUSETTS

TECHNICAL REPORT DISTRIBUTION

Report No.: WAL TR 893.3/4
March 1963

Title: A Method of Successive Approximation Applied to a Class of Shells of Revolution with Regions of Rapidly Varying Thickness

No. of Copies	TO
	Director, Defense Research and Engineering, Room 3D-1067, The Pentagon, Washington 25, D. C.
1	ATTN: Dr. James H. Gardner
1	Dr. Earl T. Hayes
	Advanced Research Projects Agency, Washington 25, D. C.
1	ATTN: Mr. Charles Yost
	Armed Services Technical Information Agency, Arlington Hall Station, Arlington 12, Virginia
10	ATTN: TIPDR
1	Defense Metals Information Center, Battelle Memorial Institute, Columbus 1, Ohio
1	Commanding Officer, U. S. Army Research Office, Arlington Hall Station, Arlington 12, Virginia
	Commanding Officer, Army Research Office (Durham), Box CM, Duke Station, Durham, North Carolina
1	ATTN: Physics Division
	Commanding General, U. S. Army Materiel Command, Washington 25, D. C.
1	ATTN: AMCRD-RS, Research Division
1	AMCRD-DE, Development Division
1	AMCRD-RS-CM-M, Dr. P. Kosting
1	AMCRD-RS-CM, Mr. J. Kaufman
1	AMCRD-RS, Scientific Deputy
	Commanding General, U. S. Army Electronics Command, Fort Monmouth, New Jersey
1	ATTN: SRDL, Institute for Fundamental Research

No. of Copies	TO
1	Commanding Officer, Picatinny Arsenal, Dover, New Jersey
1	ATTN: Feltman Research Laboratories
1	Technical Library
1	Commanding Officer, Rock Island Arsenal, Rock Island, Illinois
1	ATTN: 9320, R&D Division
1	Commanding Officer, Springfield Armory, Springfield 1, Massachusetts
1	ATTN: R&D Division
1	Commanding General, Transportation Research Command, Fort Belvoir, Virginia
1	Commanding Officer, Watervliet Arsenal, Watervliet, New York
1	ATTN: Research Division, Dr. R. Weigle
1	Commanding General, White Sands Missile Range, White Sands, New Mexico
1	ATTN: Chief Scientist
1	Commander, Office of Naval Research, Washington 25, D. C.
1	Commander, Naval Research Laboratory, Anacostia Station, Washington 25, D. C.
1	ATTN: Dr. G. R. Irwin
1	Dr. J. Kraft
1	Mr. J. E. Srawley
1	Commander, Office of Scientific Research, Air R&D Command, Temporary Building T, Washington 25, D. C.
1	Commanding General, Air Force Materials Central, Wright-Patterson Air Force Base, Ohio
1	ATTN: Physics Laboratory
1	Aeronautical Research Laboratories
1	Commanding General, Air Force Cambridge Research Laboratories, Hanscom Field, Bedford, Massachusetts
1	ATTN: CRRE, Electronic Research Directorate
1	Chairman, U. S. Atomic Energy Commission, Washington 25, D. C.
1	ATTN: Division of Technical Information
1	Chairman, U. S. Atomic Energy Commission, P. O. Box 62, Oak Ridge, Tennessee
1	ATTN: Division of Technical Information Extension

No. of Copies	TO
1	National Aeronautics and Space Administration, Washington 25, D. C. ATTN: Mr. George C. Deutsch
1	Director, Jet Propulsion Laboratory, California Institute of Technology, Pasadena 3, California ATTN: Dr. L. Jaffe
1	Director, Lewis Research Center, Cleveland Airport, Cleveland, Ohio
1	Director, George C. Marshall Space Flight Center, Huntsville, Alabama ATTN: Dr. W. Lucas
1	Director, National Bureau of Standards, Washington 25, D. C.
1	Director, Research Analysis Corporation, 6935 Arlington Road, Bethesda, Maryland
1	Boeing Aircraft Corporation, Seattle, Washington ATTN: Mr. W. E. Anderson
1	Convair, San Diego, California ATTN: Mr. A. Hurlich
1	General Electric Company, Schenectady, New York ATTN: Dr. L. F. Coffin, Jr.
1	Westinghouse Research Laboratories, Pittsburgh, Pennsylvania ATTN: Dr. B. W. Wundt
1	Brown University, Providence, Rhode Island ATTN: Dr. D. C. Drucker
1	California Institute of Technology, Pasadena, California ATTN: Dr. D. S. Wood
1	Dr. J. A. Hendrickson
1	Dr. D. S. Clark
1	Massachusetts Institute of Technology, Cambridge, Massachusetts ATTN: Dr. F. McIntock
1	Stanford Research Institute, Menlo Park, California ATTN: Dr. L. A. Seaman

No. of Copies	TO
1	University of Illinois, Urbana, Illinois ATTN: Dr. H. T. Corten
1	University of Syracuse, Syracuse, New York ATTN: Dr. V. Weiss
1	University of Washington, Seattle, Washington ATTN: Dr. P. Paris
5	Commanding Officer, U. S. Army Materials Research Agency, Watertown 72, Massachusetts ATTN: AMCOMR-LXM, Technical Information Section
1	AMCOMR-OPT
1	AMCOMR, Dr. R. Beeuwkes, Jr.
1	Author

82 -- TOTAL COPIES DISTRIBUTED

AD Accession No.
Watertown Arsenal Laboratories, Watertown 72, Mass.
A METHOD OF SUCCESSIVE APPROXIMATION APPLIED TO A CLASS
OF SHELLS OF REVOLUTION WITH REGIONS OF RAPIDLY VARYING
THICKNESS - Oscar L. Bowie
Report No. WAL TR 893.3/4, Mar 1963, 16 pp - illus,
AMS Code 5011.11.838, D/A Proj 1-A-0-10501-B-010,
Unclassified Report

A plan of successive approximations is outlined for handling the equations of the three-dimensional problem in elasticity for shells of revolution with regions of rapidly varying thickness along the conceptual lines of a technique proposed by O. Göbner. Attention is confined to essentially cylindrical shells with regions of rapidly varying thickness, e.g., circumferential notches or grooves. For a restricted but useful class of loadings, plane biharmonic stress functions can be utilized. The first two orders of theory are explicitly formulated in the framework of analytic functions of a complex variable.

NO DISTRIBUTION LIMITATIONS

UNCLASSIFIED

1. Shells, thin cylindrical

2. Applied mechanics

I. Bowie, Oscar L.

II. AMS Code 5011.11.838

III. D/A Proj 1-A-0-10501-B-010

AD Accession No.
Watertown Arsenal Laboratories, Watertown 72, Mass.
A METHOD OF SUCCESSIVE APPROXIMATION APPLIED TO A CLASS
OF SHELLS OF REVOLUTION WITH REGIONS OF RAPIDLY VARYING
THICKNESS - Oscar L. Bowie
Report No. WAL TR 893.3/4, Mar 1963, 16 pp - illus,
AMS Code 5011.11.838, D/A Proj 1-A-0-10501-B-010,
Unclassified Report

A plan of successive approximations is outlined for handling the equations of the three-dimensional problem in elasticity for shells of revolution with regions of rapidly varying thickness along the conceptual lines of a technique proposed by O. Göbner. Attention is confined to essentially cylindrical shells with regions of rapidly varying thickness, e.g., circumferential notches or grooves. For a restricted but useful class of loadings, plane biharmonic stress functions can be utilized. The first two orders of theory are explicitly formulated in the framework of analytic functions of a complex variable.

NO DISTRIBUTION LIMITATIONS

UNCLASSIFIED

1. Shells, thin cylindrical

2. Applied mechanics

I. Bowie, Oscar L.

II. AMS Code 5011.11.838

III. D/A Proj 1-A-0-10501-B-010

AD Accession No.
Watertown Arsenal Laboratories, Watertown 72, Mass.
A METHOD OF SUCCESSIVE APPROXIMATION APPLIED TO A CLASS
OF SHELLS OF REVOLUTION WITH REGIONS OF RAPIDLY VARYING
THICKNESS - Oscar L. Bowie
Report No. WAL TR 893.3/4, Mar 1963, 16 pp - illus,
AMS Code 5011.11.838, D/A Proj 1-A-0-10501-B-010,
Unclassified Report

A plan of successive approximations is outlined for handling the equations of the three-dimensional problem in elasticity for shells of revolution with regions of rapidly varying thickness along the conceptual lines of a technique proposed by O. Göbner. Attention is confined to essentially cylindrical shells with regions of rapidly varying thickness, e.g., circumferential notches or grooves. For a restricted but useful class of loadings, plane biharmonic stress functions can be utilized. The first two orders of theory are explicitly formulated in the framework of analytic functions of a complex variable.

NO DISTRIBUTION LIMITATIONS

UNCLASSIFIED

1. Shells, thin cylindrical

2. Applied mechanics

I. Bowie, Oscar L.

II. AMS Code 5011.11.838

III. D/A Proj 1-A-0-10501-B-010

AD Accession No.
Watertown Arsenal Laboratories, Watertown 72, Mass.
A METHOD OF SUCCESSIVE APPROXIMATION APPLIED TO A CLASS
OF SHELLS OF REVOLUTION WITH REGIONS OF RAPIDLY VARYING
THICKNESS - Oscar L. Bowie
Report No. WAL TR 893.3/4, Mar 1963, 16 pp - illus,
AMS Code 5011.11.838, D/A Proj 1-A-0-10501-B-010,
Unclassified Report

A plan of successive approximations is outlined for handling the equations of the three-dimensional problem in elasticity for shells of revolution with regions of rapidly varying thickness along the conceptual lines of a technique proposed by O. Göbner. Attention is confined to essentially cylindrical shells with regions of rapidly varying thickness, e.g., circumferential notches or grooves. For a restricted but useful class of loadings, plane biharmonic stress functions can be utilized. The first two orders of theory are explicitly formulated in the framework of analytic functions of a complex variable.

NO DISTRIBUTION LIMITATIONS

UNCLASSIFIED

1. Shells, thin cylindrical

2. Applied mechanics

I. Bowie, Oscar L.

II. AMS Code 5011.11.838

III. D/A Proj 1-A-0-10501-B-010