

UNCLASSIFIED

AD 406 455

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD No. 406455
FILE COPY

406 455

NOLTR 62-72

HEAT TRANSFER TO THE THROAT REGION OF
A SOLID PROPELLANT ROCKET NOZZLE

NOL

26 FEBRUARY 1963

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

NOLTR 62-72

HEAT TRANSFER TO THE THROAT REGION OF A
SOLID PROPELLANT ROCKET NOZZLE,

by
Roland E. Lee,

ABSTRACT: A combined experimental and analytical method for obtaining the surface heat-transfer rate in a rocket nozzle ~~has been~~ developed at the Naval Ordnance Laboratory. This method is particularly applicable to high energy rocket nozzle flow where instrumentation directly on the flow surface is impractical.

The method employs data of the temperature-versus-time history of two points within the nozzle wall with one of them near the surface of the nozzle. The temperature distribution between the two points and the temperature of the nearby nozzle surface are computed on the IBM 7090 using the implicit numerical solution to the one-dimensional transient heat conduction equation. The heat-transfer rate at the nozzle surface is then calculated from the computed temperature gradient at the surface. Application of this method to determine the heat-transfer rate at the throat of a molybdenum insert in a conical solid propellant rocket nozzle is presented. The nozzle was operated at nominal chamber conditions of 1150 psia and 2500°K in the Johns Hopkins University Applied Physics Laboratory rocket tunnel facility. The experimental technique is described.

The experimental data are compared with theoretical predictions and other available experimental results. Good agreement is obtained with turbulent heat-transfer rates computed from the numerical integration of the boundary-layer momentum equation.

U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

NOLTR 62-72

26 February 1963

Heat Transfer to the Throat Region of a Solid Propellant
Rocket Nozzle

This report presents the results of a program to investigate the applicability of existing heat-transfer theories to the case of heat transfer involving combustion products such as in a solid propellant rocket nozzle.

The author wishes to express his indebtedness to Dr. F. Hill of the John Hopkins University Applied Physics Laboratory whose generosity made the experimental program possible, and to Messrs. E. Wallace and E. Robison, also of the Johns Hopkins University Applied Physics Laboratory for their assistance in carrying out the experiments. He also wishes to express his thanks to Mr. I. Errera who instrumented the heat-transfer model, to Mr. R. Zimmerman who performed the programming and supporting calculations on the IBM 7090, and to Drs. E. L. Harris, W. R. Thickstun, and W. E. Parr for many helpful discussions during this work.

This work was sponsored by the Special Projects Office, Bureau of Naval Weapons, Task No. NOL 456.

R. E. ODENING
Captain, USN
Commander

R. E. Odening
K. R. ENKENHUS
By direction

NOLTR 62-72

CONTENTS

	Page
INTRODUCTION.....	1
FORMULATION.....	1
EXPERIMENTAL PROCEDURE AND INSTRUMENTATION.....	3
RESULTS.....	4
Accuracy.....	6
CONCLUSIONS.....	7
REFERENCES.....	8
APPENDIX A.....	A-1

ILLUSTRATIONS

- Figure 1 Temperature Transformation for Molybdenum
- Figure 2 Variation of Thermal Diffusivity with Transformed Temperature for Molybdenum
- Figure 3 Instrumented Rocket Nozzle
- Figure 4 Photograph of Thermocouples Mounted in Tapered Molybdenum Plugs
- Figure 5 Effect of Temperature on Thermocouple Resistance for 0.010" Wires
- Figure 6 Supply Pressure Change as Function of Time
- Figure 7 Chamber Temperature Versus Time
- Figure 8 Isotherms in the Molybdenum Throat Insert at 1 and 2 Seconds After Start of Run
- Figure 9 Isotherms in the Molybdenum Throat Insert at 3 and 5 Seconds After Start of Run
- Figure 10 Isotherms in the Molybdenum Throat Insert at 7 and 10 Seconds After Start of Run
- Figure 11 Temperature Distribution in the Nozzle Throat Plane
- Figure 12 Nozzle Throat Surface Temperature Rise
- Figure 13 Heat Flux at the Nozzle Throat Surface
- Figure 14 Stanton Number Correlation at the Nozzle Throat Surface
- Figure 15 Range of Interpretation of Temperature Data in the Nozzle Throat Plane

TABLES

- Table 1 Material Property Data - Molybdenum

SYMBOLS

c_m	specific heat of nozzle material
c_p	specific heat of gas at constant pressure
h	local convective heat-transfer coefficient
k_c	reference thermal conductivity
k_t	temperature dependent thermal conductivity
Pr	Prandtl number
q	time rate of heat transfer per unit area
R	dimensionless radial coordinate = r/r^*
R_g	gas constant
r	coordinate in radial direction
r^*	nozzle throat radius
S	transformed radial coordinate
S_1	identification of curve corresponding to higher T_0 data
S_2	identification of curve corresponding to lower T_0 data
T	temperature
U	transformed temperature
u	velocity
α_t	temperature dependent thermal diffusivity of nozzle material
γ	ratio of specific heats
ρ	density of gas
ρ_m	density of nozzle material
ξ	fraction of space increment ΔS
τ	time
μ	absolute viscosity of gas

Subscripts

a	average fluid conditions
j	space reference in the radial direction
s	nozzle surface conditions
o	supply or stagnation conditions
1, 2, etc.	point identification for numerical solution

Superscripts

n	time reference
----------	----------------

INTRODUCTION

The development of higher energy solid propellant rocket motors has produced a corresponding increase in the heat-transfer rate from the exhaust gas to the motor components, and in turn has raised the temperature level of these components. Near the melting temperature of the components, heat must be removed in order to prevent structural failure. More accurate predictions of the quantity of heat transferred from the hot exhaust jet to the internal structure will permit a more efficient design of the motor and cooling system and will increase the probability of a successful mission.

There are many simplified methods for computing the heat-transfer rate from hot gases (refs. (1) through (6)), but little experimental data were available at the start of this work to support the accuracy of these methods when applied to combustion products, such as in the case of solid propellant motors. An important factor in experimental research is the difficulty of accurately measuring temperatures which exceed the melting temperature of thermocouple materials. The present report describes a technique, employing the implicit finite difference approximation of the transient heat conduction equation, to calculate the heat flow in the high-temperature region from the known temperature history in the low-temperature region where instrumentation is practical. Only one-dimensional heat flow is considered in the present analysis, and the method is applied to the flow in the nozzle throat region where maximum heating occurs. The computed heat-transfer rate in terms of Stanton number is compared with several convective heat-transfer methods based on both laminar and turbulent boundary-layer flow.

FORMULATION

Assuming axial symmetry, the general one-dimensional transient heat conduction equation in cylindrical coordinates with variable thermal conductivity and specific heat is:

$$\frac{\partial}{\partial r} \left(k_t \frac{\partial T}{\partial r} \right) + \frac{1}{r} \left(k_t \frac{\partial T}{\partial r} \right) = \rho_m c_m \frac{\partial T}{\partial \tau} \quad (1)$$

Equation (1) can be simplified by applying the following two transformations to adjust for variable thermal conductivity and geometry, respectively:

$$U = \int_{T_{k_c}}^T \frac{k_t}{k_c} dT \quad (2)$$

and

$$S = 1/h R \quad (3)$$

where

$$R = \frac{r}{r^*}$$

Then equation (1) assumes the form:

$$\frac{\partial^2 U}{\partial S^2} = \frac{(Rr^*)^2}{\alpha_t} \frac{\partial U}{\partial \tau} \quad (4)$$

where

$$\alpha_t = \frac{k_t}{\rho_m c_m}$$

Equation (4) can be solved numerically using the implicit finite difference approximation presented in reference (7) which states that for any internal point, j , in the body at a particular instant, n :

$$\frac{(\Delta^2 U)_j^{n+1}}{(\Delta S)^2} = \left[\frac{(U_{j+1} - U_j)^{n+1}}{\Delta S} - \frac{(U_j - U_{j-1})^{n+1}}{\Delta S} \right] \frac{1}{\Delta S} = \frac{(Rr^*)^2}{\alpha_t} \frac{(U_j^{n+1} - U_j^n)}{\Delta \tau} \quad (5)$$

where there are three unknown temperatures; namely, U_{j+1}^{n+1} , U_j^{n+1} , and U_{j-1}^{n+1} , and one known temperature, U_j^n .

If the body is divided into m segments, then there will be m equation (5)'s with $m+2$ unknowns. If two of these unknowns, namely, the temperature history at the two boundaries, can be determined experimentally, then the temperature field between the two points can be computed by solving the m algebraic equations with m unknowns. Likewise, the same procedure can be used to extrapolate beyond the measured points toward the surface. At the surface, the convection film coefficient, h , can be computed from Newton's law of cooling and the Fourier heat-conduction equation:

$$q = h(T_a - T_s) = \frac{k_c}{Rr^*} \left(\frac{dU}{dS} \right)_s \quad (6)$$

Reference (7) indicated the truncation error of the implicit numerical solution between the two given boundaries to be of the order of $\Delta \tau + (\Delta S)^2$. The stability of the solution is independent of the values chosen for $\Delta \tau$ and ΔS in contrast with the explicit solution. A general discussion of experimental and

numerical accuracy will be presented in the results section.

The numerical solution of equation (5) for six internal points was coded for computation on the IBM 7090 using time increments of 0.1 second. An iterative procedure to compensate for temperature variation of the thermal diffusivity was incorporated in the mechanized solution. A tabulation of the thermodynamic properties of the nozzle material, molybdenum, is shown in Table 1. The temperature transformation of equation (2) to compensate for temperature variation in thermal conductivity is graphed in figure 1. The variation of the thermal diffusivity with transformed temperature of molybdenum is shown in figure 2.

EXPERIMENTAL PROCEDURE AND INSTRUMENTATION

Tests were conducted at the rocket tunnel facility of the Applied Physics Laboratory, Johns Hopkins University, Maryland. The nominal operating supply conditions were 1150 psia and 2500°K which were produced by a standard double base, end burning ARP ten-second propellant prepared by the Allegany Ballistics Laboratory. A detailed discussion of the facility and the flow produced by this propellant is given in references (8) and (9).

The heat-transfer model, one of the standard nozzle configurations used at APL, consisted of a solid molybdenum throat insert that was pressed into a conical steel nozzle. The dimensions of the insert are 2.85 inches long and 0.68 inch-thick at the throat with a convergence of 45 degrees and an expansion angle of 12.5 degrees and throat radius of curvature of 0.77 inch. The nozzle throat and exit diameters were 0.63 inch and 1.99 inches, respectively (see fig. 3).

The throat insert was instrumented with a total of 28 thermocouples in five axial locations and at the interface between the molybdenum and steel as shown by the solid dots in figure 3. All the thermocouples were mounted in one plane passing through the nozzle axis. The thermocouples made from 30-gage platinum and platinum-rhodium wires were mounted in the radial planes in one-degree tapered molybdenum plugs as shown in figure 4. The plugs were inserted into mating holes which bottomed at depths of .010 inch from the gas flow surface (see figure 4).

The thermocouples were anchored in one axial plane of the plug and protruded approximately .001 inch above the surface of the plug. The wires were threaded through a .062 inch diameter hole drilled across the diameter of the plug and were led out of the plug through a channel cut on the opposite face. Having the wire along the diameter is a precaution to minimize any heat

losses by conduction through the wire by extending a short segment of the wire along the assumed isotherms. The smallest diameter of the plug was .25 inch and the potting agent was Saureisen No. 76. These plugs were then lap-fitted to the throat insert to insure a good surface contact between each plug and the insert. Thermocouples on the interface between the molybdenum insert and steel shell were mounted into threaded plugs which were screwed into place. The reference thermocouples were formed with copper extension wires kept at room temperature. The emf's of the thermocouples were recorded on a 50-Channel Midwestern Direct Recording Oscillograph, Model 602. The nozzle inlet pressure was recorded with a Statham pressure transducer, and the inlet temperature was measured with two unshielded .020 inch diameter tungsten-iridium thermocouples. One of the two thermocouples was connected to the Midwestern oscillograph, while the other thermocouple and the pressure transducer were connected to Sanborn recorders.

The effect of electrical resistance of the thermocouple lead-wires at elevated temperatures was considered and measured in an electric furnace under simulated test conditions. Wires from the same lot and of the same lengths as those used for the model instrumentation were calibrated against a standard thermocouple calibrated by the National Bureau of Standards. In general, the change in resistance due to uncertainties in the leads at these temperatures as shown in figure 5 is very small compared to the nominal circuit resistance of 230 ohms. The maximum error introduced in the final results is less than one percent.

RESULTS

The characteristic pressure and temperature rise in the combustion chamber is shown in figures 6 and 7, respectively. The two independently measured chamber temperatures represented by curves T_{01} and T_{02} in figure 7 showed good initial temperature agreement but departed by approximately ten percent toward the end of the run. The higher temperature curve, T_{01} , measured on the Midwestern oscillograph had a few saw-tooth type bursts after five seconds duration as shown. The lowest peak of these bursts was approximately four percent below the average. The second temperature data, T_{02} , were lower and more irregular than the T_{01} data, and the lower and irregular T_{02} data appeared to have been caused by the temporary insulation effect of non-gaseous products deposited on the bare thermocouples. The effect of this temperature difference in the heat-transfer results will be shown later.

The maps of isotherms, determined from the data of the thermocouples embedded in the throat insert at time intervals of one, two, three, five, seven and ten seconds, are shown in figures 8 through 10, respectively. The slope of the isotherms in the throat region indicates small axial heat flow. Graphical evaluation of the data shows the second derivative of the temperature in the axial direction to be less than two percent of the second derivative of the temperature in the radial direction. Consequently, it is expected that the temperature and heat-transfer rate at the throat surface can be computed with good accuracy by the one-dimensional heat flow analysis previously described. The computation was performed on the IBM 7090.

Figure 11 is a graph of the radial temperature distribution in the nozzle throat plane. The symbols represent measured temperatures at the location shown. The two temperature boundaries used for the numerical solution were located at the circular and triangular points. The lines plotted represent the computed solution of the transient heat conduction equation at the selected time intervals as described in Appendix A. The heat-transfer rate at the surface was determined from the temperature gradient at the surface. The computed surface temperature and heat flux during the run are shown in figures 12 and 13, respectively. The bands shown represent variations resulting from different interpretation of the data and expected experimental error. They will be discussed more fully later.

The heat transfer to the nozzle throat using the present extrapolation method was compared with several convective heat-transfer theories based on both laminar and turbulent flow (see figure 14). The pertinent equations used for computation are summarized in Appendix A. The upper group of solid curves shows the turbulent heat-transfer rate predicted by the theories of references (1) through (4), using fluid properties corresponding to the average of the surface temperature and the free-stream static temperature. The free-stream static temperature was computed from the known supply temperature and the assumed perfect-gas flow at the nozzle inlet. The equation of Sibulkin (ref. (1)) considers the heat transfer only at the nozzle throat while that of Bartz (ref. (4)) can be applied to other regions of the nozzle. The equations of Dittus and Boelter and of Eckert and Drake (ref. (2)) are relations based on turbulent pipe flow. The curve of Persh and Lee (ref. (3)) is from a step-wise integration of the boundary-layer momentum equation which includes the effect of pressure gradient. Colucci's results of heat-transfer measurements in a rocket nozzle (ref. (10)) were fitted with an equation which coincides with the result of Dittus and Boelter.

The lower group of curves are approximate solutions based on laminar flow over a flat plate (ref. (6)) with selected representative wetted lengths. A wetted length equal to 2.5 times the throat diameter corresponds to the distance from the nozzle throat to the beginning of the conical nozzle inlet; six diameters correspond to the initial burning face of the propellant, and 11.5 diameters corresponds to the burning face of the propellant at 50 percent burn-out. A more exact method for the computation of the laminar heat-transfer rate was presented by reference (5) which included the effect of pressure gradient. One point was computed by this method assuming a surface temperature equal to 90 percent of free-stream stagnation temperature. This is represented by the diamond symbol on the graph.

The computed Reynolds number based on laminar boundary-layer momentum thickness is approximately 650 at the nozzle throat, i.e., it is of a magnitude usually associated with the transition region from laminar to turbulent flow. The present data support the existence of turbulent flow in the throat region and appear to be predicted best by the numerical integration of the boundary-layer momentum equation.

The experimental heat-transfer data in the form of Stanton number are shown by the two curves T_{01} and T_{02} of figure 14. The difference between these two curves is due to the difference in supply temperature as was shown in figure 5. The divergence of the experimental data at the higher surface temperature is due to the small temperature differences between the wall and free-stream temperatures and the resulting large relative error in $(T_a - T_s)$ used in equation (6) to compute the heat flux.

Accuracy

The accuracy of the present method for extrapolating the surface temperatures is dependent upon the experimental errors and the truncation error of the numerical solution which was discussed earlier. For the numerical solution on the IBM 7090, the distance between the two boundaries was divided into five segments of equal length on a logarithmic scale and time increments of 0.1 second. Based on past experience of related problems under similar conditions, it was judged that the present selection of increments would give sufficiently accurate results.

Experimental errors may be divided into two classes: those which are systematic or determinate and those which are accidental or indeterminate. The former, which included resistance change of thermocouple wires due to temperature, were minimized by calibration at simulated temperatures as discussed earlier. Indeterminate errors are due to unpredictable effects which are usually lumped together as deviation from some assumed average.

In the present investigation three significant effects classified as indeterminate errors affected the accuracy of the data. One of these was in the insulation of the chamber thermocouple by the unburned propellant. The result of this effect is indicated by the divergence of the two temperature curves as shown in figure 7. The error introduced in the Stanton number correlation is shown by the difference of the T_{01} and T_{02} in figure 14. The second effect is the change in contact resistance between the embedded thermocouples and the molybdenum throat insert. Any shifting of the thermocouple during the run usually results in a sudden decrease in emf output when compared to the relatively slow rise of the temperature being measured. Consequently this effect could be easily detected by discontinuities in the temperature-versus-time data recorded. The probability of thermocouple shifting was decreased by welding the thermocouples directly to the tapered plug prior to installation. The third effect, which is characteristic of the nozzle material used, is the fracturing of the insert by the starting thermal shock. These fractures appear as longitudinal hairline cracks located in the throat region and were formed in many of the molybdenum throat inserts tested. Although in the instrumented nozzle the fractures did not impinge directly on the thermocouples, local penetration of the hot gas may have resulted in the high temperatures of some of the internal points. It is speculated that the departure of experimental data from computed results (near the end of the run) as shown in figure 11 was due to local gas flow, i.e., the internal thermocouples were heated by hot gas leaking through the fractures.

The human factor in drawing the curve through the points of figure 11 is illustrated in figure 15. The bands shown represent the spread of curves made by ten independent interpretations of the data. The resultant scatter at the end points was incorporated into the numerical solution and the uncertainties at the throat surface are shown by the cross-hatched areas in figures 12, 13, and 14.

CONCLUSIONS

A combined experimental and analytical method is given for obtaining the surface heat-transfer rate at the throat of a rocket nozzle. Experimental data justify the use of the one-dimensional heat flow analysis. The results are compared with theoretical predictions and with other available experimental results. Good agreement is obtained with turbulent heat-transfer rates computed from the point-by-point solution of the boundary-layer momentum equation along the nozzle contour.

REFERENCES

- (1) Sibulkin, M., "Heat Transfer to an Incompressible Turbulent Boundary Layer and Estimation of Heat-Transfer Coefficients at Supersonic Nozzle Throats," JAS, Vol. 23, No. 2, Feb 1956
- (2) Eckert, E. R. and Drake, R. M., "Heat and Mass Transfer," Second Edition, McGraw-Hill Book Co., Inc., 1959
- (3) Persh, J. and Lee, R. E., "A Method for Calculating Turbulent Boundary-Layer Development in Supersonic and Hypersonic Nozzles Including the Effects of Heat Transfer," NAVORD Report 4200, Jun 1956
- (4) Bartz, D. R., "A Simple Equation for Rapid Estimation of Rocket Nozzle Convective Heat-Transfer Coefficients," Jet Propulsion, Jan 1957
- (5) Cohen, C. B. and Reshotko, E., "The Compressible Laminar Boundary Layer with Heat Transfer and Arbitrary Pressure Gradient," NACA Report 1294, 1956
- (6) Van Driest, E. R., "The Problem of Aerodynamic Heating," Aero. Eng. Review, Vol. 15, No. 10, Oct 1956
- (7) Richtmyer, R. D., "Difference Methods for Initial-Value Problems," Interscience Publishers, Inc., p. 93, 1957
- (8) Wallskog, H. A., "A High Temperature Wind Tunnel Using a Solid Propellant Rocket as a Source," presented at the Fourth U. S. Navy Symposium on Aeroballistics sponsored by the Bureau of Ordnance, Vol. I, NAVORD Report 5904, NPG Report 1599, 1 May 1958
- (9) Hill, F. K., "Rocket Tunnel Gas Properties," APL/JHU CF 2680, Applied Physics Laboratory, Johns Hopkins University, 12 Sept 1957
- (10) Colucci, S. E., "Experimental Determination of Solid Rocket Nozzle Heat-Transfer Coefficient," Aerojet-General Corp., Technical Paper 106 SRP, May 1960
- (11) Schneider, P. J., "Conduction Heat Transfer," Addison-Wesley Publishing Company, Inc., 1955

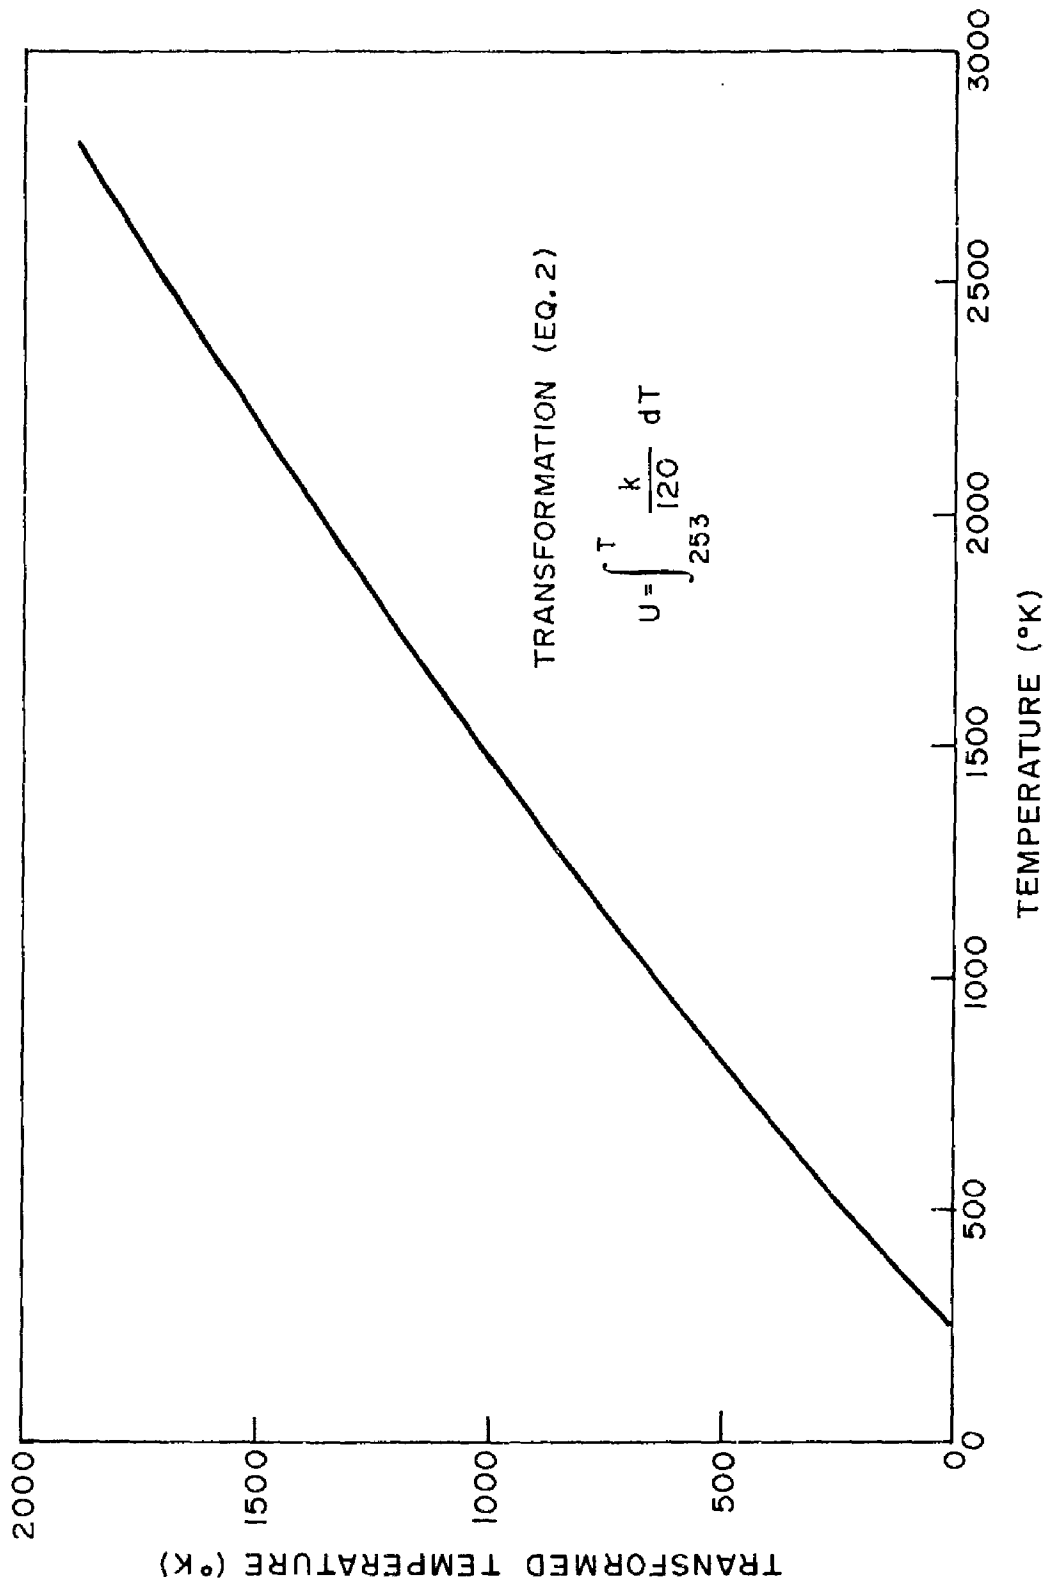


FIG.1 TEMPERATURE TRANSFORMATION FOR MOLYBDENUM

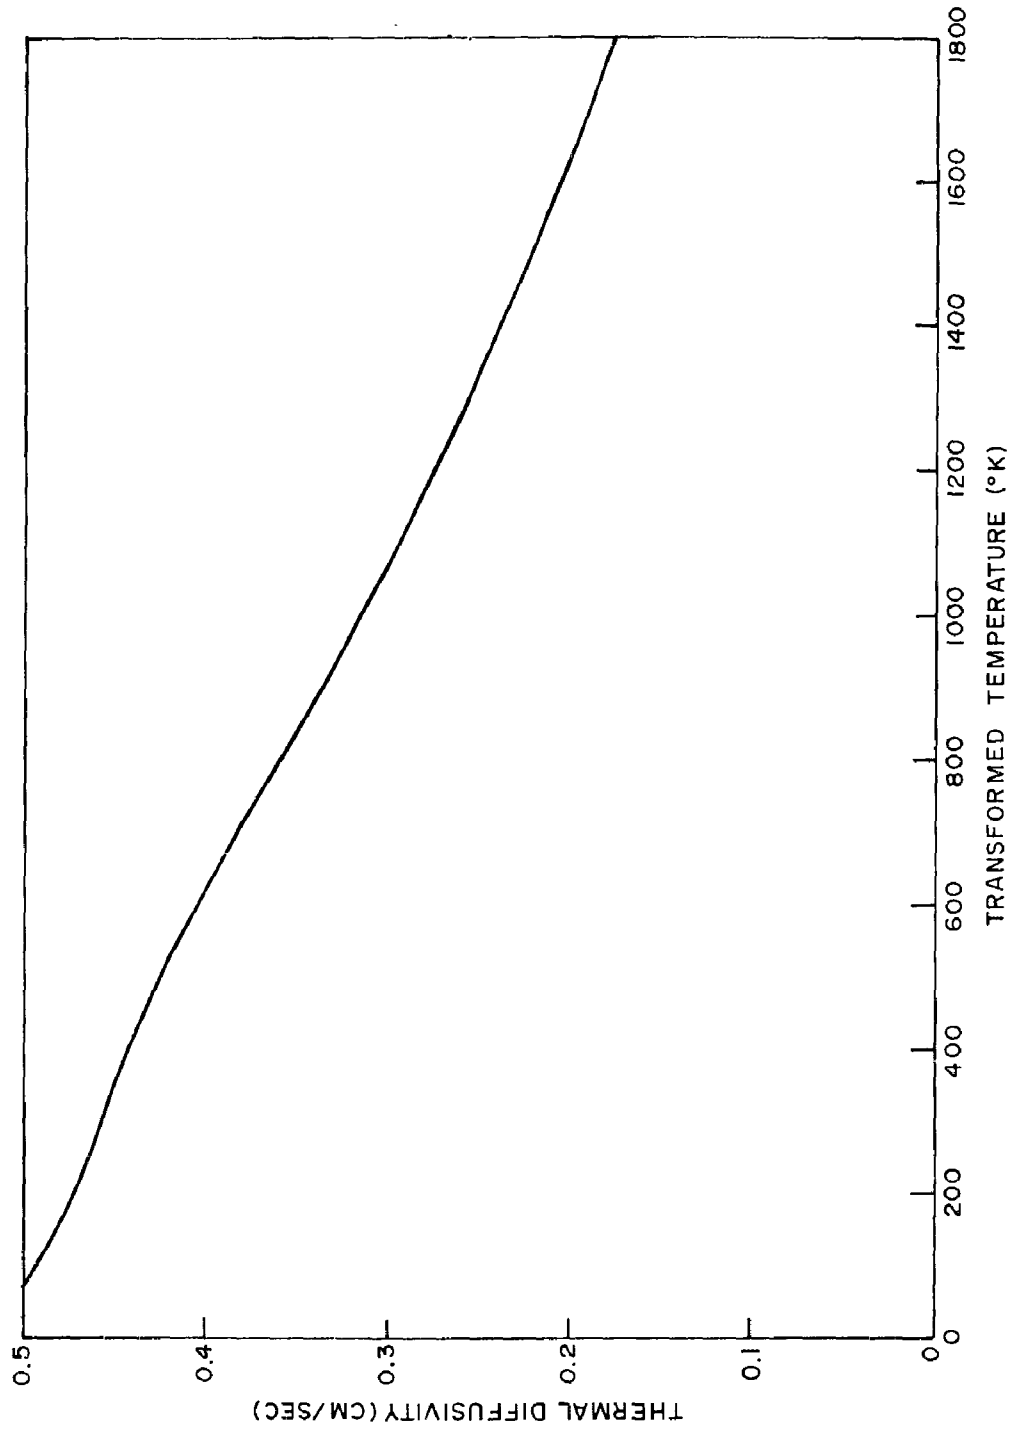


FIG. 2 VARIATION OF THERMAL DIFFUSIVITY WITH TRANSFORMED TEMPERATURE
FOR MOLYBDENUM

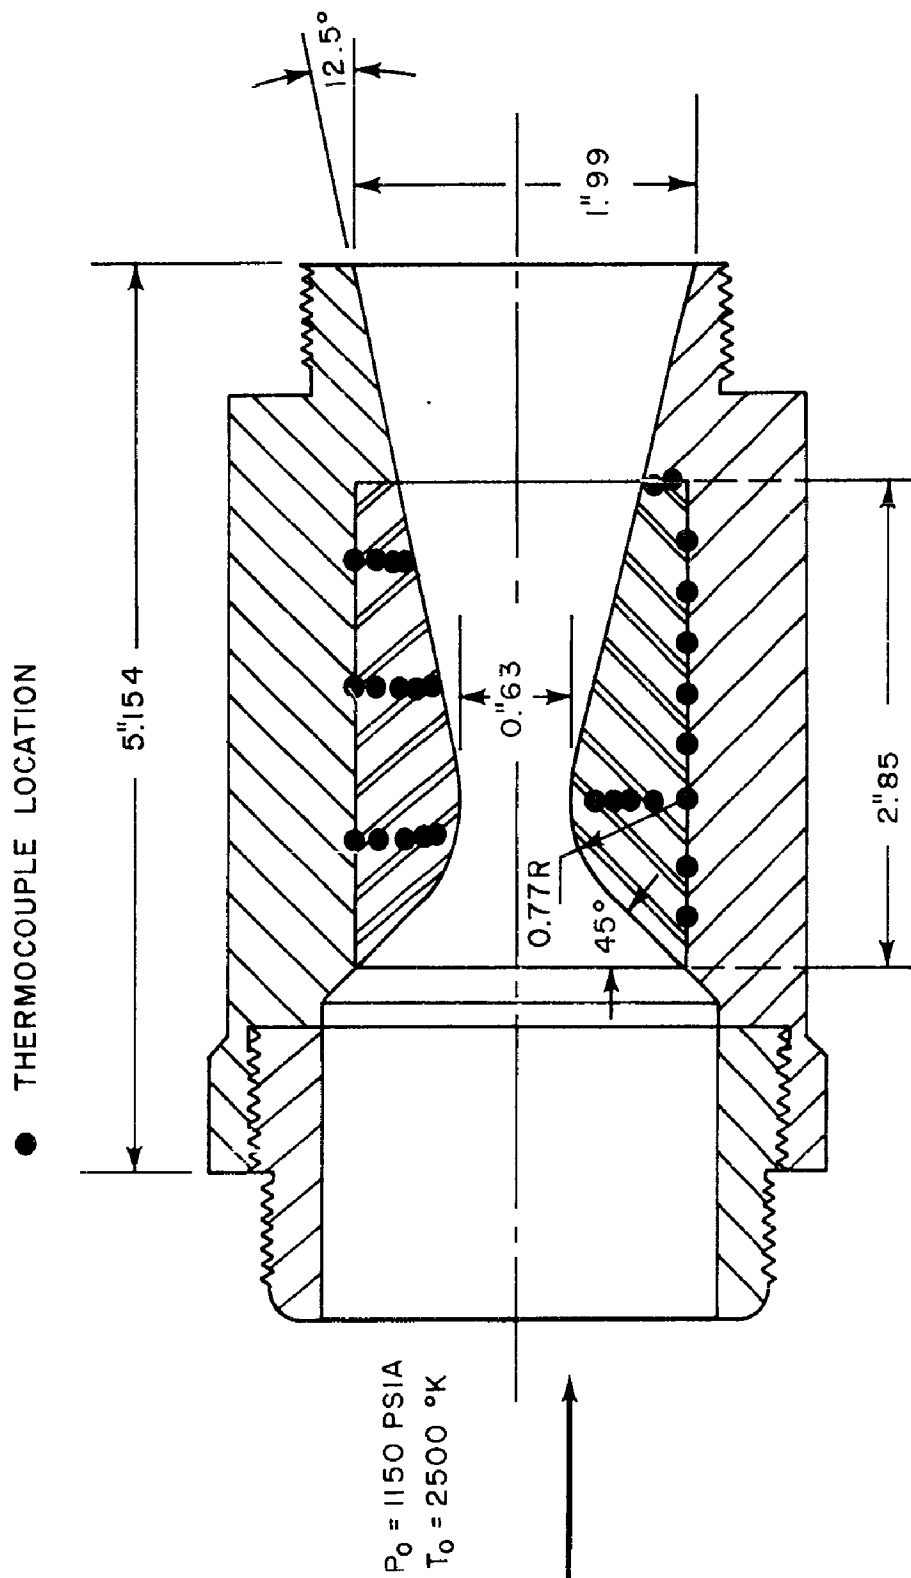


FIG. 3 INSTRUMENTED ROCKET NOZZLE

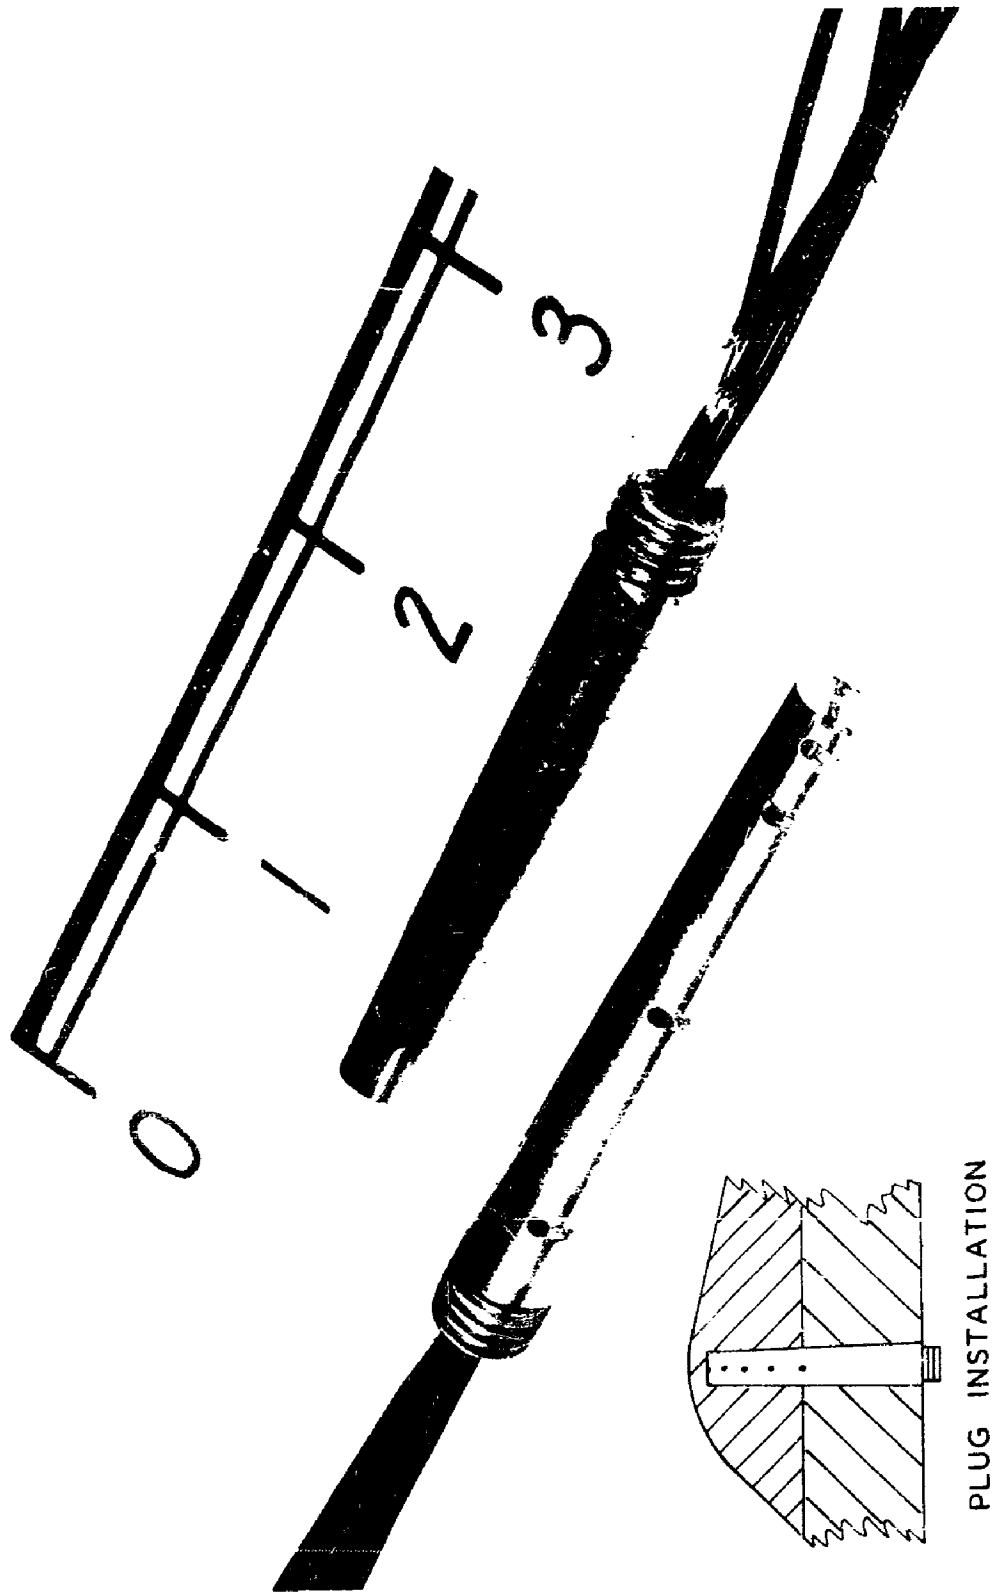


FIG. 4 PHOTOGRAPH OF THERMOCOUPLES MOUNTED INTO TAPERED MOLYBDENUM PLUGS

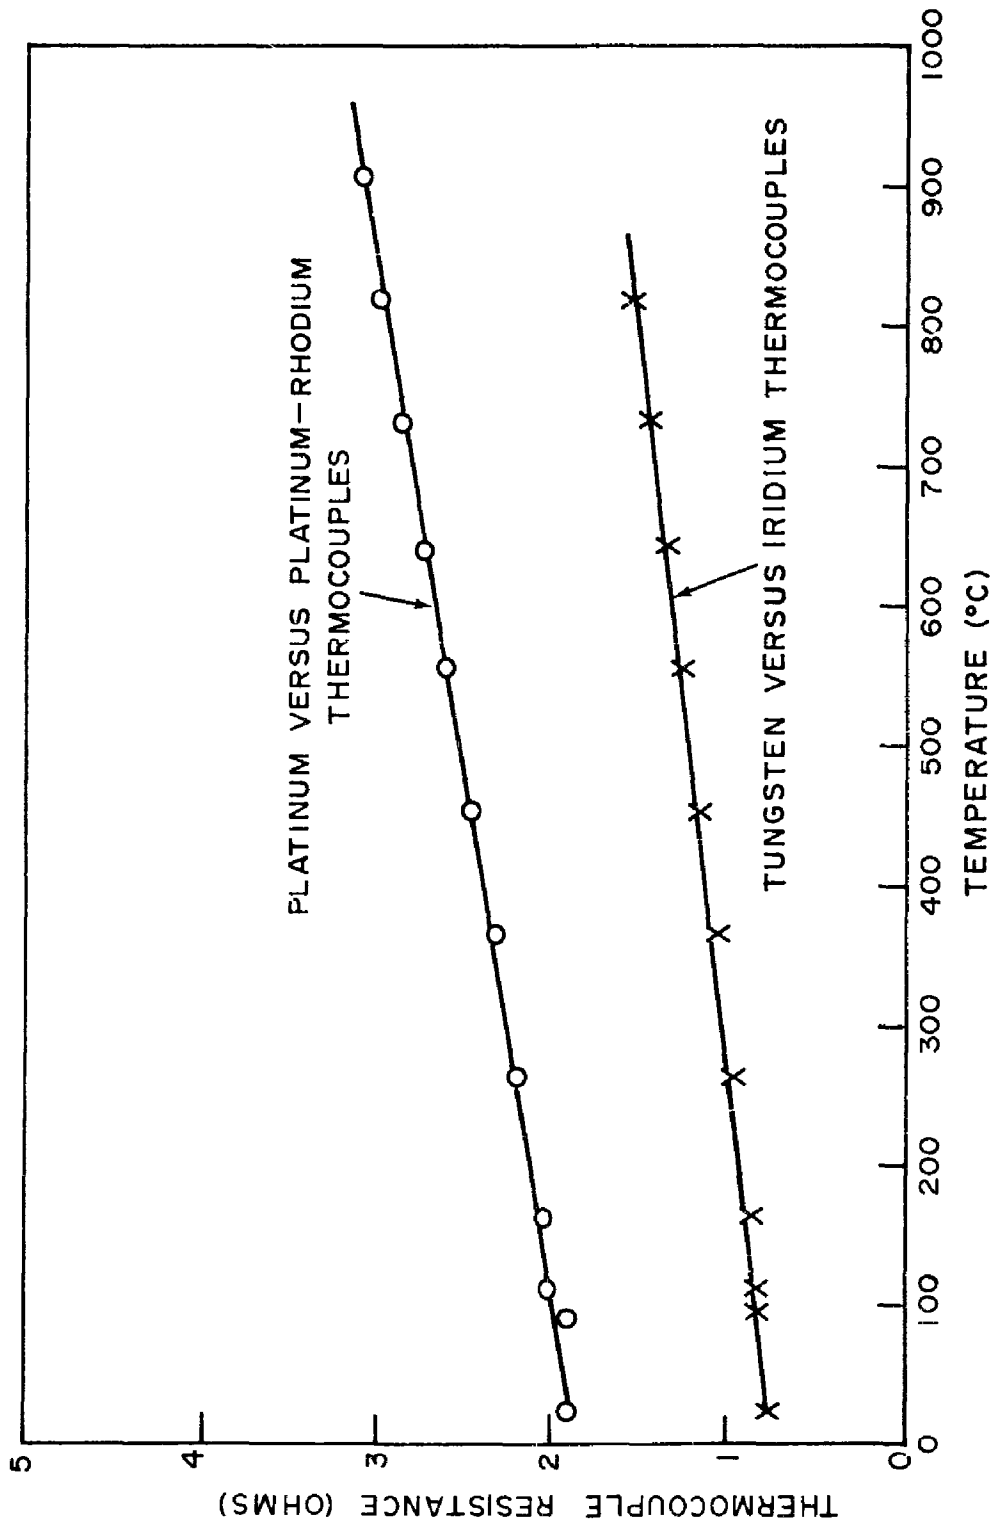


FIG. 5 EFFECT OF TEMPERATURE ON THERMOCOUPLE RESISTANCE
FOR 0.010" WIRES

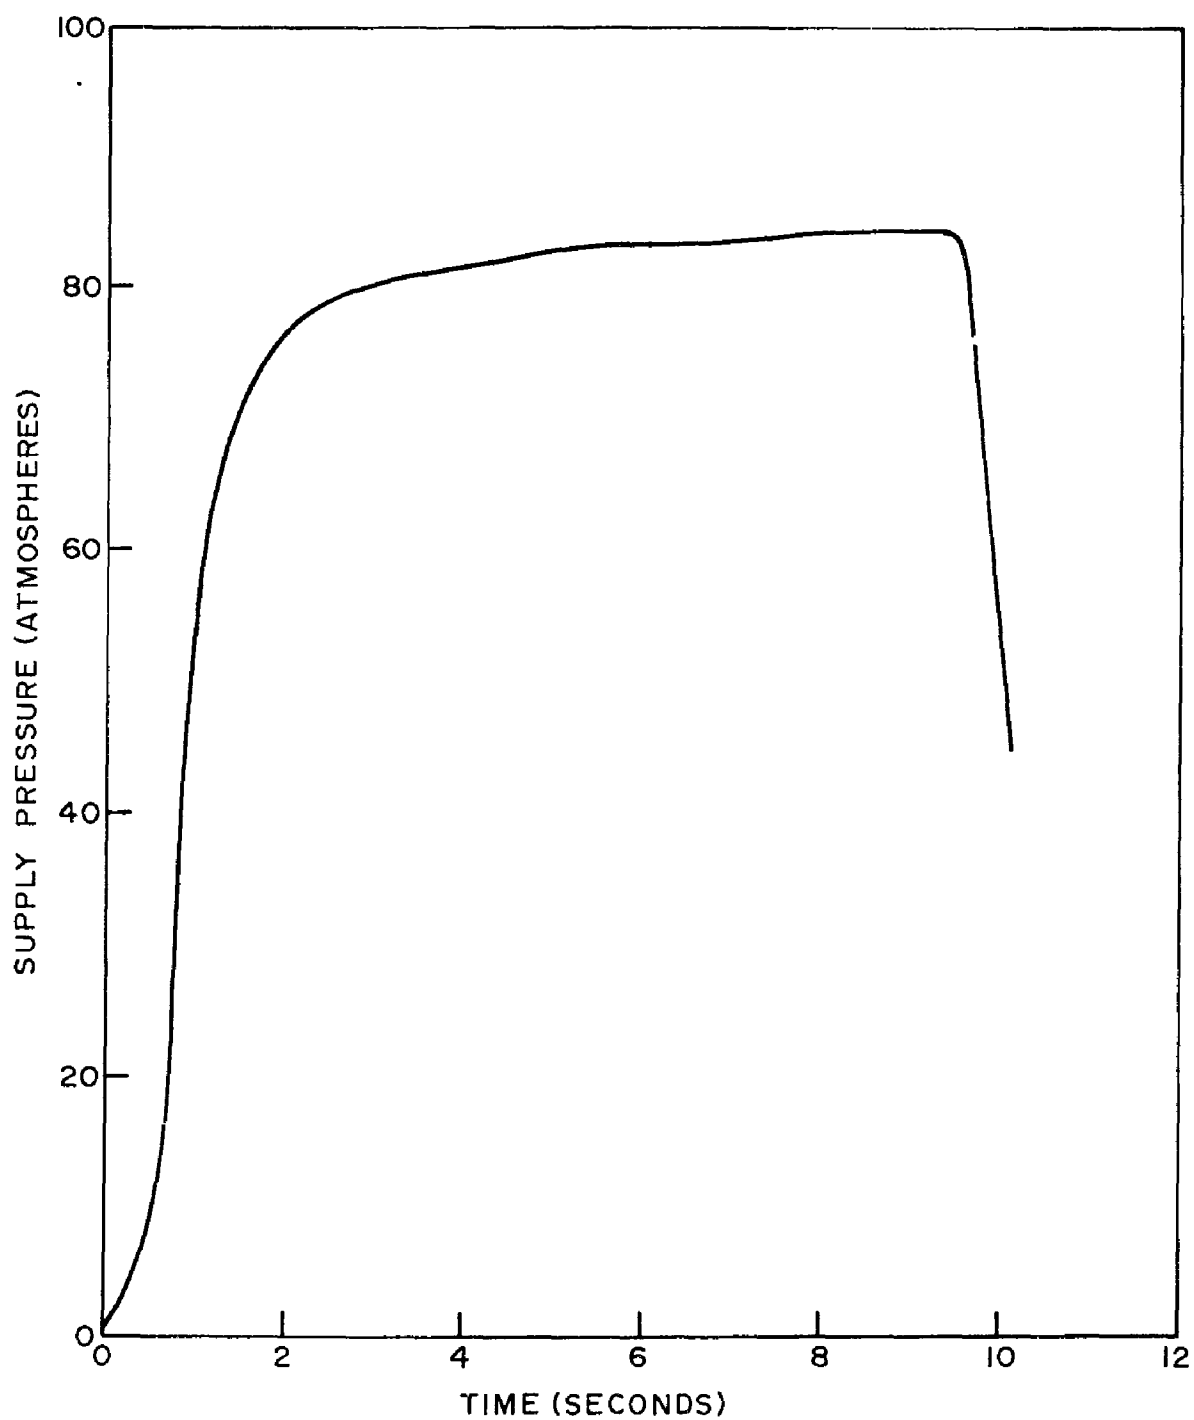


FIG. 6 SUPPLY PRESSURE CHANGE AS FUNCTION OF TIME

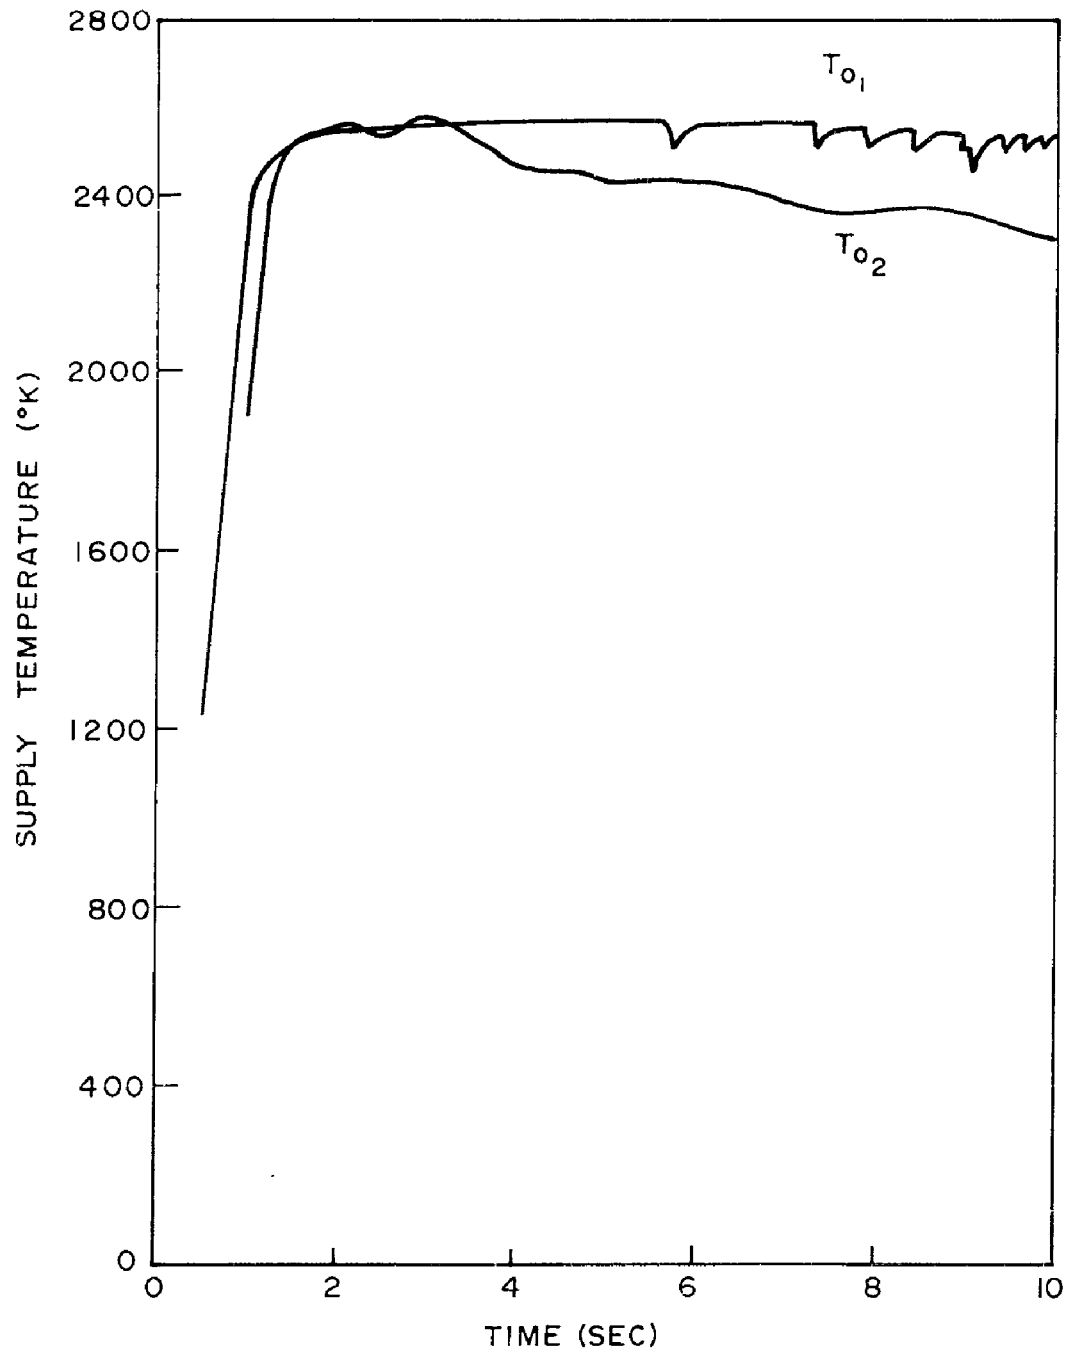


FIG. 7 CHAMBER TEMPERATURE VERSUS TIME

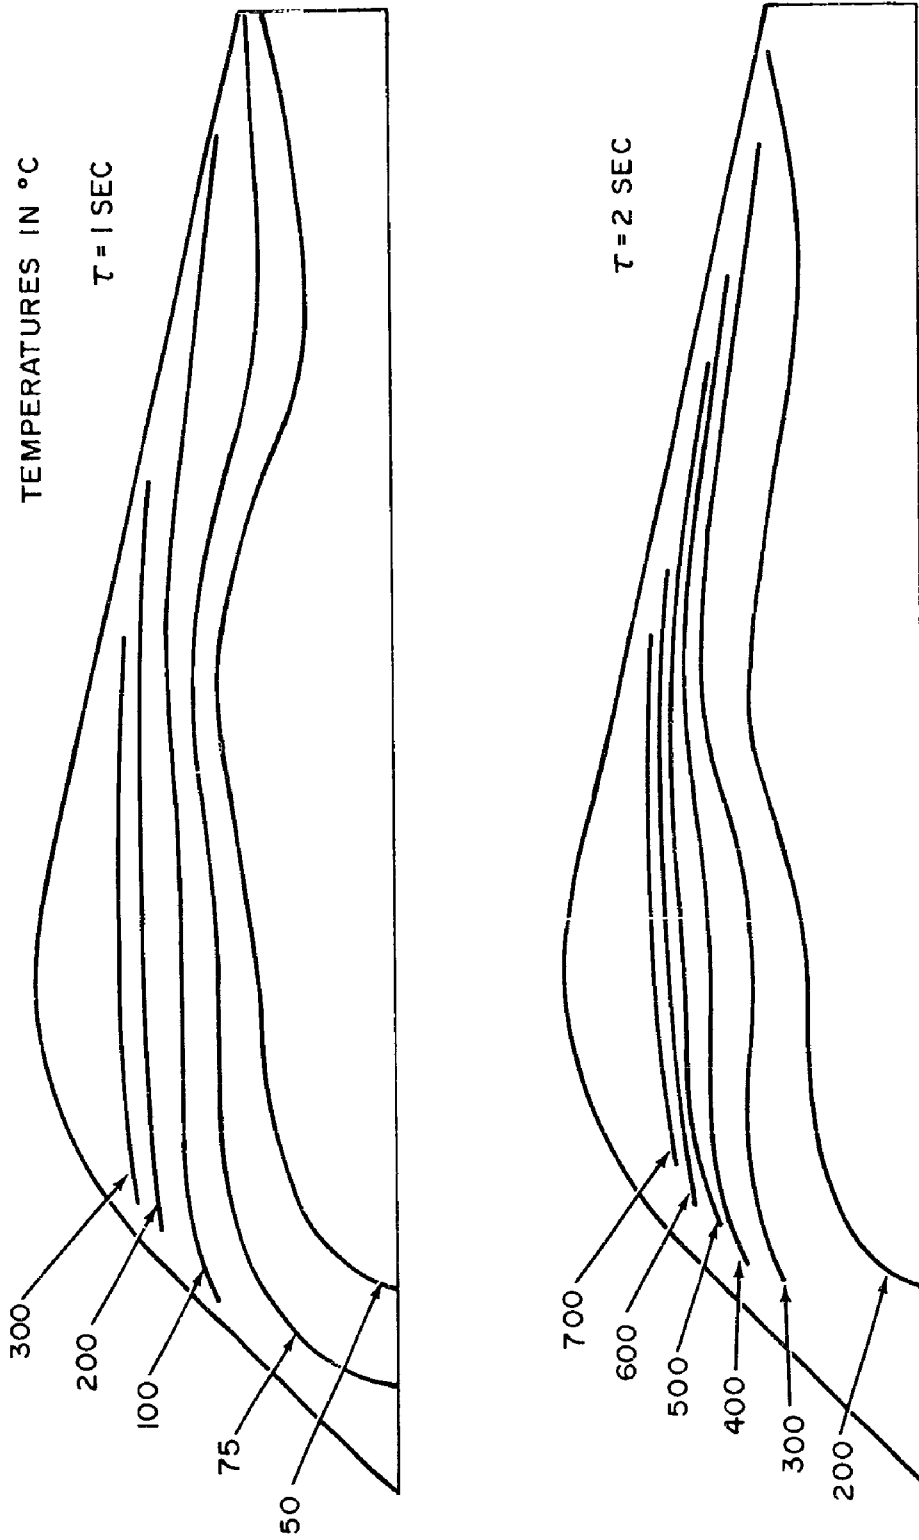


FIG. 8 ISOTHERMS IN THE MOLYBDENUM THROAT INSERT AT 1 AND 2 SECONDS AFTER START OF RUN

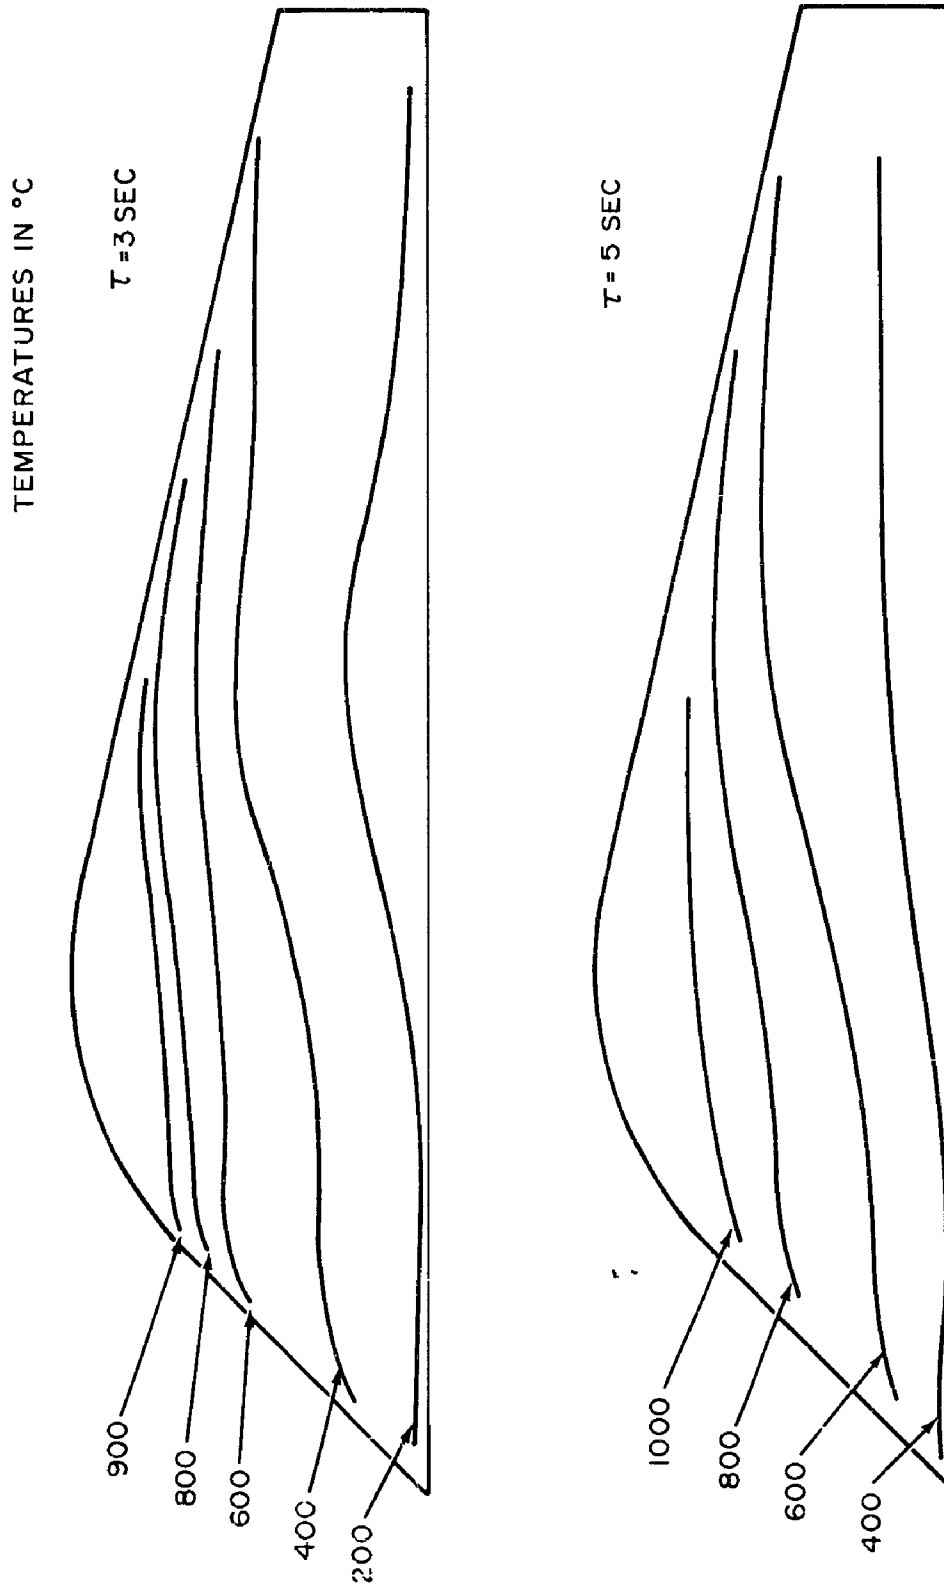


FIG. 9 ISOTHERMS IN THE MOLYBDENUM THROAT INSERT AT 3 AND 5 SECONDS AFTER START OF RUN

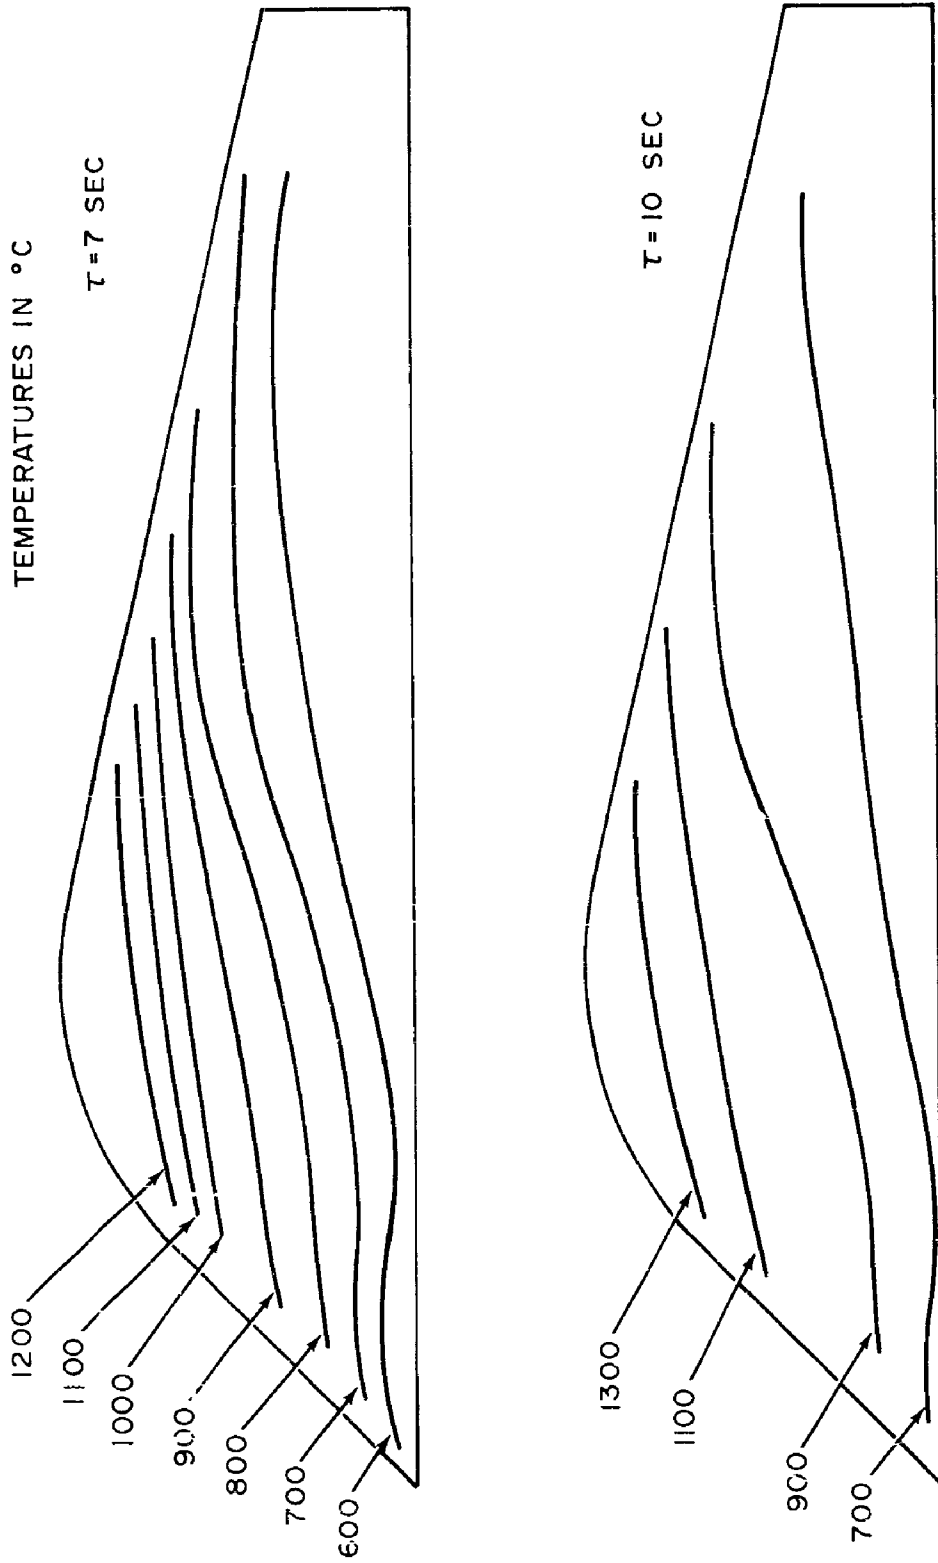


FIG. 10 ISOTHERMS IN THE MOLYBDENUM THROAT INSERT AT 7 AND 10 SECONDS AFTER START OF RUN

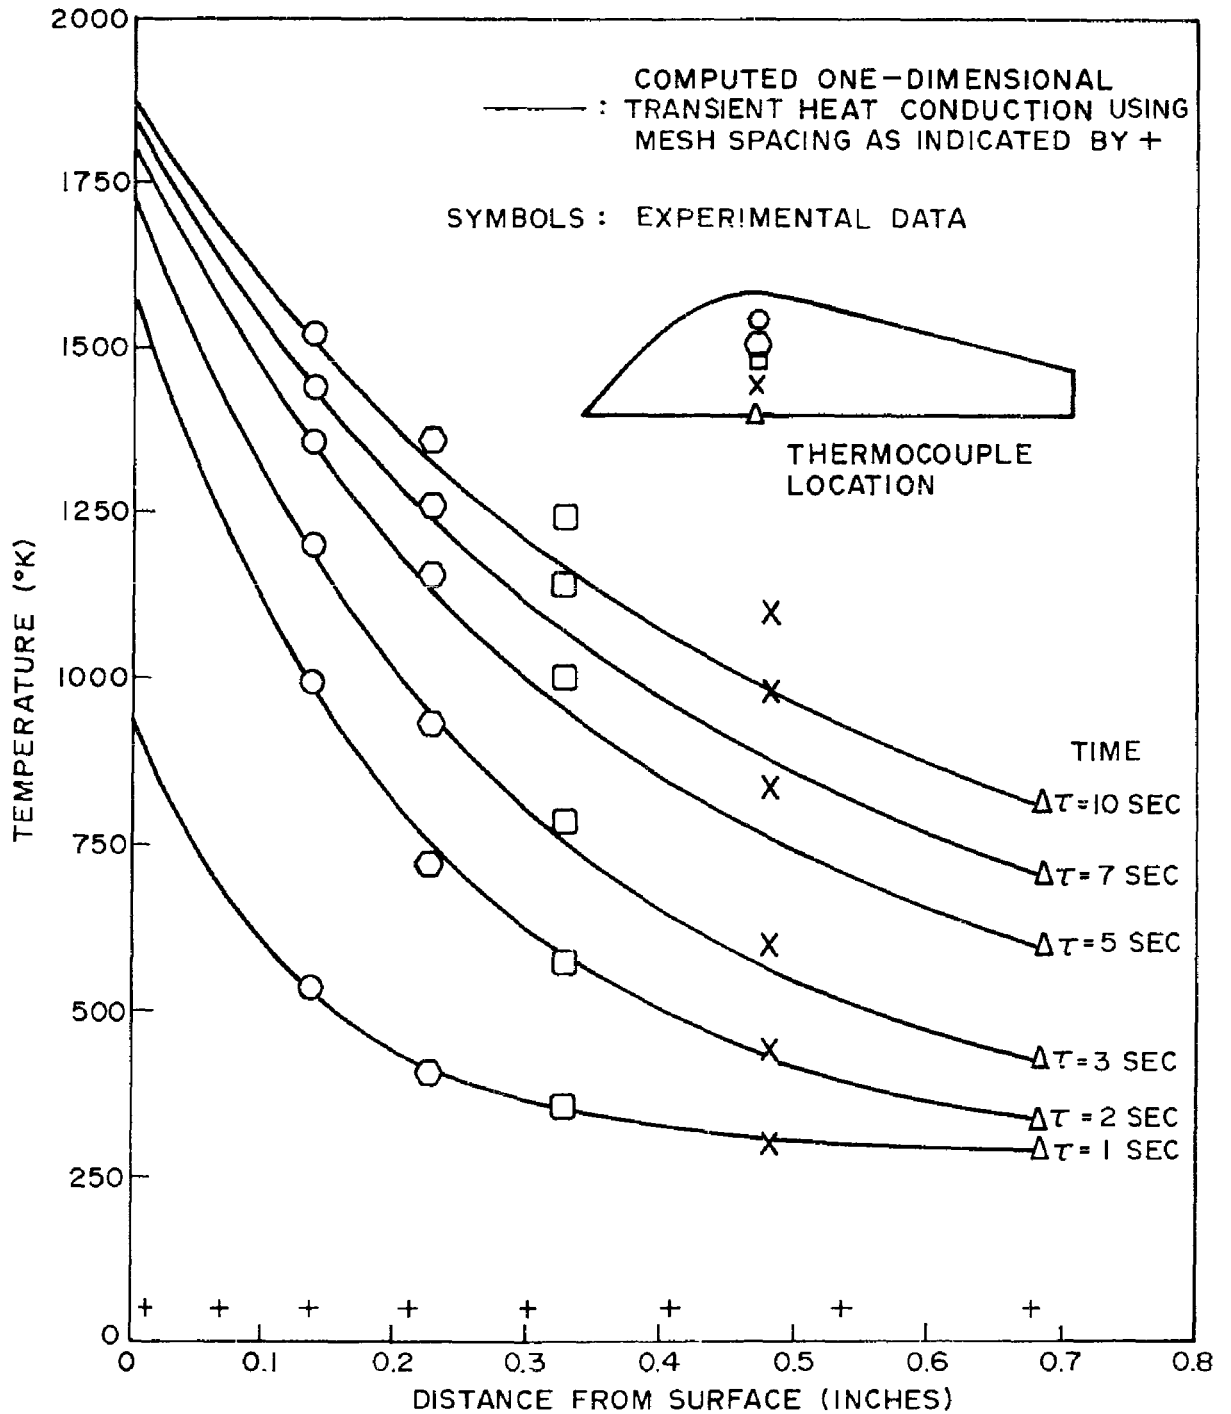


FIG. 11 TEMPERATURE DISTRIBUTION IN THE NOZZLE THROAT PLANE

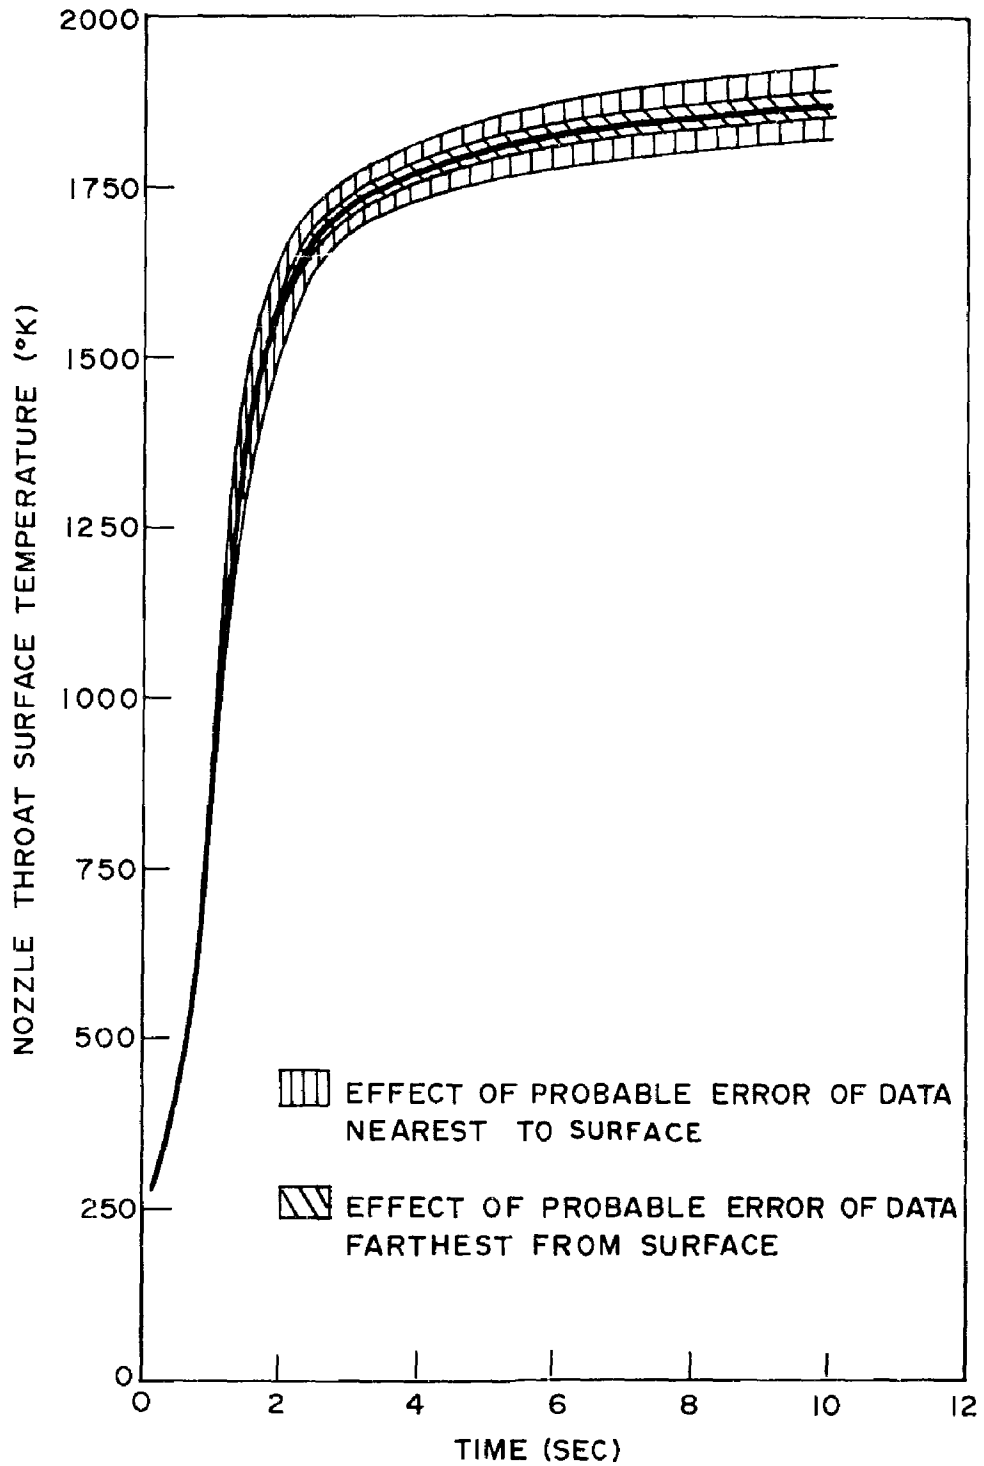


FIG. 12 NOZZLE THROAT SURFACE TEMPERATURE RISE

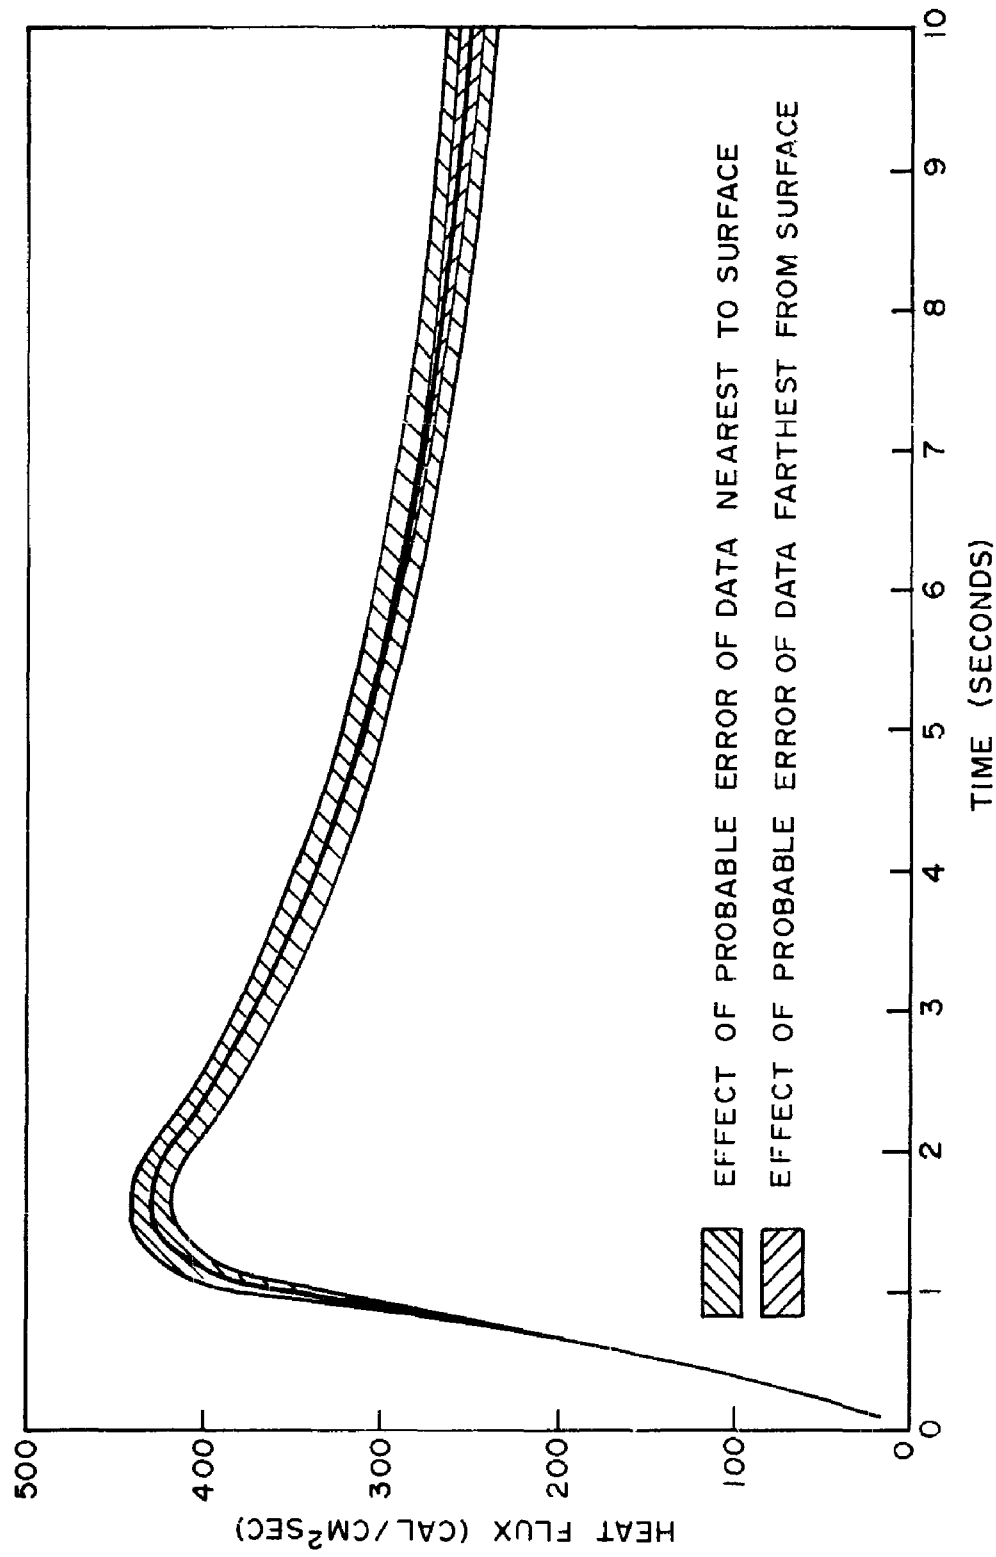


FIG. 13 HEAT FLUX AT THE NOZZLE THROAT SURFACE

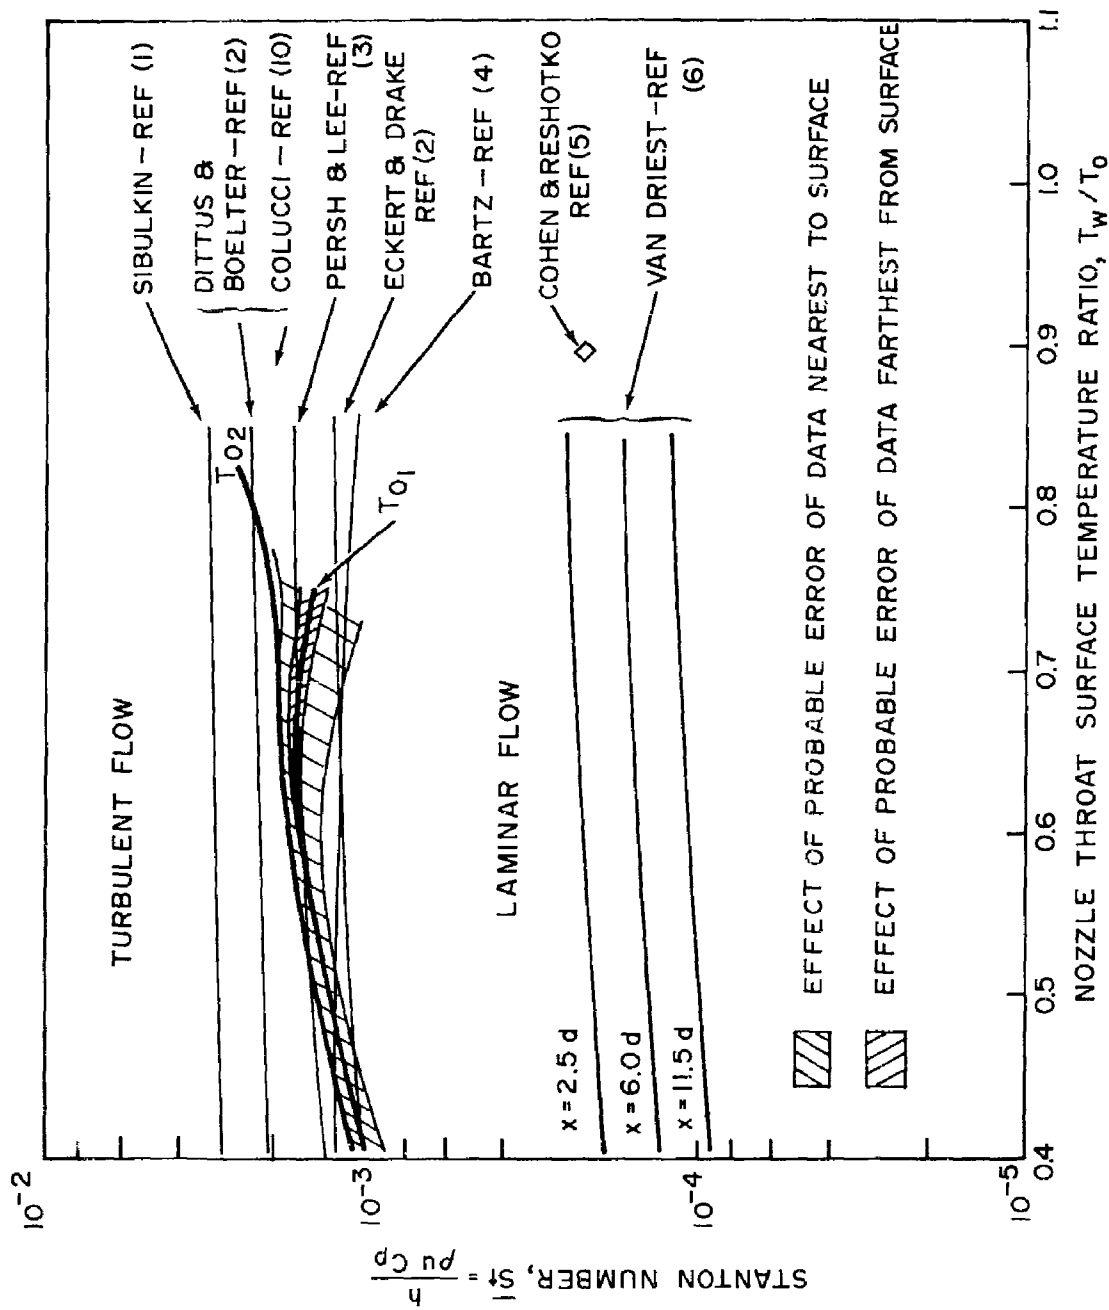


FIG. 14 STANTON NUMBER CORRELATION AT THE NOZZLE THROAT SURFACE

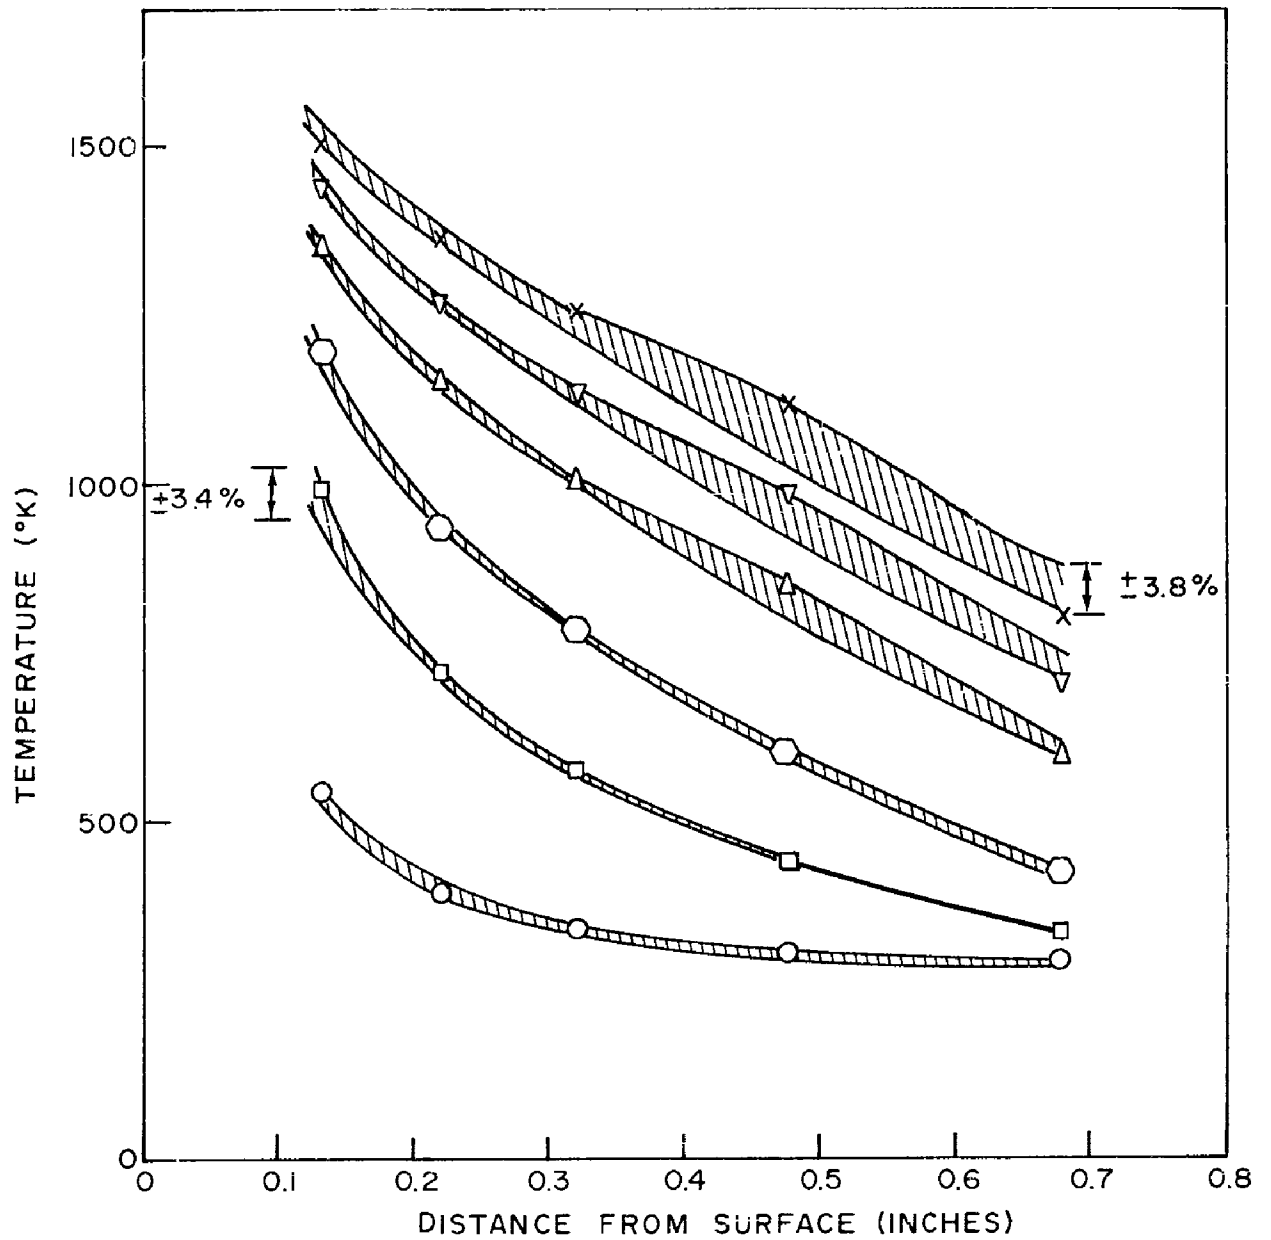


FIG. 15 RANGE OF INTERPRETATION OF TEMPERATURE DATA IN THE NOZZLE THROAT PLANE

Table 1

MATERIAL PROPERTY DATA - MOLYBDENUM

Melting Point: 5200° Rankine = 2888° Kelvin
 Emissivity : 0.10
 Density : 9.9371 gm/cm³

<u>Temperature</u> <u>(deg Kelvin)</u>	<u>Conductivity</u> <u>(cal/cm sec °C)</u>	<u>Specific Heat</u> <u>(cal/gm °C)</u>
253	.333	0.065
273	.328	0.065
477	.302	0.065
588	.289	0.064
699	.281	0.064
810	.273	0.064
921	.264	0.065
1033	.256	0.067
1144	.252	0.069
1255	.247	0.071
1366	.243	0.074
1477	.239	0.077
1588	.235	0.080
1699	.231	0.083
1810	.231	0.086
1921	.227	0.090
2032	.227	0.094
2144	.222	0.098
2255	.222	0.103
2366	.218	0.108
2477	.218	0.113
2588	.218	0.119
2699	.214	0.124
2810	.214	0.130

APPENDIX A

Summary of Theories Used for Heat-Transfer Correlation

Heat transfer was correlated in terms of Stanton number which is defined as:

$$St = \frac{h}{\rho u c_p} = \frac{Nu}{Re Pr} \quad (A-1)$$

Computations were based on isentropic flow in the region between the combustion chamber and the nozzle throat and the following gas properties obtained from references (8) and (9):

$$\gamma = 1.25$$

$$C_p = .424 \text{ Btu/lb}^\circ\text{R}$$

$$R_g = 63.173 \text{ ft-lb/lb}^\circ\text{R}$$

$$\mu_0 = 4.81 \times 10^{-5} \text{ lb/ft-sec}$$

$$Pr = .607$$

The values of the convective heat-transfer coefficient, h , were computed from equation (6). The method for computing the theoretical values of h are listed as follows:

- a. Sibulkin, reference (1) - (applies to nozzle throat only)

$$St = \frac{1}{\bar{\rho} u_1 c_p} \left[\frac{C_2 p_0 (\gamma^*)^{1/5}}{T_0^{3/5} (r^* L^*)^{1/10}} \right] \left(\frac{T_1}{\bar{T}} \right)^* \quad (A-2)$$

where:

$$C_2 = .0226 \left(\frac{2}{\gamma+1} \right)^{1/2} \frac{\gamma^{2/5}}{R_g^{3/5}} \frac{C_p}{Pr^{2/3}} \quad (A-3)$$

γ = ratio of specific heaters

R_g = gas constant, $\text{ft}^2/\text{sec}^2\text{OR}$

C_p = specific heat at constant pressure, $\text{Btu/slug}^\circ\text{R}$

Pr = Prandtl number

p_o = supply pressure, lb/ft²

ν^* = kinematic viscosity, ft²/sec

T_o = supply temperature, °R

T_1 = stream temperature, °R

$\bar{T} = \frac{T_o + T_w}{2}$, °R

T_w = wall temperature, °R

r^* = radius of nozzle throat opening, ft

L^* = radius of nozzle throat curvature, ft

$\bar{\rho}$ = density at $\bar{T}$, lb-sec²/ft⁴

u_1 = local stream velocity

b. Dittus and Boelter, reference (2)

$$St = .0265 (\bar{Re}_d)^{-.2} (Pr)^{-.7} \quad (A-4)$$

Pr = Prandtl number

$\bar{Re}_d$ = Reynolds number based on local diameter, local stream velocity, density and viscosity at $\bar{T}$.

c. Colucci, reference (10) - curve drawn through experimental data

$$St = .023 (\bar{Re}_d)^{-.2} Pr^{-.1} \quad (A-5)$$

d. Persh and Lee, reference (3) - The Colburn form of Reynolds analogy

$$St = \frac{C_f}{2} Pr^{-2/3} \quad (A-6)$$

is used to obtain the heat-transfer coefficient. The local skin friction coefficient is obtained from its assumed dependency on the boundary-layer momentum thickness given in reference (3), and the numerical integration of the boundary-layer momentum equation.

e. Eckert and Drake, reference (2)

$$St = \frac{.0384 (\bar{Re}_d)^{-1/4}}{1 + (1.5 Pr^{-1/6})(\bar{Re}_d^{-1/8})(Pr - 1)} \quad (A-7)$$

f. Bartz, reference (4)

$$St = \frac{1}{\bar{\rho} u_{\infty} c_p} \left[\frac{0.026}{D_*^{0.2}} \left(\frac{\mu_{c_p}^{0.2}}{Pr^{0.6}} \right)_0 \left(\frac{p_c g}{C^*} \right)^{0.8} \left(\frac{D_*}{r_c} \right)^{0.1} \right] \left(\frac{A_*}{A} \right)^{0.9} \sigma \quad (A-8)$$

D_* = throat diameter

μ = viscosity

c_p = specific heat at constant pressure

$()_0$ = stagnation condition

p_c = chamber pressure

g = gravitational acceleration

C^* = characteristic velocity

r_c = throat radius of curvature

σ = dimensionless factor accounting for variation of ρ and μ values across boundary layer

g. Cohen and Reshotko, reference (5)

$$St = \frac{1}{Pr^{1-\alpha} \sqrt{Re_w}} \left[\frac{2.2 \sqrt{\frac{x}{L}} \frac{P'(t_o/t_e)}{n}}{\left(\frac{C_f Re_w}{Nu} \right)_{Pr=1}} \right] \quad (A-9)$$

Pr = Prandtl number

α = exponent of Prandtl number in Reynolds analogy parameter

Re_w = Reynolds number, $Re_w = \frac{\rho_w u_{\infty} x}{\mu_w}$

P' = dimensionless pressure gradient

$\frac{x}{L}$ = dimensionless surface coordinate

$\frac{t_o}{t_e}$ = ratio of stagnation to free-stream temperatures

C_f = local skin-friction coefficient

n = correlation number

Nu = Nusselt number

h. Van Driest, reference (6)

$$St = 0.332 Re_x^{-1/2} Pr^{-2/3} \quad (A-10)$$

Re_x = Reynolds number based on the assumed wetted length x and the density and viscosity computed at the mean temperature between the surface and free-stream.

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A1)

	<u>No. of Copies</u>
Chief, Bureau of Naval Weapons Department of the Navy Washington 25, D. C.	
Attn: DLI-30	1
Attn: R-14	1
Attn: RRRE-4	1
Attn: RMGA-413	1
Office of Naval Research Room 2709, T-3 Washington 25, D. C.	
Attn: Head, Mechanics Branch	1
Director, David Taylor Model Basin Aerodynamics Laboratory Washington 7, D. C.	
Attn: Library	1
Commander, U. S. Naval Ordnance Test Station China Lake, California	
Attn: Technical Library	1
Attn: Code 503	1
Attn: Code 406	1
Director, Naval Research Laboratory Washington 25, D. C.	
Attn: Code 2027	1
Commanding Officer Office of Naval Research Branch Office Box 39, Navy 100 Fleet Post Office New York, New York	1
NASA High Speed Flight Station Box 273 Edwards Air Force Base, California	
Attn: W. C. Williams	1
NASA Ames Research Center Moffett Field, California	
Attn: Librarian	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A1)

	<u>No. of Copies</u>
NASA	
Langley Research Center	
Langley Field, Virginia	
Attn: Librarian	3
Attn: C. H. McLellan	1
Attn: J. J. Stack	1
Attn: Adolf Busemann	1
Attn: Comp. Res. Div.	1
Attn: Theoretical Aerodynamics Division	1
NASA	
Lewis Research Center	
21000 Brookpark Road	
Cleveland 11, Ohio	
Attn: Librarian	1
Attn: Chief, Propulsion Aerodynamics Div.	1
NASA	
1520 H Street, N. W.	
Washington 25, D. C.	
Attn: Chief, Division of Research Information	1
Attn: Dr. H. H. Kurzweg, Asst. Director of Research	1
Office of the Assistant Secretary of Defense (R&D)	
Room 3E1065, The Pentagon	
Washington 25, D. C.	
Attn: Technical Library	1
Research and Development Board	
Room 3D1041, The Pentagon	
Washington 25, D. C.	
Attn: Library	1
ASTIA	
Arlington Hall Station	10
Arlington 12, Virginia	
Commander, Pacific Missile Range	
Point Mugu, California	
Attn: Technical Library	1
Commanding General	
Aberdeen Proving Ground, Maryland	
Attn: Technical Information Branch	1
Attn: Ballistic Research Laboratory	1

NOLTR 62-72

AEODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A1)

	<u>No. of Copies</u>
Commander, Naval Weapons Laboratory Dahlgren, Virginia Attn: Library	1
Director, Special Projects Department of the Navy Washington 25, D. C. Attn: SP-2722	1
Director of Intelligence Headquarters, USAF Washington 25, D. C. Attn: AFOIN-3B	1
Headquarters - Aero. Systems Division Wright-Patterson Air Force Base Dayton, Ohio Attn: WWAD Attn: RRLA-Library	2 1
Commander Air Force Ballistic Missile Division HQ Air Research & Development Command P. O. Box 262 Inglewood, California Attn: WDTLAR	1
Chief, Defense Atomic Support Agency Washington 25, D. C. Attn: Document Library	1
Headquarters, Arnold Engineering Development Center Air Research and Development Center Arnold Air Force Station, Tennessee Attn: Technical Library Attn: AEOR Attn: AEOIM	1 1 1
Commanding Officer, DOFL Washington 25, D. C. Attn: Library, Room 211, Bldg. 92	1
Commanding General Redstone Arsenal Huntsville, Alabama Attn: Mr. N. Shapiro (ORDDW-MRF) Attn: Technical Library	1 1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A1)

	<u>No. of Copies</u>
NASA	
George C. Marshall Space Flight Center	
Huntsville, Alabama	
Attn: Dr. E. Geissler	1
Attn: Mr. T. Reed	1
Attn: Mr. H. Paul	1
Attn: Mr. W. Dahm	1
Attn: Mr. D. Burrows	1
Attn: Mr. J. Kingsbury	1
Attn: ORDAB-DA	1
APL/JHU (C/NOw 7386)	
8621 Georgia Avenue	
Silver Spring, Maryland	
Attn: Technical Reports Group	2
Attn: Mr. D. Fox	1
Attn: Dr. F. Hill	1
Via: INSORD	
Air Force Systems Command	
Scientific & Technical Liaison Office	
Room 2305, Munitions Building	
Department of the Navy	
Washington 25, D. C.	
Attn: E. G. Haas	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
University of Minnesota Minneapolis 14, Minnesota	
Attn: Dr. E. R. G. Eckert	1
Attn: Heat Transfer Laboratory	1
Attn: Technical Library	1
Rensselaer Polytechnic Institute Troy, New York	
Attn: Dept. of Aeronautical Engineering	1
Dr. James P. Hartnett Department of Mechanical Engineering University of Delaware Newark, Delaware	1
Princeton University James Forrestal Research Center Gas Dynamics Laboratory Princeton, New Jersey	
Attn: Prof. S. Bogdonoff	1
Attn: Dept. of Aeronautical Engineering Library	1
Defense Research Laboratory The University of Texas P. O. Box 8029 Austin 12, Texas	
Attn: Assistant Director	1
Ohio State University Columbus 10, Ohio	
Attn: Security Officer	1
Attn: Aerodynamics Laboratory	1
Attn: Dr. J. Lee	1
Attn: Chairman, Dept. of Aero. Engineering	1
California Institute of Technology Pasadena, California	
Attn: Guggenheim Aero. Laboratory, Aeronautics Library	1
Attn: Jet Propulsion Laboratory	1
Attn: Dr. H. Liepmann	1
Attn: Dr. L. Lees	1
Attn: Dr. D. Coles	1
Attn: Mr. A. Roshko	1
Attn: Dr. J. Laufer	1
Case Institute of Technology Cleveland 6, Ohio	
Attn: G. Kuerti	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
North American Aviation, Inc. Aerophysics Laboratory Downing, California	
Attn: Dr. E. R. Van Driest	1
Attn: Missile Division (Library)	1
Department of Mechanical Engineering Yale University 400 Temple Street New Haven 10, Connecticut	
Attn: Dr. P. P. Wegener	1
Attn: Prof. N. A. Hall	1
MIT Lincoln Laboratory Lexington, Massachusetts	1
RAND Corporation 1700 Main Street Santa Monica, California	
Attn: Library, USAF Project RAND	1
Attn: Technical Communications	1
Mr. J. Lukasiewicz Chief, Gas Dynamics Facility ARO, Incorporated Tullahoma, Tennessee	1
Massachusetts Institute of Technology Cambridge 39, Massachusetts	
Attn: Prof. J. Kaye	1
Attn: Prof. M. Finston	1
Attn: Mr. J. Baron	1
Attn: Prof. A. H. Shapiro	1
Attn: Naval Supersonic Laboratory	1
Attn: Aero. Engineering Library	1
Polytechnic Institute of Brooklyn 527 Atlantic Avenue Freeport, New York	
Attn: Dr. A. Ferri	1
Attn: Dr. M. Bloom	1
Attn: Dr. P. Libby	1
Attn: Aerodynamics Laboratory	1
Brown University Division of Engineering Providence, Rhode Island	
Attn: Prof. R. Probst	1
Attn: Prof. C. Lin	1
Attn: Librarian	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Air Ballistics Laboratory Army Ballistic Missile Agency Huntsville, Alabama	1
Applied Mechanics Reviews Southwest Research Institute 8500 Culebra Road San Antonio 6, Texas	1
BuWeps Representative Aerojet-General Corporation 6352 N. Irwindale Avenue Azusa, California	1
Boeing Airplane Company Seattle, Washington Attn: J. H. Russell	1
Attn: Research Library	1
United Aircraft Corporation 400 Main Street East Hartford 8, Connecticut Attn: Chief Librarian	1
Attn: Mr. W. Kuhrt, Research Dept.	2
Attn: Mr. J. G. Lee	1
Hughes Aircraft Company Florence Avenue at Teale Streets Culver City, California Attn: Mr. D. J. Johnson	1
R&D Technical Library	
McDonnell Aircraft Corporation P. O. Box 516 St. Louis 3, Missouri	1
Lockheed Missiles and Space Company P. O. Box 504 Sunnyvale, California Attn: Dr. L. H. Wilson	1
Attn: Mr. M. Tucker	1
Attn: Mr. R. Smelt	1
The Martin Company Baltimore 3, Maryland Attn: Library	1
Attn: Chief Aerodynamicist	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
CONVAIR	
A Division of General Dynamics Corporation Fort Worth, Texas	
Attn: Library	1
Attn: Theoretical Aerodynamics Group	1
Purdue University	
School of Aeronautical & Engineering Sciences LaFayette, Indiana	
Attn: R. L. Taggart, Library	1
University of Maryland	
College Park, Maryland	
Attn: Director	2
Attn: Dr. J. Burgers	1
Attn: Librarian, Engr. & Physical Sciences	1
Attn: Librarian, Institute for Fluid Dynamics and Applied Mathematics	1
University of Michigan	
Ann Arbor, Michigan	
Attn: Dr. A. Kuethe	1
Attn: Dr. O. Laporte	1
Attn: Department of Aeronautical Engineering	1
Stanford University	
Palo Alto, California	
Attn: Applied Mathematics & Statistics Lab.	1
Attn: Prof. D. Bershader, Dept. of Aero. Engr.	1
Cornell University	
Graduate School of Aeronautical Engineering Ithaca, New York	
Attn: Prof. W. R. Sears	1
The Johns Hopkins University	
Charles and 34th Streets Baltimore, Maryland	
Attn: Dr. F. H. Clauser	1
Attn: Dr. M. Morkovin	1
University of California	
Berkeley 4, California	
Attn: G. Maslach	1
Attn: Dr. S. Schaaf	1
Attn: Dr. Holt	1
Attn: Institute of Engineering Research	1

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Cornell Aeronautical Laboratory, Inc. 4455 Genesee Street Buffalo 21, New York	
Attn: Librarian	1
Attn: Dr. Franklin Moore	1
Attn: Dr. J. G. Hall	1
University of Minnesota Rosemount Research Laboratories Rosemount, Minnesota	
Attn: Technical Library	1
Director, Air University Library Maxwell Air Force Base, Alabama	1
Douglas Aircraft Company, Inc. Santa Monica Division 3000 Ocean Park Boulevard Santa Monica California	
Attn: Chief Missiles Engineer	1
Attn: Aerodynamics Section	1
General Motors Corporation Defense Systems Division Santa Barbara, California	
Attn: Dr. A. C. Charters	1
CONVAIR	1
A Division of General Dynamics Corporation Daingerfield, Texas	
CONVAIR Scientific Research Laboratory 5001 Kearney Villa Road San Diego 11, California	
Attn: Mr. M. Sibulkin	1
Attn: Asst. to the Director of Scientific Research	1
Attn: Dr. B. M. Leadon	1
Attn: Library	1
Republic Aviation Corporation Farmingdale, New York	
Attn: Technical Library	1
General Applied Science Laboratories, Inc. Merrick and Stewart Avenues Westbury, L. I., New York	
Attn: Mr. Walter Daskin	1
Attn: Mr. R. W. Byrne	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Arnold Research Organization, Inc. Tullahoma, Tennessee	
Attn: Technical Library	1
Attn: Chief, Propulsion Wind Tunnel	1
Attn: Dr. J. L. Potter	1
General Electric Company Missile and Space Vehicle Department 3198 Chestnut Street Philadelphia, Pennsylvania	
Attn: Larry Chasen, Mgr. Library	2
Attn: Mr. R. Kirby	1
Attn: Dr. J. Farber	1
Attn: Dr. G. Sutton	1
Attn: Dr. J. D. Stewart	1
Attn: Dr. S. M. Scala	1
Attn: Dr. H. Lew	1
Eastman Kodak Company Navy Ordnance Division 50 West Main Street Rochester 14, New York	
Attn: W. B. Forman	2
Library	3
AVCO-Everett Research Laboratory 2385 Revere Beach Parkway Everett 49, Massachusetts	
AVCO-Everett Research Laboratory 201 Lowell Street Wilmington, Massachusetts	
Attn: Mr. F. R. Riddell	1
AER, Incorporated 158 North Hill Avenue Pasadena, California	1
Armour Research Foundation 10 West 35th Street Chicago 16, Illinois	
Attn: Dept. M	2
Attn: Dr. Paul T. Torda	1
Chance-Vought Aircraft, Inc. Dallas, Texas	
Attn: Librarian	2

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
National Science Foundation 1951 Constitution Avenue, N. W. Washington 25, D. C. Attn: Engineering Sciences Division	1
New York University University Heights New York 53, New York Attn: Department of Aeronautical Engineering	1
New York University 25 Waverly Place New York 3, New York Attn: Library, Institute of Math. Sciences	1
NORAIR A Division of Northrop Corp. Hawthorne, California Attn: Library	1
Northrop Aircraft, Inc. Hawthorne, California Attn: Library	1
Gas Dynamics Laboratory Technological Institute Northwestern University Evanston, Illinois Attn: Library	1
Pennsylvania State University University Park, Pennsylvania Attn: Library, Dept. of Aero. Engineering	1
The Ramo-Wooldridge Corporation 8820 Bellanca Avenue Los Angeles 45, California	1
Gifts and Exchanges Fondren Library Rice Institute P. O. Box 1892 Houston 1, Texas	1
University of Southern California Engineering Center Los Angeles 7, California Attn: Librarian	1

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Commander Air Force Flight Test Center Edwards Air Force Base Muroc, California Attn: FTOTL	1
Air Force Office of Scientific Research Holloman Air Force Base Alamogordo, New Mexico Attn: SRLTL	1
The Editor Battelle Technical Review Battelle Memorial Institute 505 King Avenue Columbus 1, Ohio	1
Douglas Aircraft Company, Inc. El Segundo Division El Segundo, California	1
Fluidyne Engineering Corp. 5740 Wayzata Blvd. Golden Valley Minneapolis 16, Minnesota	1
Grumman Aircraft Engineering Corp. Bethpage, L. I., New York	1
Lockheed Missile and Space Company P. O. Box 551 Burbank, California Attn: Library	1
Marquardt Aircraft Corporation 7801 Havenhurst Van Nuys, California	1
The Martin Company Denver, Colorado Attn: Library	1
Mississippi State College Engineering and Industrial Research Station Aerophysics Department P. O. Box 248 State College, Mississippi	1

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Lockheed Missile and Space Company 3251 Hanover Street Palo Alto, California Attn: Mr. J. A. Laurmann Attn: Library	1
General Electric Company Research Laboratory Schenectady, New York Attn: Dr. H. T. Nagamatsu Attn: Library	1
Fluid Dynamics Laboratory Mechanical Engineering Department Stevens Institute of Technology Hoboken, New Jersey Attn: Dr. R. H. Page, Director	1
Department of Mechanical Engineering University of Arizona Tucson, Arizona Attn: Dr. E. K. Parks	1
Vitro Laboratories 200 Pleasant Valley Way West Orange, New Jersey Attn: Dr. Charles Sheer	1
Department of Aeronautical Engineering University of Washington Seattle 5, Washington Attn: Prof. R. E. Street Attn: Library	1 1
Aeronautical Engineering Review 2 East 64th Street New York 21, New York	1
Institute of the Aerospace Sciences 2 East 64th Street New York 21, New York Attn: Managing Editor Attn: Library	1 1
Department of Aeronautics United States Air Force Academy Colorado	1

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
MHD Research, Inc. Newport Beach, California Attn: Dr. V. H. Blackman, Technical Director	1
University of Alabama College of Engineering University, Alabama Attn: Prof. C. H. Bryan, Head Dept. of Aeronautical Engineering	1
Office of Naval Research Bldg. T-3, Department of the Navy 17th and Constitution Avenue Washington 25, D. C. Attn: Mr. Ralph D. Cooper, Head Fluid Dynamics Branch	1
ARDE Associates 100 W. Century Road Paramus, New Jersey Attn: Mr. Edward Cooperman	1
Aeronautical Research Associates of Princeton 50 Washington Road Princeton, New Jersey Attn: Dr. C. duP. Donaldson, President	1
Daniel Guggenheim School of Aeronautics Georgia Institute of Technology Atlanta, Georgia Attn: Prof. A. L. Ducoffe	1
University of Cincinnati Cincinnati, Ohio Attn: Prof. R. P. Harrington, Head Dept. of Aeronautical Engineering	1
Virginia Polytechnic Institute Dept. of Aerospace Engineering Blacksburg, Virginia Attn: Mr. R. T. Keefe Attn: Library	1 1
IBM Federal System Division 7220 Wisconsin Avenue Bethesda, Maryland Attn: Dr. I. Korobkin	1

NOLTR 62-72

AERODYNAMICS DEPARTMENT
EXTERNAL DISTRIBUTION LIST (A2)

	<u>No. of Copies</u>
Superintendent U. S. Naval Postgraduate School Monterey, California Attn: Technical Reports Section Library	1
National Bureau of Standards Washington 25, D. C. Attn: Chief, Fluid Mechanics Section	1
North Carolina State College Raleigh, North Carolina Attn: Prof. R. W. Truitt, Head Dept. of Mechanical Engineering	1
Attn: Division of Engineering Research Technical Library	1
Apollo - DDCS General Electric Company A&E Bldg., Rm. 204 Daytona Beach, Florida Attn: Dave Hovis	1

CATALOGING INFORMATION FOR LIBRARY USE

BIBLIOGRAPHIC INFORMATION

	DESCRIPTORS	CODES	SECURITY CLASSIFICATION AND CODE COUNT	DESCRIPTORS	CODES
SOURCE	NOL technical report	NOLTR		Unclassified-30	U030
REPORT NUMBER	62-72	620072	CIRCULATION LIMITATION		
REPORT DATE	26 February 1963	0263	CIRCULATION LIMITATION OR BIBLIOGRAPHIC		
			BIBLIOGRAPHIC (SUPPL., VOL., ETC.)		

SUBJECT ANALYSIS OF REPORT

	DESCRIPTORS	CODES	DESCRIPTORS	CODES	DESCRIPTORS	CODES
Heat transfer	HEAF		Heat	HEAT	Method	METD
Throat	THRO		Conduction	COND	Theory	THEY
Rocket motor	ROCK		Equation	EQUA	Rate	RATE
Nozzle	NOZZ		IBM	IBMA	Turbulent	TUBU
Solid	SOLI		7090	7090	Gas	GASE
Propellant	FUEL		Computer	COMP	Flow	FLOW
Surface	SURA		Code	CODE		
Measurement	MEAU		Flux	FLUZ		
Temperature	TEMP		Gradient	GRDI		
Numerical	NUMB		Conical	CONE		
Solution	SOLG		Comparison	CMRI		
Transient	TRNN		Experimental	EXPE		

406 455

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-72)
HEAT TRANSFER TO THE THROAT REGION OF A
SOLID PROPELLANT ROCKET NOZZLE (U), by Roland
E. Lee. 26 Feb. 1963. v.p. illus., diagr.
(Aerodynamics research report 178) Task
NOL-456. UNCLASSIFIED
A combined experimental and analytical method is given for obtaining the surface heat-transfer rate in a rocket nozzle. The method requires the temperature history at two locations in the nozzle from which the temperature field and surface heat flux is computed using the implicit numerical solution of the one-dimensional transient heat-conduction equation. Application of the method to the throat heating of a conical nozzle showed good agreement with theoretical heat-transfer rates based on turbulent gas flow.

1. Rocket nozzles
2. Heat transfer
3. Heat - Transference
4. Title
5. I. Lee, Roland E.
6. II. Series
7. III. Project
8. Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-72)
HEAT TRANSFER TO THE THROAT REGION OF A
SOLID PROPELLANT ROCKET NOZZLE (U), by Roland
E. Lee. 26 Feb. 1963. v.p. illus., diagr.
(Aerodynamics research report 178) Task
NOL-456. UNCLASSIFIED
A combined experimental and analytical method is given for obtaining the surface heat-transfer rate in a rocket nozzle. The method requires the temperature history at two locations in the nozzle from which the temperature field and surface heat flux is computed using the implicit numerical solution of the one-dimensional transient heat-conduction equation. Application of the method to the throat heating of a conical nozzle showed good agreement with theoretical heat-transfer rates based on turbulent gas flow.

1. Rocket nozzles
2. Heat transfer
3. Heat - Transference
4. Title
5. I. Lee, Roland E.
6. II. Series
7. III. Project
8. Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-72)
HEAT TRANSFER TO THE THROAT REGION OF A
SOLID PROPELLANT ROCKET NOZZLE (U), by Roland
E. Lee. 26 Feb. 1963. v.p. illus., diagr.
(Aerodynamics research report 178) Task
NOL-456. UNCLASSIFIED
A combined experimental and analytical method is given for obtaining the surface heat-transfer rate in a rocket nozzle. The method requires the temperature history at two locations in the nozzle from which the temperature field and surface heat flux is computed using the implicit numerical solution of the one-dimensional transient heat-conduction equation. Application of the method to the throat heating of a conical nozzle showed good agreement with theoretical heat-transfer rates based on turbulent gas flow.

1. Rocket nozzles
2. Heat transfer
3. Heat - Transference
4. Title
5. I. Lee, Roland E.
6. II. Series
7. III. Project
8. Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.
(NOL technical report 62-72)
HEAT TRANSFER TO THE THROAT REGION OF A
SOLID PROPELLANT ROCKET NOZZLE (U), by Roland
E. Lee. 26 Feb. 1963. v.p. illus., diagr.
(Aerodynamics research report 178) Task
NOL-456. UNCLASSIFIED
A combined experimental and analytical method is given for obtaining the surface heat-transfer rate in a rocket nozzle. The method requires the temperature history at two locations in the nozzle from which the temperature field and surface heat flux is computed using the implicit numerical solution of the one-dimensional transient heat-conduction equation. Application of the method to the throat heating of a conical nozzle showed good agreement with theoretical heat-transfer rates based on turbulent gas flow.

1. Rocket nozzles
2. Heat transfer
3. Heat - Transference
4. Title
5. I. Lee, Roland E.
6. II. Series
7. III. Project
8. Abstract card is unclassified.