

N-62-4-2

409 044

FTD-TT- 62-1843

CATALOGED BY DDC
AS AD No. 489044


TRANSLATION

EMISSIVITY OF DIFFUSED p-n TRANSITION

By

Yu. O. Tkoryk

FOREIGN TECHNOLOGY DIVISION



AIR FORCE SYSTEMS COMMAND

WRIGHT-PATTERSON AIR FORCE BASE

OHIO

DDC
RECEIVED
MAY 1962
JTS-A

UNEDITED ROUGH DRAFT TRANSLATION

EMISSIVITY OF DIFFUSED p-n TRANSITION

BY: Yu. O. Tkoryk

English Pages: 8

SOURCE: Ukrainian Periodical, Ukrayinskiy Fizichnyi
Zhurnal, Vol 7, No 5, 1962, pp 476-481

S/185-62-7-5

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION SERVICES BRANCH
FOREIGN TECHNOLOGY DIVISION
WP-APB, OHIO.

Emissivity of Diffused p-n Transition

by

Yu. O. Tkhoryk

The distribution of current carrier concentrations in a diffused layer of semiconductor p-n transition, obtained by the method of thermodiffusion, has been discussed. An expression for the emissivity of p-n transition has been introduced.

Problems concerning the distribution of concentrations and currents in a flat semiconductor diode have been thoroughly investigated by K.B. ^{Tal'pizov}[1], who showed, that the injection coefficient γ depends upon the structure of p-n transition and is a function of the current, whereby with a rise in current γ is directly proportional to the boundary value $\gamma_{\text{bound}} < 1$, which is designated by values (ratios) b of mobility of the nonbasic and basic current carriers in the basic zone of the diode. Approximations of γ to γ_{bound} are possible from top and bottom depending upon the emissivity value β . The author [1] having developed the criterion of great emissivity applied same in the zone of not too high currents $\gamma \approx 1$ for cases of linear and exponential distributions of alloying admixtures.

High β values are especially important for pulsed diodes, in which considerable base conductance modulation should be attained in order to obtain low direct resistance. But real flat pulsed diodes are ordinarily obtained by the diffusion method [2-5]; it is therefore very important to have proper criteria also for the distribution of admixtures, inherent to diffusion diodes.

This investigation is devoted to the study of emissivity of diffusion p-n transition. It is assumed, that the p-n transition is formed by the diffusion of donors in a hole semiconductor. The concentration of donors decreases with removal from the

boundary in accordance with the law $\text{erfc} \sqrt{\frac{x}{Dt}}$, where x - distance from boundary, D - coefficient of diffusion of donors and t - time of diffusion annealing.

We will introduce such dimensionless designations:

$$N = \frac{n}{p_p}, \quad Z = \frac{p}{p_p}, \quad v = \frac{x}{L_p}, \quad N^0 = \frac{n_p}{p_p}, \quad Z^0 = \frac{p_p}{p_p};$$

$$B_n = \frac{j_n}{be\vartheta_p \cdot p_p \cdot x}, \quad B_p = \frac{j_p}{e\vartheta_p p_p x}, \quad B = \frac{j_{\Sigma}}{e\vartheta_p p_p x};$$

$$Y = \frac{Ee}{kTx}; \quad A = \frac{e \cdot p_0}{4\pi\epsilon}; \quad \xi = xL_p.$$

Here n, p and $\mathcal{R}$ - concentrations of electrons, holes and donor respectively, p_p - equilibrium concentration of holes in the base, n_p - equilibrium concentrations of electrons in p-zone and holes in n-zone, j_n, j_p and j_{Σ} - densities of electron, hole and total currents respectively, E - electric field intensity, e - electron charge; k - Boltzmann constant, T - absolute temperature; ϵ - dielectric permeability, τ - life span of current carriers, ρ_0 - specific resistance of base at low level of injection, $\frac{1}{x} \sqrt{\frac{\epsilon kT}{4\pi e^2 p_p}}$ - length of screening.


In conformity with the selected designations of diffusion-drift equation for electron and hole currents, the law of preservation of the number of holes and Poisson equation for the n-zone of the diode is written as follows:

$$B_n = -NY - \frac{dN}{d\xi}, \quad (1)$$

$$B_p = ZY - \frac{dZ}{d\xi}, \quad (2)$$

$$\frac{dB_p}{d\xi} = A(NZ - N^0 Z^0) \simeq ANZ, \quad (3)$$

$$\frac{dY}{d\xi} = N - Z - v + 1. \quad (4)$$

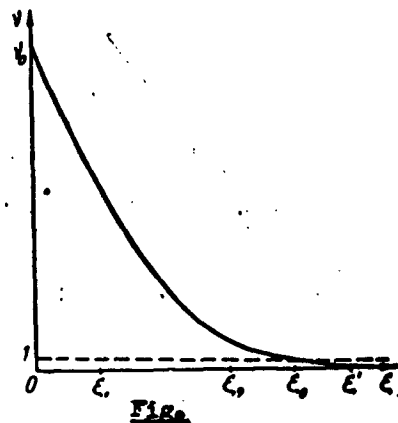

The distribution of donor concentrations in the n-layer is expressed by

$$v = v_0 \text{erfc} \frac{\xi}{a},$$

where

$$a = 2x\sqrt{Dt}.$$

We will break up the n-layer into three zones (see drawing); $0 < x_1 < x_{11}, x_{11} < x_{12} < x_{10}$, where x_{10} corresponds to the center of p-n transition, and

$x_i = 0$ -metal contact, whereby points x_{i1} and x_{i2} will be selected so that at $x_i < x_{i1}$ it will be possible to approximate the distribution of donor concentrations by the linear function, and restrict ourselves to the first member of the schedule

$$\operatorname{erfc} \frac{\xi}{a} = 1 - \frac{2}{\sqrt{\pi}} \left[\frac{\xi}{a} - \frac{\left(\frac{\xi}{a}\right)^3}{3 \cdot 1!} + \frac{\left(\frac{\xi}{a}\right)^5}{5 \cdot 2!} - \frac{\left(\frac{\xi}{a}\right)^7}{7 \cdot 3!} + \dots \right], \quad (6)$$

and at $x_i > x_{i2}$ utilize the asymptotic formula

$$\operatorname{erfc} \frac{\xi}{a} = \frac{a \cdot e^{-\frac{\xi^2}{a^2}}}{\sqrt{\pi} \cdot \xi} \left(1 - \frac{a^2}{2\xi^2} + \frac{1 \cdot 3a^4}{4\xi^4} - \frac{1 \cdot 3 \cdot 5a^6}{8\xi^6} + \dots \right), \quad (7)$$

in which it is also possible to confine ourselves to the first member; It can be shown easily that the adopted approximations offer an error, which does not exceed 5% at $x_{i1} = 0.4a$ and $x_{i2} = 3a$.

In the first zone ($0 < x_i < x_{i1}$) we will obtain a linear distribution of donor concentrations - case investigated by K.B. Tolpigo [1], the solution of which we have utilized. It has the form of

$$B_p(\xi_i) = \left[\frac{Q_+}{N(0)} + A\xi_i \right] N'(1 + N'), \quad (8)$$

where Q_+ - transparency of the contact for holes and $N' = N(x_i')$, whereby x_i' - a certain point in quasineutral p-zone.

We will now examine the zone $x_{i2} < x_i < x_{i0}$. Disregarding the volumetric charge, we will write equations (4) in form of

$$N - Z = v - 1. \quad (9)$$

Differentiating (9) by x_i and substituting the result in the expression for $B_p - B_n$, obtained by subtracting (1) from (2), we will designate the fields:

$$Y = \frac{\frac{v_0}{\sqrt{\pi}q} e^{-\xi^2} \left(2q + \frac{1}{\xi^2} \right) + B_p - B_n}{2N + 1 - \frac{v_0}{\sqrt{\pi}q\xi} e^{-\xi^2}}, \quad (10)$$

where $q = \frac{2}{x_{i2}^2}$. Since we are interested in the high emissivity criterion, it is sufficient

only to consider the case of weak currents. For this we will write

$$v \gg \frac{|B_p - B_n|}{2q\xi + \frac{1}{\xi}}. \quad (10a)$$

Then

$$Y = \frac{\frac{v_0}{\sqrt{\pi}q} e^{-\xi^2} \left(2q + \frac{1}{\xi^2} \right)}{2N + 1 - \frac{v_0}{\sqrt{\pi}q\xi} e^{-\xi^2}}. \quad (11)$$

Substituting this expression in (2) and disregarding B_p we compare same with other terms and obtain

$$\frac{dZ}{d\xi} = \frac{Z \frac{v_0}{V \kappa q} e^{-\kappa \xi} \left(2q + \frac{1}{\xi^2} \right)}{2Z - 1 + \frac{v_0}{V \kappa q} e^{-\kappa \xi}} \quad (12)$$

Solution, which is easily obtained by substituting

$$Z = yu(y), \quad y = v - 1, \quad (12a)$$

which acquires the form of

$$Z \cdot (Z - 1 + v) = NZ = \text{const.} \quad (13)$$

This result is also in agreement with that obtained in [1] for the case of linear distribution of donor concentrations. In this way, in two boundary zones of transient layer we obtained solutions, which are in agreement. We will assume, that solution (13) can be applied also for the zone where $\xi_1 < \xi < \xi_2$, that is valid for all ξ values (validity criteria of such an approximation will be obtained later on). Then

$$B_p(\xi_0) = \left[\frac{Q_+}{N(0)} + A\xi_0 \right] N'(1 + N'), \quad (14)$$

hence the emissivity of p-n transition

$$\beta = \frac{\frac{N(0)}{Q_+}}{1 + A\xi_0 \frac{N(0)}{Q_+}} \quad (15)$$

which is in conformity with formula (26) of report [1].

We shall evaluate the accuracy of the made approximation. For which it was possible to write $NZ = \text{const}$ for which it is necessary that

$$NZ \gg \left| \int_0^{\xi} \frac{d}{d\xi} (NZ) d\xi \right|. \quad (16)$$

The value $\frac{d}{d\xi} (NZ^0)$ can be designated so. We will multiply (1) by Z , and (2) by N and compile the obtained equations. Then we will substitute in the found expression the value B_p from (3), where will be written

$$NZ = N'(1 + N') \quad (17)$$

and

$$B_s = \frac{B_p - B}{b} \quad 17a$$

Applying (9) and (17), we will obtain

$$\begin{aligned}
\int_0^{\xi_0} \frac{d}{d\xi} (NZ) d\xi &= \frac{(b-1)AN'(1+N')}{4b} \xi_0^2 + \frac{B+(b-1)B_p(0)}{2b} \xi_0 + \\
&+ \frac{B-B_p(0)}{2b} \int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') - v] d\xi - \\
&- \frac{AN'(1+N')}{2b} \int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') - v] \xi d\xi - \\
&- \frac{B_p(0)}{2} \int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') + v] d\xi - \\
&- \frac{AN'(1+N')}{2} \int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') + v] \xi d\xi. \quad (18)
\end{aligned}$$

We will evaluate the integrals, which are included in (18). We will notice that

$$V(v-1)^2 + 4N'(1+N') + v = (18a)$$

monotonously increasing, and

$$V(v-1)^2 + 4N'(1+N') - v = (18b)$$

monotonously decreasing function v , and for this are valid inequalities

$$\int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') - v] d\xi \leq [2V N'(1+N') - 1] \xi_0. \quad (19)$$

$$\int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') - v] \xi d\xi \leq [2V N'(1+N') - 1] \xi_0^2. \quad (20)$$

$$\int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') + v] d\xi \leq 2v_0 \xi_0. \quad (21)$$

$$\int_0^{\xi_0} [V(v-1)^2 + 4N'(1+N') + v] \xi d\xi \leq 2v_0 \xi_0^2. \quad (22)$$

(It is assumed that $v_0 \gg 1$, $N^0(1+N^0)$; $v(x_{10})=1$). Using the inequalities (19)-(22)

we will only magnify the inequality (16). It can therefore be written that

$$NZ \gg v_0 [AN'(1+N') \xi_0^2 + B_p(0) \xi_0]. \quad (23)$$

Substituting in (23) $B_p(0)$ from (8) and writing that $v_0 \approx N(0)$, we will finally obtain

$$1 \gg Q_+ \xi_0 + A \xi_0^2 N(0). \quad (24)$$

With an accuracy to constant multiples of the order of a unit of criterion (24) agrees with the analogous criterion (28) in report [1].

In addition to above statement, in the investigation was also utilized another

approximation, and it was assumed, that in the zone, which confines itself to p-n transition ($x_{i2} < x_i < x_{i0}$), the hole current can be disregarded. At $\gamma \approx 1$ this is equivalent to the requirement of low thickness of this zone as compared with x_{i2} , i.e.

$$x_{i0} - x_{i2} \ll x_{i2} \quad (24a) \quad \text{page 480}$$

Since $\text{erfc } \alpha$ at $\alpha > 3$ decreases rapidly with a rise in x_i this restriction is not actual. True, already at $x_{i0} - x_{i2} = 0.6 x_{i2}$ we will obtain $\gamma_0 = 2 \cdot 10^6$, then as usually γ_0 does not exceed $10^4 - 10^5$.

The criterion, that at weak currents the injection coefficient is close to one, is

$$Q + \xi_0 \ll AN(0) \xi_0^2 \ll 1. \quad (25)$$

It can be seen easily, that criterions (24) and (25) are in practical conformity. Since we are interested only in the case of large β , we will not consider an opposite case, when these criteria are disrupted.

We have to explain at what currents is realized the condition $\gamma \approx 1$. The proper criterion for strong currents will be

$$B \ll \beta^2 A^2. \quad (26)$$

During the realization (25)

$$\beta \approx \frac{1}{A \xi_0} \quad (26a) \quad \text{..page 480}$$

Formula (26) will then be written as

$$B \ll \frac{1}{A \xi_0^2}. \quad (27)$$

Otherwise at

$$B \gg \frac{1}{A \xi_0^2} \quad (28)$$

γ tends directly to the boundary

$$\gamma_{cr} = \frac{b}{1+b} \quad (28a)$$

In conclusion we will mention, that, as is evident from [1] the emissivity of p-n transition in case of linear distribution of admixtures should be the higher, the greater $\frac{dx}{dx_i}$. For the diffusion p-n transition $\frac{dx}{dx_i}$ - variable value, which reaches $\frac{dx}{dx_i}^{\text{max}}$ value when $x_i = 0$. Consequently also in this case remain valid the conditions for a rise in β with a rise in $\left(\frac{dx}{dx_i}\right)_{x_i=0}$. We will also point out, that because of

impossibility of accurately evaluating the value $\frac{d}{dx_1}$ (NZ) in the zone $x_{11} < x_1 < x_{12}$ the requirements of criterion (24) are, apparently, highly dependent, i.e. at other uniform conditions the emissivity of diffusion p-n transition should be much higher, than during linear distribution of admixtures.

The author expresses thanks to Cand. of Phys-Math. Sc. K. P. Tolpigo for a number of valuable advices.

Literature

1. K. P. Tolpigo, Zhurnal Tekhnicheskoy Fiziki, 27, 884, 1957.
2. J. R. A. Peale. Proc. Phys. Soc. 70, 1037, 1957
3. R. H. Rediker; D. E. Sawyer; Proc. I. R. E. 45, 944, 1957
4. F. N. Maslovskiy; A. I. Skopenko; O. I. Kopylov; Automation and Instrument Construction No. 3, 68, 1961
5. Ye. G. Miselyuk; R. L. Tomashevskaya; Yu. A. Tchirik; Automation and Instrument Construction, No. 2, 69, 1962

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE	Nr. Copies	MAJOR AIR COMMANDS	Nr. Copies
		AFSC	
		SCFDD	1
		DDC	25
HEADQUARTERS USAF		TDBTL	5
		TDBDP	5
AFCIN-3D2	1	AEDC (AEY)	1
ARL (ARB)	1	SSD (SSF)	2
		ESD (ESY)	1
		RADC (RAY)	1
		AFSWC (SWF)	1
		AFMTC (MTW)	1
		ASD (ASYIM)	1
OTHER AGENCIES			
CIA	1		
NSA	6		
DIA	9		
AID	2		
OTS	2		
AEC	2		
PWS	1		
NASA	1		
ARMY (FSTC)	3		
NAVY	3		
NAFEC	1		
AFCLRL (CRCLR)	1		
RAND	1		