



ORA-63-6


ORA-63-6

HEADQUARTERS OFFICE OF AEROSPACE RESEARCH TECHNICAL REPORT

GYROTHERY OF A SPINNING ROTATIONALLY
SYMMETRIC SATELLITE


A New Integral of the Equations of Motion

Herbert Knothe

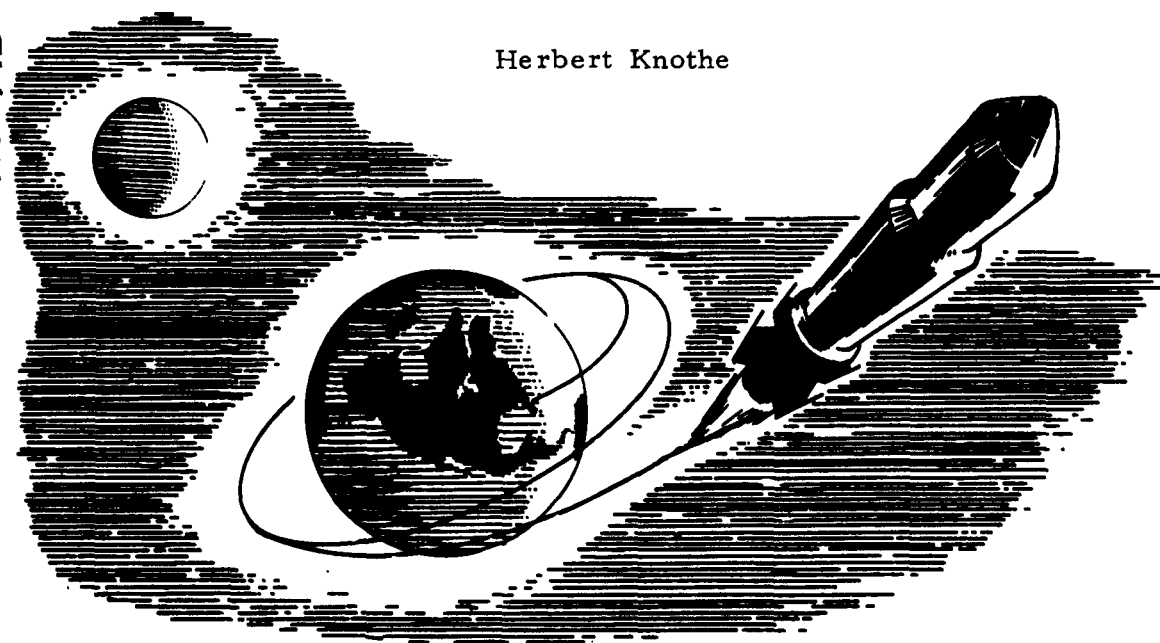

**OFFICE OF RESEARCH ANALYSES
HOLLOMAN AIR FORCE BASE
NEW MEXICO**

March 1963



409134

4

240913

AS AB 110

ORA-63-6

ORA-63-6

GYROTHERY OF A SPINNING ROTATIONALLY
SYMMETRIC SATELLITE

A New Integral of the Equations of Motion

by

Herbert Knothe

Mathematics Division

Office of Research Analyses

OFFICE OF AEROSPACE RESEARCH
UNITED STATES AIR FORCE
Holloman Air Force Base, New Mexico

March 1963

ABSTRACT

Without restriction to plane or infinitesimally small motions, the differential equations for a spinning rotationally symmetric satellite have been established, using new methods, in the form of two second-order differential equations. An integral of these equations has been found.

KEYWORDS

New Integral

Gyrotheory

Spinning Satellite

This report is approved for publication.



K. W. GALLUP
Colonel, USAF

Commander, Office of Research Analyses

GYROTHEORY OF A SPINNING ROTATIONALLY SYMMETRIC SATELLITE

A New Integral of the Equations of Motion

Although some of the following deductions can be found dispersed in various American and German textbooks, the whole approach given in this paper, as well as many results, seems to be new. It is worth while to go back in the development to the very beginnings of theoretical physics, i.e., Newton's laws and Hamilton's principle.

We are particularly interested in the motion of the spinning satellite under the influence of the gravitational field of the earth, which shall be assumed as spherically symmetric. Lagrange-Hamilton's theory immediately yields the equations of motion for N mass points:

$$\frac{\partial L}{\partial x_1} - \frac{d}{dt} \frac{\partial L}{\partial \dot{x}_1} = 0$$

$$\frac{\partial L}{\partial y_1} - \frac{d}{dt} \frac{\partial L}{\partial \dot{y}_1} = 0 \quad (1)$$

$$\frac{\partial L}{\partial z_1} - \frac{d}{dt} \frac{\partial L}{\partial \dot{z}_1} = 0$$

where

$$L = \sum_1 \left(\frac{m_1}{2} \dot{\bar{x}}_1^2 - \phi_1 \right) + \sum_{1,k=1}^N \lambda_{1k} \left(\bar{x}_1 - \bar{x}_k \right)^2 \quad (2)$$

(The vector $\bar{x}_1$ has the components (x_1, y_1, z_1))

and

$$\phi_1 = - \frac{kMm_1}{r_1} = - \frac{\mu m_1}{r_1} \quad (3)$$

means the gravitational potential of the i^{th} mass point. The constants λ_{ik} are Lagrangian multipliers corresponding to the boundary conditions

$$(\bar{x}_i - \bar{x}_k)^2 = \text{const.}$$

which express the fact that for a rigid body the distance between two arbitrary mass points remains constant.

Equations (1) can now be condensed into the vector equation

$$m_1 \ddot{\bar{x}}_1 + \frac{kMm_1}{r_1^3} \bar{x}_1 + 2 \sum_{k=1}^N \lambda_{ik} (\bar{x}_1 - \bar{x}_k) = 0 \quad (4)$$

We substitute

$$\bar{x}_1 = \bar{x}_0 + \bar{y}_1 \quad (5)$$

and neglect higher than linear terms of

$$\frac{|\bar{y}_1|}{|\bar{x}_0|} \quad (6)$$

which is certainly justified because the diameter of the satellite is extremely small compared with the radius of the earth. From equation (5)

it follows

$$r_1^2 = (r_0 + \Delta r_1)^2 \approx r_0^2 + 2r_0 \Delta r_1 \approx \bar{x}_0^2 + 2\bar{x}_0 \bar{y}_1$$

or

$$\Delta r_1 = \frac{\bar{x}_1 \bar{y}_1}{r_0} \quad (7)$$

Therefore, equation (4) can be transformed into

$$m_1 \ddot{\bar{x}}_0 + m_1 \ddot{\bar{y}}_1 = - \frac{\mu m_1}{r_0^3} \bar{x}_0 + \frac{3\mu m_1}{r_0^5} (\bar{x}_0 \bar{y}_1) \bar{x}_0 - \frac{\mu m_1}{r_0^3} \bar{y}_1 - 2 \sum_{k=1}^N \lambda_{1k} (\bar{y}_1 - \bar{y}_k) \quad (8)$$

We now sum over all mass points and take into account

$$\sum_{i=1}^N m_i \bar{y}_1 = 0 \quad (9)$$

which states that $\bar{x}_0$ is the center of gravity of the satellite, and

$$\sum_{i,k=1}^N \lambda_{ik} (\bar{y}_1 - \bar{y}_k) = 0 \quad (10)$$

Equation (10) is a consequence of the fact that $\lambda_{ik} = \lambda_{ki}$ since λ_{ik} , λ_{ki} are multipliers belonging to the same boundary condition

$$(\bar{x}_i - \bar{x}_k)^2 = \text{const.}$$

We obtain

$$(\Sigma m_1) \ddot{\bar{x}}_0 = - \frac{\mu(\Sigma m_1)}{r_0^3} \bar{x}_0 \quad (11)$$

Equation (11) states that the motion of the center of gravity of the satellite is not influenced by the satellite's librations, at least not as long as we neglect second and higher powers of $|\bar{y}_1|/|\bar{x}_0|$. From equations (8), (9), and (11) we conclude

$$m_1 \ddot{\bar{y}}_1 = + \frac{3\mu m_1}{r_0^5} (\bar{x}_0 \bar{y}_1) \bar{x}_0 - \frac{\mu m_1}{r_0^3} \bar{y}_1 - 2 \sum_{k=1}^N \lambda_{1k} (\bar{y}_1 - \bar{y}_k) \quad (12)$$

If we now form the vector product of (12) with $\bar{y}_1$, sum over i , and take into account that $\lambda_{1k} = \lambda_{k1}$, we obtain

$$\sum m_1 (\ddot{\bar{y}}_1 \times \bar{y}_1) = + \sum \frac{3\mu m_1}{r_0^5} (\bar{x}_0 \bar{y}_1) (\bar{x}_0 \times \bar{y}_1) \quad (13)$$

or

$$\frac{d}{dt} \sum m_1 (\dot{\bar{y}}_1 \times \bar{y}_1) = + \sum \frac{3\mu m_1}{r_0^5} (\bar{x}_0 \bar{y}_1) (\bar{x}_0 \times \bar{y}_1) \quad (14)$$

We now make use of a fundamental formula describing the motion of a rigid body:

$$\dot{\bar{y}}_1 = \bar{y}_1 \times \bar{v} \quad (15)$$

where $\bar{v}$, the instantaneous vector of rotation, is independent of i .

Substituting (15) in equation (14) we obtain

$$\frac{d}{dt} \sum m_i \left[(\bar{y}_i^2) \bar{v} - (\bar{v} \bar{y}_i) \bar{y}_i \right] = + \sum \frac{3\mu m_i}{r_0^5} (\bar{x}_0 \bar{y}_i) (\bar{x}_0 \times \bar{y}_i) \quad (16)$$

For a short time we shall leave the vector representation and shall introduce the principal axes of inertia through the center of gravity as coordinate axes. Because of the rotational symmetry of the satellite, two of these axes are determined only to a rotation about the third axis corresponding to the axis of rotation. They may be chosen arbitrarily but perpendicular to each other and to the third axis.

Let v_1, v_2, v_3 be the components of $\bar{v}$ with respect to such a coordinate system, I_1 being the moment of inertia corresponding to the axis of rotation, $I_2 = I_3$ being the moment of inertia of an axis through the center of gravity and perpendicular to the axis of rotation. Let x_1, x_2, x_3 be the components of $\bar{x}_0$ with respect to our coordinate system. Equation (16) can then be written

$$\frac{d}{dt} (I_1 v_1) = 0$$

$$\frac{d}{dt} (I_2 v_2) = - \frac{3\mu}{r_0^5} x_1 x_3 (I_1 - I_2) \quad (17)$$

$$\frac{d}{dt} (I_2 v_3) = + \frac{3\mu}{r_0^5} x_1 x_2 (I_1 - I_2)$$

We introduce the vectors

$$\bar{e} = (v_1, 0, 0)$$

$$\bar{h} = (0, v_2, v_3)$$

and condense equations (17) into the vector equation

$$I_1 \dot{\bar{a}} + I_2 \dot{\bar{h}} = - \frac{3\mu (I_1 - I_2)}{r_0^5 \bar{a}^2} (\bar{x}_0 \bar{a}) (\bar{x}_0 \times \bar{a}) \quad (18)$$

We still need additional equations in order to eliminate the indeterminacy of $\bar{h}$. At first we have

$$\bar{a} \bar{h} = 0 \quad (19)$$

Secondly we remark that the end point of the unit vector

$$\frac{\bar{a}}{|\bar{a}|} = \bar{e} \quad (20)$$

whose initial point coincides with the center of gravity, is a point rigidly connected with the gyro satellite. Therefore, formula (15) can be applied to $\bar{e}$:

$$\dot{\bar{e}} = \bar{e} \times \bar{v} = \bar{e} \times (\bar{a} + \bar{h}) = \bar{e} \times \bar{h}$$

or

$$\bar{h} = \dot{\bar{e}} \times \bar{e} = \frac{\dot{\bar{a}} \times \bar{a}}{\bar{a}^2} \quad (21)$$

From equations (19) and (21) we conclude

$$\dot{\bar{a}} \bar{h} = \bar{a} \dot{\bar{h}} = 0 \quad (22)$$

and forming the scalar product of equation (18) and $\bar{a}$

$$\bar{a}^2 = \text{const.} = \omega_0^2 \quad (23)$$

We replace $\bar{x}_0$ by $r_0 \bar{w}$ where $\bar{w}$ is a unit vector indicating the direction earth center $\rightarrow$ satellite.

Combining equations (18), (20), (21), and (23), we obtain the fundamental differential equation for the motion of the satellite's axis of rotation, represented by the unit vector $\bar{e}$:

$$\boxed{I_1 \omega_0 \dot{\bar{e}} + I_2 (\ddot{\bar{e}} \times \bar{e}) = \frac{3\mu (I_1 - I_2)}{r_0^3} (\bar{w} \bar{e}) (\bar{w} \times \bar{e})} \quad (24)$$

Equation (24) is valid for any elliptical orbit.

After determining $\bar{e}$ from equation (24) $\bar{h}$ can be derived from equation (21) by differentiation and simple algebraical processes.

Since

$$\bar{v} = \omega_0 \bar{e} + \bar{h}$$

we master the gyro motion of the satellite.

Let us apply formula (24) to the case of a circular orbit where $r_0 = \text{const.}$ In order to simplify the formulae we first introduce

$$\tau = \Omega_s t$$

as a new independent variable where Ω_s means the angular velocity of the satellite's rotation about the earth. Formula (24) assumes the form

$$I_1 \omega_0 \Omega_s \bar{e}' + I_2 \Omega_s^2 (\bar{e}'' \times \bar{e}) = - \frac{3\mu (I_1 - I_2)}{r_0^3} (\bar{w} \bar{e}) (\bar{w} \times \bar{e}) \quad (25)$$

where the primes denote differentiation with respect to τ . Using the abbreviations

$$\begin{aligned} I_1 \omega_0 \Omega_s &= \tilde{I}_1 \\ I_2 \Omega_s^2 &= \tilde{I}_2 \end{aligned} \quad (26)$$

$$- \frac{3\mu}{r_0^3} (I_1 - I_2) = K$$

equation (25) can be written

$$\tilde{I}_1 \bar{e}' + \tilde{I}_2 (\bar{e}'' \times \bar{e}) = K (\bar{w} \bar{e}) (\bar{w} \times \bar{e}) \quad (27)$$

It is advantageous to refer $\bar{e}$ to a coordinate system which rotates about the earth in the same way as the satellite's center of gravity. The axes of this coordinate system may be defined by the unit vectors $\bar{w}$, $\bar{w}'$, $\bar{n}$ where $\bar{n}$ is defined by

$$\begin{aligned} \bar{n} &= \bar{w} \times \bar{w}' = \bar{w} \times \bar{t} \\ \bar{t} &= \bar{w}' \end{aligned} \quad (28)$$

The unit vector $\bar{n}$ is a constant vector representing the normal vector

of the orbit plane. We express $\bar{e}$ as a linear combination of $\bar{w}$, $\bar{t}$, $\bar{n}$

$$\bar{e} = \lambda \bar{w} + \mu \bar{t} + \rho \bar{n} \quad (29)$$

since

$$\bar{w}' = \bar{t}, \quad \bar{t}' = -\bar{w}, \quad \bar{n}' = 0$$

we have

$$\bar{e}' = (\lambda' - \mu) \bar{w} + (\mu' + \lambda) \bar{t} + \rho' \bar{n} \quad (30)$$

If we move with the satellite and observe the attitude of its axis of rotation which is given by the unit vector (λ, μ, ρ) we observe that this vector moves on the surface of the unit sphere at a velocity the vector of which has the components λ', μ', ρ' in the satellite system. Equation (30) shows the relation between the velocity vector $\bar{e}'$ observed in a universe-fixed system and the velocity vector (λ', μ', ρ') observed in a satellite-fixed system can be written

$$\bar{e}' = \bar{z}' + (\bar{n} \times \bar{z}) \quad (31)$$

where

$$\bar{z} = (\lambda, \mu, \rho)$$

and $\lambda^2 + \mu^2 + \rho^2 = 1$.

Applying the operator of equation (31)

$$\frac{d}{d\tau} + (\bar{n} \times \bar{z})$$

twice, we get

$$\bar{e}'' = \bar{z}'' + 2(\bar{n} \times \bar{z}') - \bar{z} + (\bar{z} \bar{n})\bar{n} \quad (32)$$

Equations (31) and (32) enable us to write the equation of motion (27) in the satellite-fixed system $\bar{w}, \bar{t}, \bar{n}$:

$$\begin{aligned} \tilde{I}_1 \left(\bar{z}' + (\bar{n} \times \bar{z}) \right) + \tilde{I}_2 \left((\bar{z}'' \times \bar{z}) + 2(\bar{n} \bar{z})\bar{z}' + (\bar{z} \bar{n}) (\bar{n} \times \bar{z}) \right) \\ = K (\bar{w} \bar{z}) (\bar{w} \times \bar{z}) \end{aligned} \quad (33)$$

From equation (33), apparently more complicated than equation (27), an integral of the equation of motion can easily be derived, by forming the vector product of (33) and $\bar{z}'$. We obtain

$$\tilde{I}_1 (\bar{n} \bar{z}') + \tilde{I}_2 (\bar{z}' \bar{z}'') + \tilde{I}_2 (\bar{n} \bar{z}) (\bar{n} \bar{z}') = K (\bar{w} \bar{z}) (\bar{w} \bar{z}') \quad (34)$$

Integration of equation (34) yields

$$\tilde{I}_1 (\bar{n} \bar{z}) + \frac{1}{2} \tilde{I}_2 \left(\bar{z}'^2 + (\bar{n} \bar{z})^2 \right) - \frac{1}{2} K (\bar{w} \bar{z})^2 = \text{const.} \quad (35)$$

Let us now write the equation of motion (33) in the coordinate system λ, μ, ρ . The motion can be described by three algebraic differential equations. One of these equations is identical with the integral (35), the second equation is obtained by forming the scalar product of equation (33) and $\bar{n}$, and the third equation expresses the fact that the vector

(λ, μ, ρ) is a unit vector:

$$\tilde{I}_1 \rho + \frac{1}{2} \tilde{I}_2 (\lambda'^2 + \mu'^2 + \rho'^2 + \rho^2) - \frac{1}{2} K \lambda^2 = \text{const.}$$

$$\tilde{I}_1 \rho' + \tilde{I}_2 (\lambda''\mu - \lambda\mu'') + 2\tilde{I}_2 \rho\rho' = K\lambda\mu \quad (36)$$

$$\lambda^2 + \mu^2 + \rho^2 = 1$$

Introducing polar coordinates

$$\lambda = \cos \phi \sin \theta$$

$$\mu = \sin \phi \sin \theta \quad (37)$$

$$\rho = \cos \theta$$

The system (36) is equivalent to

$$\tilde{I}_1 \cos \theta + \frac{1}{2} \tilde{I}_2 (\sin^2 \theta \phi'^2 + \theta'^2 + \cos^2 \theta) - \frac{1}{2} K \sin^2 \theta \cos^2 \phi = \text{const.} \quad (38)$$

$$\tilde{I}_1 (\cos \theta)' - \tilde{I}_2 (\sin^2 \theta \phi')' + \tilde{I}_2 (\cos^2 \theta)' = K \sin^2 \theta \cos \phi \sin \phi$$

DISTRIBUTION

AFOSR (SRIL) Wash 25, DC	2	The RAND Corporation 1700 Main Street Santa Monica, Calif	2
Scientific and Technical Information Facility ATTN: NASA Representative (S-AK/DL) P. O. Box 5700 Bethesda, Md	2	ASTIA (TIPCR) Arlington Hall Station Arlington 12, Va	20
Chief, R&D, Dept of the Army ATTN: Scientific Information Branch Wash 25, DC	1	Langley Research Center (NASA) ATTN: Technical Library Langley AFB, Va	1
AFSC (SCRS) Andrews AFB Wash 25, DC	1	Lewis Research Center (NASA) ATTN: Technical Library 21000 Brookpark Road Cleveland 35, Ohio	1
Chairman Canadian Joint Staff (DRB/DSIS) 2450 Massachusetts Avenue NW Wash 25, DC	1	Redstone Scientific Information Center U. S. Army Missile Command Redstone Arsenal, Ala	1
U. S. Naval Research Laboratory ATTN: Library Wash 25, DC	1	Institute of Aeronautical Sciences 2 East 64th Street New York 21, NY	1
Institute of Technology (AU) Library MCLI-LIB, Bldg 125, Area B Wright-Patterson AFB, Ohio	1	Applied Mechanics Reviews Southwest Research Institute 8500 Culebra Road San Antonio 6, Texas	2
ASD (Technical Library) Wright-Patterson AFB, Ohio	1	AFCRL (CRRELA) L. G. Hanscom Field, Mass	1
ARL (Technical Library) Bldg 450 Wright-Patterson AFB, Ohio	2	AEDC (AEOIM) Arnold AF Stn, Tenn	1
High Speed Flight Station (NASA) ATTN: Technical Library Edwards AFB, Calif	1	Signal Corps Engineering Laboratory (SIGFM/EL-RPO) Fort Monmouth, NJ	1
AFFTC (FTOTL) Edwards AFB, Calif	1	Linda Hall Library ATTN: Documents Division 5109 Cherry Street Kansas City 10, Mo	1
Ames Research Center (NASA) ATTN: Technical Library Moffett Field, Calif	1	CIA (OCR Mail Room) 2430 E Street NW Wash 25, DC	2

Detachment 1	1	USAFA (DLIB)	2
Hq, Office of Aerospace Research		U. S. Air Force Academy, Colo	
European Office, USAF			
47 Cantersteen		School of Aeronautical and	1
Brussels, Belgium		Engineering Sciences	
		ATTN: Aero and ES Library	
Hq USAF (AFCIN-3T)	1	Purdue University	
Wash 25, DC		Lafayette, Ind	
Hq USAF (AFRDR-LS)	1	Space Technology Laboratories, Inc.	1
Wash 25, DC		ATTN: Information Services	
		Document Acquisition Group	
Chief, Bureau of Ordnance (Sp-401)	1	P. O. Box 95001	
Dept of the Navy		Los Angeles 45, Calif	
Wash 25, DC			
		Commanding General	1
AFMTC (Tech Library MU-135)	1	ATTN: ORDBS-OM-TL 312	
Patrick AFB, Fla		White Sands Missile Range	
		NMex	
APGC (PGTRIL)	1		
Eglin AFB, Fla		Ordnance Mission	1
		British Liaison Office	
AFSWC (SWOI)	1	White Sands Missile Range	
Kirtland AFB, NMex		NMex	
AU (AUL-6008)	1	New Mexico State University of	1
Maxwell AFB, Ala		Agriculture, Engineering, and Science	
		ATTN: Library	
RADC (RAALD)	1	University Park, NMex	
ATTN: Documents Library			
Griffiss AFB, NY		University of New Mexico	1
		Government Publications Division	
Naval Research Laboratory	1	University of New Mexico Library	
Dept of the Navy		Albuquerque, NMex	
ATTN: Director, Code 5360			
Wash 25, DC		<u>LOCAL</u>	
Commanding Officer	1	NLO	1
Diamond Ordnance Fuse Laboratories			
ATTN: Technical Reference Section		RRR	1
(ORDTL 06.33)			
Wash 25, DC		RRRT	3
Hq OAR (RRON/Col T. M. Love)	1		
Tempo D			
4th & Independence Ave, SW			
Wash 25, DC			
Hq OAR (RRY)	1		
Wash 25, DC			

Office of Research Analyses Office of Aerospace Research Holloman AFB, New Mexico GYROTHERY OF A SPINNING ROTATIONALLY SYMMETRIC SATELLITE: A New Integral of the Equations of Motion March 1963, 12 pp ORA-63-6 Unclassified Report Without restriction to plane or infinitesimally small motions, the differential equations for a spinning rotationally symmetric satellite have been established,  using new methods, (over)	UNCLASSIFIED New Integral Gyrotheory Spinning Satellite I. Herbert Knothe II. In ASTIA collection UNCLASSIFIED	Office of Research Analyses Office of Aerospace Research Holloman AFB, New Mexico GYROTHERY OF A SPINNING ROTATIONALLY SYMMETRIC SATELLITE: A New Integral of the Equations of Motion March 1963, 12 pp ORA-63-6 Unclassified Report Without restriction to plane or infinitesimally small motions, the differential equations for a spinning rotationally symmetric satellite have been established,  using new methods, (over)	UNCLASSIFIED New Integral Gyrotheory Spinning Satellite I. Herbert Knothe II. In ASTIA collection UNCLASSIFIED
Office of Research Analyses Office of Aerospace Research Holloman AFB, New Mexico GYROTHERY OF A SPINNING ROTATIONALLY SYMMETRIC SATELLITE: A New Integral of the Equations of Motion March 1963, 12 pp ORA-63-6 Unclassified Report Without restriction to plane or infinitesimally small motions, the differential equations for a spinning rotationally symmetric satellite have been established,  using new methods, (over)	UNCLASSIFIED New Integral Gyrotheory Spinning Satellite I. Herbert Knothe II. In ASTIA collection UNCLASSIFIED	Office of Research Analyses Office of Aerospace Research Holloman AFB, New Mexico GYROTHERY OF A SPINNING ROTATIONALLY SYMMETRIC SATELLITE: A New Integral of the Equations of Motion March 1963, 12 pp ORA-63-6 Unclassified Report Without restriction to plane or infinitesimally small motions, the differential equations for a spinning rotationally symmetric satellite have been established,  using new methods, (over)	UNCLASSIFIED New Integral Gyrotheory Spinning Satellite I. Herbert Knothe II. In ASTIA collection UNCLASSIFIED

in the form of two second-order differential equations. An integral of these equations has been found. ○	UNCLASSIFIED	in the form of two second-order differential equations. An integral of these equations has been found. ○	UNCLASSIFIED
in the form of two second-order differential equations. An integral of these equations has been found. ○	UNCLASSIFIED	in the form of two second-order differential equations. An integral of these equations has been found. ○	UNCLASSIFIED