

UNCLASSIFIED

AD

410250

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD NO. 410250

DDC FILE COPY

2102 N-63-4-3

634A
4

ARMOUR

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

DDC
RECEIVED
JUL 29 1963
TISIA 18

410250

THIS DOCUMENT MAY BE RELEASED WITH NO
RESTRICTIONS ON DISSEMINATION

NOTE: Effective June 1, 1963,
the name of Armour Research
Foundation of Illinois Institute
of Technology will change to
IIT RESEARCH INSTITUTE.

Report No. ARF-C6001-3
(Progress Report)

**PREPARATION AND EVALUATION
OF NEW HYDRAULIC FLUIDS**

Bureau of Ships
Washington 25, D. C.

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

48110 5 423 950

(14) Report No. ARF-C6001-3
(9) Progress Report

(6) PREPARATION AND EVALUATION OF NEW HYDRAULIC FLUIDS

January 28 ~~through~~ February 27, 1963

Bureau of Ships
Washington 25, D. C.

(13) Contract No. NObS-88249
(16) ARF Project C6001

↓
The purpose of this project is to develop new fire-resistant hydraulic fluids based on fluorinated, sulfur-containing compounds. The compounds will be synthesized specifically to meet the critical property requirements.

Various derivatives of sulfur hexafluoride and other fluorinated materials ~~are being investigated.~~ ^{were prepared}

↖
During the past month fluorination of di-n-propyl sulfide, $(C_3H_7)_2S$, in the Simon's cell was studied. In the first run, 7 ml of di-n-propyl sulfide was electrolyzed in approximately 50 ml of liquid hydrogen fluoride at $-78^\circ C$. Electrolysis was carried out for approximately 12 hours at 3 to 5 volts (5 to 7 amps). After the run had been terminated, only a solid, powdery product was found in the cell. This product was not characterized because only fluorinated liquid products are of interest.

In the second run, 10 ml of di-n-propyl sulfide was electrolyzed in 40-50 ml* of liquid hydrogen fluoride. During this run, both the body of the cell and the reflux assembly were refrigerated with powdered dry ice. (In the first run only the reflux condenser had been refrigerated.) Electrolysis was

*It was difficult to estimate the exact amount of hydrogen fluoride used because it had been transferred from the conical bottom of the hydrogen fluoride reservoir.

① NA

② NA

③ Sample 5

④ 27 Feb 6

⑤ 6 p.

⑥ NA

⑦ NA

⑧ NA

⑨ NA

⑩ NA

⑪ NA


⑫ NA

⑬ C

carried out for approximately 14 hours at 2 volts (2.5 to 2.8 amps). After the run had been terminated, about 40 ml of a liquid material was drained from the cell. This fuming, red liquid is now being characterized.

Before the third run can be started, the hydrogen fluoride handling system must be repaired. At present, hydrogen fluoride gas escapes from the cylinder during transfer operations. Repair work is now in progress, and the third run will be carried out as soon as sufficient hydrogen fluoride has been transferred to the reservoir.

The preparation of pentafluorosulfur pentafluoride, $C_6F_5SF_5$, is being carried out as shown in Equation (1).



The preparation of the starting material was described in Report No. ARF-C6001-2. The disulfide and the silver difluoride were heated gradually to about 130°C. Reaction started at about 80°C and then subsided until the temperature reached about 130°C.

The nuclear magnetic resonance (NMR) spectrum of the product shows a complex mixture of compounds. The gas-liquid chromatography (GLC) analysis shows two main product peaks (See Figure 1), which represent roughly 95% of the sample. It was suspected that one of these peaks was due to pentafluorophenylsulfur trifluoride and that the other was due to the desired product, pentafluorosulfur pentafluoride.

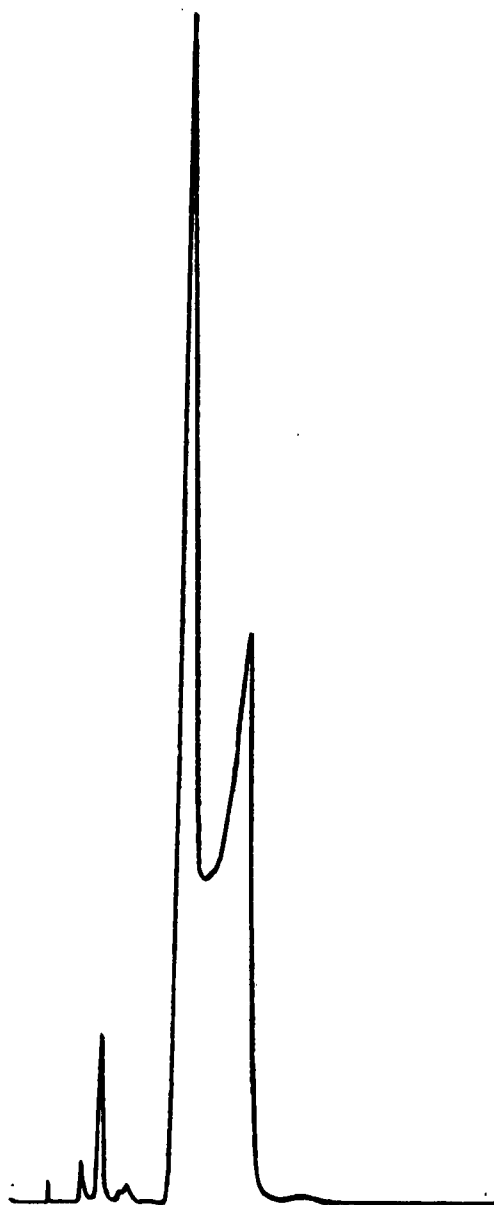


Figure 1

CHROMATOGRAPHIC ANALYSIS
OF PRODUCTS FROM REACTION 1

The trifluoride, $C_6F_5SF_3$, is easily hydrolyzed, whereas the pentafluoride, $C_6F_5SF_5$, should be stable to hydrolysis. Hence hydrolysis appeared to be a convenient way of disposing of the trifluoride and obtaining pure pentafluoride. Therefore, the sample was hydrolyzed, washed with sodium bicarbonate, and extracted with diethyl ether. The products from the hydrolysis should remain in the water extract. Chromatographic analysis of the product remaining in the ether extract showed one major peak, which differed from the product peaks shown in Figure 1. This new product peak falls between the other two on elution time. Upon closer examination of the peaks in Figure 1 it is seen that the product peak on the right side is unsymmetrical and appears to contain a third peak on the left shoulder.

It is now thought that this third product peak is due to the desired product and that the other two peaks may be due to C_6F_5SF and $C_6F_5SF_3$. The entire reaction and workup is now being repeated on a larger scale in order to obtain more of the product for analysis.

In Report No. ARF-C60001-2, a large amount of data was given on the viscosities and other properties of various fluorocarbons. These data were gathered in order to determine the structural characteristics necessary for the desired viscosity index. A preliminary evaluation has shown the following:


- (1) Straight chain compounds are better than branched compounds.
- (2) Cyclic compounds are better than aliphatic compounds containing the same number of CF_x groups.
- (3) Aromatic compounds are better than cyclic compounds.

During March the study of the preparation of $C_6F_5SF_5$ and $(C_6F_7)_2SF_4$ will continue. The synthesis of SF_5Cl will be started and should be completed by the end of March. This compound will be added to various olefins in order to prepare compounds of the type $Cl(CH_2)_xSF_5$ and $Cl(CF_2)_xSF_5$.


Data for this report are recorded in ARF Logbooks C 13206 and C 13209. In addition to the author, personnel contributing to the program include: T. Burgwald, Research Chemist; J. Raney, Associate Physicist; G Macur, Assistant Chemist; and R. Douthart, Assistant Chemist.

Respectfully submitted,

ARMOUR RESEARCH FOUNDATION
of Illinois Institute of Technology


Irvine J. Solomon
Senior Chemist
Propellant Research

Approved by:



Charles K. Hersh
Manager
Propellant Research

IJS:lag
3-11-63

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

Copy No. /

Distribution List:

<u>Copy No.</u>	<u>Recipient</u>
1-12	Chief, Bureau of Ships, Code 634A Department of the Navy Washington 25, D.C.
13	Armour Research Foundation Division C Files
14	Armour Research Foundation Editors, G.S. Gordon, M.J. Klein, Main Files
15	Armour Research Foundation K. W. Miller, Report Library