

UNCLASSIFIED

AD **426837**

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

BEST

AVAILABLE

COPY

426837

CATALOGED BY DDC

AS AD No. _____

426837

AMRL-TDR-63-112

WALKING RESPONSES UNDER LUNAR AND LOW GRAVITY CONDITIONS

JAMES F. ROBERTS, CAPTAIN, USAF

TECHNICAL DOCUMENTARY REPORT No. AMRL-TDR-63-112

NOVEMBER 1963

BEHAVIORAL SCIENCES LABORATORY
6570th AEROSPACE MEDICAL RESEARCH LABORATORIES
AEROSPACE MEDICAL DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

Project No. 7181, Task No. 718406

Best Available Copy

NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified requesters may obtain copies from the Defense Documentation Center (DDC), Cameron Station Alexandria Virginia. Orders will be expedited if placed through the librarian or other person designated to request documents from DDC formerly ASTIA.

Do not return this copy. Retain or destroy.

Stock quantities available at Office of Technical Services, Department of Commerce, Washington 25 D C Price per copy is \$2.75.

Change of Address

Organizations receiving reports via the 6570th Aerospace Medical Research Laboratories automatic mailing lists should submit the addressograph plate stamp on the report envelope or refer to the code number when corresponding about change of address.

" . . . They danced on the ceilings,

They danced on the walls,

At the Gandy Dancers' Ball. "

From "The Gandy Dancers' Ball"
American Folk Ballad

List of Tables

Table		Page
B-I	Subjects' Physical Data	B-1
B-II	Summary of Reduced Data	B-25
C-I	Drawing Numbers of the Components of the Force Measuring Walkway	C-10

List of Figures

Figure		Page
1	Phases in the Walking Cycle	16
2	Body Axis System and Cardinal Planes	20
3	External Forces on the Walking Man	22
4	Surface Reaction Forces During a Walking Cycle . . .	27
5	Muscle Groups	30
6	Schematic Muscle Action Diagrams - I	31
7	Schematic Muscle Action Diagrams - II	32
8	Force Measuring Walkway	42
9	Cantilever Beams.	46
10	Strain Gage Circuits	50
11	Fixed Camera View of Walkway and Subject B	57
12	Distance vs. Time - Subject A	64
13	Distance Vs. Time - Subject B	65
14	Step Relationships of Low-Gravity Walking	67
15	Phase Times of Low-Gravity Walking	69
16	Mathematical Approximation of the Time of Swing . .	71
17	Phase Ratios of the Low-Gravity Walk	72

	Page
Concluding Statements	75
Recommendations for Future Study	76
Bibliography.	78
Appendix A: Computation of the Atmospheric Drag on a Walking Man	A-1
Appendix B: Experimental Data	B-1
Data Log, Subject A	B-1
Data Log, Subject B	B-10
Sample Calculations	B-19
Appendix C: Sample Calculations for the Design of the Force Measuring Walkway	C-1
Structural Design	C-1
Walkway Platform	C-1
Vertical Force Beam	C-2
Horizontal Force Beam	C-5
Strain Gage Instrumentation	C-6
Vertical Force Circuit	C-6
Horizontal Force Circuit	C-9

	Page
IV. Proposal for a Force Measuring Walkway	39
Introduction	39
Structural Design	40
Walkway Platforms	43
Cantilever Beams	44
Lateral Guides	47
End Brackets	47
Mounting Plates	48
Electrical Instrumentation	48
Vertical Force Circuit	49
Horizontal Force Circuit	51
Data Analysis	51
V. Low Gravity Time-Displacement Walking Equipment	55
Purpose	55
Scope	55
Procedures and Technique	56
Aircraft Laboratory	56
Instrumentation	56
Subjects	58
Run Procedures	58
Test Sequence	58
Data	59
Data Reduction	59
Run Selection	59
Data Log	60
Calculation of Parameters	60
Time	61
Velocity	61
Acceleration	61
Step Frequency	62
Step Length	62
Phase Times and Ratios	62
Results	63
VI. Concluding Statements and Recommendations for Future Study	75

Contents

Page

I. Introduction	1
Subject and Purpose	1
Subject Background	1
Scope	2
Development	3
II. Previous Studies of Walking	5
Normal Walking Studies	5
Low Gravity Walking Studies	7
Experimental Methods and Instrumentation	8
Instrumentation for Motion Analysis	10
Instrumentation for Force Analysis	11
Walkways	13
III. Description of Normal Level Walking	15
Phases of the Walking Cycle	15
Body Axis System	19
Forces in Normal Level Walking	21
External Forces	21
Weight	21
Atmospheric Drag	24
Surface Reaction Forces	25
Internal Forces	29
Muscle Groups	29
Muscle Functions	33
Displacements in the Walking Cycle	37

ABSTRACT

Previous walking studies are reviewed to determine methods of investigation. A description of normal walking is included for definition and as a basis for comparison of the low gravity gait. Walking behavior can be analyzed by motion methods or by force methods. Motion analysis is sufficient to quantitatively describe the low gravity gait, but a force analysis is needed to establish the reasons for the degradation of the walk. The construction of a force-measuring walkway is proposed, but was not completed. Alternatively, a motion picture (time-displacement) walking experiment was conducted at various artificial gravity levels in an aircraft flying parabolic trajectories. Two subjects walked fore and aft on a floor-marked distance scale. Successive lowering of the gravity level from 1.0 g to 0.1 g produced the following effects. The subjects maintained within 10 percent of their normal 1-g velocity to gravity levels of 0.25 g or below. The most consistent effect of the reduction of gravity was the increased swinging time of the leg, which varied inversely as the sixth root of the gravity level. The increasing swing-to-support ratio indicates the decreasing control of progression, and leads one to describe the low-gravity gait as "a fast walk in slow motion." The discontinuity in the performance curves in the region of 0.2 g tends to substantiate previous estimates of the lower gravity limit for walking.

PUBLICATION REVIEW

This technical documentary report is approved.

Walter F. Grether
WALTER F. GREETHER
Technical Director
Behavioral Sciences Laboratory

FOREWORD

This locomotion study was suggested by Captain John C. Simons, Crew Stations Branch, Human Engineering Division, Behavioral Sciences Laboratory, 6570th Aerospace Medical Research Laboratories, and fulfills a requirement under Project No. 7184, "Human Performance in Advanced Systems," Task No. 718405, "Design Criteria for Crew Stations in Advanced Systems."

The report was prepared by Captain Roberts in partial fulfillment of the requirements for the Master of Science Degree in Engineering at USAF Institute of Technology in 1962.

Special acknowledgment is made to Captain Simons and to Lieutenant Bucciarelli, thesis adviser, for their sincere interest, suggestions, and guidance throughout this study. Also, thanks are extended to Mr. R. E. Conover, Mr. V. F. Willis, Mr. E. C. Titterington, and Mr. F. C. Shera of the Data Systems Division, Directorate of Test Data, Deputy for Flight Test, for their assistance in the design of the strain gage instrumentation; and to Sergeants William Sears and Harold Espensen, Crew Stations Branch, for their assistance in all phases of the experimental tests; and to Mr. Charles E. Clauser, Anthropology Branch, Human Engineering Division, for his many suggestions and literature guidance.

I. Introduction

Subject and Purpose

The subject of this study is the walking performance of a man under the conditions of reduced gravity. The purpose is to objectively determine his capabilities and to quantitatively describe his performance.

Subject Background

Encumbered by a space suit and other life-support equipment, it is unlikely that the astronauts, like the railroad men of old, will be "dancing on the walls." That is, at least not voluntarily. But the questions, "Will he be able to walk?" and if so, "How well?" remain unanswered. In the near future the Apollo mission will require that the astronaut emerge from his landing vehicle and walk about on the surface of the moon. In fact, until lunar roving vehicles are available, the primary means of locomotion on the moon will be normal walking.

Lunar walking will be only the first of the requirements for man to walk in space. Duties aboard manned orbital space stations and exploration of the near planets will undoubtedly require man to walk in a variety of gravity fields. These requirements, coupled

with the lack of existing subject knowledge, establish the need for this investigation. The basic assumption that it is desirable to learn as much as possible about man's capabilities before he is placed in an adverse environment provides the motivation for its continuance.

Scope

This study is concerned with the effect of the reduction of gravity on man's walking performance. The initial objectives of the study are as follows:

1. To describe in quantitative terms the walking performance that is possible at reduced gravity levels,
2. To determine the lower limit at which man can walk unaided, and
3. To determine the reasons for man's relative failure or success in walking.

This study is limited to man's capabilities in a "shirtsleeve" environment under the influence of gravity levels between 0.1 g and 1.0 g. No attempt is made to evaluate walking performance in the absence of gravity, that is, under purely "weightless" conditions. Emphasis is placed on describing the dynamics of the gait rather than on the biological phenomena within the body that produce this motion.

The approach is primarily experimental. Because of the complexity of walking, mathematical analysis is used to explain only certain facets of the gait rather than to derive the whole walking performance.

This investigation is of a preliminary nature and serves as a guideline for future study.

Development

The problem of describing man's walking performance under reduced gravity conditions is approached in three phases:

1. Description of normal walking
2. Selection of an experimental approach
3. Experimental evaluation of man's walking performance.

As an introduction to the three phases of this study, Chapter II is devoted to a review of previous walking studies. The more significant findings of previous researchers are noted along with a description of the techniques by which they attained their results. A more complete description of the merits and objectives of other experimental methods completes the chapter.

In accordance with the first phase of this study, a description of normal walking is presented in Chapter III. This description was deemed necessary to define terminology, to establish the characteristics of the gait that are significant to this study, and to provide a basis for comparison of the low-gravity gait.

Based on the available experimental techniques listed in Chapter II and the significant characteristics of the gait that are presented in Chapter III, a force measuring walkway is proposed in Chapter IV as the best means for measuring the low-gravity walking performance. However, delays in material procurement precluded its use in the present study.

A motion analysis technique was conceived as an alternate approach. Evaluation of low-gravity walking performance by means of a time-displacement walking experiment is presented in Chapter V.

Finally, some concluding remarks about the objectives of the study and recommendations for future work are given in Chapter VI.

II. Previous Studies of Walking

Normal Walking Studies

Although walking behavior has probably been studied for centuries, the first significant information dates back approximately one hundred years. The scope of these studies has ranged from a dynamics problem in classical mechanics to the correction of pathological walking behavior in the field of medicine. Certain of these works are generally accepted as milestones in the historical account of walking studies, and will therefore be mentioned here.

In 1836 the Weber brothers in Germany reported on anatomical studies on cadavers and on living subjects. In addition to determining the vertical center of gravity of the body, they presented a theory of walking and running in which they concluded that the swinging phase of the gait is a pendulum motion only, and does not depend upon muscular action. This theory gave rise to much discussion by other investigators, but was later repudiated by Braune and Fischer, Marey, and others (Ref 6:A-3).

Muybridge, in 1882, made photographic studies of the paces of the horse. Although one purpose of the study was to decide a bet as to whether all four legs were ever off the ground simultaneously, the study is significant because it was probably the first time that

photography was used in the study of locomotion (Ref 6:A-6).

Between 1873 and 1895 in France, Marey's studies led to two important investigative techniques. The first innovation was the use of pneumatic cells (or "tambours") for the objective recording of forces and motion. Marey's greatest contribution, however, was the development of chronophotography - a technique by which successive exposures are made on the same photographic plate by means of a rotating mechanism within the camera (Ref 6:A-6).

Braune and Fischer, in 1890, determined masses and centers of gravity of the body and its various segments by measuring and dismembering cadavers. They established the first table of coefficients that related the dimensions and masses of the body segments to overall height and weight (Ref 6:A-8).

Later, between 1898 and 1904, Fischer published six volumes concerning the human gait. By use of four chronophotographic cameras simultaneously to photograph miniature gas tubes located at specific body points, he was able to record the displacements of the body during 31 phases of the double step. The results of his detailed motion analysis indicated that the leg swing is not purely a pendulum motion, but that it also depends on muscle action. "Fischer's Der Gang des Menschen (Human Gait) is considered the classical work on gait" (Ref 6:A-10).

Between 1928 and 1936, Bernstein in Moscow repeated and expanded Fischer's experiments to include additions of mass to the body and also to study the effects of fatigue on locomotion (Ref 6:A-17).

Steindler, in 1935, published a comprehensive work on the mechanics of locomotion, primarily for use as a basis for the analysis and comparison of pathological walking gaits. The description of normal walking contained in this book (Ref 19:348-386) was used extensively as a reference during the early stages of this investigation.

Since 1945, much work has been sponsored by the National Research Council directed toward the improvement of the design and operation of artificial limbs. Although several universities (Refs 6, 8) have participated in this project, researchers at the University of California Biomechanics Institute (formerly the Prosthetics Devices Research Project) have published the most comprehensive study of normal walking (Refs 1, 3, 6, 14, and others). These reports were referenced extensively during the later stages of this investigation.

Low-Gravity Walking Studies

Personnel of the Crew Stations Branch of the Aerospace Medical Research Laboratories, Wright-Patterson AFB, Ohio, have conducted two zero-gravity walking programs and several low-gravity walking

experiments aboard aircraft that were flown through Keplerian trajectories to produce periods of weightlessness. Because man can not walk unaided at zero-gravity, special footwear was designed for, and was the subject of, the zero-gravity tests.

A study of magnetic shoes was conducted during 1959. Although the magnets provided sufficient vertical force to hold the man to the surface, walking was impossible because the metal-to-metal friction of the magnetic sole against the surface was insufficient to permit the subject to develop the necessary fore-and-aft shear propulsive forces. Several improved designs of magnetic shoes have since been proposed, but have not been tested under weightless conditions (Ref 18).

A subsequent test was made using Velcro material on the shoe soles and on the walking surface (Ref 17). Although the Velcro shoes provided the necessary holding and shear forces, walking was possible but still difficult. The absence of the gravity acceleration to aid body and limb rotation requires that some muscles must perform functions for which they are ill-fitted. For example, forward body rotation must be accomplished by the pre-tibial muscle group which must reverse its normal restraining action and must instead pull the shank of the leg forward about the ankle.

Although these tests provided information applicable to the use of Velcro and magnetic devices in other space applications, the necessity for special walkway surfaces and shoes in space applications degrades their practicality as an aid to walking. In a weightless state, locomotion near a surface will probably be performed, more easily, either by soaring or else by pulling one's self forward hand-over-hand along a series of recessed handholds.

An additional low-gravity walking experiment was performed during 1961 to determine the lower gravity limit at which man can still walk. Based upon the observation of only one subject, the lower limit for acceptable walking was determined to be in the neighborhood of 0.2 g (Ref 10:19). Later tests have shown that man can still walk at lunar gravity (0.17 g). However, all these experiments have been qualitative in nature, and have provided no quantitative description of walking performance at these gravity levels.

Experimental Methods and Instrumentation

Knowledge of the relationship between the forces acting on the body and the resulting body movements is fundamental to the understanding of locomotion. Instrumentation techniques that have been used to obtain this information can be divided into two groups: instrumentation for motion analysis, and instrumentation for force analysis.

In addition, mention will be made of some previously used walkways.

Instrumentation for Motion Analysis. Most motion studies have been recorded by photographic techniques ranging from still photography to high speed motion picture photography. Motion pictures provide an excellent means of recording motion. By simultaneously photographing a timing device (or by counting frames) the recorded displacements can be plotted as a function of time and the velocity and acceleration of selected points can be determined.

Often some form of photographic targets, such as black dots on white tape, are fixed on the skin at body landmarks to facilitate data reduction. In some studies of leg segment transverse rotations, long stainless steel pins were imbedded into the various bones to mechanically amplify the small rotational displacements (Ref 9:859) (see "Body Axis System," Chapter III, for an explanation of the body axes, orientation planes, and transverse rotations).

An improved method of chronophotography called the method of interrupted lights has been found useful for obtaining "stick" diagrams of the walking displacements. Small ophthalmic lights, powered by a hand-carried battery, were attached to the subject at joint locations. The subject walked in a darkened room in front of the camera whose view was interrupted 30 times a second by means of a rotating disc.

The resulting photograph showed the location of the selected points at specific time intervals, and made possible an accurate determination of velocity and acceleration (Ref 6:Chapter 1).

Linear and angular accelerometers have been attached to the subjects in some motion studies to provide a means of checking the accuracy of the photographic reduction process. It was found that the accelerometer data required more reduction time and was less accurate than the data obtained by photographic reduction (Ref 3:1127).

Information on joint angles during motion has been most easily obtained by the use of electrogoniometers (Ref 5, 7). The electrogoniometer is an electrical potentiometer that indicates the relative angle between two adjacent segments when it is strapped across a joint. The oscillograph recording is called a goniogram. Although electrogoniometers have been used primarily for recording knee and ankle movements during walking, some athletic motions were also measured. For example, the elbow angle at the instant of baseball release by a professional pitcher was determined to be 102° - much less than the presumed 180° (Ref 7:10).

Instrumentation for Force Analysis. The direct measurement of walking forces requires a data sensor (or transducer) and a recorder. An oscillograph is generally used to record the electrical signals from the transducer.

Small resistance and capacitance force discs have been placed on the soles of the feet to record pressure patterns during walking. Because the foot contact area and spatial orientation are continually changing, the oscillograph tracings do not indicate the total force on the foot, but only indicate the degree of weight bearing by each disc. No attempt has been made to obtain quantitative force information by this method. The podograms (or "electrical foot-prints") obtained were used chiefly to compare normal and abnormal gaits (Ref 16:203-214).

Force plates have been used in several investigations for the direct measurement of the surface reaction forces (Refs 6, 13, 16). The force plates usually consist of a surface deck which is supported by strain-gaged cantilever beams or columns. Proper design of the beams or columns permits accurate measurements to be made of the forces and moments about any of three axes simultaneously. Oscillograph tracings at a known paper speed provide force versus time data.

Strain-gaged pylons have been inserted as the structural member in the shanks of artificial legs (Ref 6:Chapter 7). The pylon method has the unique advantage that it measures leg forces and moments during the swing as well as during stance. However, its application is limited to amputees, and will not be further considered here.

Phasic muscle activity has been successfully recorded by the use of electromyographic techniques. The action potentials of the muscles are picked up by surface electrodes, are amplified by a modified electroencephalograph, and are recorded by an oscillograph. Although this technique gives only qualitative information concerning the forces generated within the muscles, the period during which the muscle is acting is precisely determined.

Walkways. Mention should be made of some of the previously used walking surfaces. Some walkways consisted of little more than the floor or an elevated platform (Refs 5:iii, 9:860). A distance scale (spaced pegs or floor markings) was usually included to facilitate photographic reduction. In addition to level walking surfaces, work and energy studies have often been performed by having the subject ascend or descend a ramp or stairs.

Treadmills have been used in many laboratory tests of walking (Ref 5:iii). They are particularly useful when it is desired to control the walking velocity and/or sustain the walk over a considerable duration. The proximity of a heavily instrumented subject to the recording equipment is often a distinct advantage, especially during evaluations of body metabolism during walking.

Certain of the above techniques have been used concurrently during some tests. Perhaps the most comprehensive results were

those obtained by researchers at the University of California, who made a three-dimensional motion picture study of subjects walking on a long glass walkway into which was imbedded two force plates (Ref 6:Chapter 8).


III. Description of Normal Level Walking

The human walk¹ consists of alternate periods of support and swinging motion by each leg, with the end effect of progressive translatory motion of the body. The bipedalism peculiar to man requires that the legs alone must assume the functions of support and propulsion, as follows: in alternating play one extremity is placed to the ground in an oblique direction in a flexed position. Then, by sudden extension, it imparts to the body center of mass a propulsion forward and upward. At the same time, the other leg swings forward so that, in order to meet the downward tendency of the body path, it may effect a restraining action at the moment when it has finished its swing and is again set to the ground (Ref 19:355). The legs alternate in these events in such a way that the supporting phase of one leg largely coincides with the swinging phase of the other.

Phases of the Walking Cycle

The time that a foot is in contact with the ground is called a support phase. This is shown in Fig. 1. The support phase begins

¹Walking, as used in this report, is contrasted from running, jumping, sprinting, or soaring, by the requirement that at least one foot must be in contact with the surface at all times.

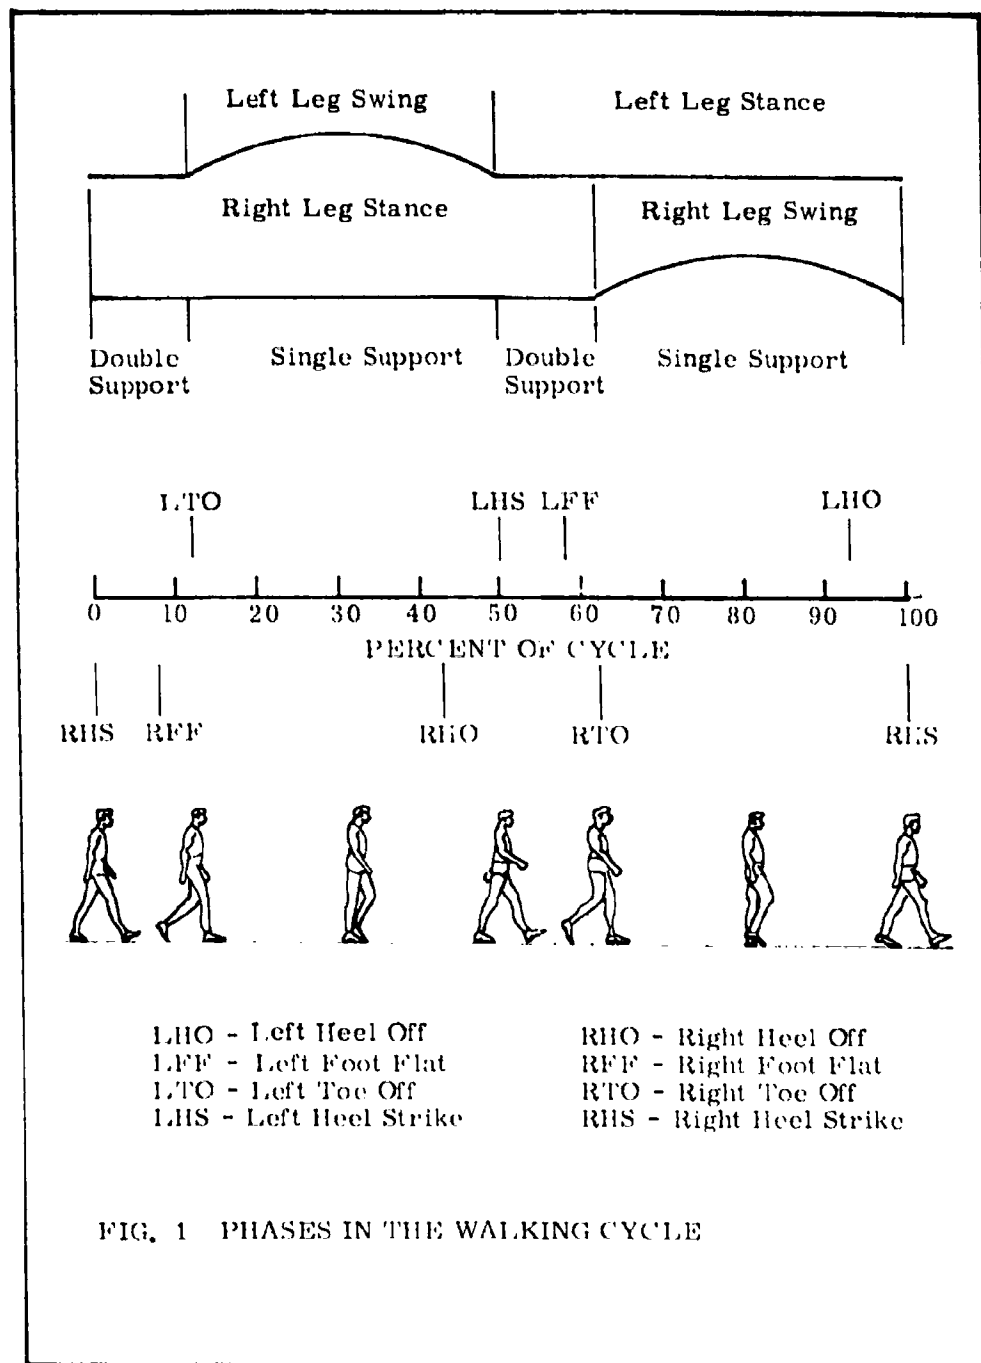

at the moment the heel is set to the ground and ends with the "takeoff," i. e., the moment the big toe leaves the ground after the deploy of the foot. The swing phase begins when the toe leaves the ground to swing forward, and it ends at the moment when the heel again strikes the ground. The period during which one limb accomplishes the above two phases is called a double step. The distance covered during this period is called the stride.

In walking, the time of support is longer than the swinging time. Finley and Karpovich determined that the ratio of swinging time to support time varied from 0.5 to 0.8 for normal subjects (Ref 5:7). Because the swing-to-support ratio is less than one, there are transitional periods when both feet are in contact with the surface. These are known as periods of double support. At average walking speeds, the ratio of the period of double support to the period of single support is about 4:10 (Ref 19:358). (This corresponds to a swing-to-support ratio of 0.55.)

The swinging leg is often compared to a pendulum. As stated in Chapter II, the Weber Brothers concluded that the swinging phase of the gait was a "pure" pendulum motion and did not depend upon muscular action. By later experiments and analysis, Marey, Fischer, and others repudiated this theory and acknowledged the presence of

other factors. The accuracy of the approximation is improved by further restriction; for example, the leg may be described as a compound physical pendulum. The analysis on this basis, however, is complicated by the facts that the leg is attached to a moving support, the distribution of its mass segments and their respective distances from the moving support changes as the leg is shortened by joint flexion during mid-swing, and the internal moments that are created by the muscle forces are both nonlinear and time varying. Knowledge of the magnitudes and the time variation of all these factors is essential for the computation of the motion of the swinging leg. Thus, the swinging leg must only be considered as a unique physical system which is acted upon by the various forces and moments and is constrained to definite boundary conditions and the path of the moving support.

Despite the restrictions that are necessary for a rigid mathematical analysis, the motion of the swinging leg is most easily visualized as that of a pendulum. Therefore, this analogy is frequently used in the qualitative description of walking.

Notwithstanding the above restrictions, the swinging leg, like a pendulum, tends to have a natural frequency and a period that is dependent upon gravity and the length of the leg. Regardless of how

fast a man walks, the swinging time of his leg remains essentially constant. During a fast walk the amplitude increases, but the period remains the same. As walking speed increases, the time of support decreases. But, consistent with the definition of walking, the swinging time of the leg can never exceed the support time (Ref 19:356).

The propulsive force that is necessary to keep this motion going is introduced by the foot as it pushes backward against the surface just before it deploys into the swing phase. A decelerating force is introduced when the heel strikes the ground at the end of the swing to become the new point of support.

Body Axis System. A three-coordinate, right-handed, orthogonal body axis system is defined with its origin at the center of mass of the standing man (see Fig. 2). In this system, the positive X axis is directed forward, the positive Y axis is directed toward the left, and positive Z axis is directed vertically upward. These three axes are the intersections of the three cardinal planes of the body. The cardinal transverse plane is a horizontal plane which contains the X and Y axes and divides the body into upper and lower halves. The cardinal frontal plane contains the Y and Z axes and divides the body fore and aft. The cardinal sagittal plane, which is usually termed the "plane of progression" in discussions of locomotion, contains the X and Z axes and divides the body into left and right halves.

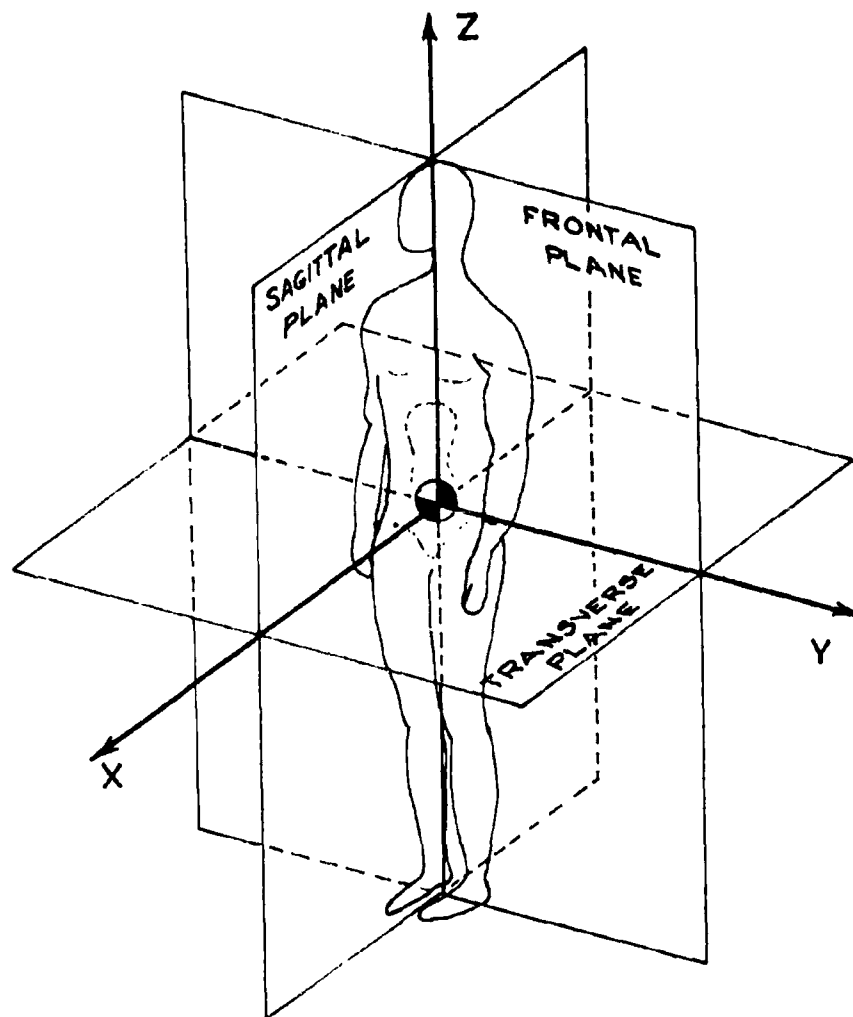


FIG. 2 BODY AXIS SYSTEM AND
CARDINAL PLANES

In addition to the body axes and cardinal planes, local axes and planes that are parallel to the body axes and cardinal planes may be defined with their origins at any desired body location. Thus, a "transverse rotation of the ankle" is a rotation of the ankle about the Z axis of a local coordinate system which has its origin at the ankle joint. This movement would occur in the local transverse plane of the ankle.

Forces in Normal Level Walking

Man, in walking, may be considered to be an isolated body acted upon by the external forces of weight (due to the acceleration of gravity acting on the body mass), air resistance, and the reaction forces of the surface against his feet (see Fig. 3). Internal forces will not be considered in this analysis except to acknowledge that they provide for body balance and the changes in position of the limbs necessary for walking.

External Forces.

Weight. At first glance the weight force, because it is directed perpendicularly to the line of progression, would seem to have little effect on normal walking. However, further analysis quickly emphasizes its significance. The force due to gravity applies uniformly over the human body. This force acts on any segment of

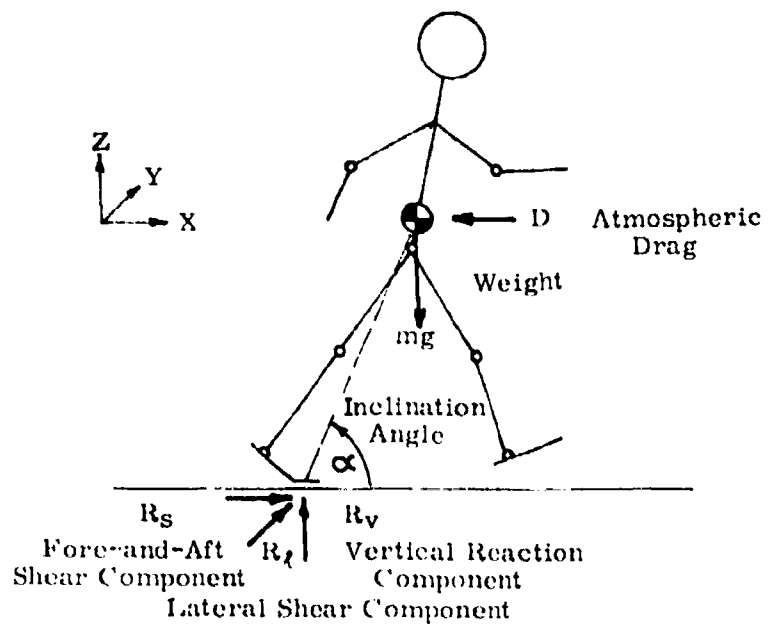


FIG. 3 EXTERNAL FORCES ON THE WALKING MAN

the body to produce a moment about its respective joint axis of

$$M_g = m g k \cos \alpha \quad (0)$$

where

M_g is the gravity moment,

g is the local gravity acceleration,

k is the distance between the segment center of mass and the respective joint axis, and

α is the inclination angle of the segment longitudinal axis measured from the horizontal.

By assuming an inclination of the various segments, or indeed, of the body as a whole, the weight force becomes a driving force which tends to accelerate the body in angular rotation. For example, when the swinging leg is ahead of the stance leg the weight force tends to rotate the body forward about the point of support, resulting in forward translation of the body center of mass. The gravity force is also considered to be the primary force that drives the swinging leg through its characteristic "pendulum-like" motion. The combination of the weight force and the forward inclination of the body opposes the external resistance developed by atmospheric drag on the body. The resultant of the surface reaction forces during the "push-off" phase is directed below the center of mass of the body, and tends to rotate

the body backward. Therefore, the combination of the weight force and the forward inclination of the body also acts to prevent the trunk from falling backward when the impetus of the "push-off" leg is transmitted to the body.

In addition to the above driving and restraining functions, one must not overlook the fact that the gravitational force "holds" man to the walking surface. Without the combination of this holding force and friction, man would be unable to anchor his foot to develop the propulsive fore-and-aft shear forces.

Atmospheric Drag. All movement through an atmosphere is opposed by atmospheric drag. During walking, the body opposes this drag force by assuming a forward inclination. Uniform progressive motion, according to Newton's first law, requires no external force. Many investigators have proposed that air resistance is the reason that man must continually apply impulses at his feet to maintain his walking velocity. However, consideration of the magnitude of the drag force does not justify this conclusion.

The atmospheric drag on a man walking under sea-level conditions at a velocity of 5 fps is computed to be 0.71 pounds (see Appendix A). The forward inclination of the body that is necessary to balance this drag moment is only 0.25 degrees. This corresponds

to a shift of the body center of mass 0.18 inches forward of the "no-wind" equilibrium position. It is considered by the author, therefore, that the role of air resistance at normal walking speeds has been over-emphasized, and that it is negligible in comparison to other factors. (In any case, it is below the accuracy of the proposed force-measuring systems to be used in this study.)

Surface Reaction Forces. The walking surface must support the man and provide sufficient traction to enable him to develop a propulsive force. Thus, there is at all times in walking, a surface reaction force which is equal and opposite to the vector sum of the forces of weight, air resistance, and the inertial forces due to the acceleration of the body mass. This surface reaction force is resolved into a vertical component (R_v) that opposes weight and the up-and-down inertia forces, a lateral shear component (R_l) that opposes the side-to-side inertia forces, and a fore-and-aft shear component (R_s) that opposes air resistance and the fore-and-aft inertia forces of the body mass. The vertical component is defined as positive when it acts in the positive Z direction (upward). The lateral shear component is defined as positive when it acts in the Y direction (left). The fore-and-aft shear component is defined as positive when it acts to prevent the foot from sliding backward,

i.e., when the shear force tends to accelerate the body in the positive X direction (forward).

Typical magnitudes of the surface reaction forces during a complete walking cycle are graphed in Fig. 4 (Ref 6:Fig. 8-33). These curves represent the forces that act during the "steady state" portion of the walk. The curves for accelerative walking would probably have the same shape but different magnitudes. The forces are plotted on the ordinate as a function of the percentage of cycle as the abscissa. The cycle may be considered as "normalized" time. Walking at a step frequency of 95 steps per minute, the full cycle requires 1.26 seconds of time. The solid lines are drawn for the right foot, whereas the dotted lines denote the left foot.

The vertical force component has a double-peaked shape because of the vertical upward and downward accelerations of the body. The difference between the magnitude of the vertical force and the body weight is proportional to the vertical acceleration. As the heel strikes the ground the force rises quickly to a magnitude equal to or slightly greater than the body weight. The unlocking of the stance knee results in the dip in the curve. As the trunk of the body moves vertically over the stance leg, the knee flexes to prevent the body from vaulting. At the same time, the hip on the side of the swinging


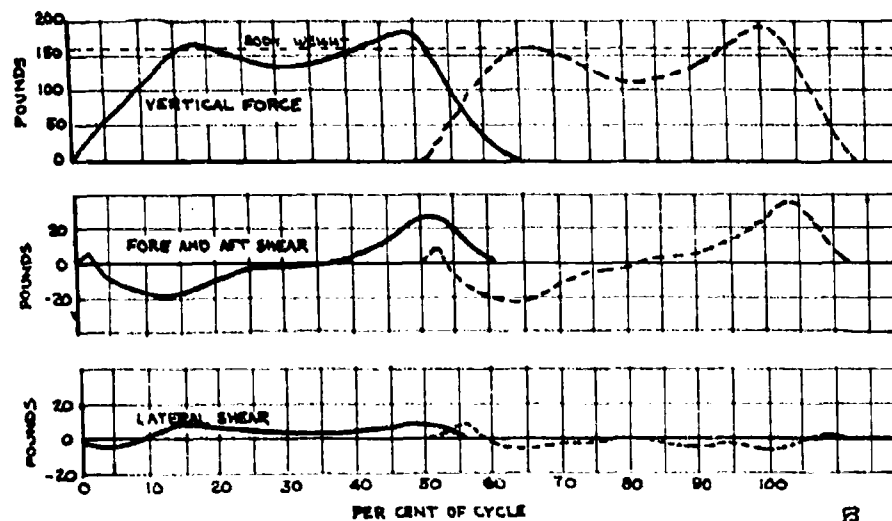


FIG. 4 SURFACE REACTION FORCES
DURING A WALKING CYCLE

(Ref 6:Fig. 8-33)



leg is lowered. The combination of these events enables the subject to move forward with a minimum raising of his center of mass, and therefore requires less work. As the leg prepares for the push-off phase, the knee again locks. Extension of the knee and ankle at this point imparts the forward and upward acceleration to the body. This causes the curve to again exceed the body weight.

The fore-and-aft shear curve has a sinusoidal shape. The variation in the force is due to the fact that upon heel strike the leg must first retard the forward motion of the body, and then a fraction of a second later, must provide the "push-off" or forward acceleration necessary to continue the motion. The small positive "blip" at the start of the curve implies that near the end of the swing the leg has decelerated to zero and the foot is actually moving aft at the instant of heel strike.


The lateral shear force is of relatively small magnitude but is important to provide lateral stability in walking. As the body weight is shifted from one leg to the other, the lateral force must be directed inward with respect to the body to prevent the subject from falling sideways. The force is thus positive for the right foot, and negative for the left foot, respectively, at all times after the foot is flat on the ground.


Internal Forces. Although the internal forces of the body need not be considered in a motion analysis of the body considered as a free body, some discussion will greatly facilitate the reader's understanding of the human walk. The propelling forces for walking must be developed internally. The muscles cannot directly translate the whole body because they have no point of attachment outside of the body. The muscles do, however, exert moments about the joints which may act either to prevent or to cause relative rotation between the segments on either side of the joint. The combination of rotations of all the various body segments produces the net result of forward motion (Ref 1:3).


Muscle Groups. The muscles that are of primary interest in the study of walking are those of the lower extremity. These muscles have been classified by researchers at the University of California into the following eight groups:

- 1) Pre-Tibial group,
- 2) Calf group,
- 3) Quadriceps group,
- 4) Hamstring group,
- 5) Abductor group,
- 6) Adductor group,
- 7) Gluteus Maximus group, and
- 8) Erector Spinae group.

The anatomical locations of these muscle groups are shown in Fig. 5 and their respective functions are schematically diagramed in Fig. 6 and Fig. 7.

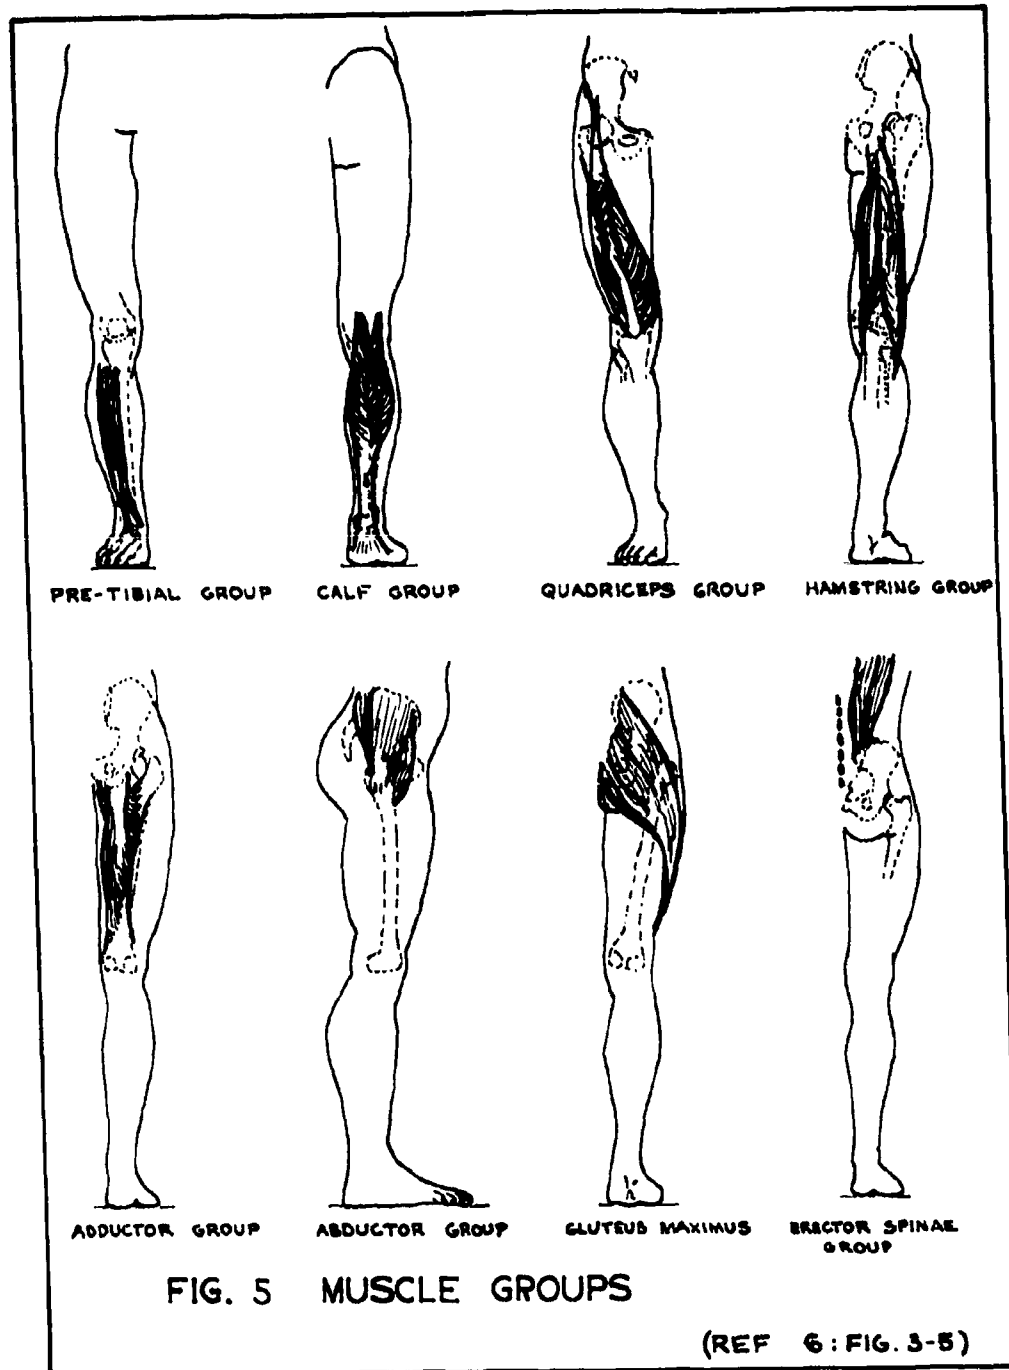

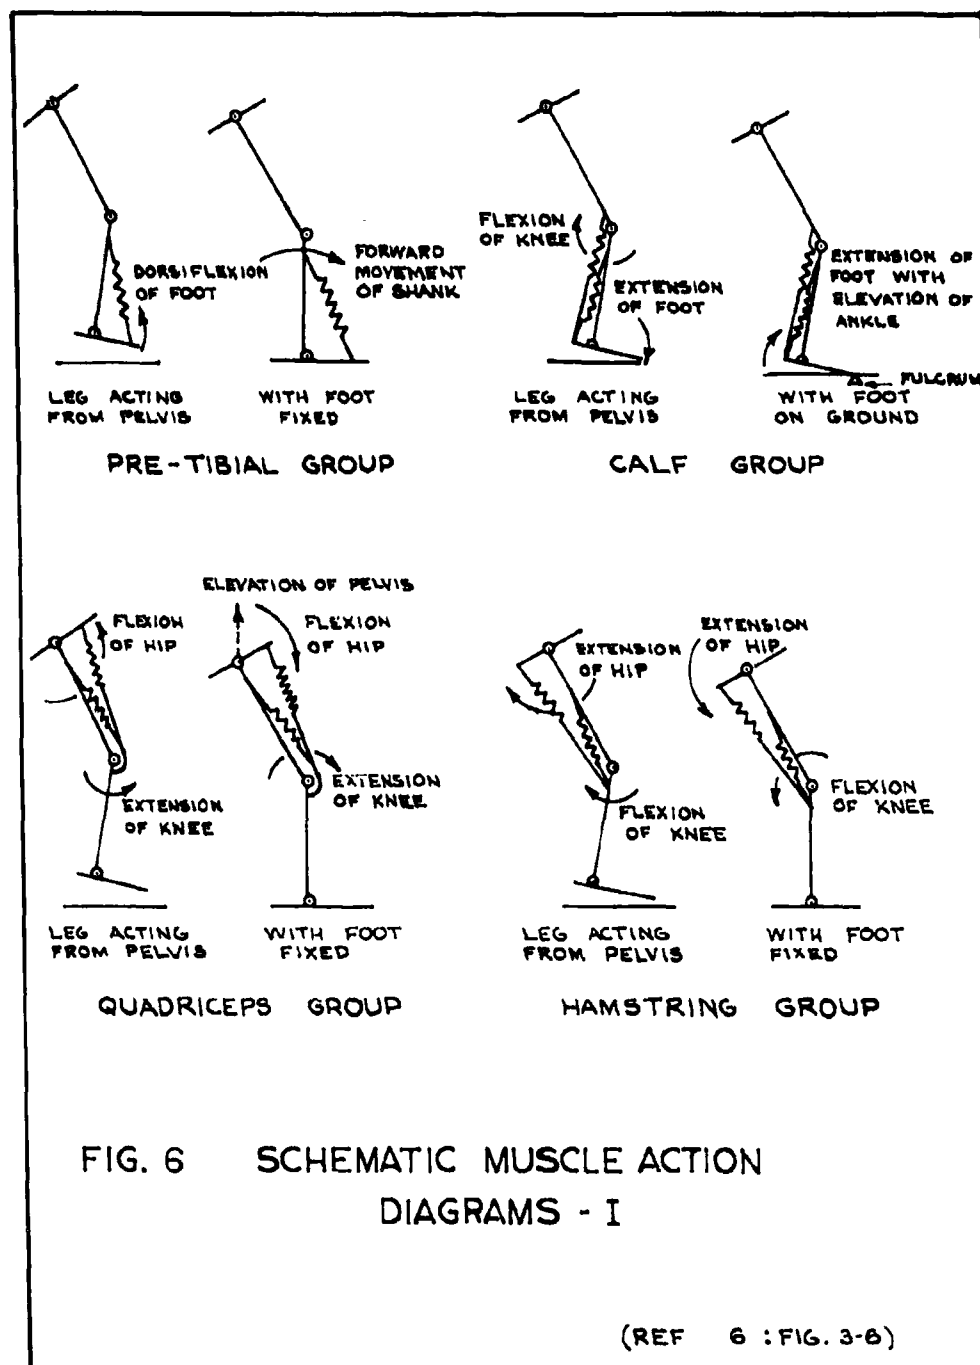

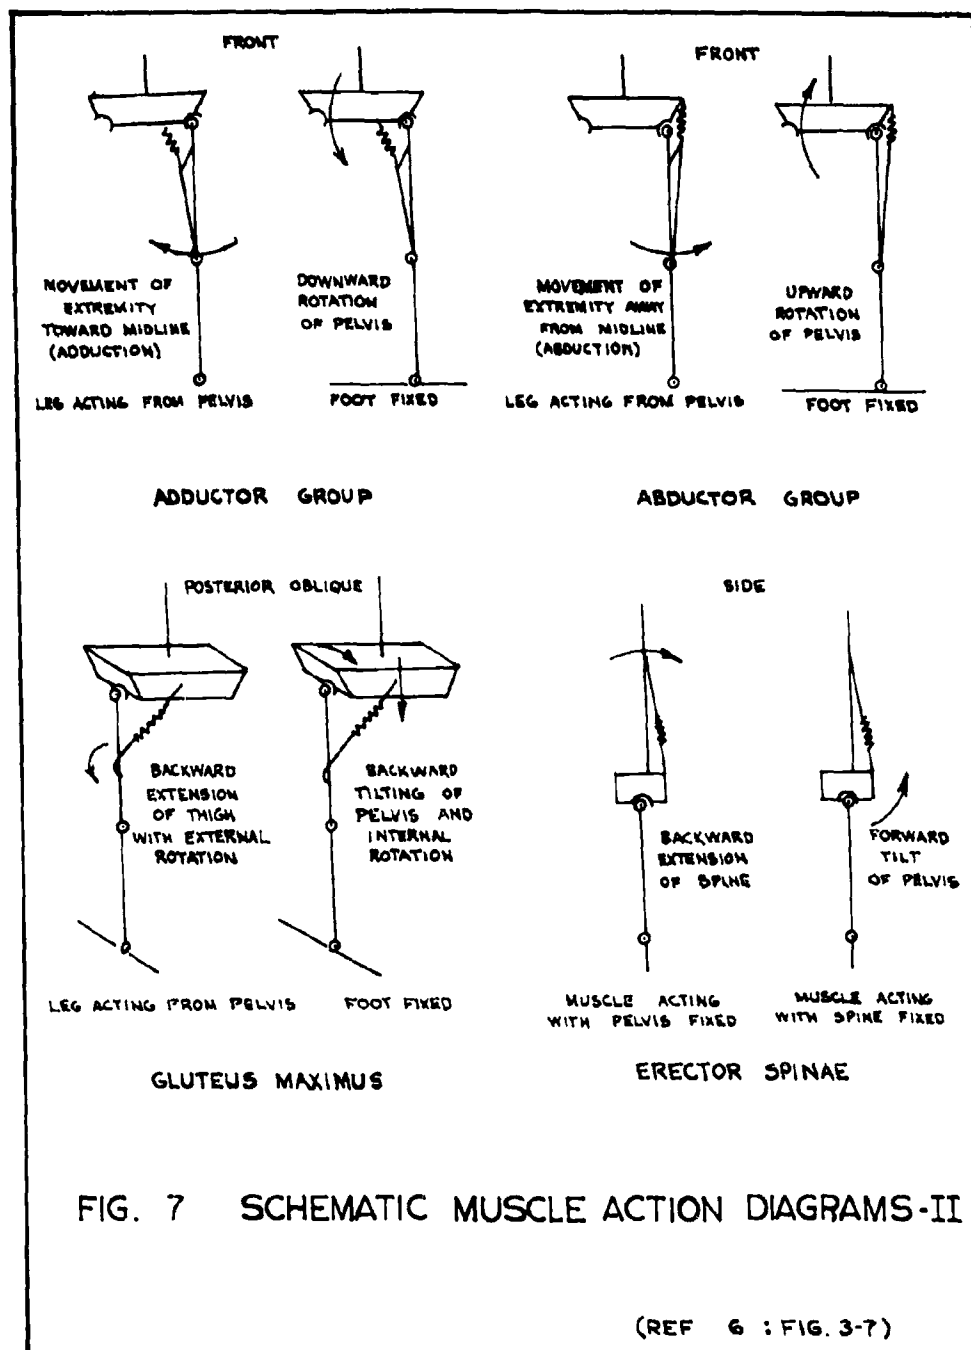

The phasic action of the eight muscle groups was analyzed by use of electromyographic techniques. Electromyography reveals the precise phase relationship of muscle action. However, it gives only suggestive or qualitative information concerning the forces generated within the muscles. The action potentials of the muscles are picked up by skin electrodes, are amplified by a modified electroencephalograph, and are recorded by an oscillograph. Thus, a record is obtained showing which muscles are acting during each phase of the walking cycle.

Muscle Functions. The functions of the major muscle groups were qualitatively deduced from the electromyograph tracings to be:

- 1) Pre-Tibial Group: The maximum activity of the pre-tibial group occurs very shortly after heel strike when the muscles act to lower the foot to the surface without slapping. Despite their contraction at heel strike, the muscles are being lengthened as they resist the moment caused by the body weight acting about the fulcrum at the heel. The resistance of the pre-tibial group initiates the deceleration of the leg and body following heel strike. (The quadriceps group completes this deceleration after the foot is flat on the surface.) The secondary function of the pre-tibial group is to dorsiflex the foot at toe-off to

provide maximum clearance between the toe and the walking surface during the swing phase. This action also rotates the foot to the optimum angle for the impending heel strike (Ref 6:3-19).

2) Calf Group: The calf group muscles act only during the stance phase and perform three functions. First, as the body weight passes forward of the ankle after mid-stance, the calf group resists ankle flexion and thereby causes the heel to come off the floor. This moves the center of pressure of the floor reaction forward from the ankle to the ball of the foot. The second and most significant function of the calf group is to extend the foot during the push-off phase, propelling first the entire body mass and then later the swinging leg. The third function of the calf group is to flex the knee of the stance leg to control the vertical height of the body as it rotates over the stance foot (Ref 6:3-23).

3) Quadriceps Group: The quadriceps group acts mainly during the stance phase. As the stance foot reaches the foot-flat position, the quadriceps group takes over control of the deceleration of the downward movement of the center of mass by permitting controlled flexion of the knee. The quadriceps muscles also contribute to the push-off force. By extension of the knee with the foot fixed, they accelerate the body in an upward and forward direction. At

faster walking speeds, the quadriceps act to retard and reverse the backward oscillation of the leg at the hip, resulting in forward acceleration of the leg for its swing-through activity (Ref 6:3-26).

4) Hamstring Group: During normal walking, the hamstring group acts during the swing phase to terminate the forward velocity of the swinging leg and to plant the heel to the surface. As the decelerative force of heel strike is transmitted up the leg, the hamstrings act to oppose the gravitational and inertial moments of the upper torso that are tending to flex the hip forward. At faster walking speeds, the hamstrings act during the swing phase to shorten the swinging leg by knee flexion (Ref 6:3-29).

5) Abductor Group: (Abduction is the act of moving an extremity laterally away from the midline of the body.) The abductor group acts during the stance phase to prevent the downward list of the swinging-leg side of the pelvis as the stance leg assumes the full weight of the body. The abductor group also limits the side-to-side oscillation of the body center of mass by opposing and limiting adduction (Ref 6:3-30).

6) Adductor Group: (Adduction is the act of moving an extremity laterally toward the midline of the body.) The adductor group acts primarily during the early stance phase. During the

period of double support, the combination of the forward leg in the heel-strike phase and the aft leg in the push-off phase develops a "scissors" torque on the pelvis. The adductor muscles resist this torque and thereby minimize the horizontal rotation of the hips. During late stance, the adductors rotate the femur outward (toe out) in preparation for the swing. Because of their location across the hip joint, the adductors aid other muscle groups in controlling both extension and flexion of the hip. The adductor muscles, in combination with gravitational forces, also control inward motion of the leg and hip in the frontal plane (Ref 6:3-33).

7) Gluteus Maximus: The gluteus maximus is a hip extensor muscle that may act at any time it is needed to resist forward rotation of the hip. Its primary activity occurs at heel strike when, like the hamstrings, it prevents the hips from rotating forward. It also resists the horizontal rotation of the pelvis about the stance leg during the push-off phase (Ref 6:3-35).

8) Erector Spinae Group: The erector spinae group acts throughout the entire walking cycle, but its peak activity occurs during heel strike of either foot. At this time it resists the gravitational and inertial moments that tend to rotate the upper torso forward about the pelvis. In addition, the erector spinae also balances the upper torso on the pelvis as the body sways from side to side in the frontal plane (Ref 6:3-35).

Displacements During the Walking Cycle

The displacements of the body during the walking cycle are the result of the complex motion of the parts of the body in three planes. A complete description of the displacements of the various segments of the body is beyond the scope of this report. However, an examination of the displacement of the body's center of mass will provide a basis from which to investigate other specific characteristics of the walking gait.

In level walking, the center of mass of the body describes a smooth regular sinusoidal curve in the plane of progression. The curve peaks twice during each cycle as the body passes successively in a double step over first the right leg and then the left. The total vertical displacement in adult males is about one and eight-tenths inches; the high points occur at the middle of the swing phases (25 and 75 per cent of cycle) and the low points occur during the periods of double support (50 and 100 per cent of cycle) (Ref 15:545).

A person is slightly shorter when he is walking than when he is standing. That is, if a person were to walk through a tunnel of a height exactly equal to his standing height, he would not bump his head because he would have nearly one-half inch of clearance (Ref 15:545).

The center of mass is also displaced laterally in the transverse (horizontal) plane. Relative to the plane of progression, the center of mass describes a sinusoidal curve, the peaks of which alternately pass to the left and right in association with the support of the weight-bearing leg. The magnitude of the displacement in normal level walking is approximately one and three-quarters inches from peak to peak.

If the vertical and horizontal displacements of the center of mass were combined and projected onto the frontal plane, they would describe an almost perfect figure of eight, occupying approximately a two-inch square, because the vertical and horizontal deviations are almost equal (Ref 15:545).

IV. A Proposal for a Force Measuring Walkway

Introduction

Walking behavior may be studied by the use of either a force analysis or a motion analysis. Knowledge of the relationship between the forces acting and the resulting body movements is fundamental for a general understanding of locomotion. Each may be determined from the other by analytical methods if it is assumed that the physical characteristics of the segments of the body such as mass distribution, length, and the moments of inertia are sufficiently well-known. However, the labor involved and the inaccuracies due to the assumptions and excessive calculation usually preclude such a study (Refs 2:32, 3:1214). The choice of a particular method is dictated by such factors as the simplicity of recording, ease of reduction of the data, and the accuracy of the results.

Previous studies of low-gravity walking have established that the lower limit of gravity at which man can still walk unaided is approximately two-tenths normal gravity (Ref 10:19). A motion analysis will confirm the subject's poor performance, but it will fail to explain why this is so. The acceleration of gravity acts on the body mass to produce one of the major forces of locomotion. It is only logical, then,

that an analysis of walking in which gravity is a controlled variable can be made most directly by use of a force method.

The primary problem in a force analysis program is to measure the magnitude and direction of the forces between the feet and the walkway surface. Two methods of instrumentation, force discs and force plates, have been used before in the analysis of walking behavior. Force discs have several disadvantages. Because a force disc measures pressure and not force, the resulting pressure must be multiplied by the area of the foot in contact with the walking surface to obtain the force. However, the foot contact area is continually changing during the walking phases. The second disadvantage of the force disc is that the direction of the resulting force is unknown.

The force plate, in contrast, has the advantage that the directions of the surface reaction forces are measured directly. A force plate can be used with any type of footwear, and its surface can be coated with a material of any desired coefficient of friction.

Structural Design

In accordance with these basic characteristics, the principles of a force plate were extended in scale toward the design of a force measuring walkway. The walkway consists of two parallel platforms, each one foot by twelve feet, that are mounted on cantilever beams

which are strain gaged to measure independently for each foot the vertical and fore-and-aft shear surface reaction components of a walking subject. The length of the platform permits a continuous-time oscillograph recording of the respective forces during several consecutive walking steps. A sketch of the proposed walkway is shown in Fig. 8.

A complete description of the proposed walkway is beyond the scope of this chapter. However, certain design factors were deemed significant and will be stated to justify the proposed configuration. The basic requirements of the force-measuring walkway were that

1. It must support the man at gravity levels between zero-g and normal gravity.
2. It must measure independently for each foot the two components of the reaction forces in the plane of progression.
3. It must be of a size and weight compatible with the KC-135 airplane and the desired test objectives.

By use of structural metals, the requirement for support was found to be less stringent than the requirements for rigidity of the overall walkway and the sensitivity of the cantilever beams. The

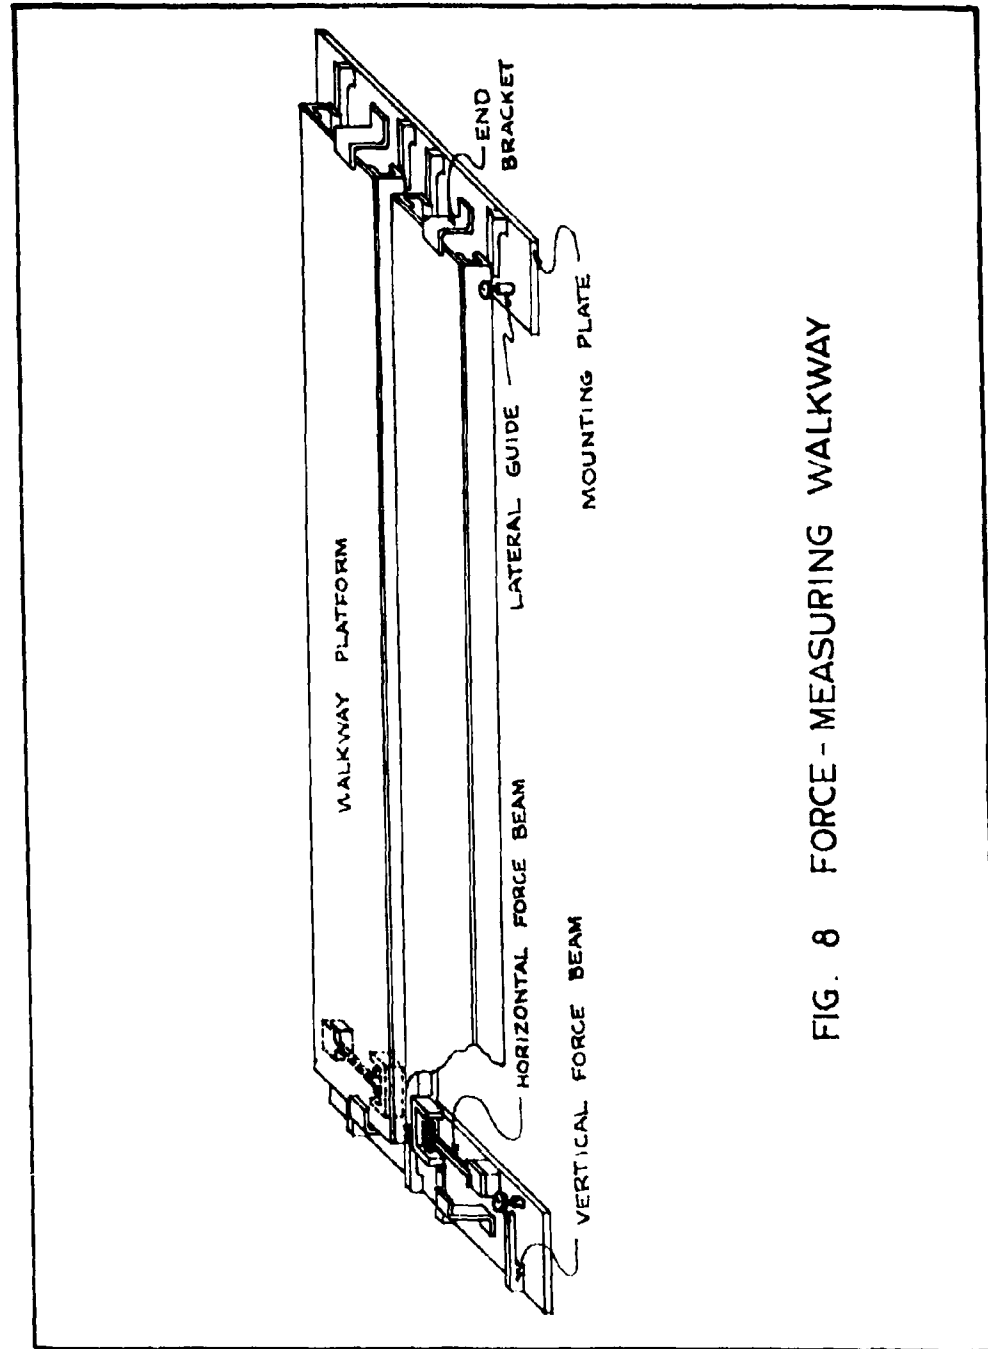


FIG. 8 FORCE-MEASURING WALKWAY

KC-135 floor-to-ceiling height is 78.5 inches. It was necessary to limit the height of the assembled walkway to approximately six inches to allow head clearance for the walking subject. To preclude a "springboard" action of the walk on the subject it was necessary to limit the maximum mid-span deflection of the walking platform to less than one-half inch. This deflection was selected arbitrarily as a gross approximation for the conditions that are stated in Appendix C, namely, that the subject stands at mid-span and is supported by only one of the two channels. The deflections and the natural frequency of the assembled platform should be further investigated.

The structural components of the force-measuring walkway consist of two walkway platforms, eight vertical force cantilever beams, two horizontal force cantilever beams, eight lateral guides, four end brackets, and two mounting plates. The more important design features of each component follow.

Walkway Platforms. Several construction materials were considered for the structural members of the walkway platforms. Steel was found to be too heavy, and wood could not support the load without excessive deflections. It was decided to construct the load-carrying members of the platform with standard aluminum channels,

two per platform. Structural properties of 3-inch, 4-inch, and 5-inch channels in lengths between 8 feet and 15 feet were investigated. It was determined that a 12-foot length of 4-inch channel would limit the deflection to 0.375 inches for the critical condition of a 200-pound man standing at mid-span of only one beam (see Appendix C for sample calculations).

Commercially available 3/16-inch-thick aluminum abrasive tread plate was selected as the top plate, or walkway surface. The channels are spaced by 3/16-inch aluminum ribs at six-inch intervals along the length of the platform. Besides providing torsional rigidity and spacing, the ribs help support the walkway surface between the channels.

An assembled walkway platform is twelve feet long, one foot wide, and 4-3/16 inches high, and consists of two aluminum channels, an abrasive tread plate, and twenty-four ribs. Type 6061-T6 aluminum was specified for all platform components to permit fabrication by welding.

Cantilever Beams. The strain-gaged cantilever beams were designed to conform to accepted operating practice. Aluminum alloy is used instead of steel as the structural material because it has a greater stiffness for a given surface strain (Ref 12:242). That is, the

aluminum beam will deflect less for a given load than a steel beam, provided that both are designed to yield the same maximum stress due to bending. Grade 75ST aluminum alloy was selected instead of 24ST alloy because its higher yield stress permits higher values of strain.

It is necessary that the beams retain definite end conditions. Therefore, anti-friction bearings were used at the free ends as an approximation of the theoretical knife edge (see Fig. 9). The fixed ends incorporate a drastic change in cross-sectional area between the point of anchorage and the calibrated portion of the beam to prevent "corner stresses" from being transmitted to the strain gages.

The beams were designed for a strain level of 2000 microinches per inch at the strain gage locations for a full-scale load. In the aluminum beams this corresponds to a stress (due to bending) of 20,000 pounds per square inch on the face of the beam at the locations of the strain gages. This value permits a high sensitivity, yet allows a sufficient margin of safety between the working stress and the yield stress of the alloy. This design condition resulted in a unit strain (strain per pound of load) of 8.5 microinches per inch for the vertical force cantilever beams, and a unit strain of 37.6 microinches per inch for the horizontal force beams. The deflection of the end of the

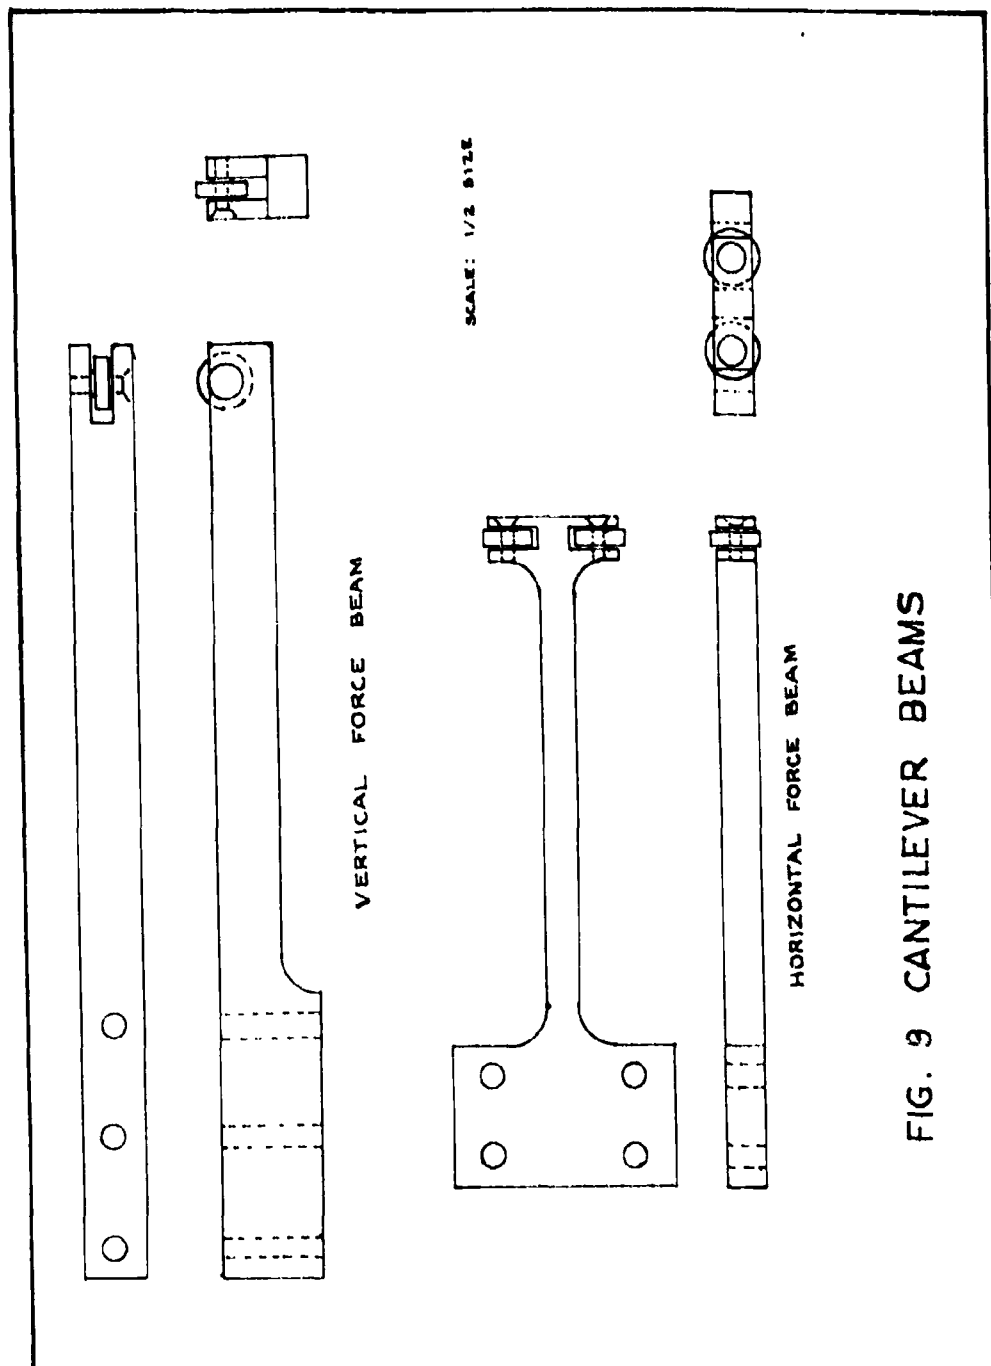


FIG. 9 CANTILEVER BEAMS

vertical force beam for the critical condition of the subject's weight being supported by only one beam was computed to be 0.073 inches. The deflection of the horizontal force beam due to the assumed maximum load of 50 pounds was 0.045 inches.

The vertical force cantilever beams support the corners of the walkway platforms and provide the means of sensing the vertical component of the walking forces. The horizontal force cantilever beam provides the means of sensing the fore-and-aft shear component of the walking force and also restricts the movement of the walkway platform in the X-direction.

Lateral Guides. The lateral guides restrict the lateral movement of the walkway platforms and yet permit small movements in the vertical and fore-and-aft direction, to allow for the minute deflections of the cantilever beams. This was accomplished by mounting self-aligning ball bearings in the horizontal plane with their rolling surfaces in contact with the sides of the walkway channels. The self-aligning bearings roll in the fore-and-aft direction and swivel in the vertical direction. Thus, the required two degrees of freedom are preserved with a minimum of friction.

End Brackets. The four end brackets are provided as a safety measure to prevent lofting of the platforms in case the airplane inadvertently enters a zero-g or a slightly negative-g maneuver. The end

brackets should not contact the walkway platforms during normal ground tests or during normal flight maneuvers.

Mounting Plates. The two mounting plates function as a base to which all the other parts of the force-measuring walkway except the walkway platforms are attached. The mounting plates were designed to contain all the active components of the system to facilitate quick assembly of the system in the aircraft and to increase maintainability. Should circuit calibration or maintenance be required, it is only necessary that the mounting plates with their integrally attached components, and not the entire walkway system, be taken into the shop.

Electrical Instrumentation


The scope of the electrical instrumentation design is limited to the selection of the strain gages and the basic bridge circuits. The sensitivity of the circuits was computed as a basis from which to select the overall system components. The completion of the circuit, including the selection of the additional components and the mounting and calibration of the strain gages, is the responsibility of the Data Systems Division, Directorate of Test Data, Deputy for Flight Test, Wright-Patterson AFB, Ohio, whose personnel fabricate or approve all instrumentation that is placed in the KC-135 aircraft.

The electrical instrumentation for the force-measuring walkway consists of four independent measuring circuits; for each platform there is a vertical force circuit and a horizontal force (fore-and-aft shear) circuit. The outputs of these four circuits will be recorded on four channels of the 48-channel oscillograph that is permanently mounted in the airplane. Besides recording test data, the oscillograph is operated during all flights to record the accelerations of the aircraft about three axes.


Vertical Force Circuit. A vertical force-measuring circuit uses eight SR-4 strain gages. Two gages are mounted on each of the four vertical force cantilever beams; one gage is mounted on the upper face, and the other gage is mounted on the lower face. The eight gages are connected to form a four-active-arm, parallel Wheatstone bridge circuit. That is, two gages are connected in parallel in each arm. This arrangement gives an output that is proportional to the total vertical force on the platform, regardless of the location of the force. This is shown in Fig. 10. A resistance divider is included in the bridge circuit to balance the variations in the nominal gage resistances and their associated wiring.

The output voltage of the circuit for a unit vertical load on the platform was computed to be (see Appendix C for sample calculations)

$$E_0 = 90 \text{ microvolts per pound.}$$

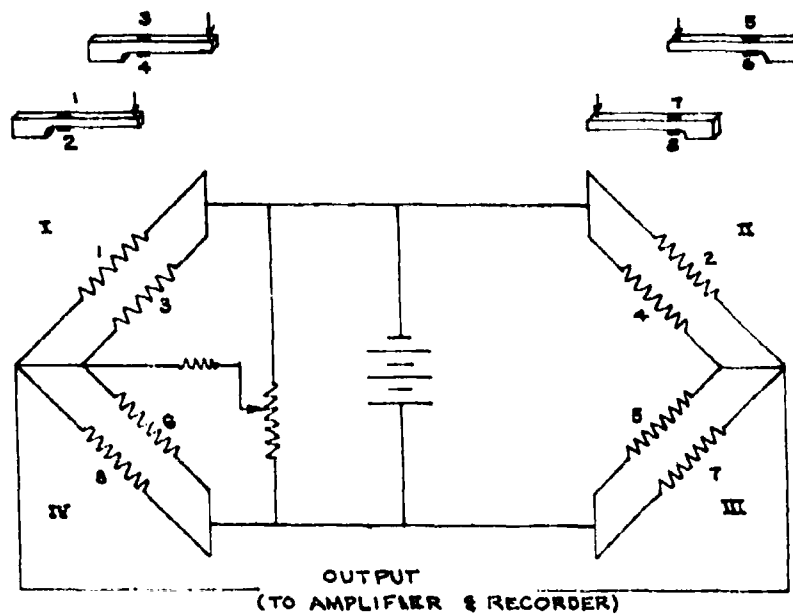

VERTICAL FORCE CIRCUIT



HORIZONTAL FORCE CIRCUIT

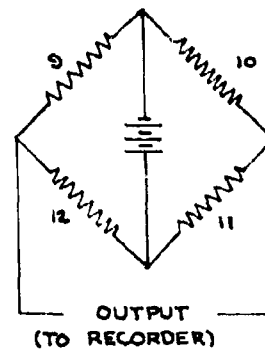


FIG. 10 STRAIN GAGE CIRCUITS

This low output will probably require amplification before it can be recorded.

Horizontal Force Circuit. The horizontal force-measuring circuit uses four SR-4 strain gages which are connected to form a four-active-arm Wheatstone bridge circuit. Two of the gages are mounted side by side on the forward face of the horizontal cantilever beam, and the other two are mounted on the aft face. It was decided to mount all four gages on the one beam to increase sensitivity and to prevent the occurrence of passive, or "dummy" branches.

The output voltage of the horizontal force-measuring circuit was computed to be

$$E_0 = 1.58 \text{ millivolts per pound.}$$

This output is sufficiently great to permit direct recording.

Data Analysis

The velocity and acceleration of the walking subject may be obtained from the force-measuring walkway data by the use of Newton's second law

$$F = Ma \tag{1}$$

which, when expressed as the principle of the conservation of linear momentum, becomes

$$F \Delta t = M \Delta V \tag{2}$$

where

F = force, lb_f

M = mass, $\text{lb}_f\text{-sec}^2/\text{ft}$ (slug)

Δt = interval of time, sec

ΔV = change in velocity, ft/sec

$F \Delta t$ = impulse, $\text{lb}_f\text{-sec}$

The area under the fore-and-aft shear force curve may be obtained by graphical integration or by the use of planimeter techniques. The algebraic sum of this area at any time is equal to the net impulse applied to the walking subject during the same time interval. Therefore, the velocity of the man at any time may be found by dividing the net impulse by the mass of the subject (Ref 19:8-17). Differentiation of the velocity would yield the acceleration at any desired time. The accuracy of the velocity could be checked by performing a concurrent motion analysis (see Chapter V).

A diagram of the forces which act during one walking cycle is shown in Fig. 4 (Chapter III). The cycle was taken from the "steady-state" portion of the walk. Thus, the net area under the fore-and-aft shear force curve is zero, which correctly indicates that there was no change in velocity. No data are available concerning the accelerative and decelerative portions of the walk, that is, during starting and stopping.

Assume that a 161-lb man accelerates to a walking speed of 4 fps during his first step, which takes one second. The area under the fore-and-aft shear curve, by Eq 2, must be

$$\begin{aligned} F \Delta t &= M \Delta V \\ &= \frac{161 (4)}{32.2} \\ &= 20 \text{ lb}_f \cdot \text{sec} \end{aligned} \quad (2)$$

The reverse procedure is used in the reduction of the force-measuring walkway data.

The magnitude of the fore-and-aft shear force is limited by the product of the vertical force and the coefficient of friction. That is

$$R_s \leq \mu R_v \quad (3)$$

where

μ = coefficient of friction between the man's feet and the walking surface

and it is understood that the magnitude of R_v is dependent upon the gravity level. If the gravity level is reduced, the magnitude of the vertical reaction force decreases. It is conceivable, then, that at some level of gravity the product of the vertical reaction force and the coefficient of friction will be insufficient to allow the man to develop the magnitude of the fore-and-aft shear force that is necessary to achieve his normal acceleration. He must therefore accelerate more

slowly, by applying the available fore-and-aft shear force over a longer period of time. This is only one of the many possible mechanisms that may degrade walking performance at low-gravity levels.

In conclusion, it is restated that the magnitudes of the vertical force and the fore-and-aft shear force could be recorded as a function of time by the use of the force-measuring walkway. It is the author's contention that establishing the relationship between these forces at various gravity levels is prerequisite to determining the dominant mechanism in the degradation of low-gravity walking performance.

(The force-measuring walkway was not completed in time for use in this investigation.)

V. Low-Gravity, Time-Displacement Walking Experiment

Purpose

The purpose of this experiment was to quantitatively evaluate the motion parameters of the human gait under partial gravity conditions. It was desired to determine the acceleration and velocity of the subject as an overall indication of man's capability under reduced-gravity levels. Other gait parameters, such as the number of steps per minute, the step length, the swinging time, and the swing-to-support ratio were desired to permit an objective comparison of the low-gravity gait with the normal gait. It was hoped that evaluation of these later parameters would help explain the changes in the velocities and accelerations, and possibly define some of the capability limits.

Scope

This experiment was an end-view motion picture analysis of man walking at various reduced-gravity conditions. In the absence of the force-measuring platform, no attempt was made to evaluate the surface reaction forces.

Procedures and Technique

Aircraft Laboratory. Experiments were conducted in the C-131 B "weightlessness" airplane. The aircraft may be flown in a parabolic trajectory to induce any constant vertical acceleration from zero to 2.5 g, or may also be flown in a "decay maneuver" to produce transient accelerations throughout the same range. Each parabola provides approximately 15 seconds at the desired gravity condition.

The cargo compartment of the aircraft provides a working volume 73 in. high (at the centerline), 96 in. wide (at the floor level), and 25 ft long. The walls of the cabin are padded to reduce the impact shock of free-floating subjects. The floor is covered with a 2-in.-thick layer of Ensolite material (a stiff foam rubber also used on the floor of boxing rings.) Floodlamps are recessed into the walls to provide uniform illumination for photography.

Instrumentation. A 20-ft distance scale was fabricated by taping 0.2-ft-wide strips of dark cloth tape over the white Ensolite floor. The lateral edges of the tape were cut to form a distinct pattern to facilitate reduction of the photographic data. This scale, or walkway, was canted across the cabin floor at a 20° angle from the aircraft centerline to permit better photographic coverage (see Fig. 11).



FIG. 11 FIXED CAMERA VIEW OF WALKWAY AND SUBJECT B

Two 16-mm (BIA-type Bell and Howell and Bolex) cameras operating at 32 frames per second were used to photograph all walking trials. The first camera was hand-held and was used to record a "close up" view of the positions of the subject's feet upon the walkway pattern. The other camera was fixed at waist level at the forward end of the aircraft to provide an overall view of body posture and motion.

Subjects. The two walking subjects were selected on the basis of availability. Both were experienced in the aircraft maneuver; the first subject has flown more than 3,500 trajectories, and the second subject has flown approximately 500 trajectories. (See Appendix B for physical data.)

Run Procedures. The subject stood with his toes at the zero mark of the distance scale during the 2.5-g entry into the maneuver. The test monitor signaled the attainment of the desired gravity condition by dropping his hand. Cameras were started. The subject walked forward the length of the walkway, pivot turned, and proceeded aft to the starting position. Subjects were instructed to walk comfortably at whatever speed seemed optimal for maintaining body control at the given gravity condition.

Test Sequence. Twelve runs comprised a test series. Two runs at 1.0 g were first made while the aircraft was flying straight

and level. Then, two runs were made successively at the gravity levels of 0.7 g, 0.4 g, 0.25 g, 0.17 g (lunar gravity), and 0.10 g. Upon completion, the subject repeated the series in reverse order. Thus, the subject performed a sequence of runs in both descending and ascending order of gravity conditions. The first series was completed July 1. A complete set, which consisted of a descending and ascending series, was completed by each subject on July 2. Including reruns of aborted runs, 62 runs were made.

Data

All data was recorded on motion picture film. Film identification numbers and reduced data are contained in Appendix B.

Data Reduction

Run Selection. Film from the five series was projected to determine the best runs for data reduction. All film was cataloged, noting any adverse conditions present that might affect the results. The best series for each subject was selected on the basis of complete film coverage and lack of adverse aircraft accelerations. Both series were run in the ascending order of gravity conditions. Film from both cameras was again reviewed to select the better run at each gravity level for each subject. Adverse aircraft acceleration

and turbulence affected some runs. Contacts by the subject against the ceiling or walls of the aircraft invalidated other runs. If no adverse factors were noticed for either run at a given gravity condition, final selection was dictated by which run had the more complete coverage of the start, turn, and stop.

Data Log. The selected runs were projected frame by frame in a 16-mm projector equipped with a frame counter and an optional manual driving mechanism. Positions of the feet on the walkway surface were logged opposite the number of the frame in which the event occurred. Heel-strike (HS) was defined as the first frame in which the heel touched the walkway surface. Toe-off (TO) was defined as the last frame in which the toe remained in contact with the surface. The feet-together position (FT) was selected as the toe position of the stance foot as the swinging foot comes forward to pass it. Because of the forward inclination of the walking man, it is believed that the feet-together position represents adequately the projection of the body center of gravity on the walking surface. The feet-together position is therefore used as the X position of the moving subject.

Calculation of Parameters. It was possible to calculate the magnitudes of the various motion parameters from the position-versus-frame number information that was logged for each run. Only basic

calculation techniques are stated here. Sample calculations may be found in Appendix B.

Time. At a constant camera speed of 32 frames per second, the time difference between frames is 0.03125 sec. The time in seconds between successive events is obtained by multiplying the difference in frames by the factor 0.03125; i.e.,

$$t \text{ (seconds)} = 0.03125 \quad Fr \quad (4)$$

Velocity. The forward velocity of the body mass can be obtained either by dividing the distance traveled between two or more feet-together positions (step relationships) by the time interval, or else by dividing the distance traveled during one or more strides by either or both feet by the respective time intervals (stride relationships). Both methods have comparable accuracy. However, if only velocity and acceleration are to be determined, the simplicity of the step method required far less reduction time.

Acceleration. The forward acceleration of the body mass can theoretically be derived by differentiating the velocity. It was thought that the acceleration could be obtained from the experimental data by dividing the changes in velocity during the first few steps by the respective time intervals. However, it was found that, with the exception of the lower gravity levels, the body accelerates

to walking velocity in the first step. Unfortunately, inadequate film coverage of the first walking step of most runs precluded this calculation. Therefore, forward acceleration could only be inferred from the displacement-time graphs.

Step Frequency. As in the case of the velocity calculations, the step frequency (N, steps/minute) can be derived from either the step relationships or the stride relationships. The step frequency was reduced from the step relationships because the method was more direct.

Step Length. The step length (S) is equal to the distance between consecutive feet-together positions. It may also be obtained by dividing the stride length (S_{st}) in half, i. e.,

$$S = \frac{S_{st}}{2} \quad (5)$$

Phase Times and Ratios. The relative time spent during the swing and support phases of a walking cycle can be obtained only from the stride relationships. The swinging time (t_{sw}) is the time between toe-off and heel-strike of the same foot. The support time (t_{sup}) is the time between heel-strike and toe-off. The time for one stride or walking cycle (t_{st}) is equal to the sum of the swinging time and the support time; i. e.,

$$t_{st} = t_{sw} + t_{sup} \quad (6)$$

The ratio of any two phasic activities is obtained by dividing the time spent in one phase by the time spent in the other phase. The swing-to-support ratio is a primary parameter for the comparison of walking gaits.

Results

The magnitudes of the motion parameters that were determined from the low-gravity walking experiment are illustrated in Figs. 12 to 17. (See Table B-II for the tabulated values.) The respective curves are plotted separately for each subject. It was considered that averaging the data from only two subjects would only mask the fundamental relationships.

The distance versus time relationships at each gravity level are shown in Fig. 12 and Fig. 13. The distance traveled while walking aft was added to the distance traveled while walking forward to present a continuous curve. (With respect to the body axis system, all walking was forward.) The first, last, and turning steps at the ends of the walkway are shown in dashed lines. An overall distance and time scale was intentionally omitted because it was necessary to space the curves to avoid the confusion of overlapping data points.

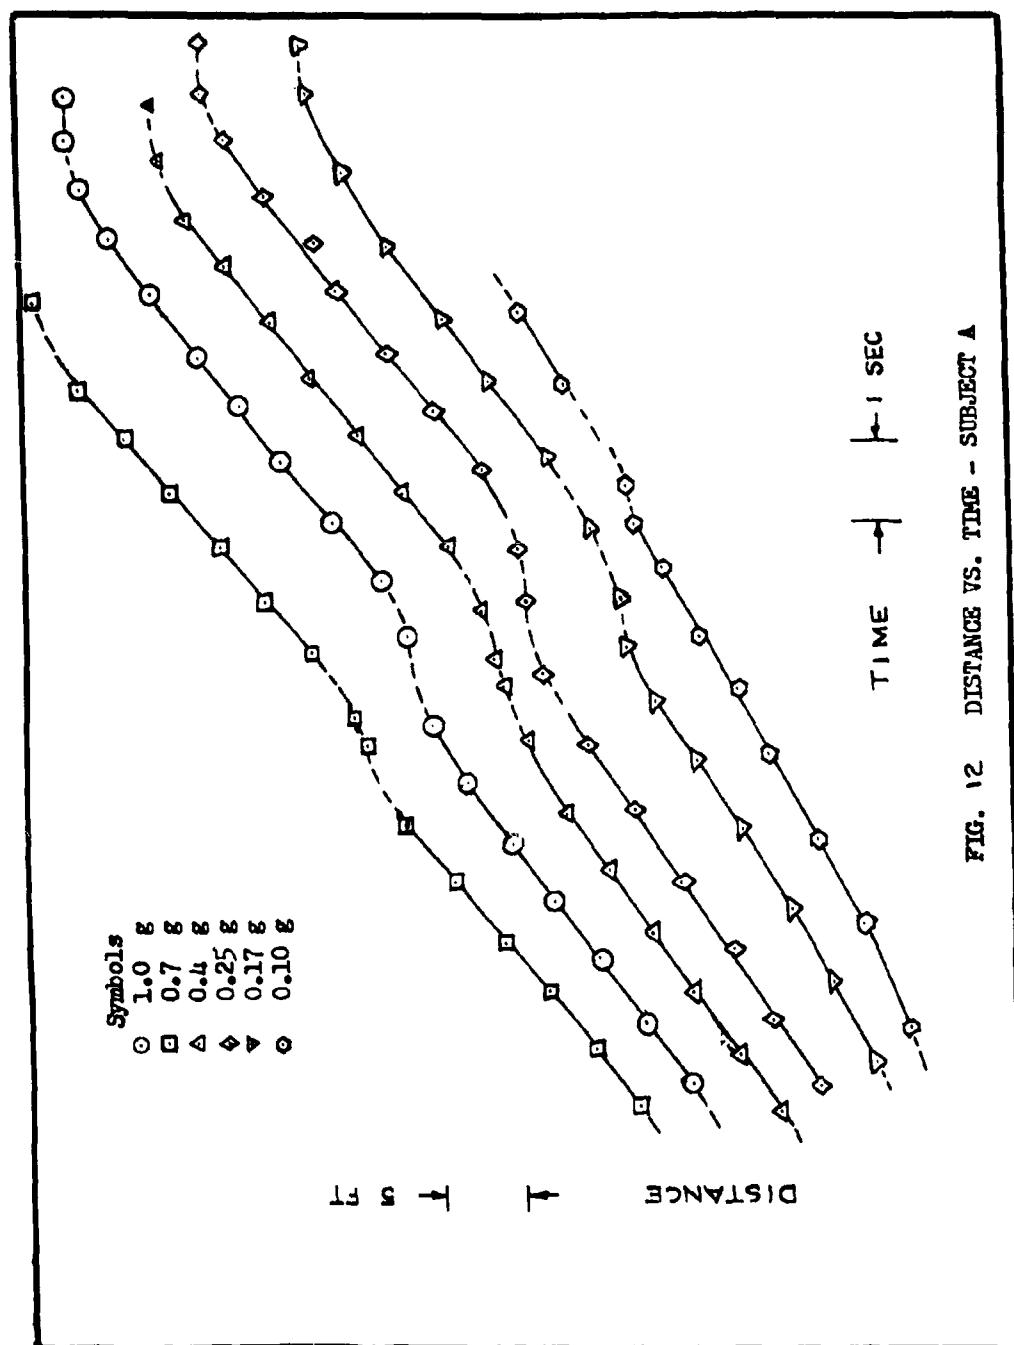


FIG. 12 DISTANCE VS. TIME - SUBJECT A


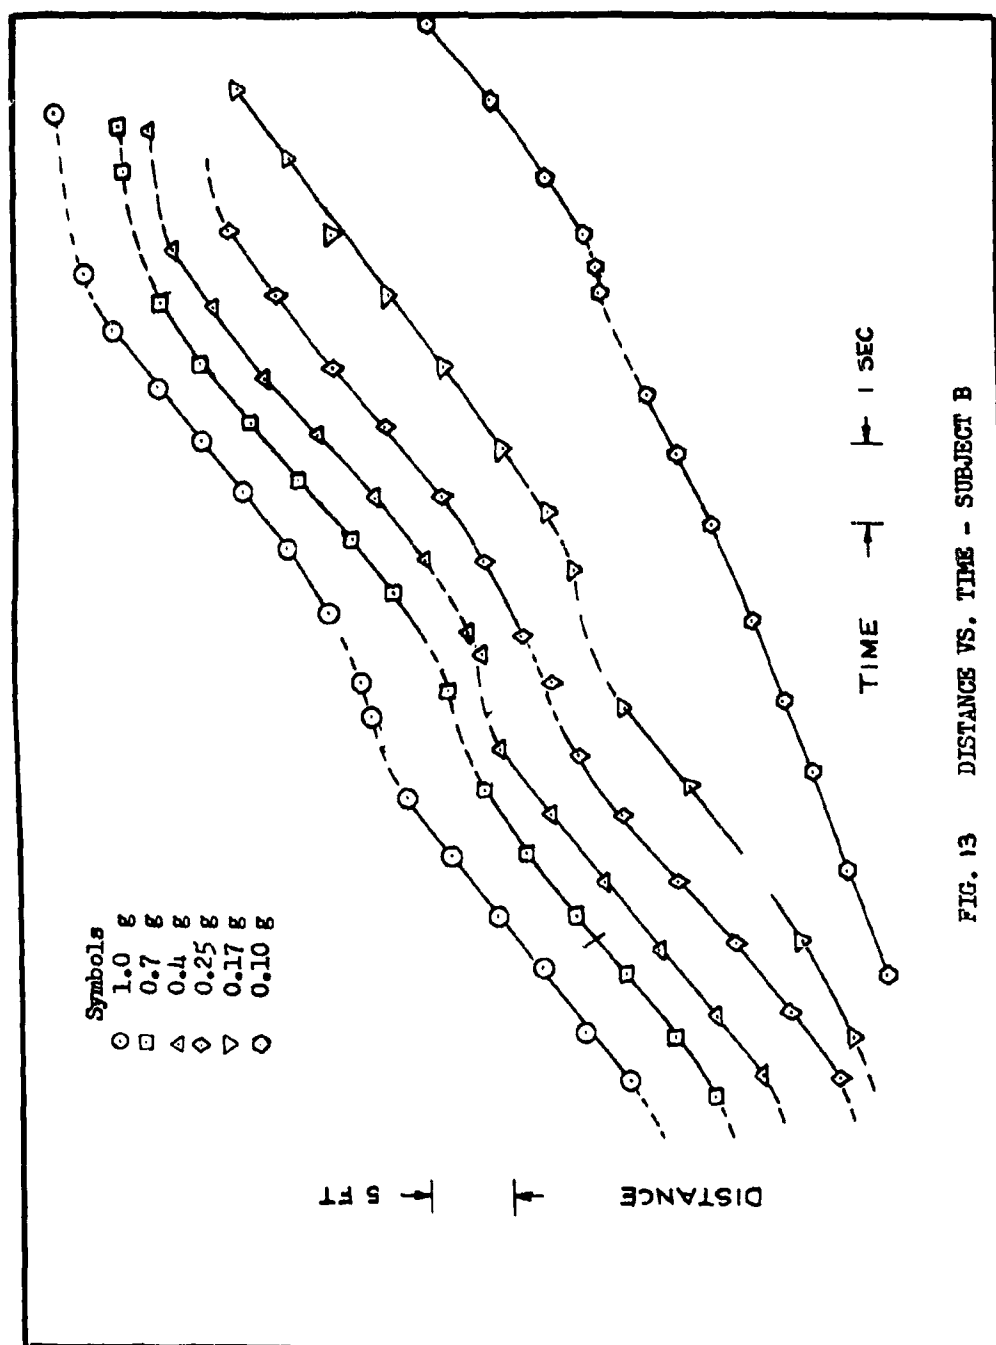


FIG. 13 DISTANCE VS. TIME - SUBJECT B

Only gross trends may be noticed from the distance versus time curves. The similarity of the curves tends to mask the changes in the various motion parameters. The values of the individual motion parameters may be shown more clearly by plotting them separately as a function of the gravity level. However, the similarity of the slopes of the curves indicates that the velocity varied little among the upper gravity levels. The linearity of the curves after the first step implies that the walking velocity is attained quickly and remains almost constant throughout the walk in the given direction. It is only at the lower gravity levels (as indicated by the slightly increasing slopes of the curves at the 0.17 and 0.10 gravity levels) that man continues to accelerate after his first walking step.

The step relationships of low-gravity walking are illustrated in Fig. 14. Both subjects walked with a velocity of 3.8 fps at the 1.0-g gravity level. Although the velocity was not a controlled variable, the subjects maintained a velocity within 10 per cent of the normal value throughout the descending range of gravity conditions to less than 0.25 g and 0.17 g, respectively. Velocity is proportional to the product of the step length and the step frequency. The factors contributing to the almost constant velocities varied between the subjects. It can be seen from the step length and the step frequency plots that

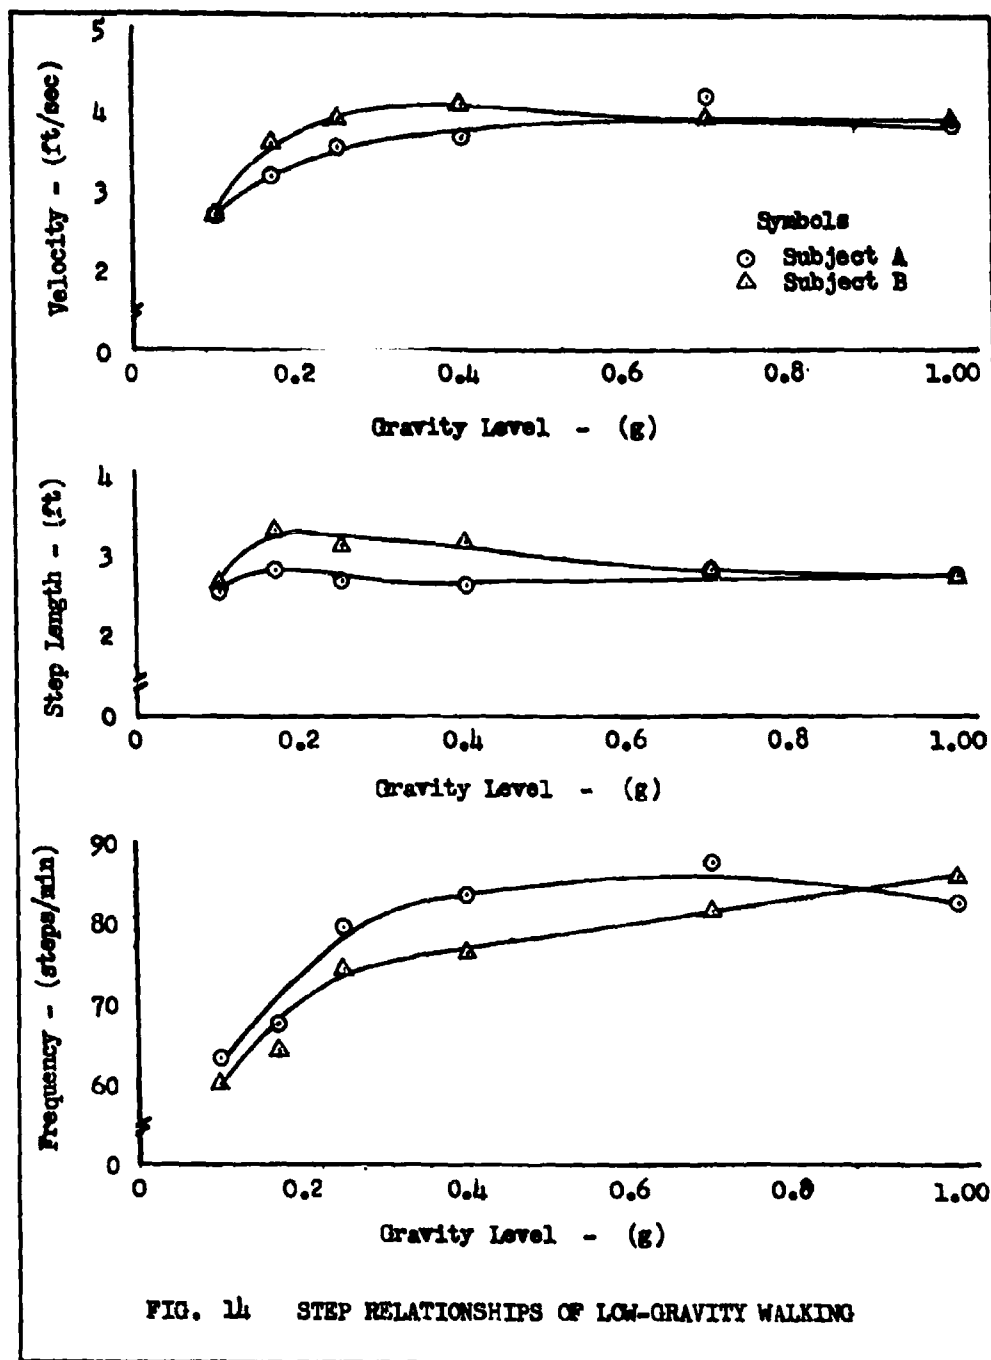


Subject A minimized his velocity decrement by maintaining an almost constant step length and by increasing his step frequency. Subject B, however, increased his step length to offset the velocity decrease that would result from his decreased step frequency.

Although the curves are drawn smooth, the data points at the lower two gravity levels indicate that a discontinuity exists somewhere in the region of 0.2 g. This is most clearly shown on the frequency plot.

The times required for the respective phases of the walk are illustrated in Fig. 15. It may be seen that the support time for each subject remains essentially constant at gravity levels above 0.25 g although there is a fourteen per cent spread between the respective subjects. The variation in the stride time is chiefly due to the variation in the swing time. The influence of this spread is also evident in the stride time curves; however, the slope of the stride time curve is dominated by the influence of the swinging time.

The most consistent effect of the reduced-gravity conditions upon the motion parameters is evident in the swinging time plot. Despite fluctuations in the velocity, step length, and step frequency, the swinging time (with only one exception) increased at each successive reduction of the gravity level. This characteristic demonstrates the strong inverse dependence of the swinging time on gravity.

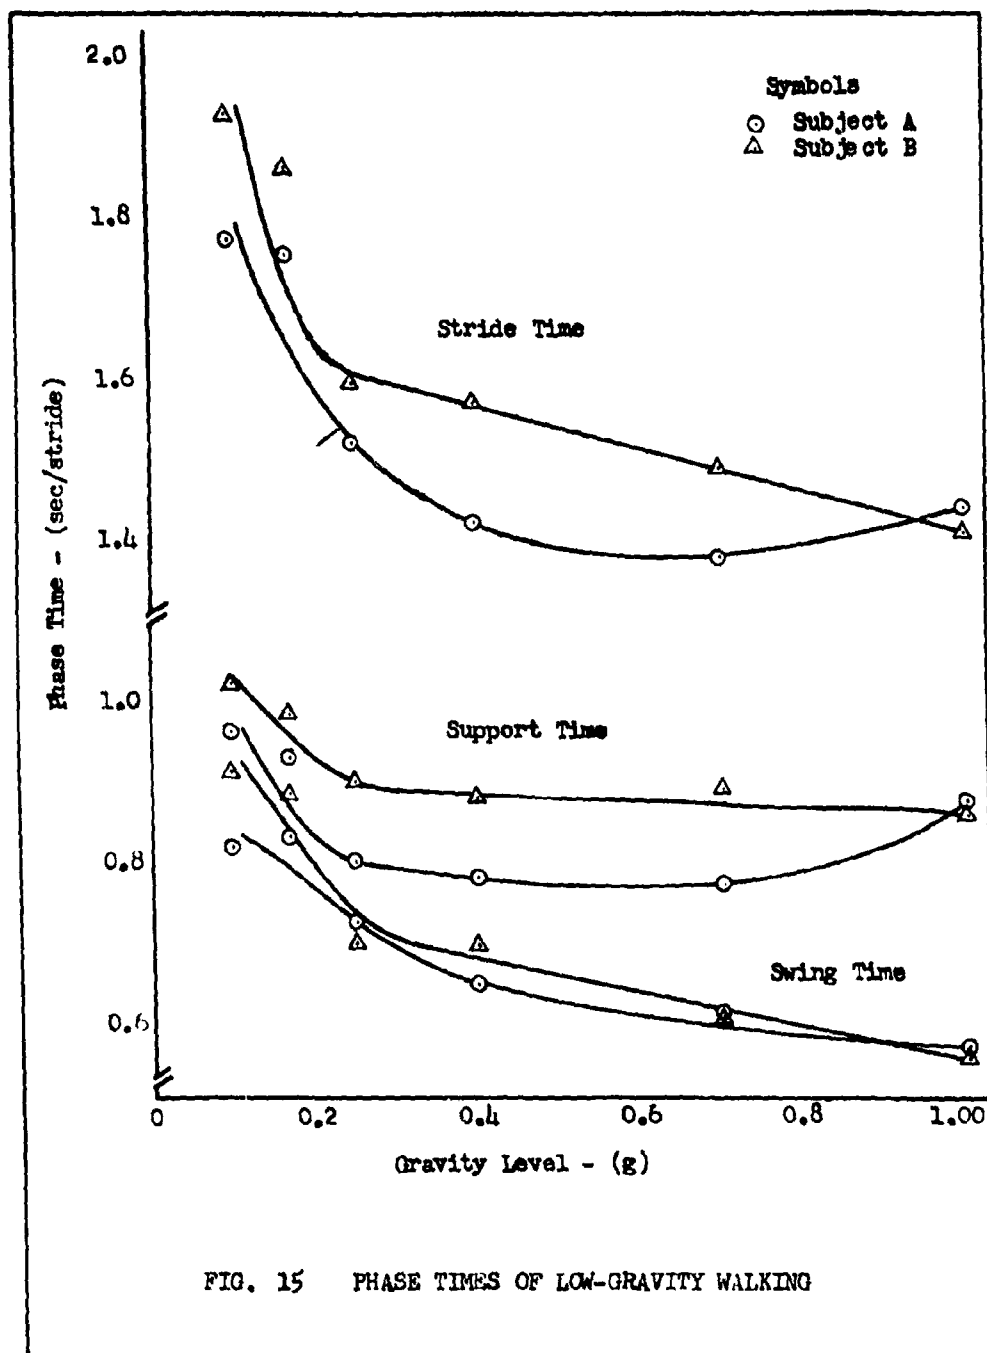

An attempt was made to find a mathematical expression that would approximate the swinging time curve. It was found that the swinging time varied inversely as the sixth root of the gravity level between the gravity levels of 0.25 g and 1.0 g, that is,

$$t_{sw} = t_{sw} 1.0 g^{-1/6} \quad (7)$$

in the range

$$0.25 \leq g \leq 1.0$$

The discontinuity and spread of data points below the 0.25 g level degrades the validity of an approximate formula. However, the function


$$t_{sw} = t_{sw} 1.0 g^{-1/5} \quad (8)$$


in the range

$$0.1 \leq g < 0.25$$

has the approximate slope and magnitude of the experimental data. A graph of these functions is superimposed on the swinging time curves in Fig. 16.

The phase ratios of the low gravity walk are shown in Fig. 17. The phase ratios provide a quantitative means of describing the manner of the gait. Under normal gravity conditions the swing-to-support ratio for normal walking is usually between 0.5 and 0.8 (Ref 5:7). The ratio increases with faster walking and approaches unity at the

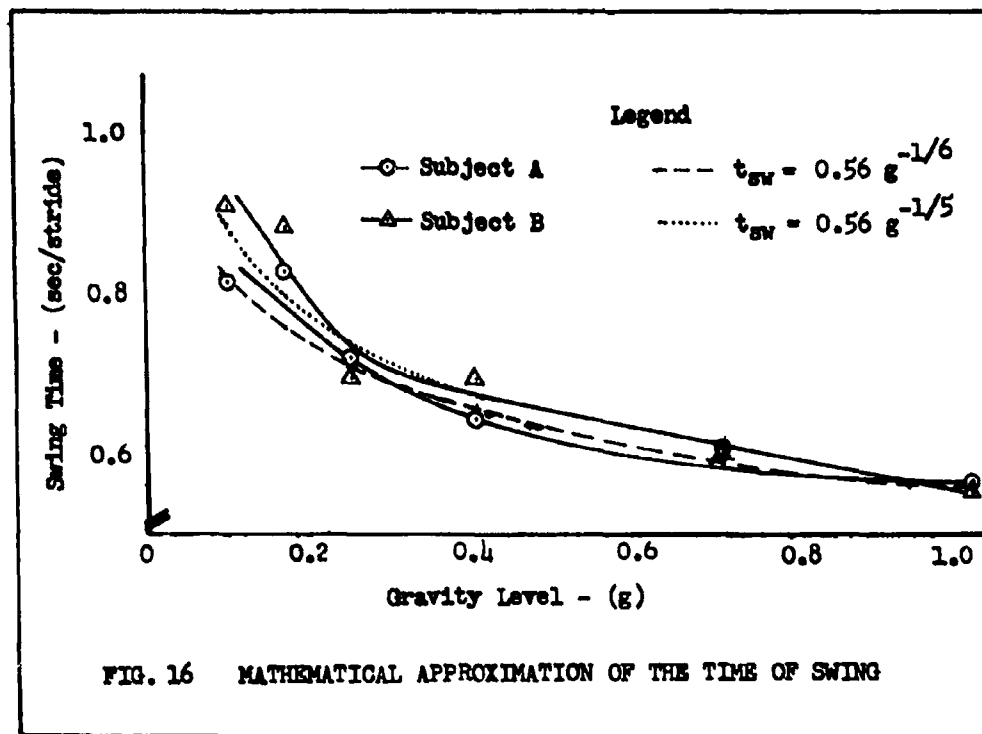

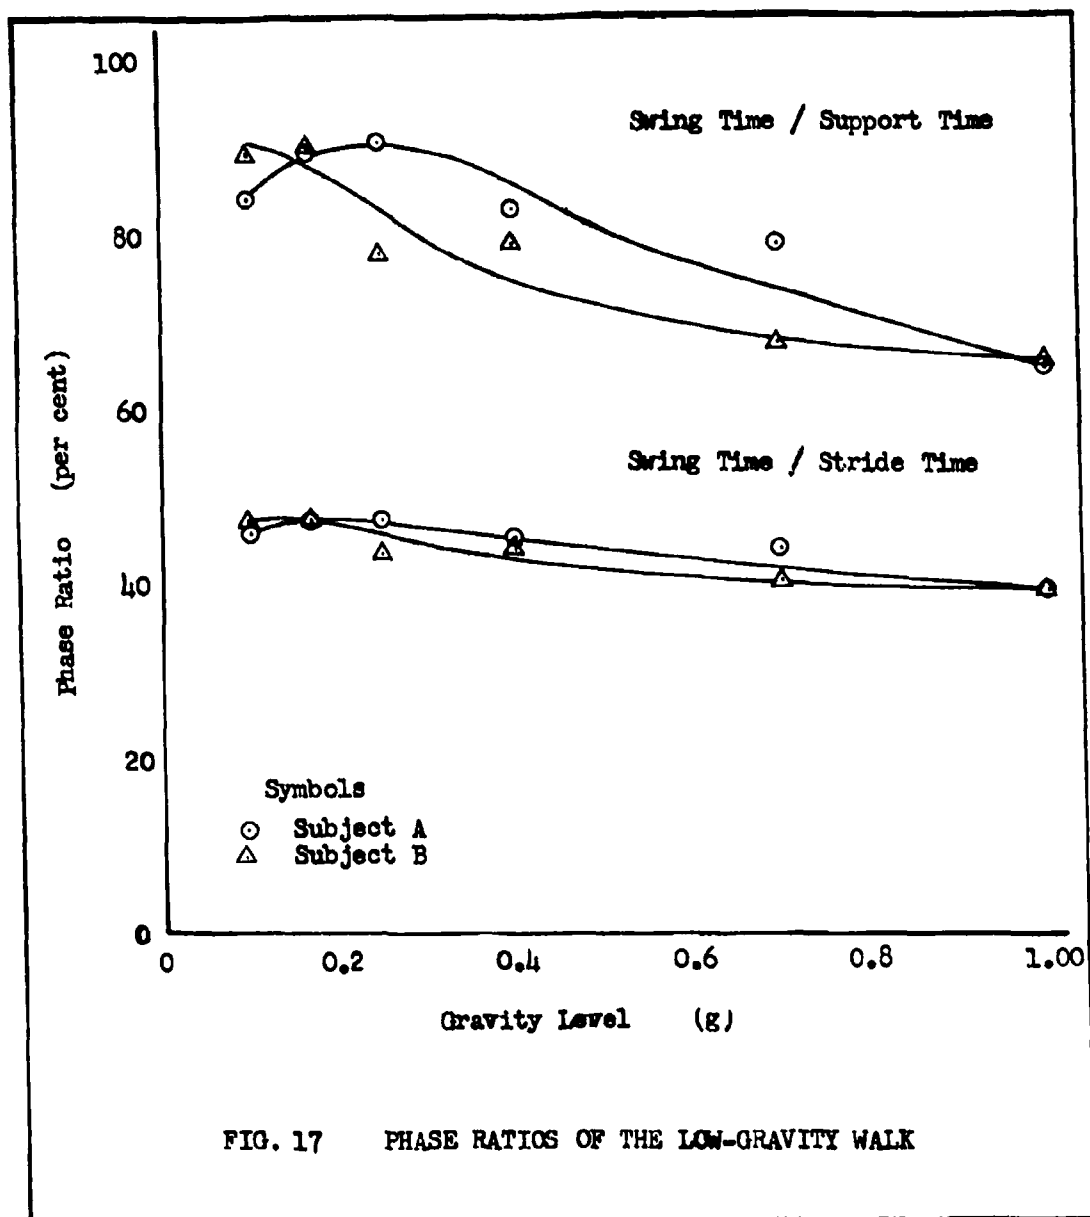

point of running. The swing-to-support ratio varied during this experiment from 0.65 at normal gravity to 0.90 at the lower gravity levels.

Most of the changes in walking motion are accomplished while both feet are on the surface. As the swing-to-support ratio increases, the duration of double support decreases and the subject has less control over his progression. The loss of body control indicated by the higher swing-to-support ratios at the lower gravity levels is clearly evident in the film record of the runs.

Based on the swing-to-support ratio, the low-gravity walking gait could be described as a fast walk. But, because velocity and step length do not increase, and the step frequency decreases, the low gravity walking gait is better described as a "fast walk in slow motion."

The swing-to-stride ratio was computed as an investigative parameter. It is concluded that this parameter presents no information that cannot be obtained more directly from the other parameters.

The results of the experimental program may be summarized as follows:

1. With the exception of the acceleration, the experimental method was adequate to quantitatively evaluate the motion variables of man's low gravity walking performance.

2. Both subjects maintained a velocity within 10 per cent of their 1.0-g walking velocity (3.8 fps) at gravity levels between 1.0 g and 0.25 g or below.

3. The increase in swinging time was the most consistent effect of the reduction of gravity. The swinging time may be approximated by the expression

$$t_{sw} = t_{sw1.0} g^{-1/6} \quad (7)$$

within the range

$$0.25 \leq g \leq 1.0$$

and

$$t_{sw} = t_{sw1.0} g^{-1/5} \quad (8)$$

in the range

$$0.1 \leq g < 0.25$$

4. The high value (0.90) of the swing-to-support ratio at the lower gravity levels indicates the reduction in control that the subject has over his motion.

5. The curves of almost all variables plotted as a function of gravity level exhibit a discontinuity in the vicinity of 0.2 g. This tends to substantiate earlier observations that the lower gravity limit for acceptable walking is in this region.

6. Qualitatively, the gait at low gravity levels appears to be a "fast walk in slow motion."

VI. Concluding Statements and Recommendations for Future Study

Concluding Statements

The experimental methods for the study of low-gravity walking may be divided into two categories according to the basis of the experimental approach:

1. Experimental motion measurement and analysis, and
2. Experimental force measurement and analysis.

Walking performance characteristics such as velocity, step length, step frequency, and the phase times and ratios, may be quantitatively determined by a motion analysis. The acceleration of the subject could probably be determined with only minor improvements in the test procedure. However, motion analysis yields little information that concerns the reasons for the discontinuity in the walking performance in the region of 0.2 g.

A force analysis which includes the measurement of the surface reaction forces is the most direct approach for interpreting the causes of the degraded walking performance at the lower gravity levels. The proposed force-measuring walkway was conceived as the best means of recording these forces.

A summary of the results of the experimental motion analysis experiment is contained in Chapter V. The quantitative magnitudes of the various parameters as a function of gravity level are listed in Table B-II and are plotted in Figs. 12 to 17. It must be emphasized that this experiment was conducted in a "shirtsleeve" environment by evaluating only a limited number of runs of two unencumbered subjects during relatively short periods of partial-gravity conditions. It is believed that the results accurately describe the exhibited walking performance. However, extrapolation of the results beyond the range of the measured gravity levels, or to the performance of a man encumbered by the addition of mass or the restrictions of a pressure suit, is deemed neither valid nor advisable.

Recommendations for Future Study

It is recommended that this investigation be continued to accomplish the following objectives:

1. Quantitatively evaluate the walking performance of a pressure-suited subject under reduced-gravity conditions.
2. Quantitatively evaluate the effect of the addition of mass to the walking subject as a function of the gravity level.
3. Evaluate the acceleration capabilities of the walking subject as a function of gravity level.

4. Establish the relationships between the vertical reaction force and the fore-and-aft shear force as a function of gravity level.

5. Identify and evaluate the cause of the degraded walking performance in the region of 0.2 g.

6. Refine the estimates of the lower limit of gravity at which man can walk unaided.

7. Evaluate the combination of any of the previous objectives.

Pressure-suited behavior, the effect of the addition of mass, acceleration capabilities, and estimates of the lower gravity limit may be determined by the given motion analysis technique. The relationships between the surface reaction forces, and the cause of the degraded low-gravity walking performance may only be determined by use of the force-measuring walkway or another investigative technique. A combination of both force and motion techniques would facilitate the achievement of objectives 2, 3, and 6.

Bibliography

1. Bresler, B., and F. R. Berry. Energy and Power in the Leg During Normal Level Walking. Report (Series 11, Issue 15) to the Advisory Committee on Artificial Limbs, National Research Council. Berkeley, California: Institute of Engineering Research, University of California, May 1951.
2. Bresler, B., and J. P. Frankel. "The Forces and Moments in the Leg During Level Walking." Transactions of the American Society of Mechanical Engineers, 72:27-36 (January 1950).
3. Eberhart, H. D., and V. T. Inman. "An Evaluation of Experimental Procedures Used in a Fundamental Study of Human Locomotion." Annals New York Academy of Sciences, 51:1213-1228 (January 1951).
4. Eshbach, Ovid W. Handbook of Engineering Fundamentals (Second Edition). New York: John Wiley & Sons, Inc., 1952.
5. Finley, F. R., and P. V. Karpovich. Electrogoniometric Analysis of Normal and Pathological Gaits. Report. Springfield, Massachusetts: Department of Physiology, Springfield College, May 1961.
6. Fundamental Studies of Human Locomotion and Other Information Relating to Design of Artificial Limbs. Subcontractor's Report (Serial No. CAL 5) to the Committee on Artificial Limbs, National Research Council. Berkeley, California: Institute of Engineering Research, University of California, June 1947. (2 Volumes).
7. Gollnick, P. D., P. V. Karpovich, and J. Sharpe. Electrogoniometric Study of Locomotion and of Some Athletic Movements. Report. Springfield, Massachusetts: Department of Physiology, Springfield College, September 1961.
8. Investigations with Respect to the Design, Construction and Evaluation of Prosthetic Devices. Report No. 80.10 to the Special Devices Center, Office of Naval Research. New York: College of Engineering, New York University, 1949 (2 Volumes).

9. Levens, A. S., V. T. Inman, and J. A. Blosser. "Transverse Rotation of the Segments of the Lower Extremity in Locomotion." The Journal of Bone and Joint Surgery, 30-A:859-872 (October 1948).
10. Loret, Benjamin J. Optimization of Manned Orbital Satellite Vehicle Design with Respect to Artificial Gravity. Thesis, published as ASD Technical Report 61-688. Wright-Patterson AFB, Ohio: Aeronautical Systems Division, December 1961.
11. NASA Life Sciences Data Book. Handbook. Yellow Springs, Ohio: Webb Associates, June 1962.
12. Perry, C. C., and H. R. Lissner. The Strain Gage Primer (Second Edition). New York: McGraw-Hill Book Company, Inc., 1962.
13. Proposal for Biokinetics Study of Humans in Simulated Weightless Condition. Report No. ER-2885. Cockeysville, Maryland: Aircraft Armaments, Inc., November 1962.
14. Ryker, N. J., Jr. Glass Walkway Studies of Normal Subjects During Normal Level Walking. Report (Series 11, Issue 20) to the Advisory Committee on Artificial Limbs, National Research Council. Berkeley, California: Institute of Engineering Research, University of California, January 1952.
15. Saunders, J. B. deC. M., V. T. Inman, and H. D. Eberhart. "The Major Determinants in Normal and Pathological Gait." The Journal of Bone and Joint Surgery, 35-A:543-558 (July 1953).
16. Schwartz, R. P., and A. L. Heath. "The Definition of Human Locomotion on the Basis of Measurement." The Journal of Bone and Joint Surgery, 29:203-214 (January 1947).
17. Sharp, Earl D., and Charles W. Sears. Walking Under Zero-Gravity Conditions Using Velcro Material. AMRL Memorandum P-23. Wright-Patterson AFB, Ohio: 6750th Aerospace Medical Research Laboratories, January 1963.
18. Simons, John C. Walking Under Zero-Gravity Conditions. WADC Technical Note 59-327. Wright-Patterson AFB, Ohio: Wright Air Development Center, October 1959.

19. Steindler, Arthur. Mechanics of Normal and Pathological Locomotion in Man. Springfield, Illinois: Charles C. Thomas, 1935.

Appendix A

Calculation of the Atmospheric Drag on a Walking Man

The magnitude of the atmospheric drag on the body may be computed by the formula

$$D = \frac{1}{2} \rho V^2 S C_D \quad (A-1)$$

where

D = drag force, lb_f

ρ = atmospheric density, slug/ft³

V = velocity of the body through the medium, ft/sec

S = projected frontal area of the body, ft²

C_D = drag coefficient

The average walking velocity is 5 ft/sec. However, the forward swinging arm and leg will progress at a proximately twice this velocity. Therefore, since drag varies as the square of velocity, this effect is accounted for by assuming that the swinging velocity is 10 ft/sec and the swinging area is one-third the projected frontal area of the entire body. The projected frontal area of the Air Force mean man is 6 ft² (Ref 11:152). The coefficient of drag is assumed to be that of a flat plate positioned perpendicularly to the airstream, i. e., $C_D = 2.0$. Assuming sea-level density, the total atmospheric drag on the body is

$$\begin{aligned} D &= \frac{1}{2} (0.002378)(6.0)(2.0) \left[\frac{1}{3} (10)^2 + \frac{2}{3} (5)^2 \right] \\ &= 0.71 \text{ lb}_f \end{aligned}$$

The body assumes a forward inclination to resist the rearward moment caused by the drag force. For the purpose of this calculation, the drag force is assumed to act at the body center of mass. The magnitude of the forward inclination for a 160-pound man is computed to be

$$\theta = \tan^{-1} \left(\frac{0.71}{160} \right) = \tan^{-1} (0.00446) = 0.25^\circ \quad (\text{A-2})$$

where θ is the change in the angle of inclination measured from the vertical.

The vertical position of the center of mass is assumed to be 40 inches above the point of support. The corresponding shift of the center of mass forward from the "no-wind" point of support is

$$\begin{aligned} x &= 40 \sin \theta & (\text{A-3}) \\ &40 \sin (0.25^\circ) \\ &0.178 \text{ in.} \end{aligned}$$

It should be noted that the assumed values are grossly conservative. Therefore, the author considers that the effect of drag on the body at normal walking speeds is negligible.

Appendix B

Experimental Data

Table B-I

Subjects' Physical Data

Subject	Age	Height (in.)	Weight (lb)
A	24	67-1/2	170
B	21	72	173

Data Log, Subject A

The following six runs were performed by Subject A on July 2, 1963, and were selected as the better of the two runs at each gravity condition. The series (number 3) was conducted in ascending order of gravity levels. The runs appear in the following order on the respective films:

Frame No.	Run No.	Gravity Level	Film No.
6,600	27	0.10	Hand Camera (Roll 2,3,4) w/o 9023(623)
7,400	29	0.17	" "
8,793	32	0.25	" "
9,831	34	0.40	" "
10,800	36	0.70	" "
0	37	1.00	Hand Camera, 2 Jul 63, w/o 9023(623)

Run 27, 0.10 g, Subject A, 2 Jul 63, Start Frame 6,600.									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO --- 0.0						
			LHS --- ~0.7						
RTO ~18		0.0							
RHS 52		3.8	LTO 60		1.6	FT 31		1.6	
			LHS 89		6.5	FT 72		4.4	
RTO 93		4.2				FT 105		7.2	
RFF 128		119.3	LTO 125		7.2				
						FT 140		10.0	Almost floating
RTO 155		10.0	LHS 155		10.9	FT 166		11.9	
RHS 177		13.3	LTO 177		12.0	FT 186		14.1	
			LHS 198		15.5				Accelerative HS
RTO 204		14.2	LTO 223		16.4	FT 214		16.3	
RHS 226		17.5				FT 231		18.2	
						CG 250		18.5	Last frame before missing frames
			LHS 260		15.5				
RTO 259		17.4				FT 270		14.6 ^T	
RHS 290		12.8	LTO 290		14.6	FT 300		12.0	
RTO 310		12.0	LHS 317		9.5				
RHS 335		9.7							Fall forward, hand contacted floor

Run 29 0.17 g Subject A 2 Jul 63 Start Frame 7,400									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO ---		0.0				Frames missing
			LHS ---		2.0 ^T 1.1 ^M				
RTO 0		0.0				FT 8		2.0	
RHS 25		4.0							
			LTO 27		2.1	FT 39		4.5	
			LHS 53		6.2	FT 69		7.1	
RTO 57		4.6							
RHS 87		9.3							
			LTO 89		7.3	FT 100		10.0	
			LHS 114		11.9				
RTO 116		10.1				FT 128		12.8	
RHS 140		11.4							
			LTO 140		12.9	FT 151		15.3	
			LHS 163		16.1				
RTO 164		15.3				FT 173		17.0	
RFF 185		18.3				CG 185		17.5	
						FT 187		17.8	
RTO 205		16.8	LHS 205		15.1	FT 215		14.2	
RHS 226		12.0							
			LTO 227		14.1	FT 241		10.8	
			LHS 255		8.8				
RTO 256		10.9				FT 271		7.9	
RHS 283		5.6							
			LTO 287		7.9	FT 300		4.6	
			LHS 315		2.8				
RTO 318		4.6				FT 329		1.9	
RHS 343		0.4				FT 359		-0.4	
			LTO 344		2.0				
			LEF 378		-0.2	CG 378		-0.6	

Run 32 0.25 g Subject A 2 Jul 63 Start Frame 8,793									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RHS	10	0	L			FT	0	-1.2	Right foot pivot
			LTO	19	-1.2	FT	30	0.8	
			LHS	43	2.6	FT	57	3.6	
RTO	48	0.8				FT	84	6.0	
RHS	70	5.6	LTO	71	3.6	FT	111	9.1	
			LHS	98	8.4	FT	139	12.0	
RTO	99	6.0				FT	165	14.6	
RHS	126	11.1	LTO	128	9.1	FT	193	17.5	
			LHS	152	13.8	CG	223	18.4	
RTO	155	12.0				FT	243	17.8	
RHS	178	16.6	LTO	181	14.6	FT	275	15.7	
			LHS	208	19.2	FT	298	12.8	
RTO	210	17.6				FT	322	10.1	
RFF	---	17.8 18.7	LTO	236	19.1	FT	346	7.0	
			LHS	263	16.5	FT	366	4.8	
RTO	266	17.8							
RHS	286	13.8	LTO	288	15.7				
			LHS	309	10.9				
RTO	311	12.9							
RHS	335	7.7	LTO	335	10.1				
			LHS	355	5.6				
RTO	359	6.9							
RHS	378	3.4							

Run 32, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 379		4.8				
			LHS 395		1.5	FT 384		2.9	
RTO 398		2.8				FT 406		0.5	
RHS 413		-0.3	LTO 416		0.5	FT 424		-1.0	
RFF 432		-1.4				CG 445		-1.0	
						CG 460		-0.5	

Run 34 0.40 g Subject A 2 Jul 63 Start Frame 9,831									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO ---		----				
			LHS 8		1.3				
RTO 11		0.0				FT 21		2.1	
RHS 31		4.0	LTO 35		2.3	FT 44		4.6	
			LHS 55		6.6	FT 68		7.3	
RTO 58		4.7	LTO 82		7.4	FT 92		9.8	
RHS 79		9.2	LHS 104		11.7	FT 117		12.4	
RTO 107		9.8	LTO 131		12.5	FT 140		14.9	
RHS 128		14.0	LHS 152		16.4	FT 167		17.2	
RTO 156		15.0							
RHS 175		18.2							

Run 34, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RTO - RHS ---			LTO 180	17.3		FT 191	19.1		
			LFF-195	19.4		CG 200	19.1		
			LTO 215	19.2		FT 219	18.3		
RTO 237	18.3		LHS 232	17.2		FT 245	16.2		
RHS 254	14.6		LTO 257	16.2		FT 266	13.6		
RTO 279	13.7		LHS 277	12.0		FT 289	10.9		
RHS 300	9.2		LTO 301	11.0		FT 312	8.1		
RTO 325	8.2		LHS 321	6.6		FT 335	5.7		
RHS 344	4.0		LTO 346	5.6		FT 356	2.9		
RTO 370	2.9		LHS 366	1.2		FT 380	0.5		
RHS 390	-0.4		LTO 390	0.4		CG 399	-1.0		
RTO 411 ---			LHS 407	-1.8		FT 399	-1.2		
						CG 420	-1.5		

Run 36 0.70 g Subject A 2 Jul 63 Start Frame 10,800									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 0 0.0						
			LHS 8 1.9						
RTO 15		0.0							
RHS 33		4.5				FT 23		2.7	
			LTO 36		2.7				
			LHS 57		7.5	FT 45		5.3	
RTO 59		5.3							
RHS 79		10.2				FT 68		8.1	
			LTO 81		8.2				
			LHS 99		13.1	FT 89		11.0	
RTO 103		11.1							
RHS 123		16.1				FT 112		13.9	
			LTO 125		14.0				
			LHS 149		19.0	FT 135		16.9	
RTO 151		16.9							
RFT 166		19.0				CG 167		19.0	
			LTO 172		19.4				
			LHS 191		16.5	FT 177		18.1	
RTO 194		18.1							
RHS 214		13.8				FT 203		15.6	
			LTO 217		15.6				
			LHS 236		11.0	FT 224		12.9	
RTO 238		12.9							
RHS 257		8.2				FT 246		10.1	
			LTO 258		10.1				
			LHS 277		5.2	FT 267		7.2	
RTO 279		7.3							
RHS 298		2.4				FT 289		4.4	
			LTO 302		4.4				
			LHS 320		-0.3	FT 310		1.5	

Run 36, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RTO	324	1.6							
RFF	340	-0.9							
						CG	344	-1.2	

Run 37 1.00 g Subject A 2 Jul 63 Start Frame 0									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO --- ---						
			LFF --- 1.6						
RTO	23	0.0							
RHS	43	4.5				FT	32	2.4	
			LTO 47 2.4			FT	56	5.2	
			LHS 67 7.2			FT	81	8.0	
RTO	72	5.2				FT	104	10.6	
RHS	90	9.9	LTO 95 8.0			FT	127	13.3	
			LHS 114 12.6			FT	151	16.0	
			LTO 14.1 13.4			FT	174	18.0	
			LHS 159 17.1			CG	210	19.5	
RTO	166	16.0	LTO 188 18.0						
RHS 181	18.9		LFF 205 20.0						
RHS ---	18.0		LTO --- 19.5			FT	216	17.0	
			LHS 226 15.5						

Frames missing
RTO-RHS-LTO-LHS

Run 37, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RTO	231	17.0				FT	240	14.5	
RHS	251	12.9	LTO	255	14.5	FT	263	12.0	
			LHS	272	10.2	FT	286	9.4	
RTO	278	12.0				FT	307	6.7	
RHS	294	7.6	LTO	299	9.3	FT	330	4.1	
			LHS	317	5.1	FT	352	1.6	
RTO	322	6.7				FT	378	-0.2	
RHS	339	2.5	LTO	344	4.3	CG	392	-1.0	
			LHS	360	0.8				
RTO	367	1.6							
RHS	379	-0.4	LTO	384	-0.3				
									Last frame

Data Log, Subject B

The following six runs were performed by Subject B on July 2, 1963, and were selected as the better of the two runs at each gravity condition. The series (number 5) was conducted in ascending order of gravity levels. The runs appear in the following order on the film:

Frame No.	Run No.	Gravity Level	Film No.
8,300	56	0.25 g	Hand Camera, 2 Jul 63, w/o 9023(623)
8,800	57	0.40 g	" "
10,650	60	0.70 g	" "
11,394	62	1.00 g	" "
13,792	52	0.10 g	" "
14,521	53	0.17 g	" "

Run 52 0.10 g Subject B 2 Jul 63 Start Frame 13,792									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO --- ----						
			LHS 18 1.1						
RTO 31	0.0								
RHS 55	2.9					FT 44	2.1		
			LTO 72 2.2			FT 85	4.5		
			LHS 110 5.8						
RTO 113	4.3					FT 124	6.6		
RHS 139	7.5		LTO 146 6.6			FT 152	8.3		
			LHS 170 9.3						
RTO 174	8.2					FT 185	10.2		
			LTO 206 10.3						
RHS 208	11.6					FT 222	12.6		
			LHS 234 13.7						
RTO 239	12.6					FT 250	14.6		
RHS 260	15.4								
			LTO 264 14.7			FT 273	16.4		
			LHS 288 19.5						
RTO 295	----					CG 314	19.3		
RTS + 314	18.3					CG 324	19.2		
			LTO + 334 19.3			FT 337	18.4		
			LHS + 349 17.2						
RTO 352	18.3					FT 360	16.1		
RHS 373	13.8					FT 390	12.8		
			LTO 377 16.0						
			LHS 407 10.1			FT 420	9.0		
RTO 406	12.8								
RHS 433	6.6								
			LTO 435 8.9			FT 448	5.6		
RTO 466	5.6								

Run 52, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RHS 496	0.5		LHS 468	2.9		FT 483	1.8		Pivot stop
			LTO 499	1.8		FT 516	-0.5		
						CG 583	-0.6		

Run 53 0.17 g Subject B 2 Jul 63 Start Frame 14,521									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RHO	2	-1.0	LTO	42	0.0	FT	50	2.4	Slipping
RTO	5	0.0							
RHS	33	1.7							
RTO	75	2.4							
RHS	105	7.6							
RTO	135	8.7							
RHS	166	15.2							
RTO	202	16.6							
RHS	---	---							
RTO†	235	18.0							
RTS	248	17.8							
			LTO	252	19.2	FT	258	17.8	
			LHS	269	16.0	FT	284	14.9	
RTO	273	17.8							
RHS	301	12.6							

Run 53, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 303	15.0					
			LHS 331	9.2		FT 316	11.0		
RTO 331	11.5					FT 344	8.1		
RHS 354	5.7		LTO 356	8.1		FT 367	4.6		
			LHS 382	2.0					
RTO 385	4.5					FT 397	2.0		
RHS 411	-0.4		LTO ---	0.8		FT 426	-1.0		
			LHS 454	0.0					Hand contact during turn-around

Run 56 0.25 g Subject B 2 Jul 63 Start Frame 8,300									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LHS 19	1.7					
RTO 24	0.0					FT 35	2.6		
RHS 48	4.6		LTO 53	2.6		FT 61	5.6		
			LHS 77	8.1		FT 89	8.9		
RTO 81	5.6					FT 112	12.4		
RHS 101	11.4		LTO 103	9.1		FT 139	15.8		
			LHS 125	14.8					
RTO 127	12.4					FT 163	18.5		
RHS 151	17.6		LTO 153	15.8		CG 192	20.0		Right foot pivot
R ---	18.1								

Run 56, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO	202	20.0				
			LHS	226	16.8	FT	210	18.1	
RTO	230	18.1							
RHS	251	14.2				FT	239	15.8	
			LTO	257	15.9				
			LHS	279	11.0	FT	265	13.2	
RTO	282	13.2							
RHS	303	7.6				FT	292	9.9	
			LTO	306	10.0				
			LHS	330	4.1	FT	316	6.6	
RTO	333	6.6							
RHS	355	1.2				FT	344	3.2	
			LTO	358	3.3				
						FT	370	0.3	
						CG	413	-0.6	Hands on back wall both feet pivoting

Run 57 0.40 g Subject B 2 Jul 63 Start Frame 8,800									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LHO	2	0.0				
			LTO	6	0.0				
			LHS	20	1.7				
RTO	26	0.0				FT	36	2.5	
RHS	46	4.5							
			LTO	51	2.3	FT	60	5.3	
			LHS	72	7.8				
RTO	75	5.4				FT	86	8.8	
RHS	100	11.3							

Run 57, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 102		8.9				
			LHS 126		14.4	FT 112		12.1	
RTO 128		12.2							
RHS 151		17.6				FT 139		15.4	
			LTO 155		15.4				
			LHS -173		19.8	FT 165		18.5	
RTO 178		18.4	LTO 204		19.6	CG 202		19.5	Right foot pivoting
			LHS 224		17.8	FT 211		18.5	
RTO 234		18.5							
RHS ---		14.0				FT 240		16.2	
			LTO 255		16.2				Frame blurred
			LHS 277		10.6	FT 265		13.0	
RTO 280		13.0							
RHS 301		7.6	LTO 303		9.7	FT 290		9.6	
			LHS 326		4.4	FT 313		6.4	
RTO 330		6.4							
RHS 348		1.9	LTO 353		3.4	FT 340		3.4	
			LHS -375		-1.0	FT 363		0.8	
RTO 376		0.8							
RTS 398		0.0				CG 4410		-0.6	

Run 60 0.70 g Subject B 2 Jul 63 Start Frame 10,650									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 0 0.0						First steps fuzzy, Camera not focused
			LHS 12 1.8						
RTO 18 0.0						FT 27 2.6			
RHS 39 4.6									
			LTO 42 2.6			FT 51 5.0			
			LHS 65 7.4			FT 76 8.1			
RTO 68 5.1						FT 99 11.2			
RHS 87 10.3			LTO 91 8.2			FT 124 14.1			
			LHS 109 13.2			FT 148 16.7			
						CG 188 18.9			
RTO 115 11.2			LTO 140 14.1						Right Foot pivot
RHS 134 15.8			LHS 160 18.4						
RTO 165 ----			LTO 191 18.9						
RFF 18.3			LHS 213 17.7						
						FT 226 15.6			
RTO 218 18.3						FT 247 13.0			
RHS 233 14.0			LTO 239 15.6			FT 271 9.8			
			LHS 258 10.8			FT 293 7.0			
RTO 262 13.0						FT 317 3.8			
RHS 281 8.0			LTO 284 9.8			FT 341 1.4			
			LHS 304 5.0			CG 393 -0.8			
RTO 308 6.9									
RHS 328 2.4			LTO 332 3.9						
			LHS 351 0.0						
RTO 357 ---									

Run 62 1.00 g Subject B 2 Jul 63 Start Frame 11,394									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
			LTO 5		0.0				
			LHS 18		1.9				
RTO 24		0.0							
						FT 33		2.8	
RHS 41		4.8							
			LTO 46		2.8				
			LHS 65		7.6	FT 53		5.7	
RTO 69		5.6							
						FT 78		8.3	
RHS 86		10.2							
			LTO 91		9.4				
			LHS 108		12.9	FT 99		11.0	
RTO ~113		11.1							
						FT 122		13.7	
RHS 131		15.6							
			LTO 137		13.8				
			LHS 153		18.6	FT 145		16.5	
RTO 160		16.6							
RFF 172		17.8				CG 177		18.6	
			LTO ~186		19.2				
			LHS 205		17.1	FT 191		17.8	
RTO 212		17.9							
						FT 219		16.0	
RHS 232		14.5							
			LTO 235		16.0	FT 244		13.5	
			LHS 254		11.9				
RTO 258		13.5							
						FT 266		10.8	
RHS 274		9.3							
			LTO 279		10.8				
			LHS 295		6.5	FT 287		8.3	
RTO 300		8.3							
						FT 309		5.5	
RHS 318		3.9							
			LTO 323		5.4				
			LHS 340		2.0	FT 331		2.9	

Run 62, continued									
Right Foot			Left Foot			Feet Together			Remarks
Phase	Fr	Pos	Phase	Fr	Pos	Phase	Fr	Pos	
RTO 347		2.8				FT 354		1.0	
IHS / 364		---	LTO 367		0.8				
			LFF -387		-1.3				
RTO -390		-0.6							
RUF + 412		0.0				CG 417		-0.7	

Sample Calculations

The following sample calculations are illustrated for Run 37, Subject A, at the 1.0-g gravity level.

The velocity, length of step, and step frequency are determined from the step (feet-together) relationships. The first and last steps in each direction are disregarded because of acceleration and deceleration. The computed values are thus the average values for the "steady state" portion of the walk.

Walking forward, the subject in five steps traveled from 2.4 ft at frame number 32 to 16.0 ft at frame number 151. The distance traveled is given by the equation

$$d = d_2 - d_1 \quad (B-1)$$

$$\begin{aligned} d_{\text{fwd}} &= 16.0 - 2.4 \\ &= 13.6 \text{ ft} \end{aligned}$$

At a camera speed of 32 frames per second the frame numbers may be converted into time by the equation

$$t = 0.03125 \text{ Fr} \quad (B-2)$$

The time for the five steps is therefore

$$t = 0.03125 (\text{Fr}_2 - \text{Fr}_1) \quad (B-3)$$

$$\begin{aligned} t_{\text{fwd}} &= 0.03125 (151 - 32) \\ &= 3.72 \text{ sec} \end{aligned}$$

The velocity is determined from the equation

$$V = \frac{d}{t} \quad (B-4)$$

$$\begin{aligned}
 v_{\text{fwd}} &= \frac{13.6}{3.72} \\
 &= 3.66 \text{ ft/sec}
 \end{aligned}$$

The step length is obtained by dividing the distance traveled by the number of steps

$$S = \frac{d}{\text{no. of steps}} \quad (\text{B-5})$$

$$\begin{aligned}
 S_{\text{fwd}} &= \frac{13.6}{5} \\
 &= 2.72 \text{ ft}
 \end{aligned}$$

The step frequency is equal to the number of steps divided by the difference in time. For comparison with published values the frequency is converted from steps per second to steps per minute.

$$N = \frac{\text{number of steps}}{t} \times 60 \quad (\text{B-6})$$

$$\begin{aligned}
 N_{\text{fwd}} &= \frac{5 (60)}{3.72} \\
 &= 80.6 \text{ steps/min}
 \end{aligned}$$

Walking aft, the subject in five steps traveled from 17.0 ft at frame number 216 to 4.1 ft at frame number 330. The values of the parameters for the aft walk are therefore

$$\begin{aligned}
 t_{\text{aft}} &= 0.03125 (330 - 216) \\
 &= 3.56 \text{ sec}
 \end{aligned}$$

$$\begin{aligned}
 d_{\text{aft}} &= 17.0 - 4.1 \\
 &= 13.9 \text{ ft}
 \end{aligned}$$

$$\begin{aligned}
 V_{aft} &= \frac{13.9}{3.56} \\
 &= 3.90 \text{ ft/sec}
 \end{aligned}$$

$$\begin{aligned}
 S_{aft} &= \frac{13.9}{5} \\
 &= 2.78 \text{ ft}
 \end{aligned}$$

$$\begin{aligned}
 N_{aft} &= \frac{5(60)}{3.56} \\
 &= 84.2 \text{ steps/min}
 \end{aligned}$$

The average value of a parameter at the gravity level is equal to one-half the sum of the respective forward and aft values, i.e.,

$$\begin{aligned}
 V &= \frac{V_{fwd} + V_{aft}}{2} & (B-7) \\
 &= \frac{3.66 + 3.90}{2} \\
 &= 3.78 \text{ ft/sec}
 \end{aligned}$$

$$\begin{aligned}
 S &= \frac{S_{fwd} + S_{aft}}{2} & (B-8) \\
 &= \frac{2.72 + 2.78}{2} \\
 &= 2.75 \text{ ft}
 \end{aligned}$$

$$\begin{aligned}
 N &= \frac{N_{fwd} + N_{aft}}{2} & (B-9) \\
 &= \frac{80.6 + 84.2}{2} \\
 &= 82.4 \text{ steps/min}
 \end{aligned}$$

The phase times and ratios are obtained from the stride relationships. The strides were selected from heel-strike to heel-strike. The subject completed two full strides by each foot in both the forward and aft directions.

For this run, the events of the first full stride of the right foot were recorded as

<u>Phase</u>	<u>Frame</u>
RHS	43
RTO	72
RHS	90

The total number of frames for this stride is

$$\begin{aligned}
 Fr_{st} &= Fr_{RHS_2} - Fr_{RHS_1} & (B-10) \\
 &= 90 - 43 \\
 &= 47
 \end{aligned}$$

The number of frames during the swing is

$$\begin{aligned}
 Fr_{sw} &= Fr_{RHS_2} - Fr_{RTO} & (B-11) \\
 &= 90 - 72 \\
 &= 18
 \end{aligned}$$

The number of frames during the support phase is

$$\begin{aligned}
 Fr_{sup} &= Fr_{st} - Fr_{sw} & (B-12) \\
 &= 47 - 18 \\
 &= 29
 \end{aligned}$$

The same calculations were performed for the other seven strides. The results are compiled in tabular form:

	Right Leg				Left Leg				Sum
	Forward		Aft		Forward		Aft		
Stride Number	1	2	3	4	5	6	7	8	
Stride Frames	47	47	47	44	48	46	44	45	368
Swing Frames	18	17	20	16	20	19	17	18	145
Support Frames	29	30	27	28	28	27	27	27	223

The average swing time is

$$\begin{aligned}
 t_{sw} &= \frac{(0.03125) \sum \text{swing frames}}{\text{number of strides}} & (B-13) \\
 &= \frac{(0.03125) 145}{8} \\
 &= 0.566 \text{ sec}
 \end{aligned}$$

The average stride time is

$$\begin{aligned}
 t_{st} &= \frac{(0.03125) \sum \text{stride frames}}{\text{number of strides}} & (B-14) \\
 &= \frac{(0.03125) 368}{8} \\
 &= 1.437 \text{ sec}
 \end{aligned}$$

The average support time is

$$\begin{aligned}
 t_{sup} &= \frac{(0.03125) \sum \text{support frames}}{\text{number of strides}} & (B-15) \\
 &= \frac{(0.03125) 223}{8} \\
 &= 0.871 \text{ sec}
 \end{aligned}$$

The swing-to-support ratio is

$$\begin{aligned}\text{swing-to-support ratio} &= \frac{t_{sw}}{t_{sup}} & (B-16) \\ &= \frac{0.566}{0.871} \\ &= 0.650\end{aligned}$$

Table B-II

Summary of Reduced Data

Gravity Level	Vel.	Step Length	Step Freq.	Swing Time	Support Time	Stride Time	Swing to Stride Ratio	Swing to Support Ratio
	V	S	N	t_{sw}	t_{sup}	t_{st}	$\frac{t_{sw}}{t_{st}}$	$\frac{t_{sw}}{t_{sup}}$
(g)	(ft/sec)	(ft)	(steps/min)	(sec)	(sec)	(sec)	(%)	(%)

Subject A

1.0	3.78	2.75	82.4	0.566	0.871	1.437	39.4	65.0
0.7	4.14	2.83	87.7	0.608	0.767	1.376	44.2	79.1
0.4	3.64	2.63	83.7	0.642	0.775	1.417	45.3	83.0
0.25	3.52	2.70	79.7	0.720	0.795	1.515	47.4	90.4
0.17	3.17	2.82	67.4	0.826	0.924	1.750	47.2	89.5
0.10	2.69	2.55	63.2	0.813	0.956	1.769	45.9	84.0

Subject B

1.0	3.83	2.68	85.7	0.551	0.853	1.404	39.3	65.6
0.7	3.89	2.83	81.4	0.601	0.886	1.487	40.4	67.8
0.4	4.05	3.19	76.2	0.691	0.875	1.568	44.1	79.0
0.25	3.88	3.14	74.2	0.695	0.895	1.590	43.7	77.8
0.17	3.57	3.31	64.2	0.880	0.978	1.859	47.4	90.0
0.10	2.69	2.67	60.0	0.906	1.016	1.922	47.1	89.1

Appendix C
Sample Calculations in the Design
of the Force-Measuring Walkway

Structural Design

Walkway Platform. The design condition for each walkway platform was that of a 200-lb man standing at mid-span of only one of the aluminum channels. In addition to the man's weight, one-half the weight of the platform was assumed to be uniformly distributed along its length.

The deflection of a simply supported beam with a concentrated load applied at the center, as determined by the Engineering Theory of Bending, is given by the expression

$$\delta_p = \frac{PL^3}{48EI} \quad (C-1)$$

where

δ_p = maximum deflection, in.

P = concentrated load, lb

L = length of the beam, in.

E = modulus of elasticity, lb/in²

I = moment of inertia of the cross-sectional area, in⁴

The moment of inertia for a standard 4 x 1.580 x 0.180 in. channel is 3.83 in⁴ (Ref 4:1-196). The modulus of elasticity for aluminum is 10×10^6 lb/in². For the given conditions, the deflection of the 12-ft beam due to the concentrated load at mid-span is determined to be

$$\begin{aligned} \delta_p &= \frac{200 (144)^3}{48 (10 \times 10^6) (3.83)} \\ &= 0.324 \text{ in.} \end{aligned}$$

The mid-span deflection of a uniformly loaded, simply supported beam is given by the expression:

$$\delta_w = \frac{5}{384} \frac{WL^3}{EI} \quad (C-2)$$

where

$$W = wL, \text{ lb}$$

in which

$$w = \text{uniform load per unit of length, lb/in.}$$

The mid-span deflection due to a uniformly distributed load of 50 lb (one-half the assumed platform weight) is

$$\begin{aligned} \delta_w &= \frac{5 (50) (144)^3}{384 (10 \times 10^6) 3.83} \\ &= 0.051 \text{ in.} \end{aligned}$$

By superposition, the total mid-span deflection of the beam is

$$\begin{aligned} \delta &= \delta_p + \delta_w \\ &= 0.324 + 0.051 \\ &= 0.375 \text{ in.} \end{aligned} \quad (C-3)$$

Vertical Force Beam. The maximum allowable strain at the strain gage location is 0.002 in/in. for the maximum load condition. The end load is 225 lb. The distance between the point of application of the load and the strain gage location is 6 in.

The strain at the gage location may be computed by use of the formula

$$\epsilon = \frac{My}{EI} \quad (C-4)$$

where

ϵ = strain, in./in.

M = bending moment, lb-in.

E = modulus of elasticity, lb/in²

I = moment of inertia, in⁴

y = distance from the neutral axis to the face of the beam, in.

For a beam of rectangular cross section, the moment of inertia is

$$I = \frac{bh^3}{12} \quad (C-5)$$

where

b = beam width, in.

h = beam height, in.

and

$$y = \frac{h}{2} \quad (C-6)$$

The moment is

$$M = PL \quad (C-7)$$

The bending strain at the extreme fibers of a cantilever beam of rectangular cross section may thus be expressed as

$$\epsilon = \frac{6PL}{Ebh^3} \quad (C-8)$$

The strain at the strain gage location for the selected 0.75 x 0.75 in. beam is therefore

$$\begin{aligned} \epsilon &= \frac{6(225)(6)}{(10 \times 10^6)(0.75)(0.75)^3} \\ &= 0.00192 \text{ in./in.} \end{aligned}$$

The unit strain caused by a one-pound load may be computed by use of Eq C-8

$$\epsilon = \frac{6 PL}{E b h^2} \quad (C-8)$$

However, it is more simply determined by dividing the total strain by the maximum load, that is

$$\epsilon_o = \frac{\epsilon}{P} \quad (C-9)$$

where ϵ_o is the unit strain, inches per inch per pound.

The unit strain for the vertical force beam is therefore

$$\begin{aligned} \epsilon_o &= \frac{0.00192}{225} \\ &= 8.5 \times 10^{-6} \\ &= 8.5 \text{ microinches per inch per pound} \end{aligned}$$

The deflection of an end-loaded cantilever beam is given by the expression

$$\delta = \frac{PL^3}{3EI} \quad (C-10)$$

which, for a beam of rectangular cross section, becomes

$$\delta = \frac{4 PL^3}{E b h^2} \quad (C-11)$$

One inch, the distance between the strain gage and the change in cross-sectional area of the beam, is added to the beam length for the purpose of computing deflections; that is, $L = 7$ in. The deflection of the vertical force beam is therefore

$$\begin{aligned} \delta &= \frac{4 (225)(7)^3}{(10 \times 10^6)(0.75)(0.75)^2} \\ &= 0.073 \text{ in.} \end{aligned}$$

Horizontal Force Beam. The design condition for the horizontal force beam is an end load of 50 lb. The distance between the point of application of the load and the location of the strain gage is 5 in. The dimensions of the selected beam are $b = 0.50$ in., and $h = 0.40$ in. The strain at the location of the strain gage is computed by the use of Eq C-8

$$\begin{aligned} \epsilon &= \frac{6 PL}{E b h^2} & (C-8) \\ &= \frac{6(50)(5)}{(10 \times 10^6)(0.50)(0.40)^2} \\ &= 0.00188 \text{ in./in.} \end{aligned}$$

By use of Eq C-9 the unit strain in the horizontal force beam is

$$\epsilon_o = \frac{\epsilon}{P} = \frac{0.00188}{50} = 0.0000376$$

or

$$\epsilon_o = 37.6 \text{ microinches per inch per pound}$$

The design length used to compute deflections is 5.625 in. The deflection is computed by use of Eq C-11

$$\delta = \frac{4 PL^3}{E b h^2} \quad (C-11)$$

The deflection of the horizontal force beam is therefore

$$\begin{aligned} \delta &= \frac{4(50)(5.625)^3}{(10 \times 10^6)(0.50)(0.40)^2} \\ &= 0.045 \text{ in.} \end{aligned}$$

Strain Gage Instrumentation

The gage factor of a strain gage is the dimensionless ratio of the change in gage resistance to the change in strain, and may be expressed mathematically as (Ref 12:18)

$$F = \frac{\Delta R/R}{\epsilon} \quad (C-12)$$

where

F = gage factor

R = nominal gage resistance, ohm

$\frac{\Delta R}{R}$ = change in resistance, ohm

ϵ = strain, in./in.

The voltage output of an unbalanced bridge circuit is given by the expression (Ref 12:61)

$$E_o = \frac{E R_G}{4(R+R_G)} \left(\frac{\Delta R_1}{R_1} - \frac{\Delta R_2}{R_2} + \frac{\Delta R_3}{R_3} - \frac{\Delta R_4}{R_4} \right) \quad (C-13)$$

where

E_o = output voltage, v

E = applied voltage, v

R = nominal gage resistance, ohm

$\frac{\Delta R}{R}$ = change in resistance of any leg of the bridge circuit, ohm/ohm

R_G = galvanometer resistance, ohm

Vertical Force Circuit. The vertical force circuit consists of eight 350-ohm gages mounted two each on the four vertical force cantilever beams. The eight gages are connected to form a parallel bridge

circuit with four active arms. Each arm has two gages connected in parallel.

Placing a unit strain on one beam, for example beam A_1 , will cause a change in resistance of gages 1 and 2 of

$$\frac{\Delta R_1}{R_1} = - \frac{\Delta R_2}{R_2} = F \epsilon_0 \quad (C-14)$$

See Fig. 10 for gage numbers and locations.

The change in resistance of a leg containing n gages in parallel is

$$\frac{\Delta R_x}{R_x} = \frac{1}{n} \frac{\Delta R_z}{R_z} \quad (C-15)$$

where

$$\frac{\Delta R_x}{R_x} = \text{change in resistance of one leg}$$

$$\frac{\Delta R_z}{R_z} = \text{change in resistance of any one gage}$$

Therefore, the respective resistance changes in legs I and II are

$$\frac{\Delta R_I}{R_I} = - \frac{\Delta R_{II}}{R_{II}} = \frac{1}{2} \frac{\Delta R_1}{R_1} = \frac{F \epsilon_0}{2} \quad (C-16)$$

The output of the parallel bridge circuit for a unit strain in only one beam therefore becomes

$$\begin{aligned} E_o &= \frac{E R_G}{4(R + R_G)} \left(\frac{F \epsilon_0}{2} - \frac{(-)F \epsilon_0}{2} + 0 - 0 \right) \\ &= \frac{E R_G F \epsilon_0}{4(R + R_G)} \end{aligned} \quad (C-17)$$

The input voltage is limited by the allowable current at any strain gage. To prevent overheating, the current at any gage is limited to 30 ma. The current at gage 1 of the parallel bridge circuit is equal to one-half the current flowing in leg I. Therefore, the allowable current in leg I is equal to twice the allowable current in gage 1, or 60 ma.

The allowable voltage across the parallel bridge circuit is therefore

$$\begin{aligned} E &= I_x (R_x + R_w) & (C-18) \\ &= 0.60 (175 + 175) \\ &= 21 \text{ volts} \end{aligned}$$

The galvanometer resistance is usually selected to be much greater than the nominal gage resistance, that is

$$R_G \gg R \quad (C-19)$$

which reduces Eq C-17 to the approximate form

$$E_o \doteq \frac{E F \epsilon_o}{4} \quad (C-20)$$

Assuming a gage factor of 2.0, and the unit strain of one vertical force beam equal to 3.6×10^{-6} in./in., the output of the vertical force circuit for a unit load applied to only one beam is computed by use of Eq C-20 to be

$$\begin{aligned} E_o &\doteq \frac{E F \epsilon_o}{4} & (C-20) \\ &= \frac{21 (2.0) (3.6 \times 10^{-6})}{4} \\ &= 90 \times 10^{-6} \text{ v} \\ &= 90 \text{ microvolts per pound of load} \end{aligned}$$

If the unit load is distributed equally or partially among the other beams and the respective values are substituted into Eq C-13, the same output will result. Thus, the output is independent of which beams in the circuit support the load. The equation

$$E_o \doteq \frac{E F \epsilon_o}{4} \quad (C-20)$$

therefore applies, and ϵ_o can be considered to be the unit strain applied to the walkway platform, regardless of its distribution.

Horizontal Force Circuit. The horizontal force measuring circuit for each platform consists of four 350-ohm strain gages mounted on the horizontal force cantilever beam, as shown in Fig. 10. Any strain in the cantilever will activate all four bridge arms simultaneously. The output of the circuit is given by the equation

$$E_o = \frac{E F \epsilon_o R_g}{(R + R_g)} \quad (C-21)$$

which, by substitution of the basic assumptions stated for the vertical force circuit, becomes

$$E_o = E F \epsilon_o \quad (C-22)$$

For equal gage resistances, the same voltage may be applied to a parallel bridge circuit regardless of the number of gages in parallel in each arm.

The unit strain of the horizontal force beams was determined to be 37.6×10^{-6} in./in. The corresponding output of the horizontal force measuring circuit for a unit load is computed by use of Eq C-22 to be

$$E_o = E F \epsilon_o \quad (C-22)$$

$$= 21 (2.0) (37.6 \times 10^{-6})$$

$$= 1580 \times 10^{-6} \text{ v}$$

$$= 1.58 \text{ millivolts per pound of load}$$