

UNCLASSIFIED

AD 430603

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

64-9

430603

DASA 11.026

430603

Technical Report
CATALOGED BY S-C
AS 11.026

R 289

GAMMA-RAY STREAMING THROUGH DUCTS

6 February 1964



U. S. NAVAL CIVIL ENGINEERING LABORATORY
Port Hueneme, California

GAMMA-RAY STREAMING THROUGH DUCTS

Y-F008-08-05-201, DASA 11.026

Type C

by

C. M. Huddleston and W. L. Wilcoxson

ABSTRACT

A survey is presented of the current status of experimental and theoretical investigations of the problem of gamma-ray streaming through air ducts in concrete. Data are tabulated and plotted for a variety of experiments. Comparisons are made between theory and experiment, inconsistencies are pointed out, and areas needing further investigation are indicated.

Qualified requesters may obtain copies of this report from DDC.
The laboratory invites comment on this report, particularly on the
results obtained by those who have applied the information.
This work sponsored by the Defense Atomic Support Agency.

INTRODUCTION

In the shielding of personnel against gamma radiation from nuclear weapons, an important aspect of the problem is consideration of the hazard caused by radiation which is scattered off interior surfaces of entranceways and air ducts into the shelter area. The duct streaming problem has been investigated both experimentally and theoretically at several laboratories. Current understanding of the problem has progressed to the stage where a review of progress to date is indicated. This report purposes to survey this information.

Section I will describe some experimental determinations of the attenuation of gamma-ray dose within concrete ducts as a function of distance from the radioactive source. Section II will be concerned with albedo, which is an important concept in gamma-ray scattering. Section III will describe theoretical approaches to the duct streaming problem. The figures, presenting plotted and tabulated data, follow the text.

I. EXPERIMENTAL INVESTIGATIONS

Several investigators have conducted experiments giving information on the distribution of radiation along the axis of air ducts in concrete with square, rectangular, and round cross sections. Some of the ducts have one right-angle bend, and some have two right-angle bends. In every case treated here the measurements were made with a gamma-ray point source.

The significant results of these investigations will be discussed and compared with each other and with theory. A systematic effort will be made to give as much information as is available on actual experimental results so that the data may be convenient to other investigators.

Definition of Terms

A uniform terminology is used for the various sources of data:

D = measured dose rate in mr/hr at some distance along the axis of the duct

D_0 = dose rate in mr/hr at 1 foot from source in air

- L = total length of the duct in feet as measured along the axis; i. e., $L = L_1 + L_2$ for a two-legged duct, and $L = L_1 + L_2 + L_3$ for a three-legged duct
- L_1 = length of first leg in feet, measured from the point source on the axis to the center of the first corner
- L_2 = length of second leg in feet, measured from the center of the first corner to the end of the duct in the case of a two-legged duct, or from the center of the first corner to the center of the second corner in the case of a three-legged duct
- T = the distance in feet from the source to a point on the axis measured along the axis of the duct
- W/2 = half-width of duct in feet: for a square, W/2 is half of the width of a side of the cross section of the duct; for a rectangle, W/2 is the geometric mean of the half-height and half-width of the duct (i. e., W^2 is the area of the cross section of the duct); for a round cross section with radius R, W/2 is given by $W/2 = \sqrt{\pi} R/2$ (i. e., W^2 is the area of the cross section of the duct)

L-shape refers to a duct with a single right-angle bend.

U-shape refers to a duct with two right-angle bends of the same sense, so that radiation reaching the detector streams in the opposite direction to radiation streaming from the source down the first leg.

Z-shape refers to a duct with two right-angle bends of opposite sense, such as a tunnel with an offset.

Experimental Findings

Eisenhauer. The scattering of Co^{60} gamma radiation in square and rectangular air ducts in concrete was investigated experimentally by Eisenhauer.¹ He measured dose rates along the axis of the second leg of a two-legged duct, and along the axis of the third leg of a three-legged duct. Results are plotted and tabulated in Figures 1 through 5.

Eisenhauer found that the dose rate along the axis of the second leg of a two-legged duct varied as the inverse cube of the distance along the second leg. Also, he demonstrated the importance of scattering from the inside corner of the first right-angle junction. He made some "trapping" experiments by setting back one of the walls in a corner junction.

Terrell. Extensive experimental investigations of gamma-ray streaming through air ducts in concrete have been carried out by Terrell and his co-workers at the Armour Research Foundation.^{2,3,4} Results are shown in Figures 6 through 23. This series of studies included Co⁶⁰, Cs¹³⁷, Na²⁴, and Au¹⁹⁸. All ducts had square cross sections, some 6 x 6 feet and some 1 x 1 foot. Some of the ducts had one right-angle bend, and some had two right-angle bends.

Terrell³ investigated the relative importance of scattering from the walls and ceiling at a corner, both by covering surface areas with lead (which has a much lower gamma-ray albedo than does concrete) and by removing walls.

Experiments with U-shaped and Z-shaped ducts⁴ showed that the sense of the second right-angle bend is not a significant factor, at least as long as the axes of all three legs of a duct lie in the same plane.

Green. An experimental study of the streaming of the gamma radiation of Co⁶⁰ in an 11-inch square duct with one right-angle bend led Green⁵ to three principal conclusions:

1. Trapping the corner surfaces of a duct is not generally an economically feasible means for improving attenuation factors.
2. Dose-rate contributions due to multiple scatter represent a significant contribution to total dose rate at the detector.
3. Dose rate falls off as the inverse square of axial distance along the first leg of a duct and almost as the inverse cube along the axis of the second leg.

Results of Green's measurements are shown in Figures 24 and 25.

Chapman. Dose-rate measurements and gamma-ray spectrum measurements were made inside a square concrete duct with a 3 x 3-foot cross section.⁶ By measuring the energy spectra of gamma rays scattered from particular surface elements, Chapman was able to demonstrate the importance of multiple scatter. He showed that, at some places within a duct, dose contributions due to multiple scatter can be of the same magnitude as the dose contribution due to single scatter. Results of Chapman's duct-streaming measurements are presented in Figures 26 and 27.

Fowler and Dorn. Measurements were made of dose attenuation along the axis of a three-legged duct having a circular cross section.⁷ Results are presented in Figures 28 and 29. It was shown that, except for minor differences, a round duct attenuates gamma radiation in much the same way as a square duct of the same cross-sectional area.

Jacovitch and Chapman. J. M. Chapman of NCEL is working on an experimental study initiated by J. Jacovitch of the possibility of a gamma-ray polarization effect which may improve the protection afforded by a three-legged duct if one of the legs is noncoplanar with the other two. The problem was suggested by L. V. Spencer, who pointed out that a gamma-ray photon is unlikely to scatter out of its plane of polarization. It is not clear whether gamma-ray polarization will be important in the crude geometry of a concrete duct. Experimental results are not yet available.

Review of Experimental Findings

Figures 30 and 31 are composite plots of all the data of Figures 1 through 29. There are several reasons why one would expect wide dispersion in the data:

1. Several different initial energies were used.
2. Some ducts had two legs and some had three.
3. Several different widths were used.
4. Several different lengths were used.


Despite all the reasons given above, it can be seen from Figures 30 and 31 that dose tends generally to fall off exponentially with T/L . Clearly, such an exponential decay cannot be true for both very short ($L \approx W$) and very long ($L \gg W$) ducts. The reason for the apparent $e^{-T/L}$ behavior is presumably that most experimenters chose leg lengths equal to a few (~ 3) duct diameters.

Efforts have been made at NCEL to find an empirical expression relating dose to such factors as number of legs, lengths of legs, initial energy, and duct width. No reasonable expression with acceptable accuracy has yet been found. A relatively simple formula needs to be found before useful criteria can be specified for designers.

II. ALBEDO

Theory

An important concept in gamma-ray scattering is "albedo," or reflection. The term "differential dose albedo" is discussed by Rockwell⁸ and by Chilton and Huddleston.⁹ The definition of differential dose albedo will be reproduced here since it will be important to theoretical arguments which will follow. The scattering of radiation from a point source incident on a slab is diagramed as follows.

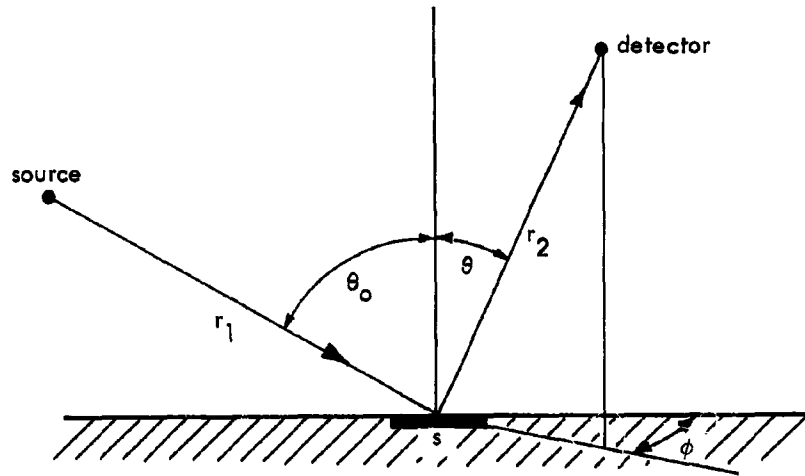

For such a case the differential dose albedo α is defined by the equation

$$dD = \frac{D_1 \alpha (E_o, \theta_o, \theta, \varphi) \cos \theta_o dA}{r_1^2 r_2^2} \quad (1)$$

where dD = differential dose at point of measurement

D_1 = dose in air at unit distance from source

E_o = energy of incident radiation

θ_o = polar angle of incidence of radiation

θ = polar angle of backscattered radiation

φ = azimuthal angle of backscattered radiation

dA = differential area of scattering surface

r_1 = distance from source to dA

r_2 = distance from dA to detector

It is seen that α may be a function of E_0 and of the three angles: θ_0 , θ , and φ , where α can be thought of as a coefficient of dose reflection.

From Equation 1 and the diagram it is clear that the dose from the source incident per unit area at dA is $D_1 \cos \theta_0 / r_1^2$. If the incident radiation is a broad parallel beam incident on a semi-infinite plane slab, the radiation intensity per unit area at dA becomes $D_0 \cos \theta_0$, where D_0 is the dose measured in the incident beam. Equation 1 then becomes

$$dD = \frac{D_0 \alpha \cos \theta_0 dA}{r_2^2} \quad (2)$$

Differential dose albedo, as used here, will be the quantity α as defined by Equation 2.

Attempts have been made to determine α as a function of angles and incident energy. Monte Carlo techniques,^{10, 11, 12, 13} analytical approaches,¹⁴ and experimental measurements^{15, 16} have all been used to determine α .

Raso¹¹ performed Monte Carlo calculations for a broad, parallel monoenergetic beam of gamma rays incident on a semi-infinite slab of concrete. From backscattering histories, differential dose albedo was computed as a function of initial energy, polar angle of incidence, and polar and azimuthal angles of reflection. Using Raso's data, Chilton and Huddleston⁹ developed a semiempirical formula for the differential dose albedo of gamma rays on concrete. The formula can be expressed as

$$\alpha = \frac{CK(\theta_s) 10^{26} + C'}{1 + \frac{\cos \theta_0}{\cos \theta}} \quad (3)$$

where $K(\theta_s)$ is the Klein-Nishina differential energy-scattering cross section; C and C' are parameters dependent on the initial energy, E_0 ; and α , θ_0 , and θ are as previously defined. θ_s is the spacial angle of gamma-ray scatter.

The parameters for the energies considered by Raso are shown below:

E_0 (Mev)	C	C'
.2	.0221 ± .0018	.0356 ± .0033
.5	.0336 ± .0016	.0220 ± .0012
1	.0547 ± .0020	.0111 ± .0007
2	.0869 ± .0027	.0077 ± .0004
4	.1238 ± .0046	.0076 ± .0003
6	.1490 ± .0065	.0075 ± .0003
10	.1660 ± .0084	.0070 ± .0002

The values were obtained by fitting the data of Raso to Equation 3 by a least-squares method.

Experimental Investigation

The U. S. Naval Radiological Defense Laboratory has made experimental measurements of the differential angular backscatter of gamma-ray doses from thick slabs of steel, aluminum, and concrete, using radioactive sources of Co^{60} and Cs^{137} . Although final results of the NRDL study are not yet available, preliminary results reported to NCEL indicate fair agreement with the results of Raso.

Uses of the Theory

The semiempirical formula of Equation 3 has been used by Chilton¹⁷ to calculate the backscatter by an infinite concrete slab of the radiation from isotropic point sources of Na^{24} , Co^{60} , Cs^{137} , and Au^{198} . Agreement was found with the experimental results of Clarke and Batter¹⁸ within the limits of experimental error.

Another test and use of Equation 3 is in the calculation of gamma-ray dose attenuation along the axis of a two-legged rectangular duct. Chapman¹⁹ has found that the semiempirical formula can be used to calculate dose attenuation in a concrete duct. Chapman compares his calculated results with the experimental results tabulated in Figures 1 through 29. He finds agreement within 30 percent in all cases except for the Au^{198} data, where the calculated results are about a factor of 2 higher than the experimental results.

The theory indicates that protection factors (which are the reciprocals of the D/D_0 attenuation factors) should decrease as the energy of the gamma-ray source decreases. Therefore, among the various sources experimentally investigated, the greatest protection factor should obtain for Na^{24} , while the protection factor for

Au¹⁹⁸ should be the smallest, provided the duct geometry is the same in all cases. However, experimental results³ indicate a larger protection factor for Au¹⁹⁸ radiation than for Cs¹³⁷ radiation. Further experimental study of the streaming of Au¹⁹⁸ gamma radiation through concrete ducts should be undertaken to resolve the "gold anomaly."

A Simplification of the Albedo Problem

It has been shown by Shoemaker and Huddleston²⁰ that variations in the azimuthal angle ϕ are redundant in experimental measurements of differential dose albedo provided that Equation 3 or a generalization of Equation 3 is valid. Once differential dose albedo has been determined for a complete set of incident and reflected polar angles with zero azimuth, albedo at any azimuth is shown to be calculable by a suitable mathematical transformation.

III. THEORY OF DUCT STREAMING

Most treatments of the streaming of gamma radiation through air ducts in concrete are based on the method of LeDoux and Chilton.²¹ They considered backscattered radiation from those areas within a two-legged duct which could be "seen" by both the source and the detector. They also considered in-scatter by the inside corner lip at the intersection of the two legs. Results generally gave good qualitative agreement with experiment, but theoretical predictions were low because of neglect of multiple-scatter contributions.

Green⁵ demonstrated the importance of multiple scatter. Silverman²² indicated how second scatter could be computed, although he did not actually carry out the calculations. Ingold²³ computed second-scatter contributions within a straight cylindrical duct. Chapman,¹⁹ using the albedo concept and an extension of the LeDoux-Chilton method, calculated dose attenuations for gamma rays of various energies in two-legged concrete ducts of various sizes.

With the geometry of rectangular ducts it should be possible to use the ADONIS²⁴ computer code for calculating gamma-ray dose attenuation. Efforts are currently underway at NCEL to perform such calculations. ADONIS is an IBM-7090 Monte Carlo computer code which can compute the neutron or gamma-ray dose anywhere within a configuration composed of rectangular parallelepipeds. Such a code is expected to be useful for calculations of dose rates within ducts.

CONCLUSION

The status of the gamma-ray streaming problem is such that current theory accounts for almost all observed results. Although the problem is by no means solved, important advances of recent years have greatly added to our understanding.

The corresponding problem for neutrons is not nearly so well understood. Increased emphasis should be placed on neutron work in the future.

REFERENCES

1. C. Eisenhauer. National Bureau of Standards Technical Note 74, Scattering of Cobalt-60 Gamma Radiation in Air Ducts. Washington, D. C., 1960.
2. C. W. Terrell, A. J. Jerri, R. O. Lyday, and D. Sperber. Armour Research Foundation Report ARF 1158-12, Radiation Streaming in Shelter Entranceways. Chicago, Illinois, 1960.
3. C. W. Terrell and A. J. Jerri. Armour Research Foundation Report ARF-1158-A01-5, Radiation Streaming in Shelter Entranceways. Chicago, Illinois, 1961.
4. C. W. Terrell, A. J. Jerri, and R. O. Lyday. Armour Research Foundation Report ARF 1158-A02-7, Radiation Streaming in Ducts and Shelter Entranceways. Chicago, Illinois, 1962.
5. D. W. Green. U. S. Naval Civil Engineering Laboratory Technical Report R-195, Attenuation of Gamma Radiation in a Two-Legged 11-Inch Rectangular Duct. Port Hueneme, California, May 1962.
6. J. M. Chapman. U. S. Naval Civil Engineering Laboratory Technical Note N-443, Gamma Dose Rates and Energy Spectra in a 3-Foot Square Duct. Port Hueneme, California, June 1962.
7. T. R. Fowler and C. H. Dorn. U. S. Naval Civil Engineering Laboratory Technical Note N-465, Gamma-Ray Attenuation in a 12-Inch-Diameter Round Concrete Duct. Port Hueneme, California, November 1962.
8. T. Rockwell, III, editor. U. S. Atomic Energy Commission Report TID-7004, Reactor Shielding Design Manual. Washington, D. C., 1956.

9. A. B. Chilton and C. M. Huddleston. U. S. Naval Civil Engineering Laboratory Technical Report R-228, A Semiempirical Formula for Differential Dose Albedo for Gamma Rays on Concrete. Port Hueneme, California, November 1962.
10. M. Leimdörfer. AB Atomenergi Report AE-92, The Backscattering of Gamma Radiation from Plane Concrete Walls. Aktiebolaget Atomenergi, Stockholm, Sweden, December 1962.
11. D. J. Raso. Technical Operations, Inc., Report TO-B 61-39 (revised), Monte Carlo Calculations on the Reflection and Transmission of Scattered Gamma Radiation. Burlington, Massachusetts, 1961.
12. M. Leimdörfer. AB Atomenergi Report AE-93, The Backscattering of Gamma Radiation from Spherical Concrete Walls. Aktiebolaget Atomenergi, Stockholm, Sweden, January 1963.
13. M. J. Berger and J. Doggett. Research Paper 2653, "Reflection and Transmission of Gamma Radiation by Barriers: Semianalytic Monte Carlo Calculation," Journal of Research of the National Bureau of Standards, Vol. 56 (1956), p. 89.
14. J. Corner and R. H. A. Liston. "The Scattering of Gamma Rays in Extended Media," Proclamation of the Royal Society, Ser. A, Vol. 204 (1950), p. 323.
15. E. Hayward and J. H. Hubbell. National Bureau of Standards Report 2264, An Experiment on Gamma-Ray Backscattering. Washington, D. C., 1953.
16. E. Hayward and J. H. Hubbell. "The Backscattering of the Co^{60} Gamma Rays From Infinite Media," Journal of Applied Physics, Vol. 25, No. 4 (1954), pp. 506-509.
17. A. B. Chilton. "Backscattering by an Infinite Concrete Plane of Gamma Radiation from a Point Isotropic Source," Transactions of the American Nuclear Society, Vol. 6, No. 1 (1963), p. 200.
18. E. T. Clarke and J. Batter. "Gamma-Ray Scattering by Nearby Surfaces," Transactions of the American Nuclear Society, Vol. 5, No. 1 (1962), p. 223.
19. J. M. Chapman. U. S. Naval Civil Engineering Laboratory Technical Report R-264, Computer Calculations of Dose Rates in Two-Legged Ducts Using the Albedo Concept. Port Hueneme, California, October 1963.

20. N. F. Shoemaker and C. M. Huddleston. "A Mathematical Simplification of the Gamma-Ray Albedo Problem," Transactions of the American Nuclear Society, Vol. 6, No. 1 (1963), p. 198. Also see: Shoemaker and Huddleston, A Mathematical Approach to Economy of Experiment in Determinations of the Differential Dose Albedo of Gamma Rays, U. S. Naval Civil Engineering Laboratory Technical Note N-478, December 1962.
21. J. C. LeDoux and A. B. Chilton. U. S. Naval Civil Engineering Laboratory Technical Note N-383, Attenuation of Gamma Radiation Through Two-Legged Rectangular Ducts and Shelter Entranceways. Port Hueneme, California, January 1961.
22. C. M. Park, C. B. Agnihotri, and J. Silverman. Department of Chemical Engineering, University of Maryland, Report UMNE-2, Interim Report on Scattering of Gammas Through Ducts. College Park, Maryland, 1962.
23. W. C. Ingold. U. S. Naval Civil Engineering Laboratory Technical Note N-469, Some Applications of a Semiempirical Formula for Differential Dose Albedo for Gamma Rays on Concrete. Port Hueneme, California, December 1962.
24. B. Eisenman and E. Hennessy. United Nuclear Corporation, UNUCOR-635, ADONIS — an IBM-7090 Monte Carlo Shielding Code Which Solves for the Transport of Neutrons or Gamma Rays in Three-Dimensional Rectangular Geometry. White Plains, New York, 1963.

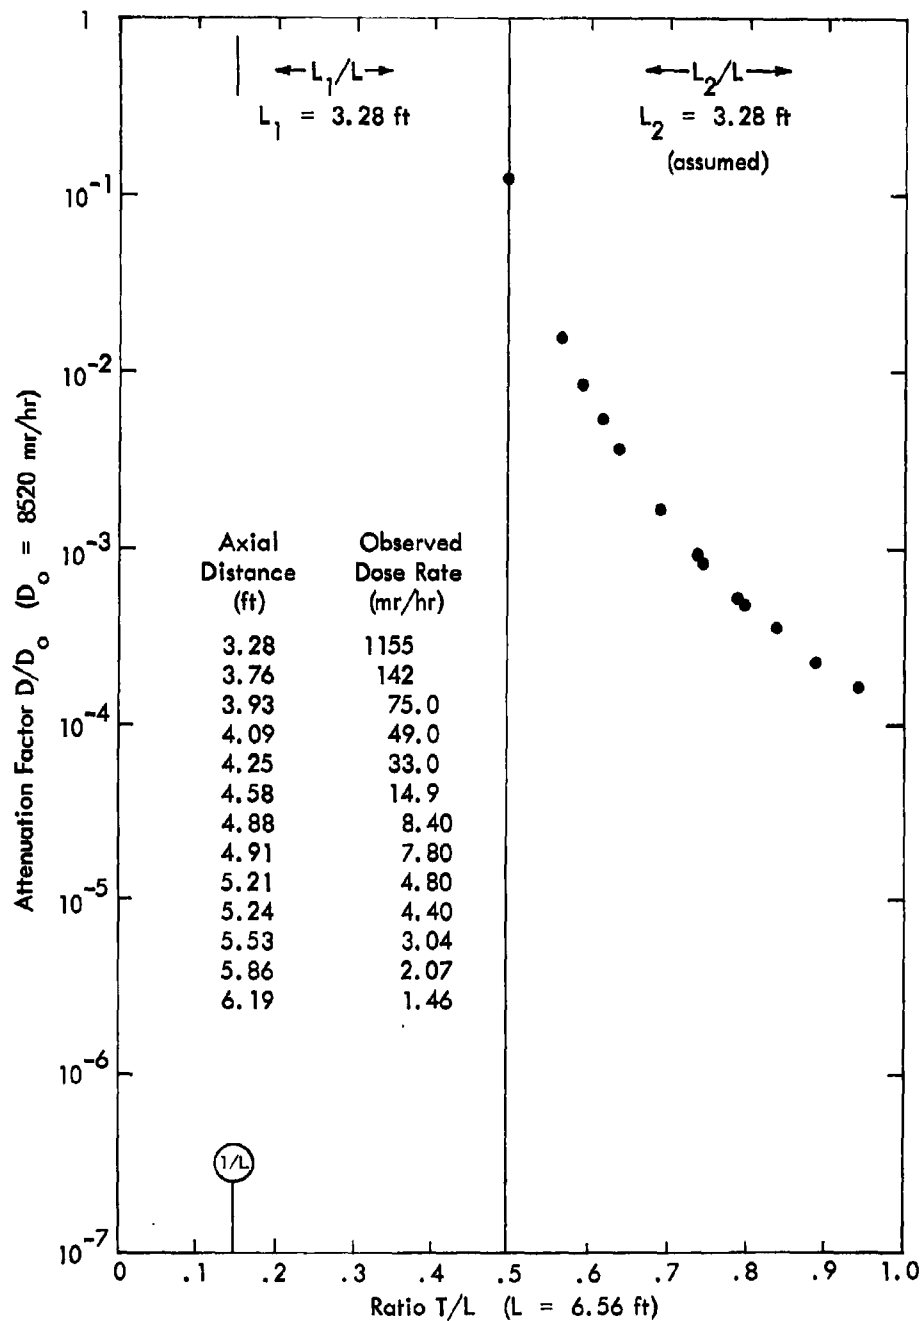


Figure 1. L-shaped 0.630 x 0.952-foot rectangular concrete duct with $W/2 = 0.3815$ foot; 0.6-curie Co^{60} point source. (From Reference 1, supplemented by correspondence.)

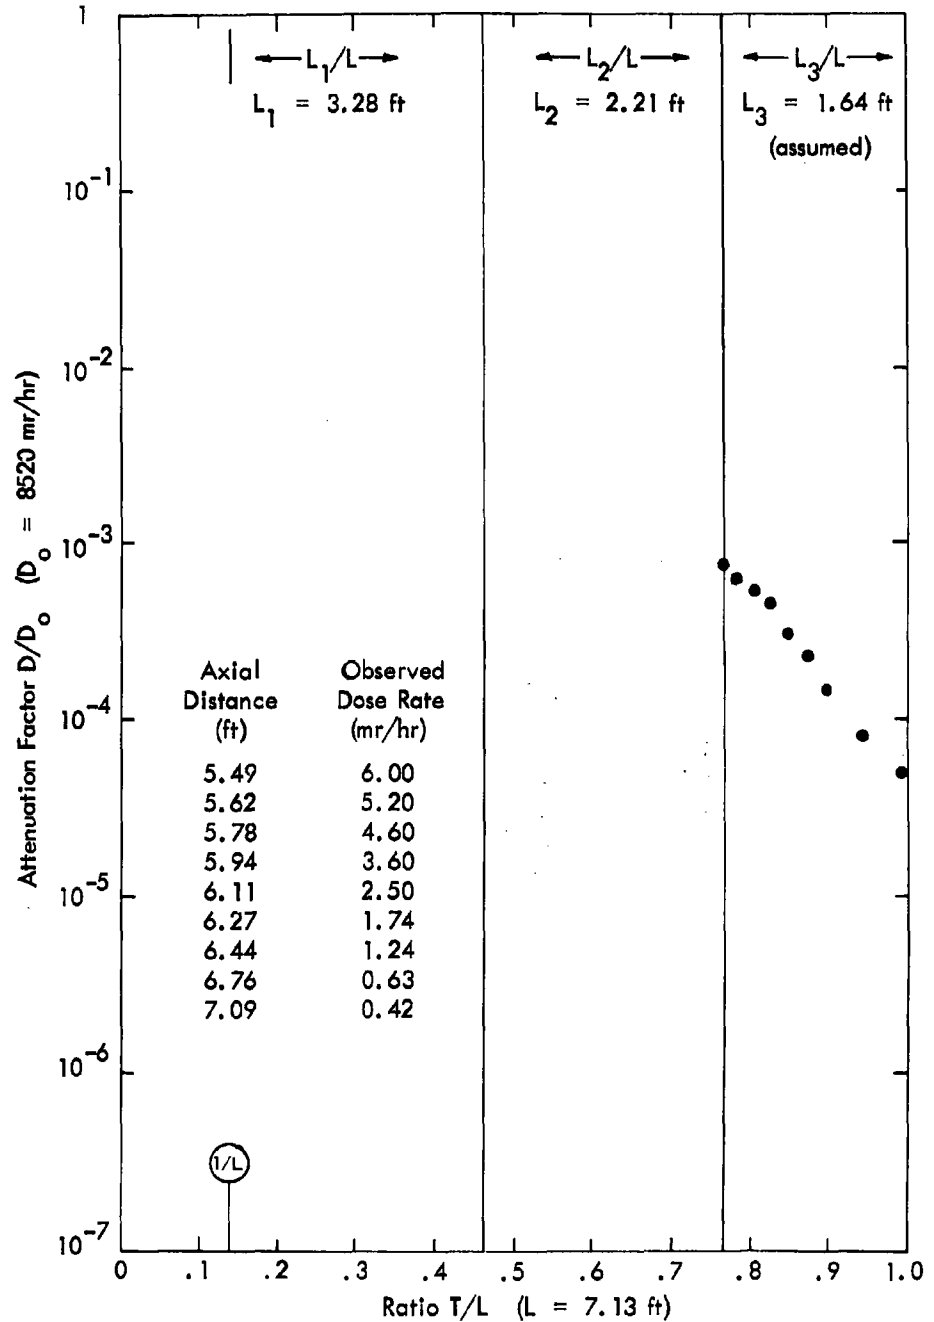


Figure 2. U-shaped 0.925 x 0.925-foot square concrete duct with $W/2 = 0.4625$ foot; 0.6-curie Co^{60} point source. (From Reference 1, supplemented by correspondence.)

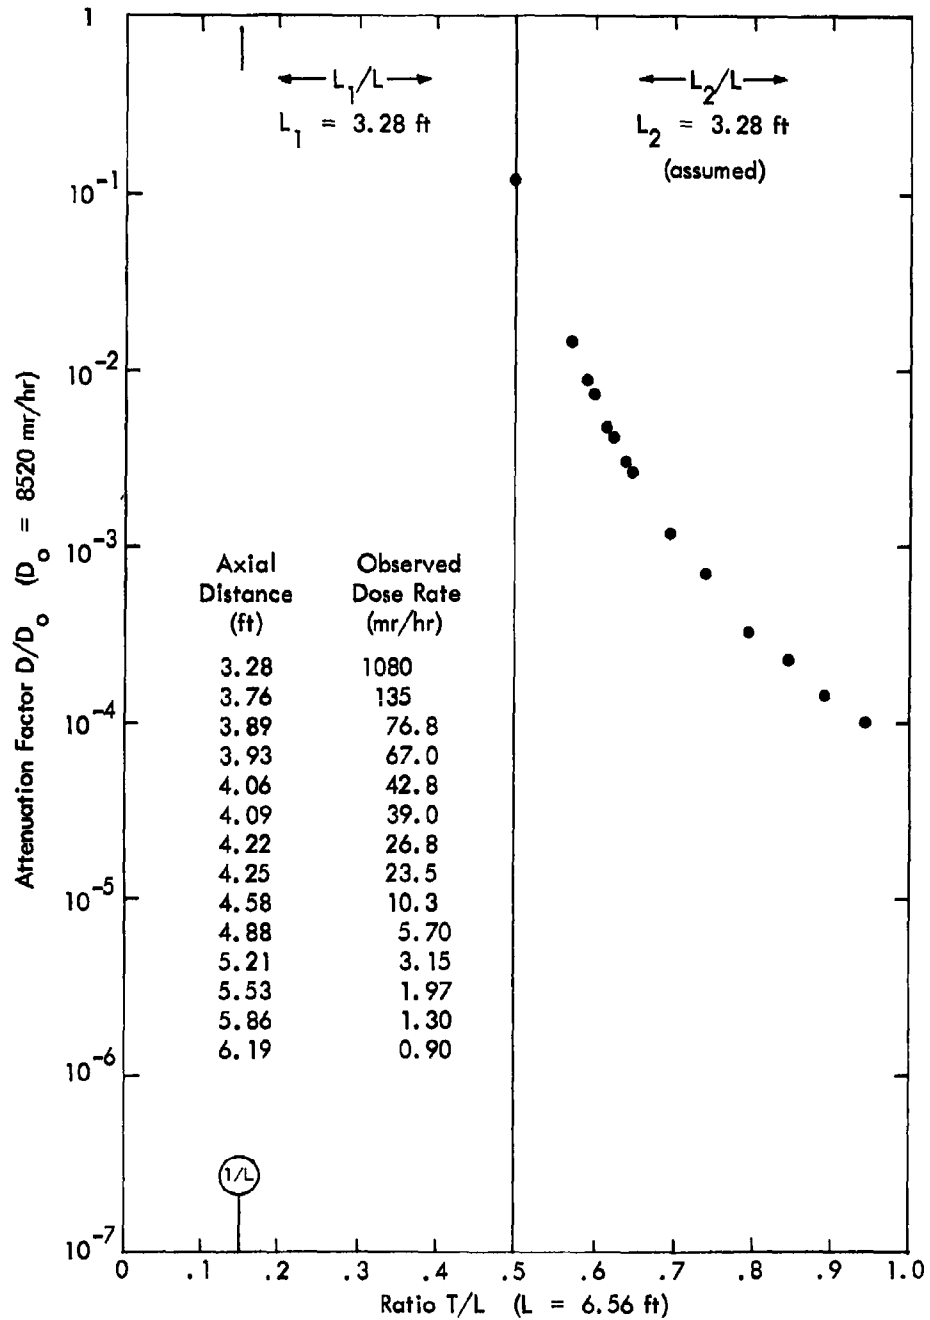


Figure 3. L-shaped 0.630 x 0.630-foot square concrete duct with $W/2 = 0.3149$ foot; 0.6-curie Co^{60} point source. (From Reference 1, supplemented by correspondence.)

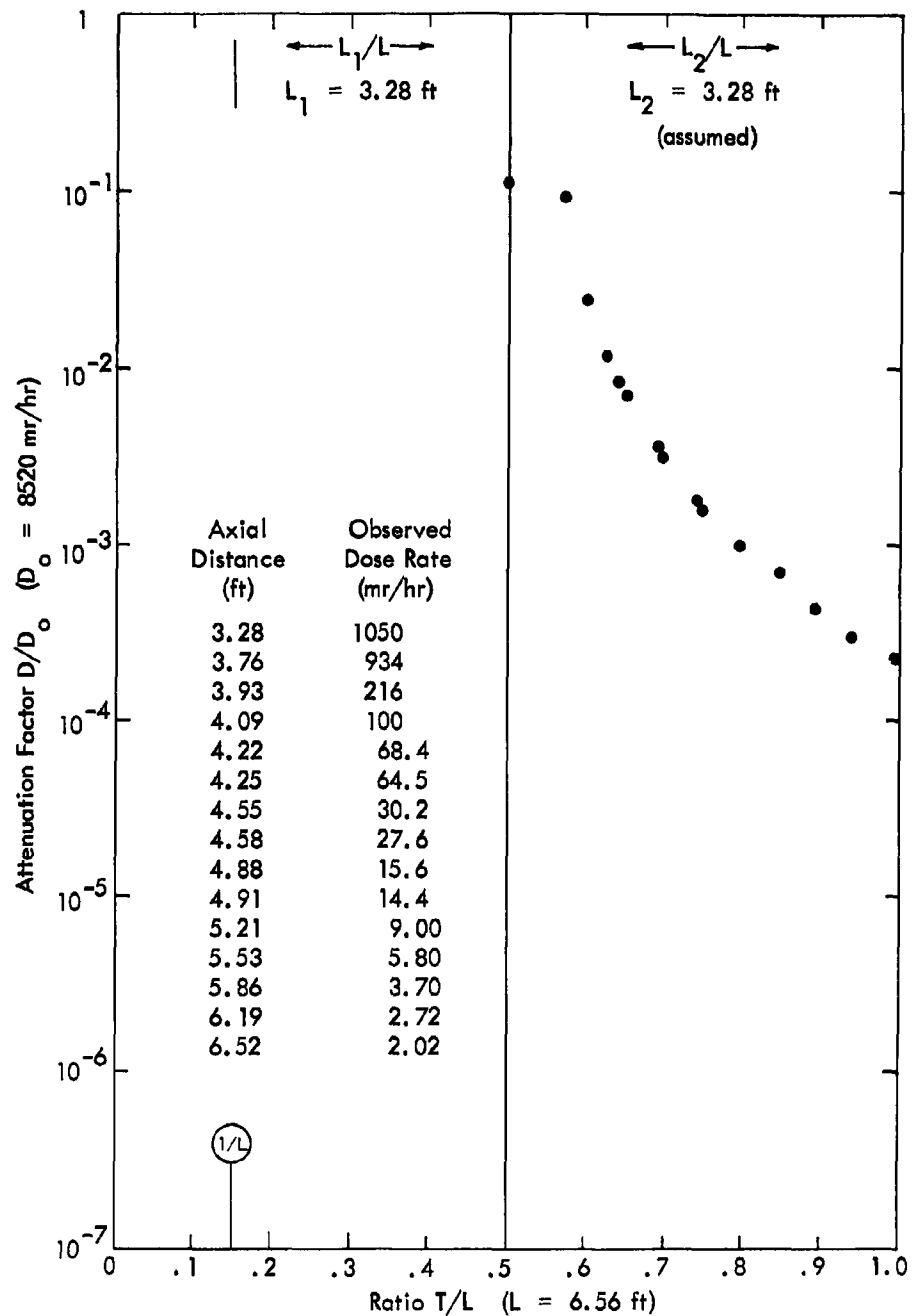


Figure 4. L-shaped 0.925 x 0.925-foot square concrete duct with $W/2 = 0.4625$ foot; 0.6-curie Co^{60} point source. (From Reference 1, supplemented by correspondence.)

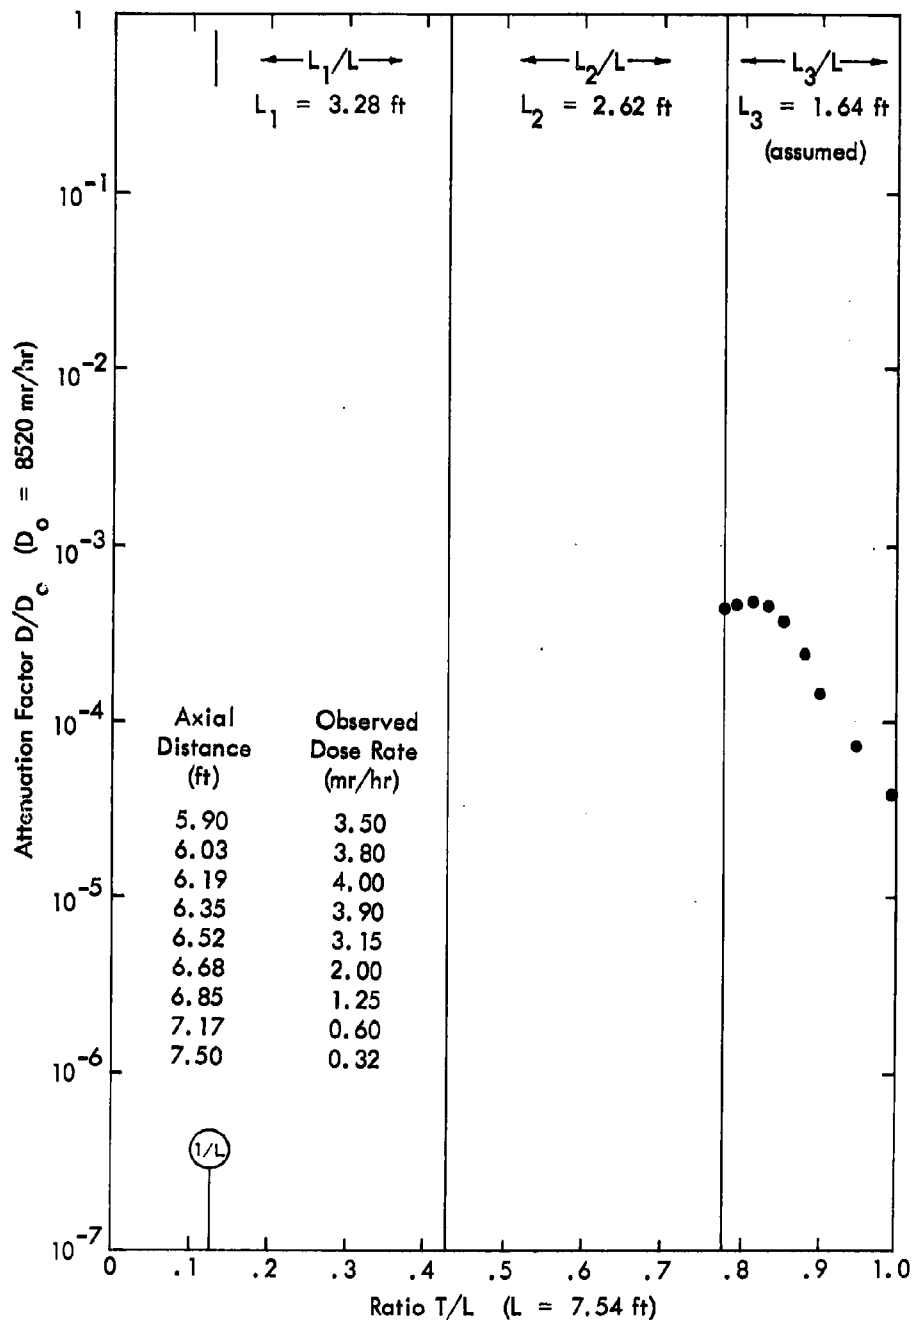


Figure 5. Z-shaped 0.925 x 0.925-foot square concrete duct with $W/2 = 0.4625$ foot; 0.6-curie Co^{60} point source. (From Reference 1, supplemented by correspondence.)

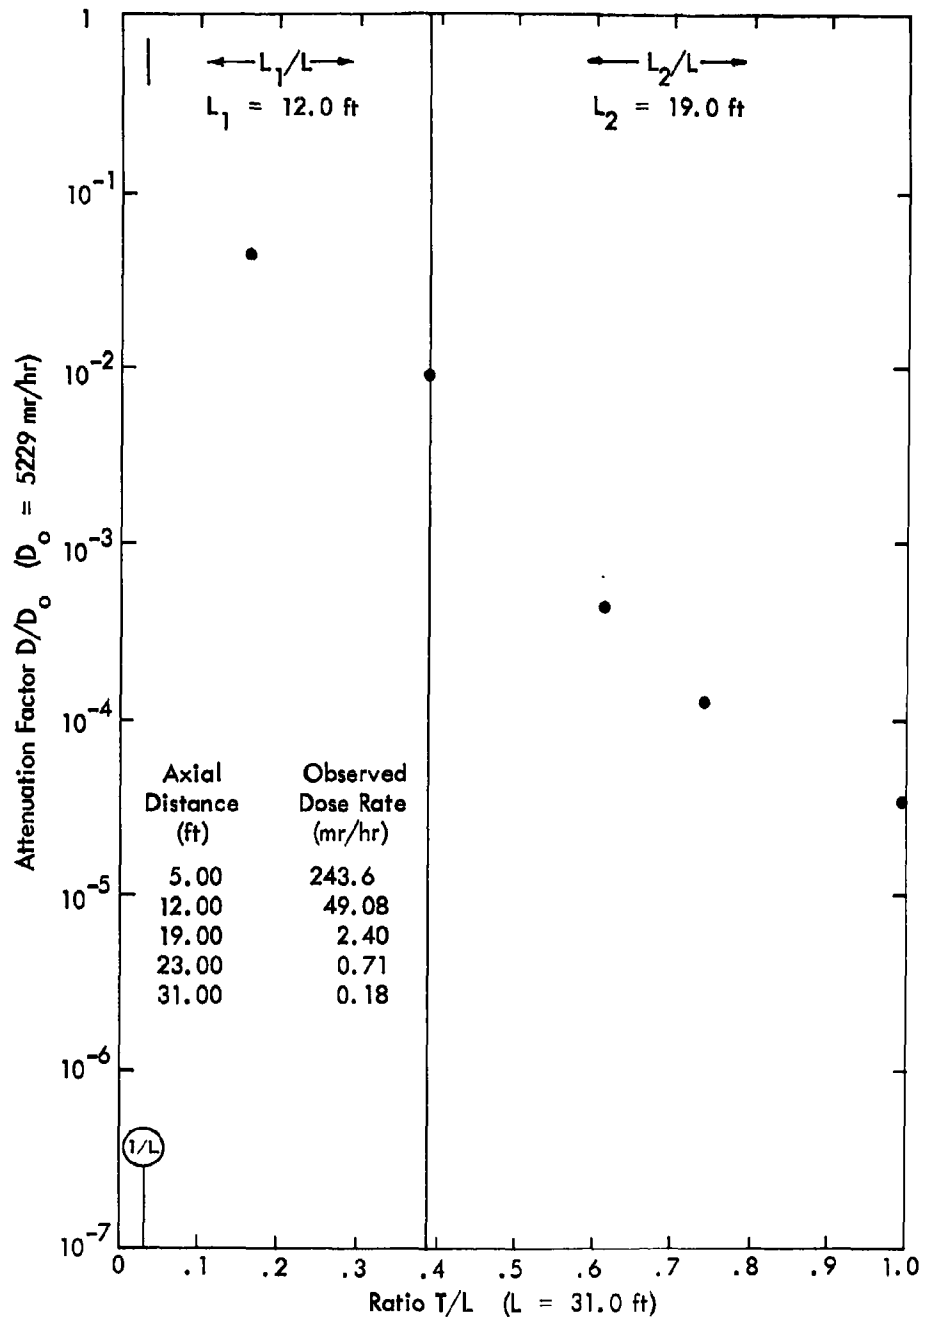


Figure 6. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 1.52-curie Cs^{137} point source. (From Reference 2, Table 4.)

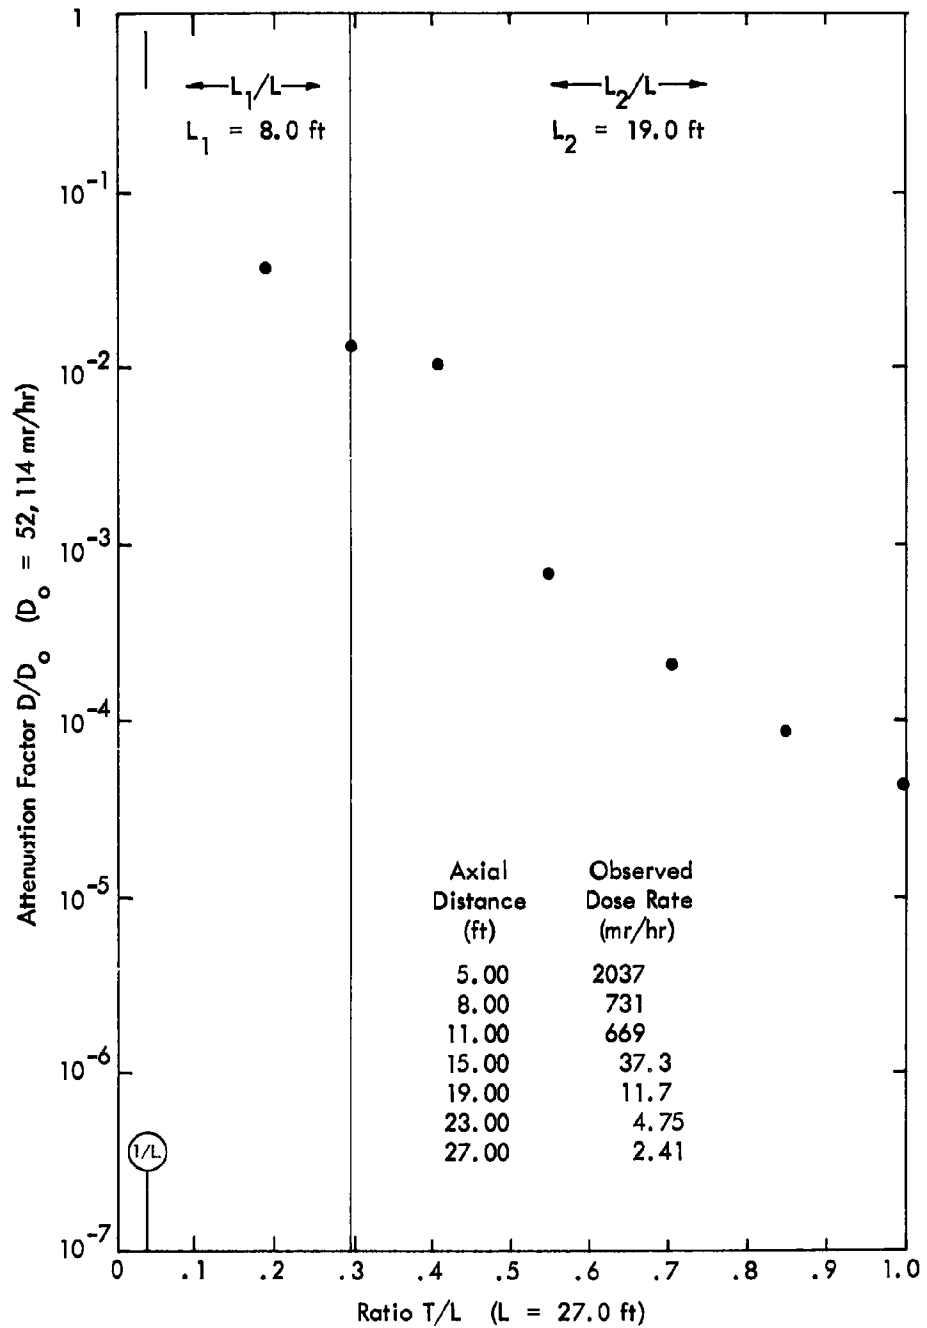


Figure 7. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 3.67-curie Co^{60} point source. (From Reference 2, Table 5A.)

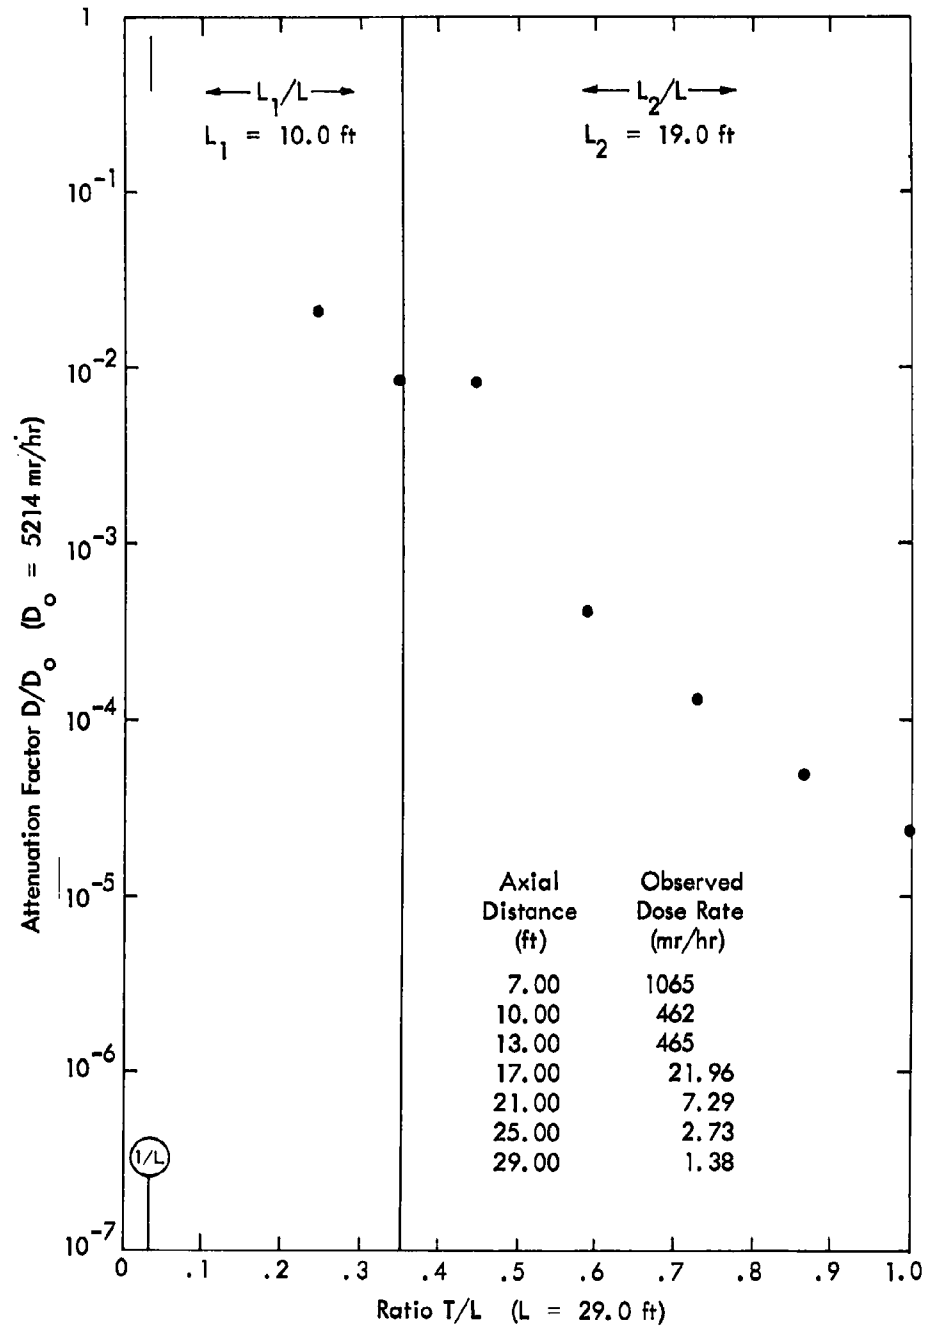


Figure 8. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 3.67-curie Co^{60} point source. (From Reference 2, Table 5B.)

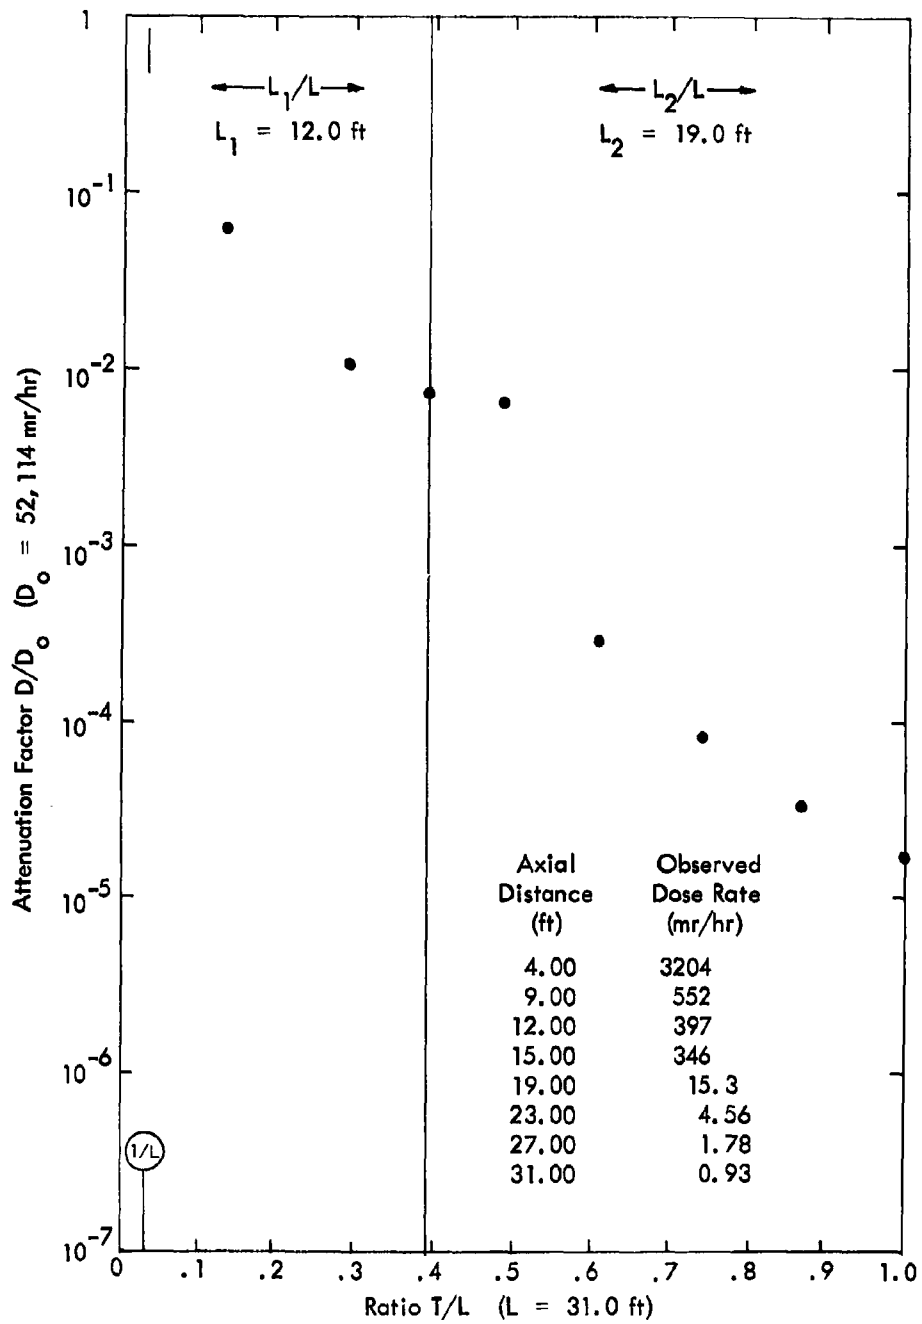


Figure 9. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 3.67-curie Co^{60} point source. (From Reference 2, Table 5C.)

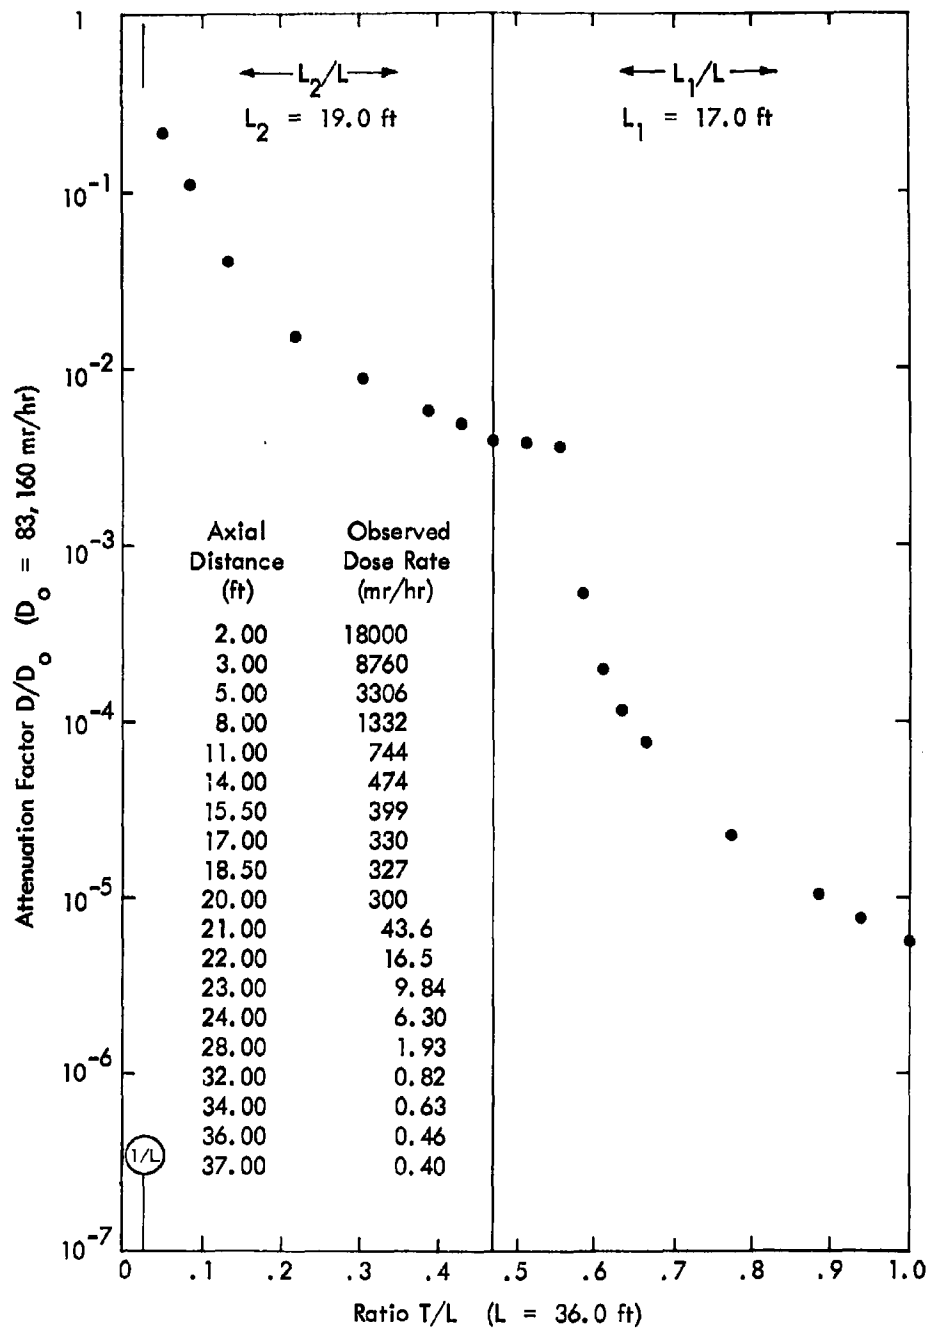


Figure 10. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 4.2-curie Na^{24} point source. (From Reference 3, Table 1.)

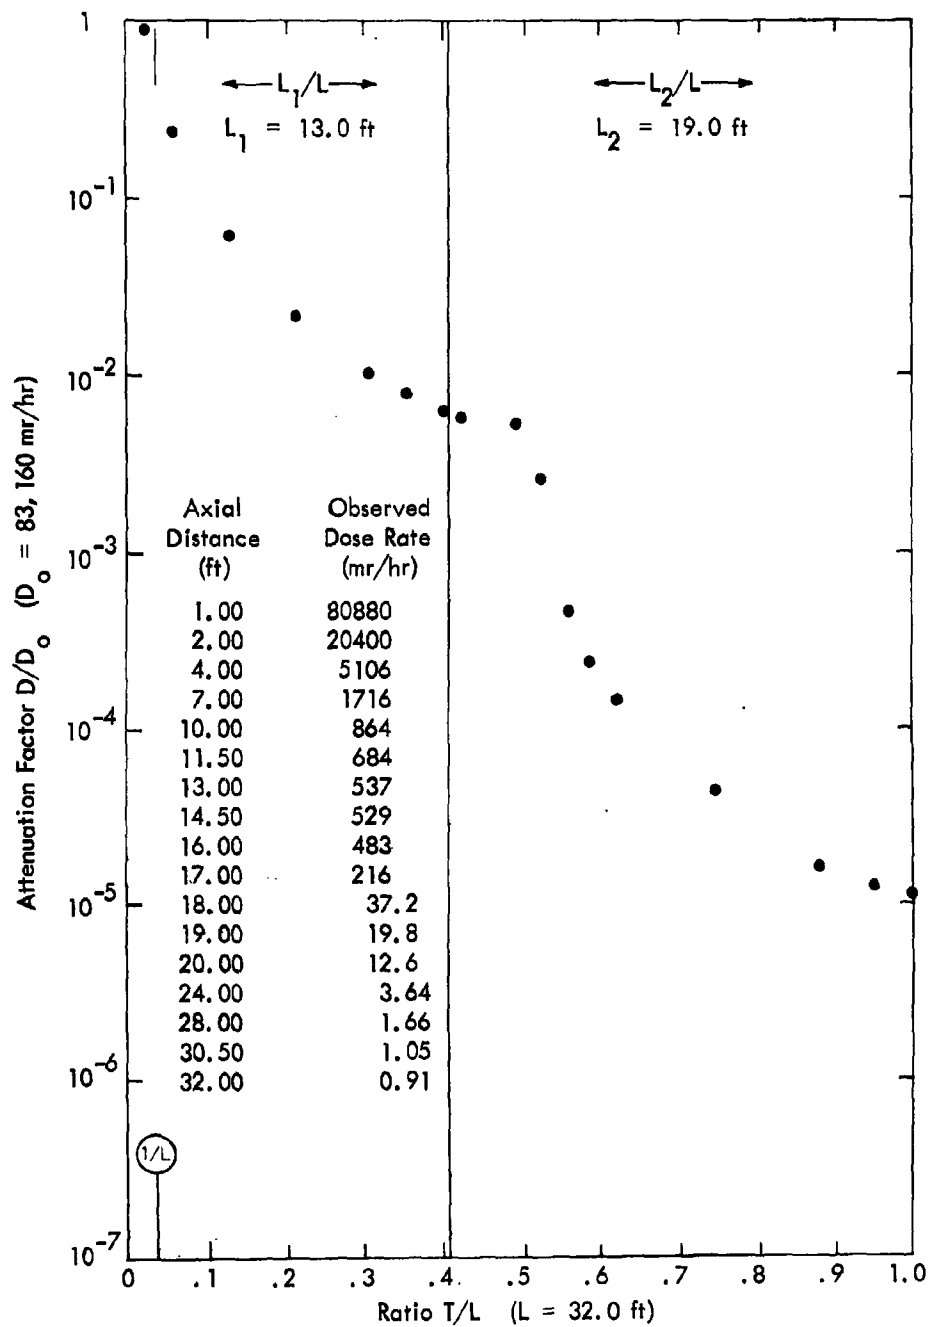


Figure 11. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 4.2-curie Na^{24} point source. (From Reference 3, Table 2.)

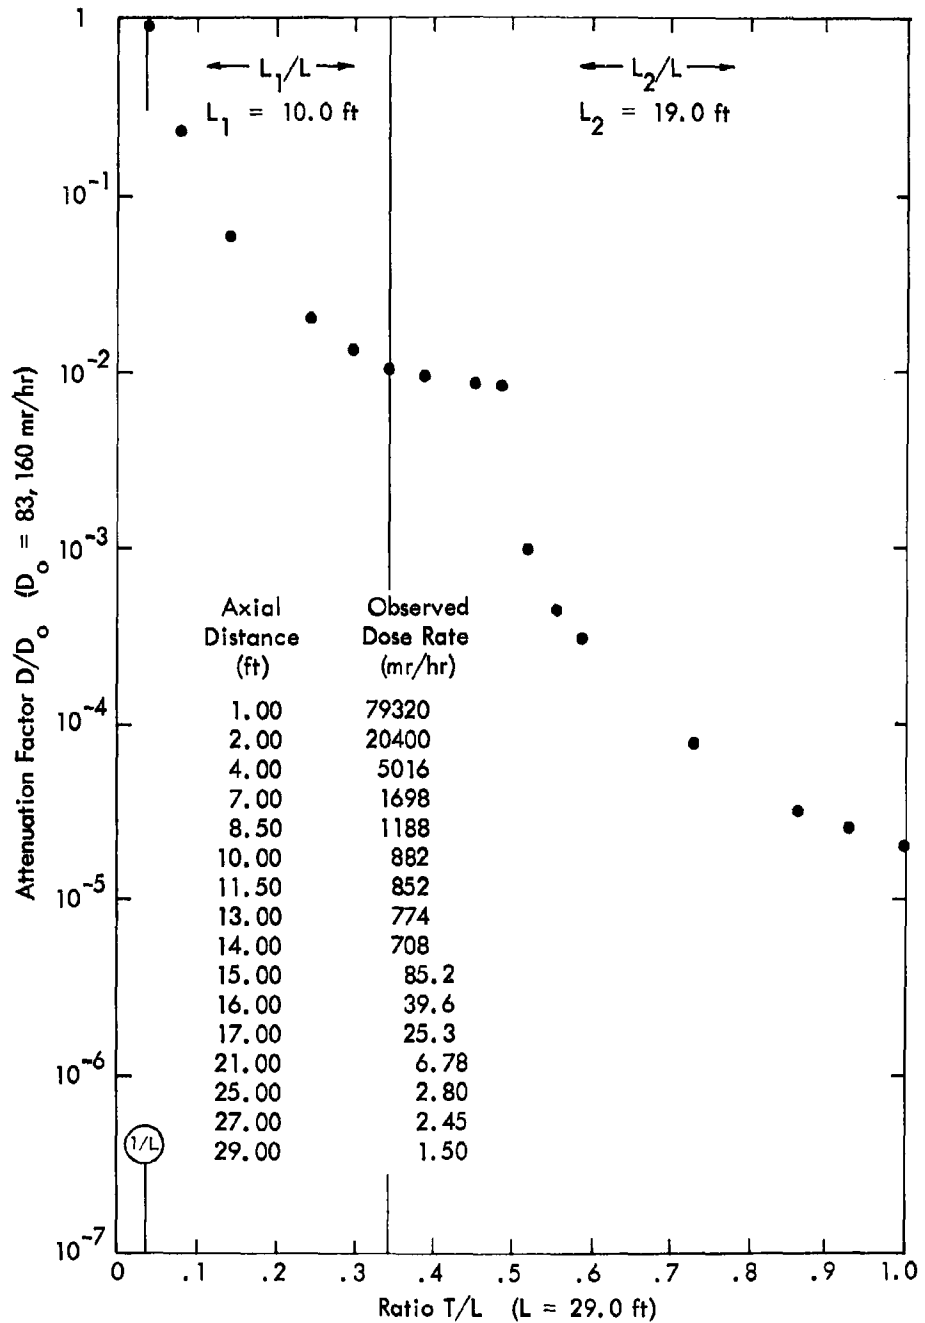


Figure 12. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 4.2-curie Na^{24} point source. (From Reference 3, Table 3.)

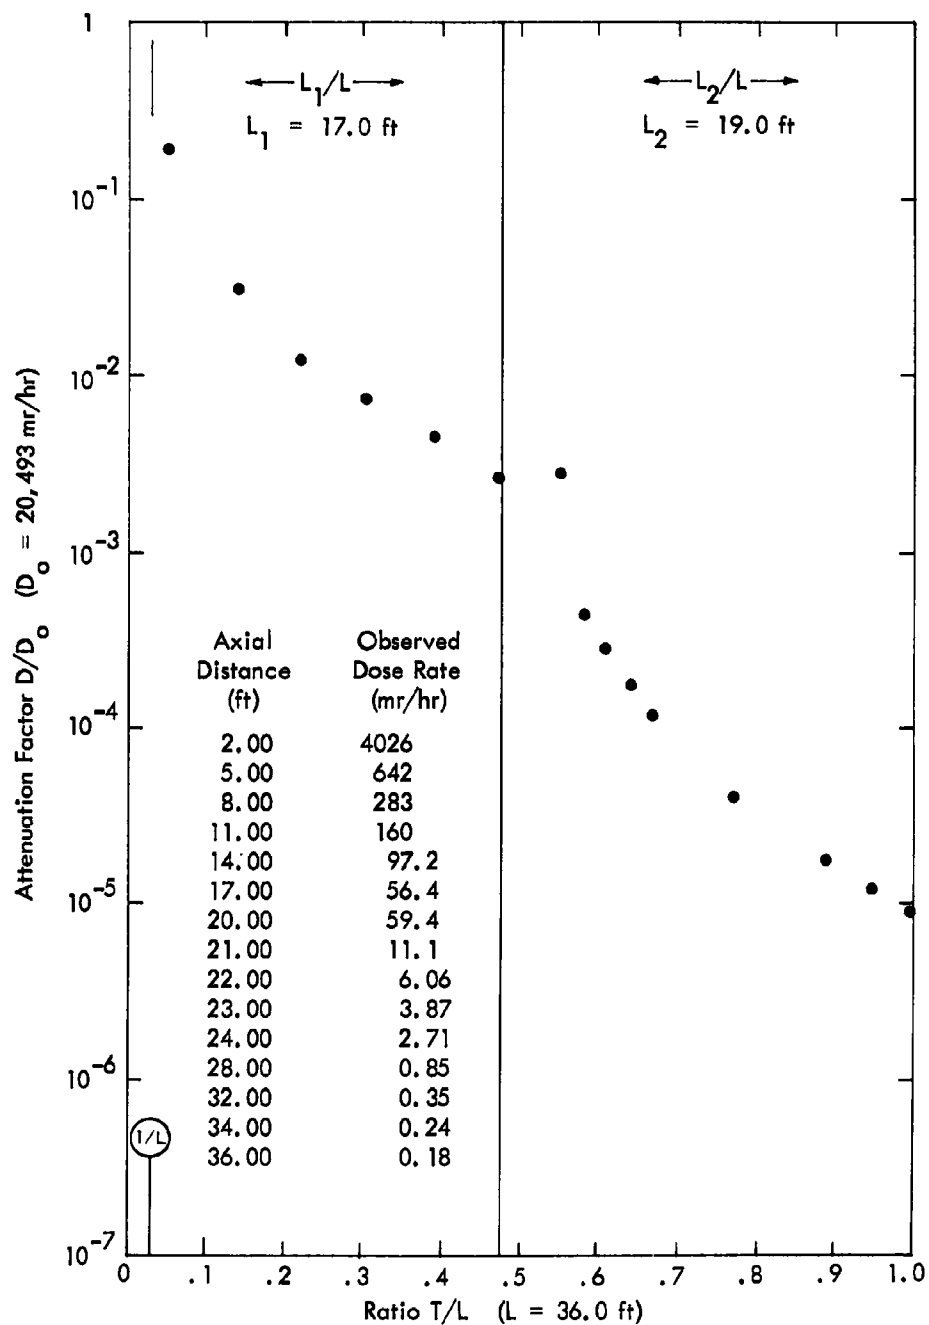


Figure 13. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 8.1-curie Au^{198} point source. (From Reference 3, Table 4.)

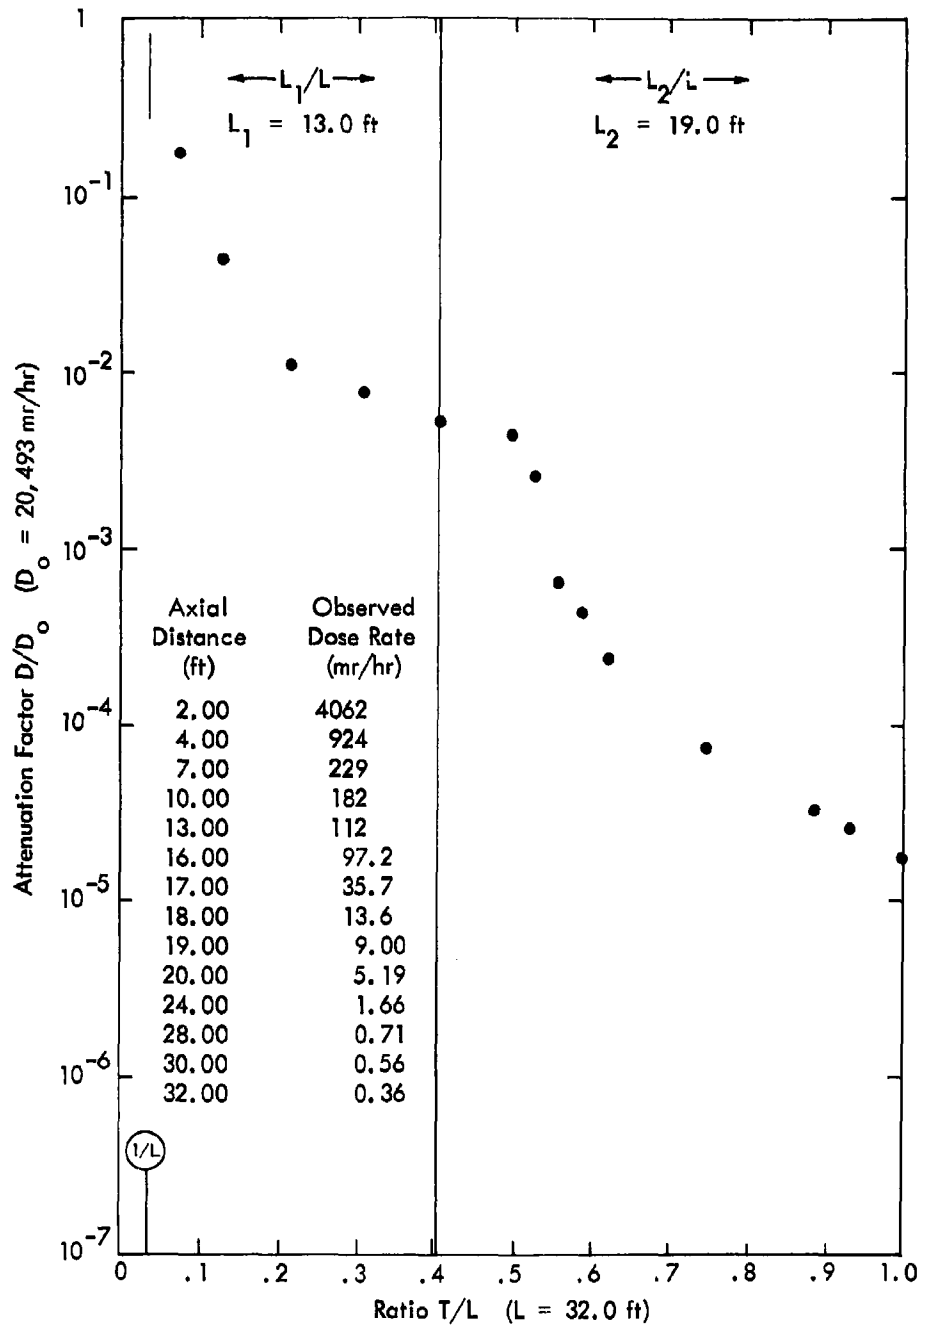


Figure 14. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 8.1-curie Au^{198} point source. (From Reference 3, Table 5.)

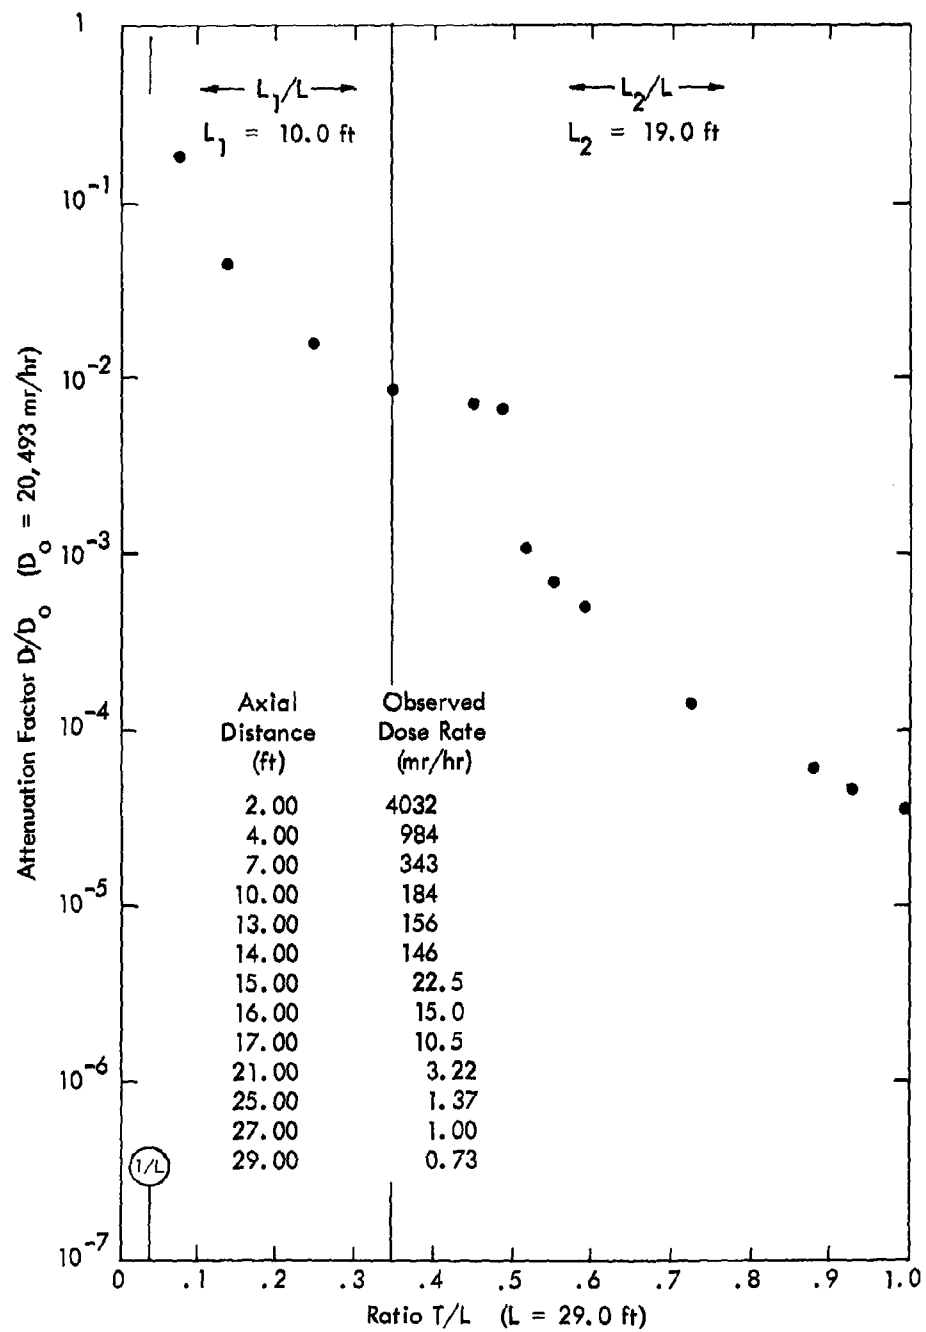


Figure 15. L-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 8.1-curie Au^{198} point source. (From Reference 3, Table 6.)

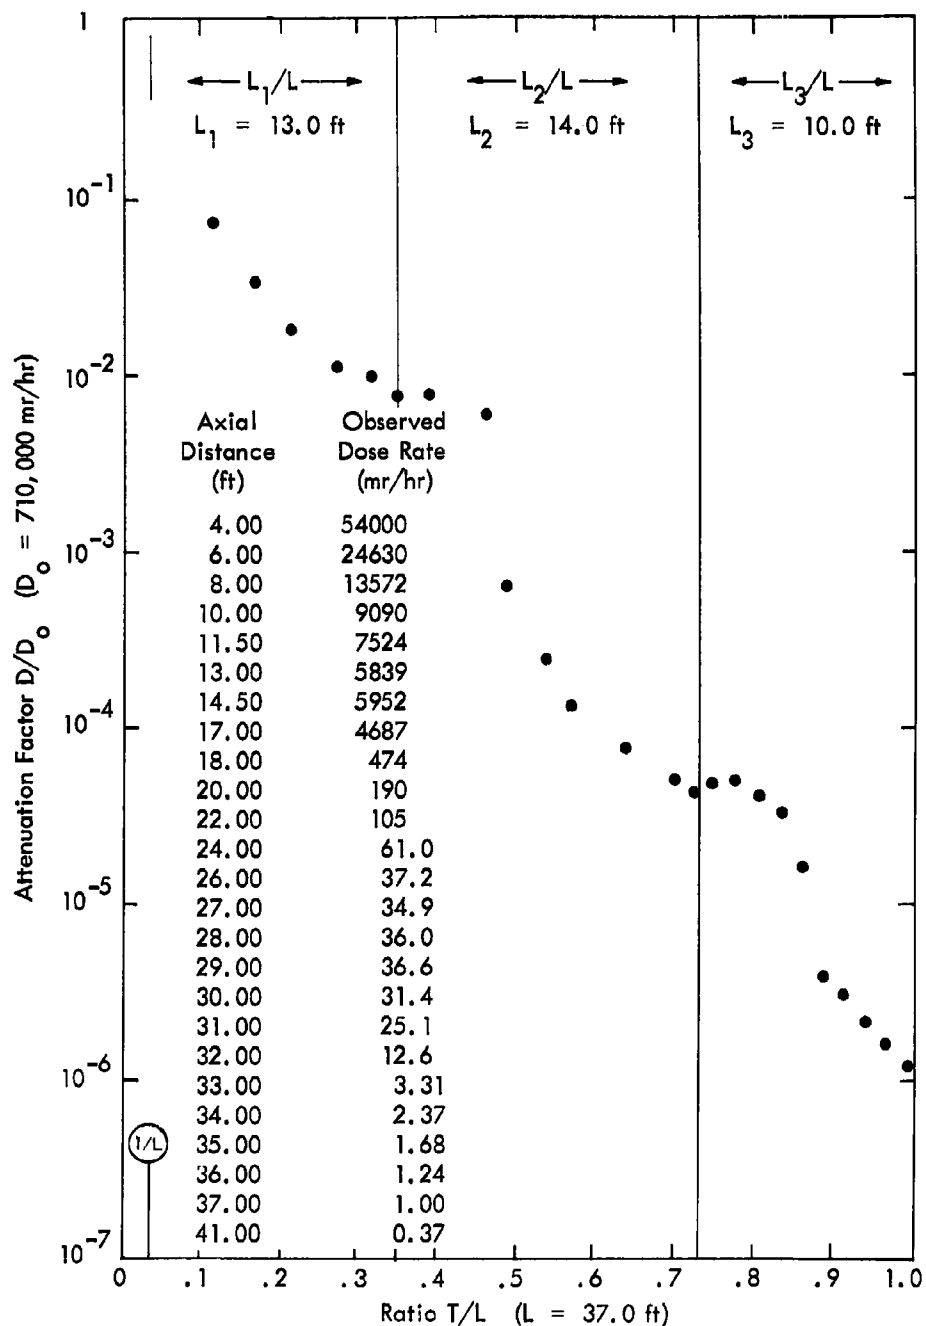


Figure 16. Z-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 50-curie Co^{60} point source. (From Reference 4, Table 1.)

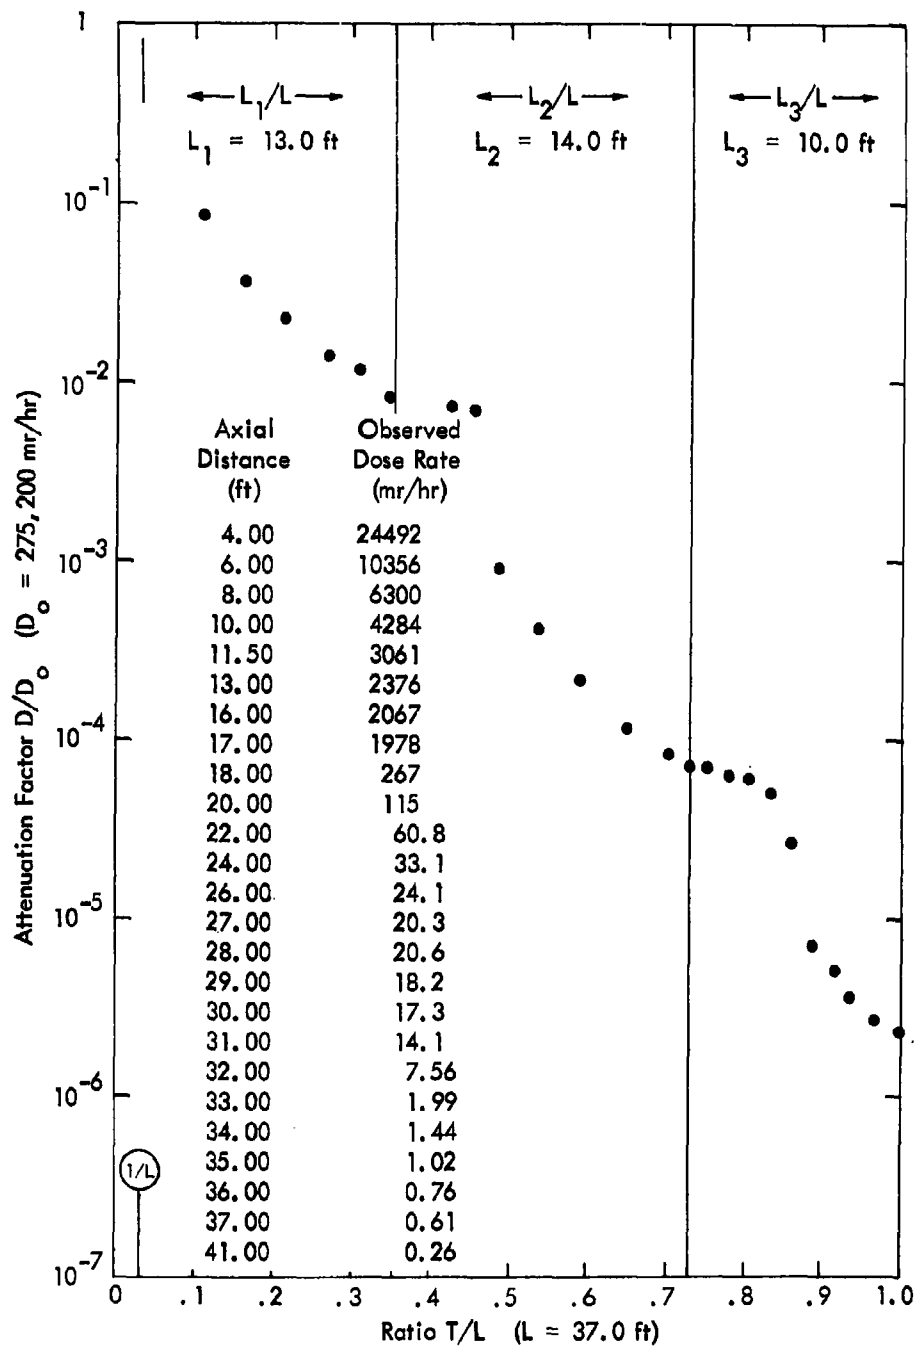


Figure 17. Z-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 80-curie Cs^{137} point source. (From Reference 4, Table 2.)

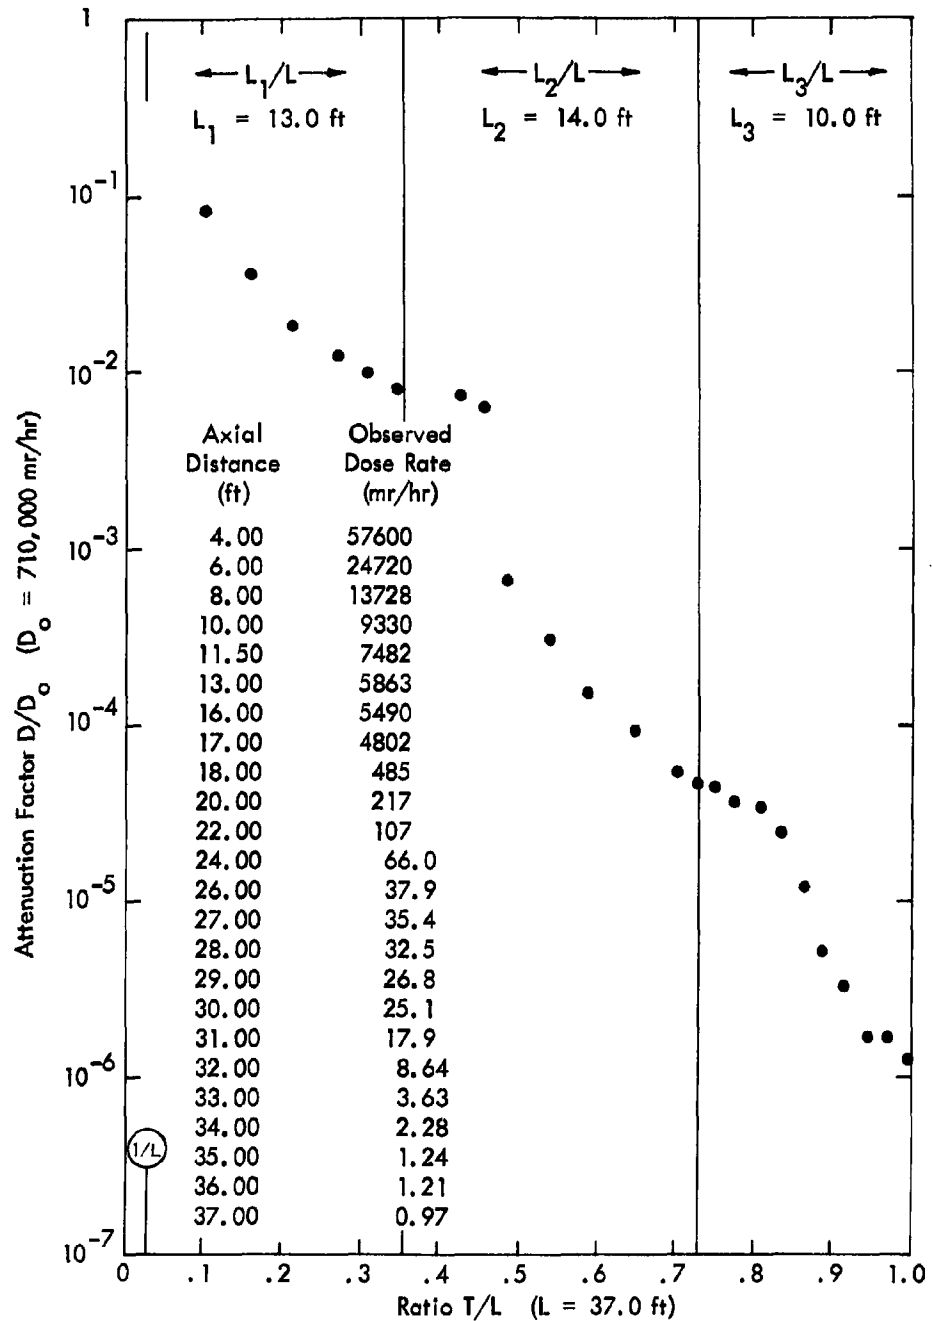


Figure 18. U-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 50-curie Co^{60} point source. (From Reference 4, Table 3.)

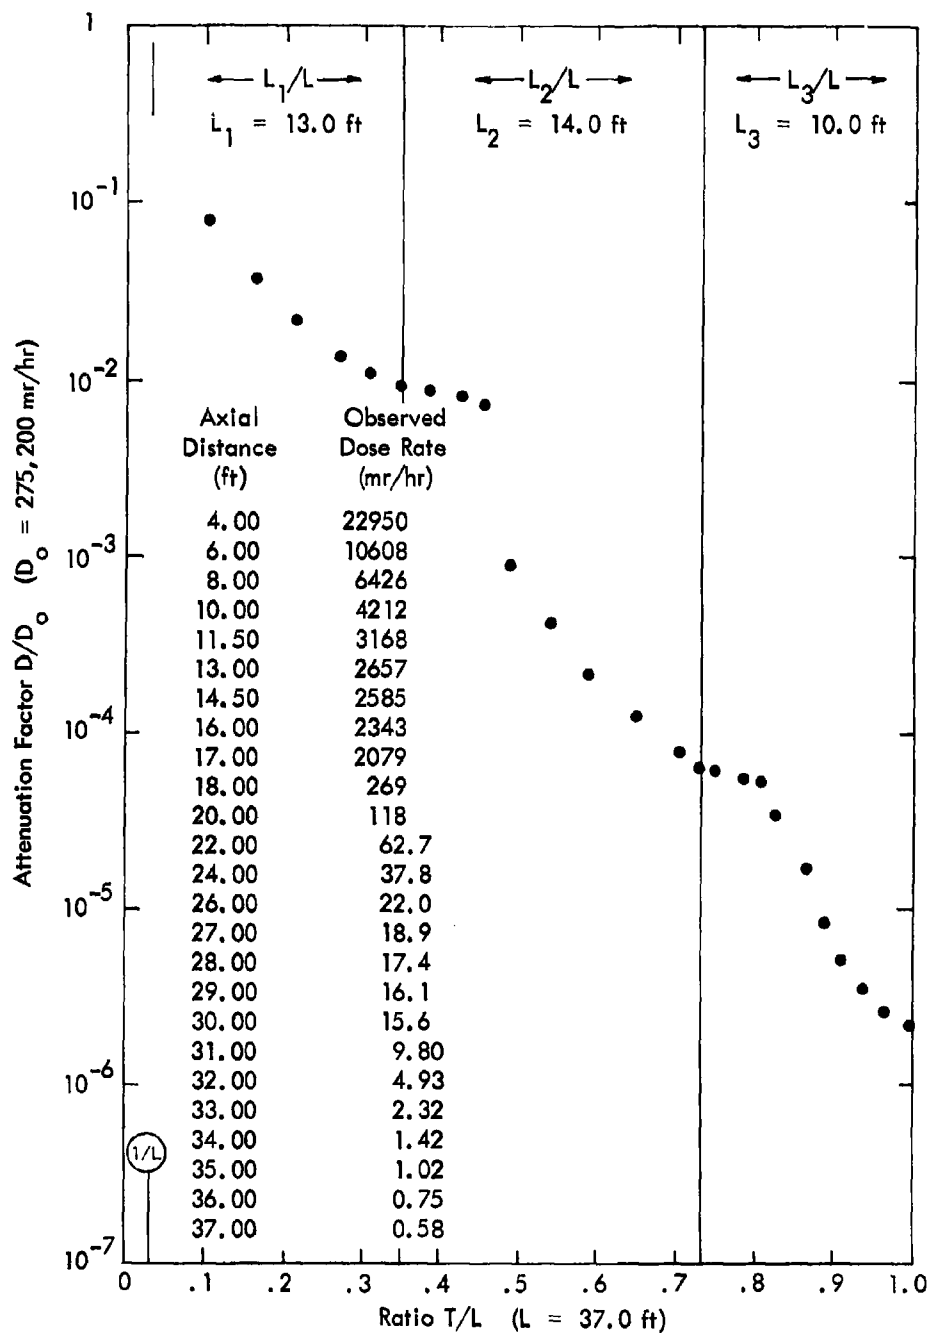


Figure 19. U-shaped 6 x 6-foot concrete entranceway with $W/2 = 3.0$ feet; 80-curie Cs^{137} point source. (From Reference 4, Table 4.)

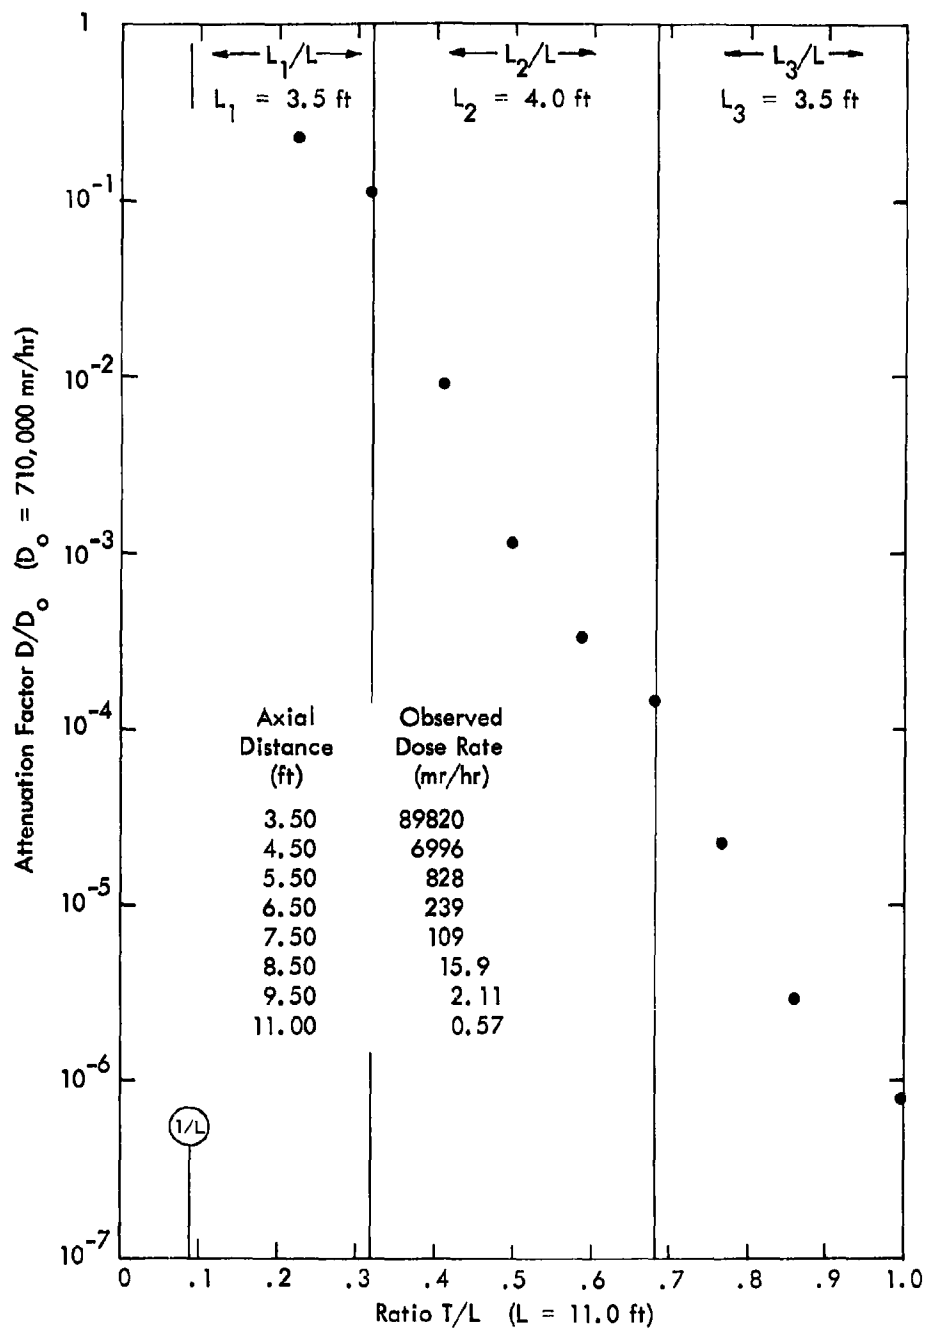


Figure 20. Z-shaped 1 x 1-foot concrete entranceway with $W/2 = 0.5$ foot; 50-curie Co^{60} point source. (From Reference 4, Table 6.)

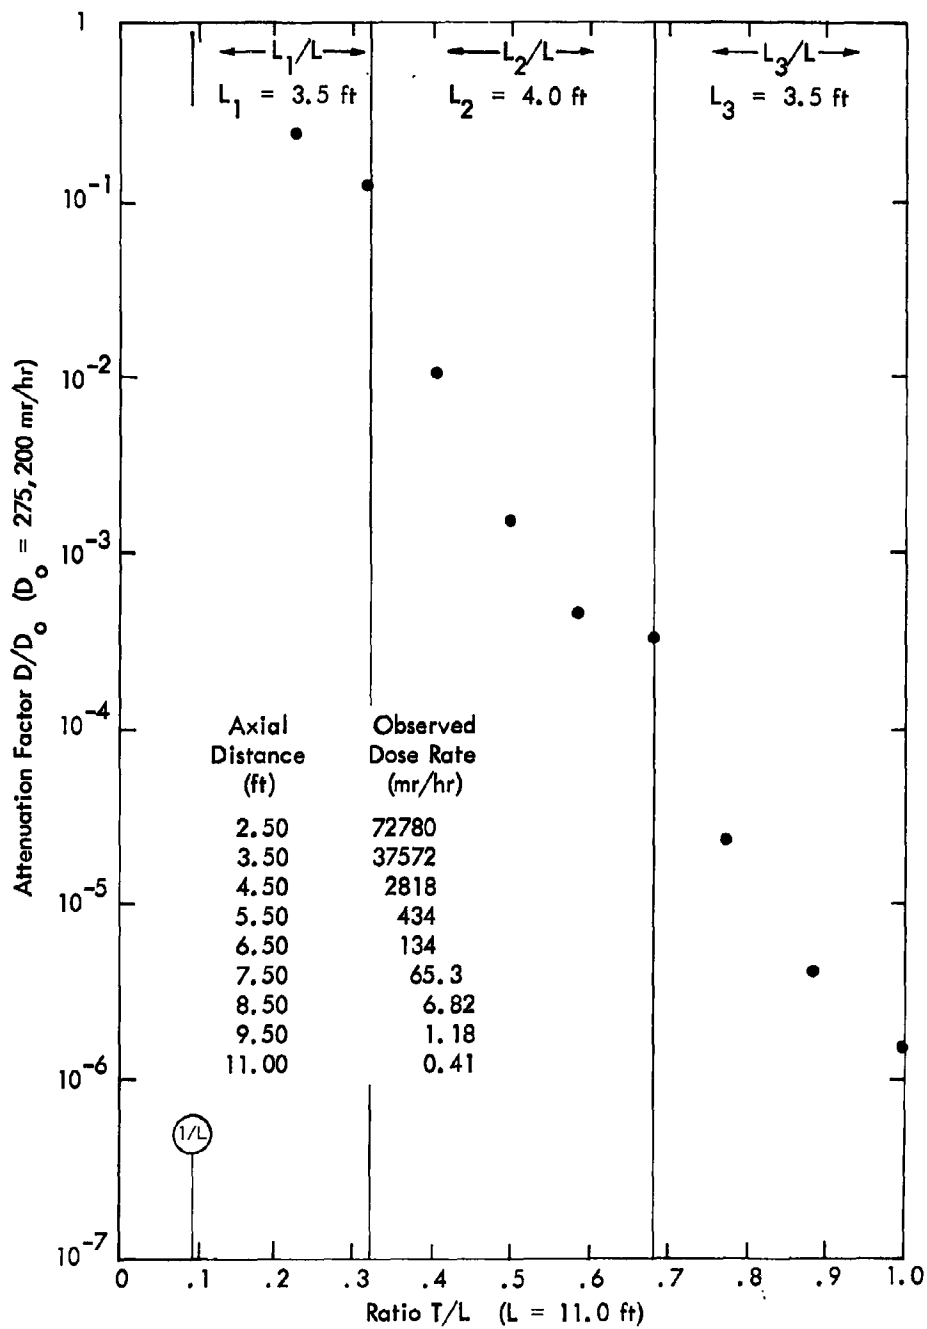


Figure 21. Z-shaped 1 x 1-foot concrete entranceway with $W/2 = 0.5$ foot; 80-curie Cs^{137} point source. (From Reference 4, Table 7.)

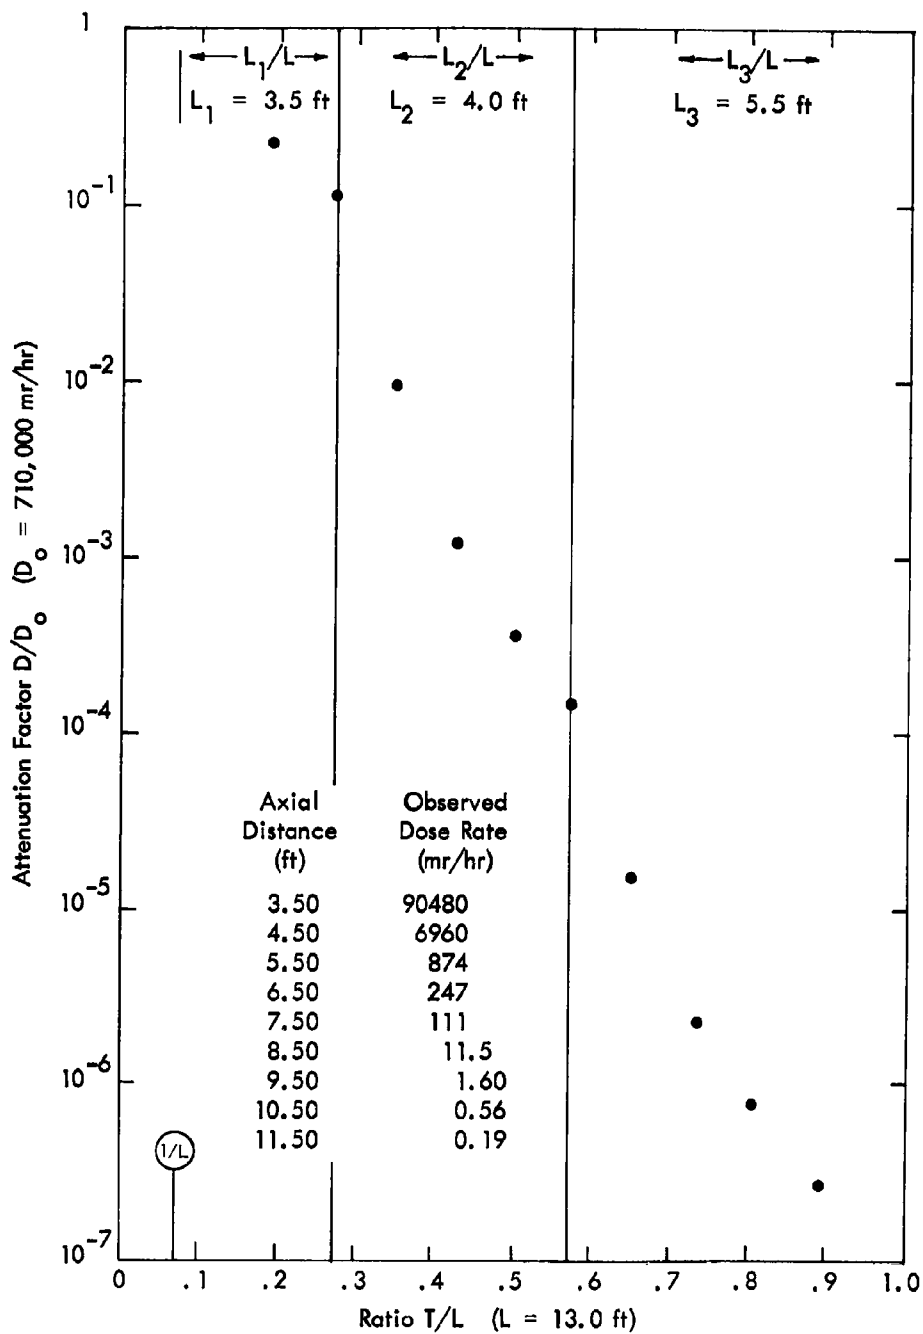


Figure 22. U-shaped 1 x 1-foot concrete entranceway with $W/2 = 0.5$ foot; 50-curie Co^{60} point source. (From Reference 4, Table 8.)

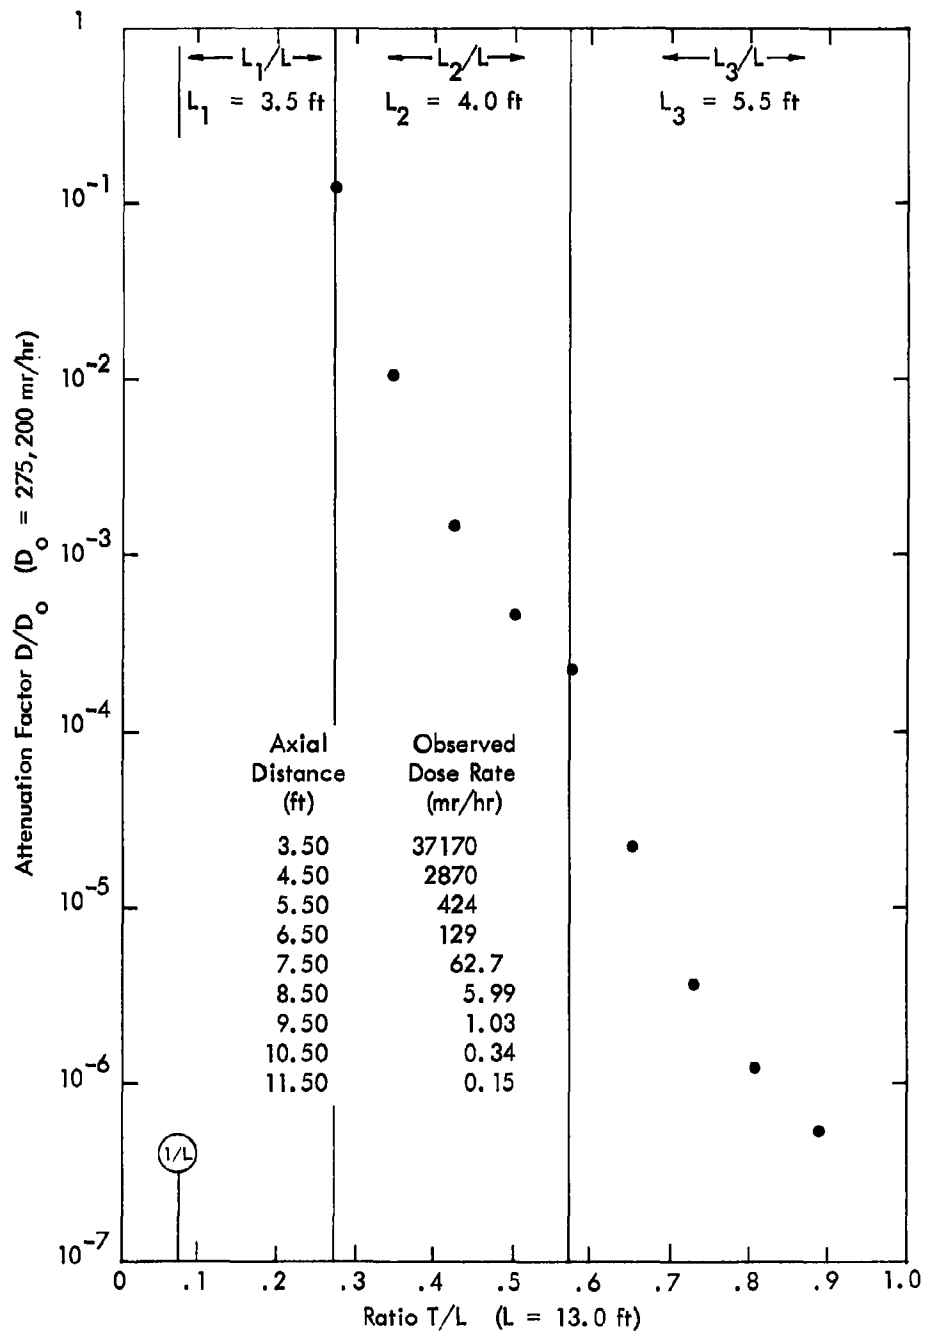


Figure 23. U-shaped 1 x 1-foot concrete entranceway with $W/2 = 0.5$ foot; 80-curie Cs^{137} point source. (From Reference 4, Table 9.)

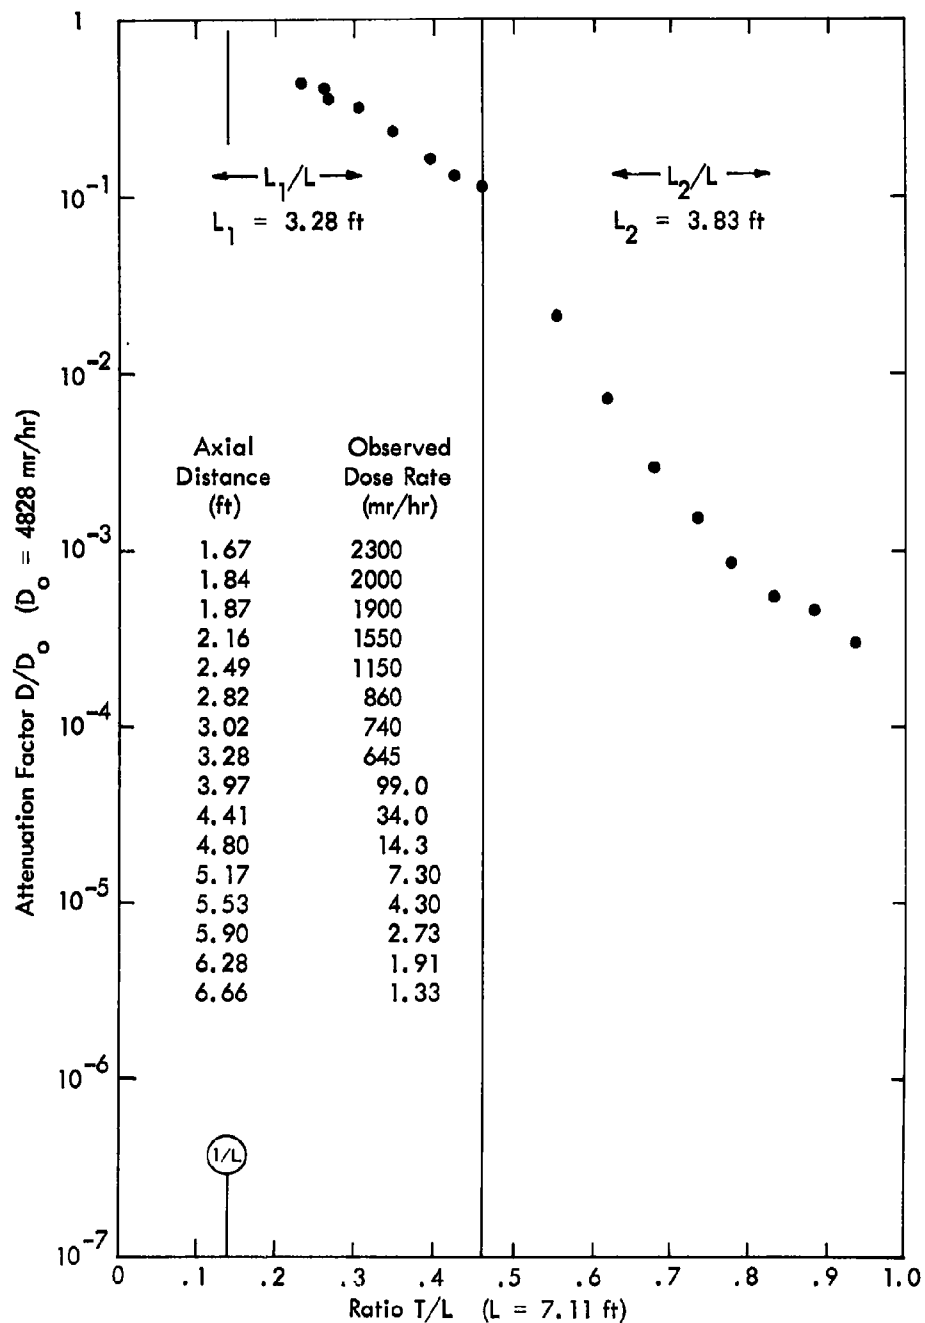


Figure 24. L-shaped 0.9167 x 0.9167-foot square concrete duct with $W/2 = 0.4583$ foot; 0.34-curie Co^{60} point source. Source in corner for L_1 measurements. (From Reference 5, Figure 12 and Table 8C-C.)

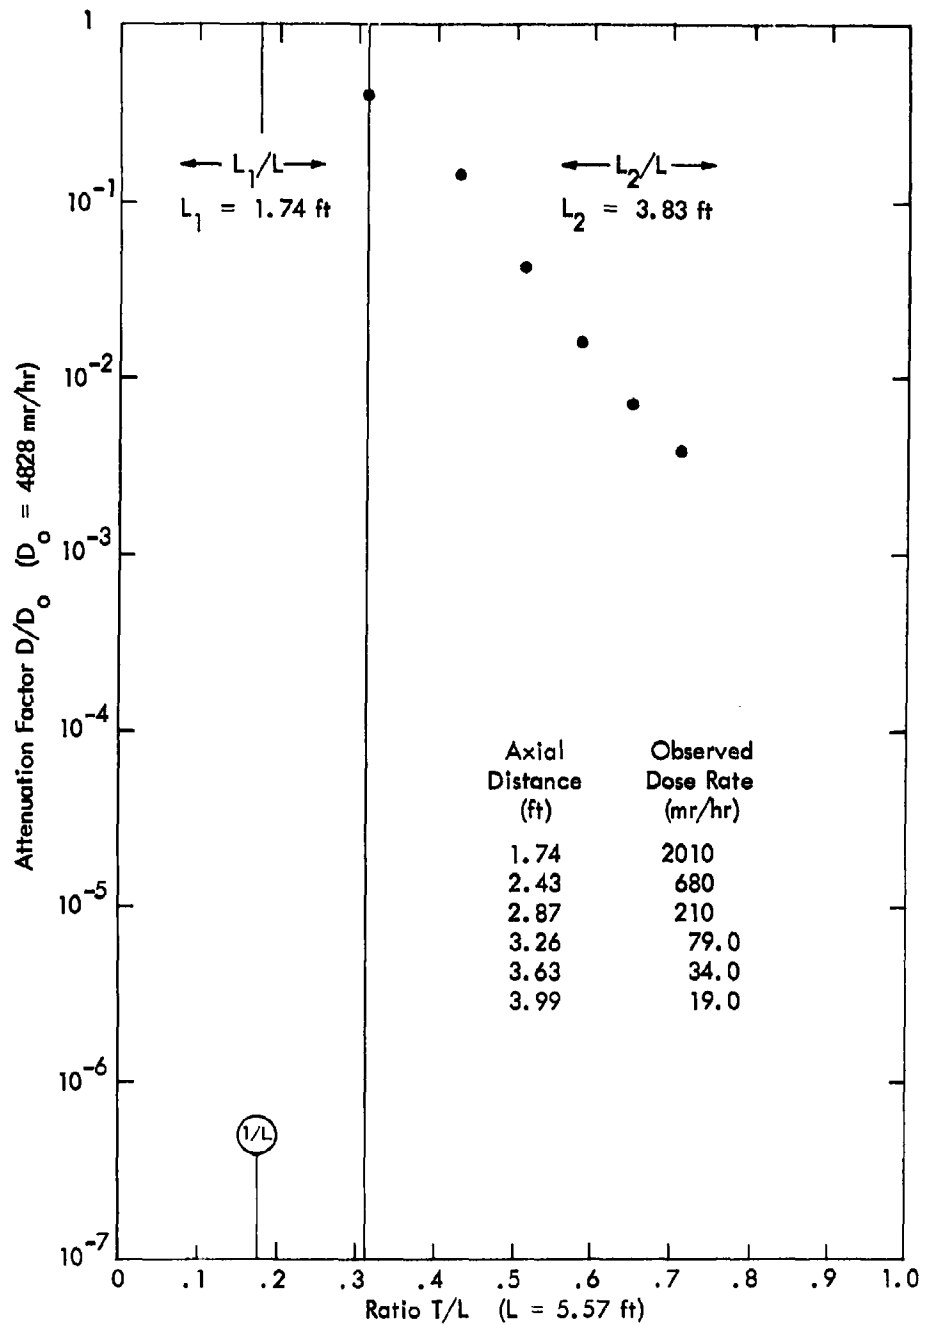


Figure 25. L-shaped 0.9167 x 0.9167-foot square concrete duct with $W/2 = 0.4583$ foot; 0.34-curie Co^{60} point source. (From Reference 5, Table 10C-C.)

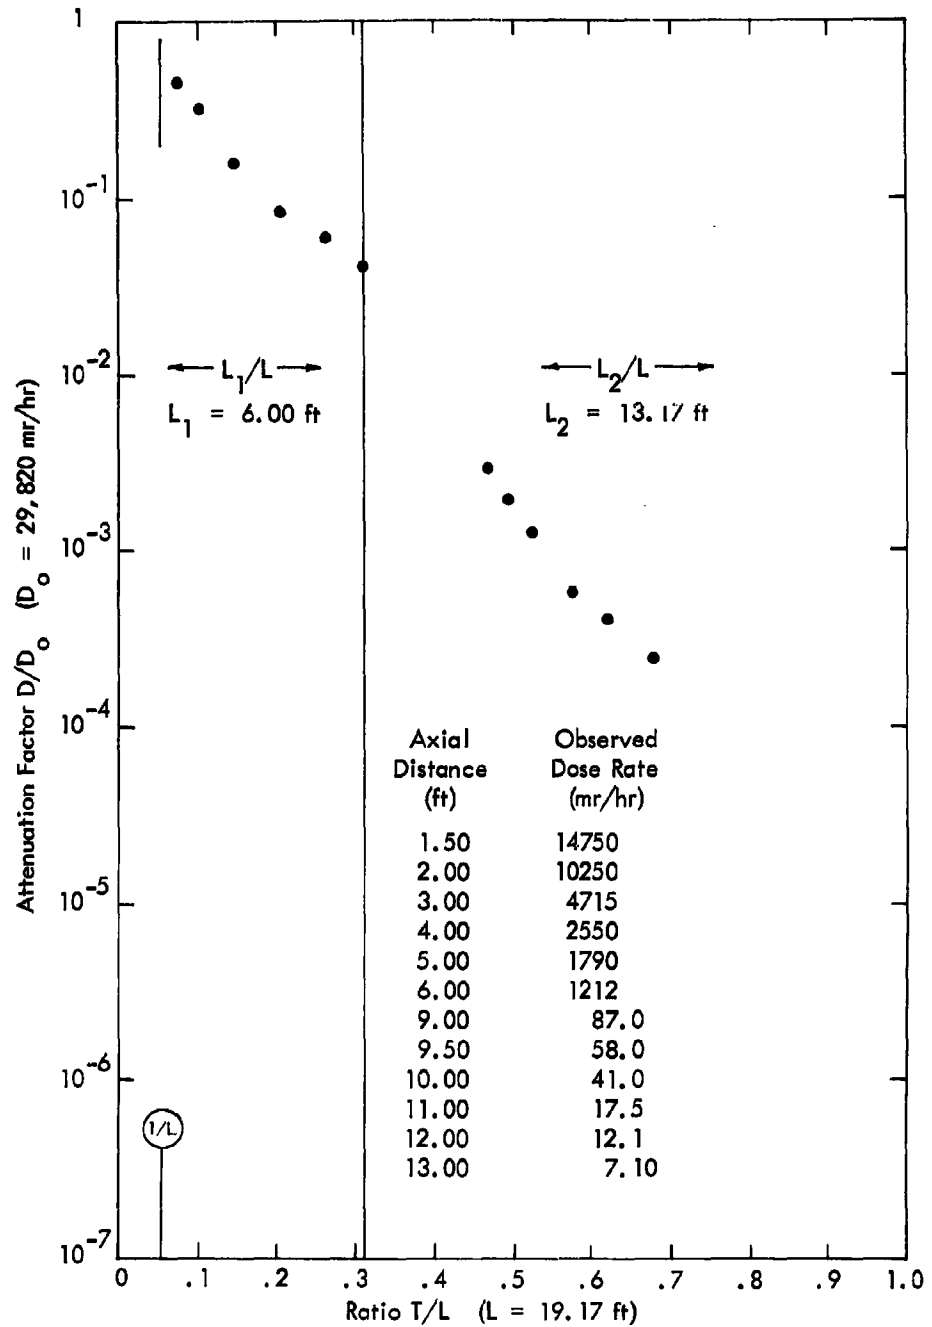


Figure 26. L-shaped 3 x 3-foot square concrete entranceway with $W/2 = 1.5$ feet; 2.1-curie Co^{60} point source. (From Reference 6, Table IA.)

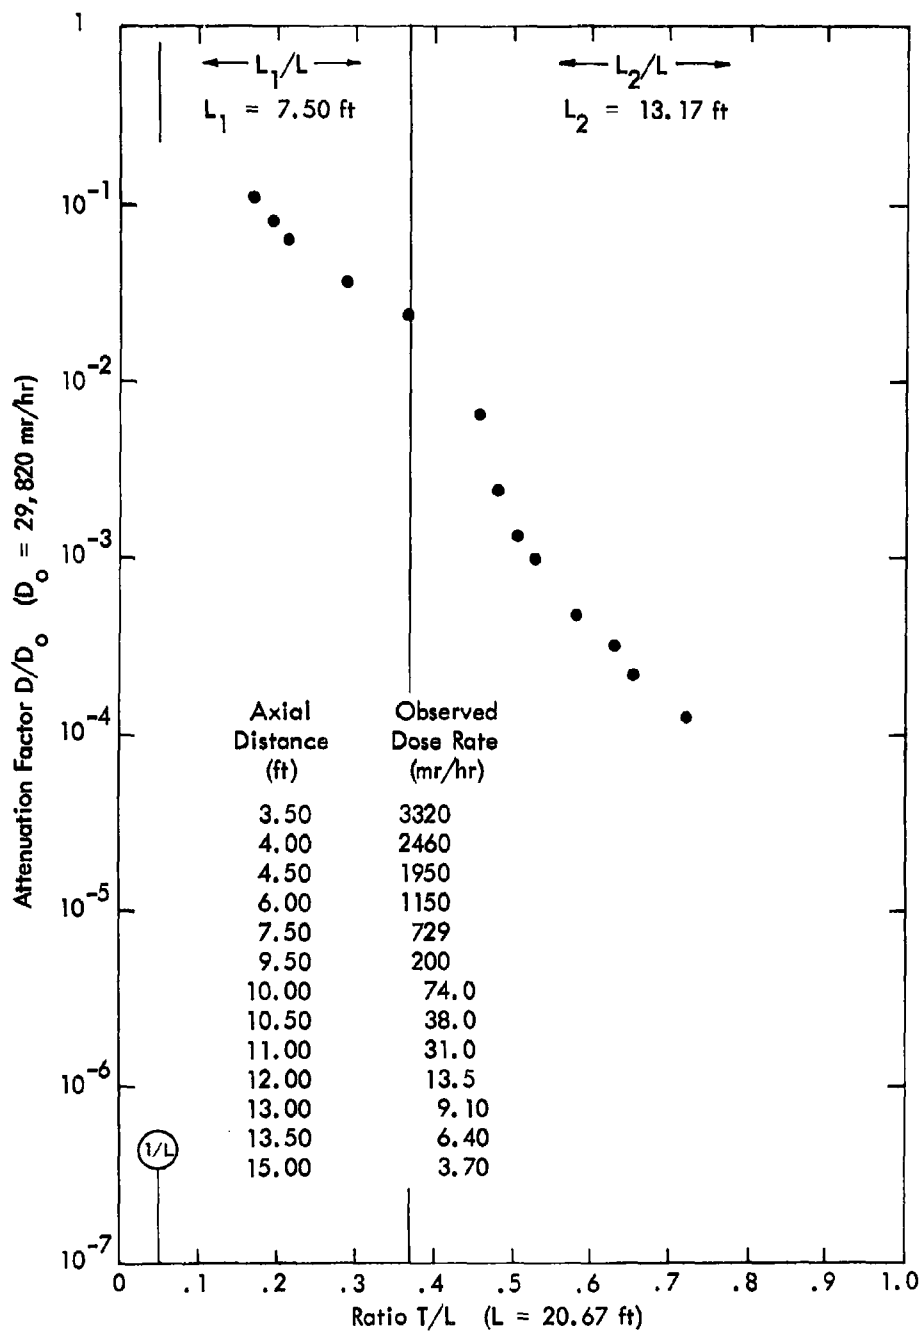


Figure 27. L-shaped 3 x 3-foot square concrete entranceway with $W/2 = 1.5$ feet; 2.1-curie Co^{60} point source. (From Reference 6, Table 1B.)

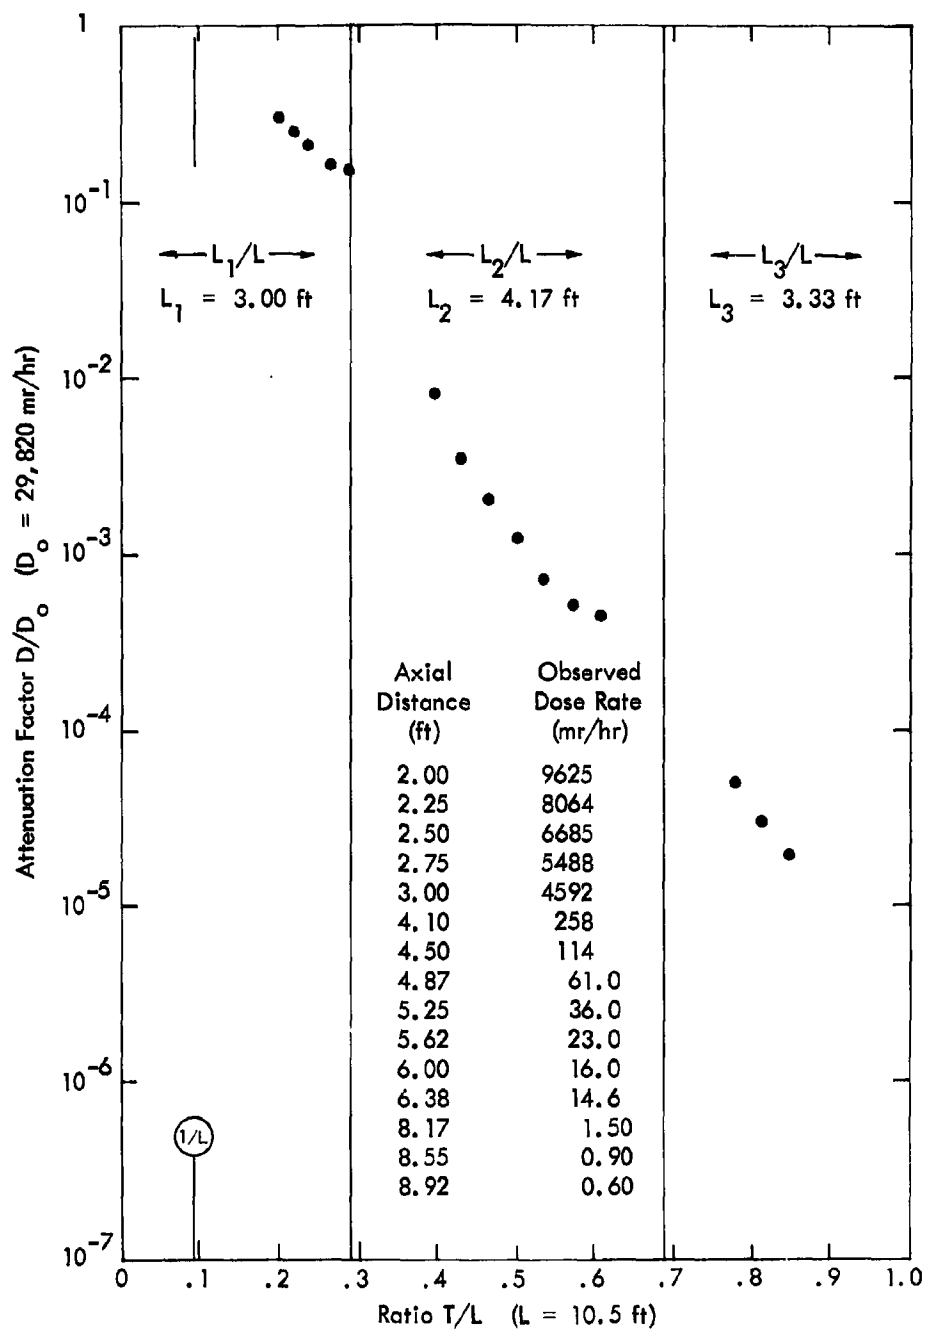


Figure 28. Z-shaped 1-foot-diameter round concrete duct with $W/2 = 0.443$ foot; 2.1-curie Co^{60} point source; 0.3-curie source used for L_1 ($D/7 = \text{actual dose}$). (From Reference 7, Tables I, III, IV.)

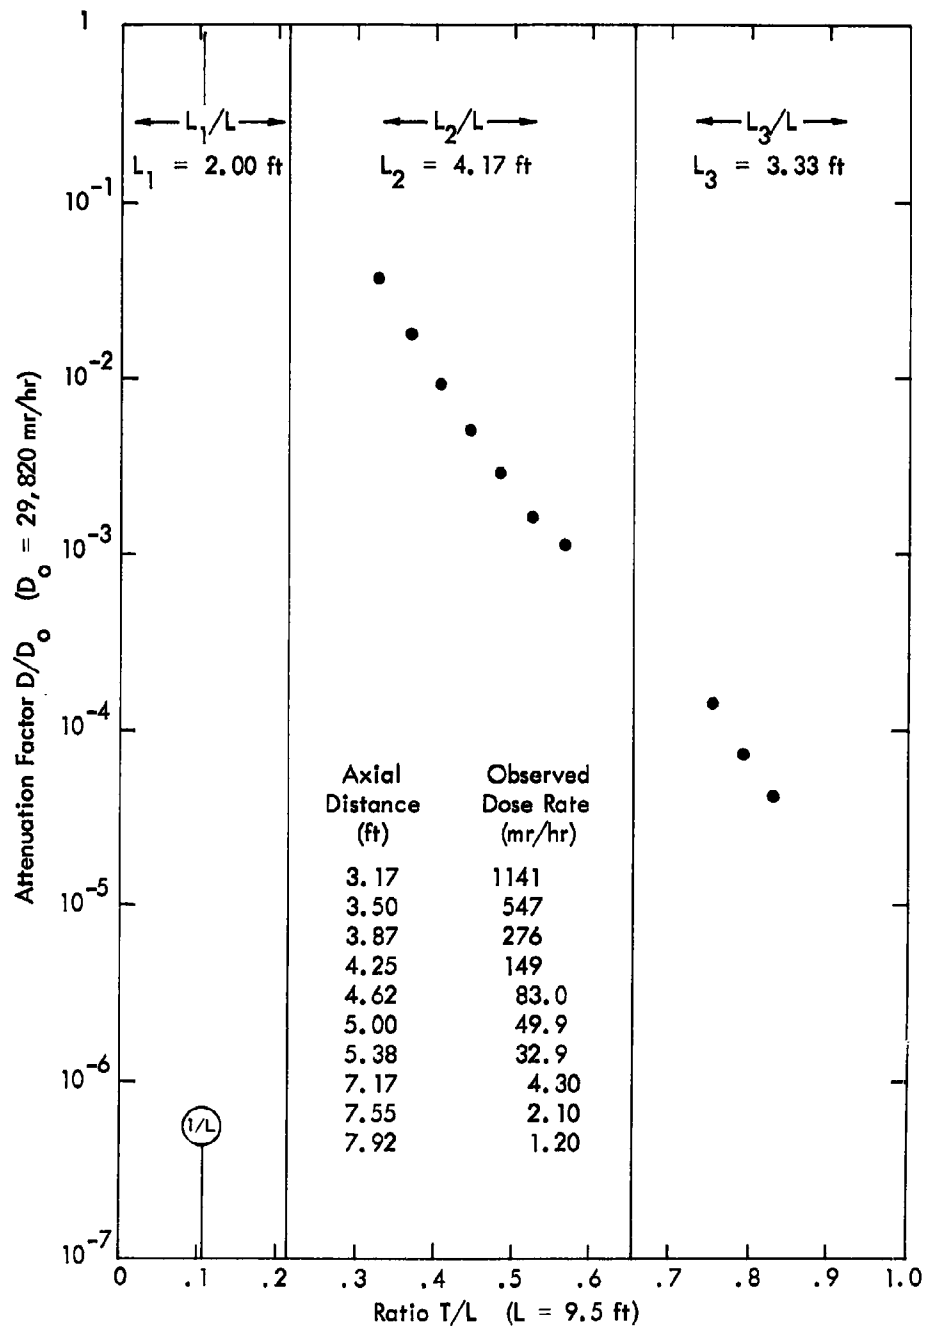


Figure 29. Z-shaped 1-foot-diameter round concrete duct with $W/2 = 0.443$ foot; 2.1-curie Co^{60} point source. (From Reference 7, Tables III, IV.)

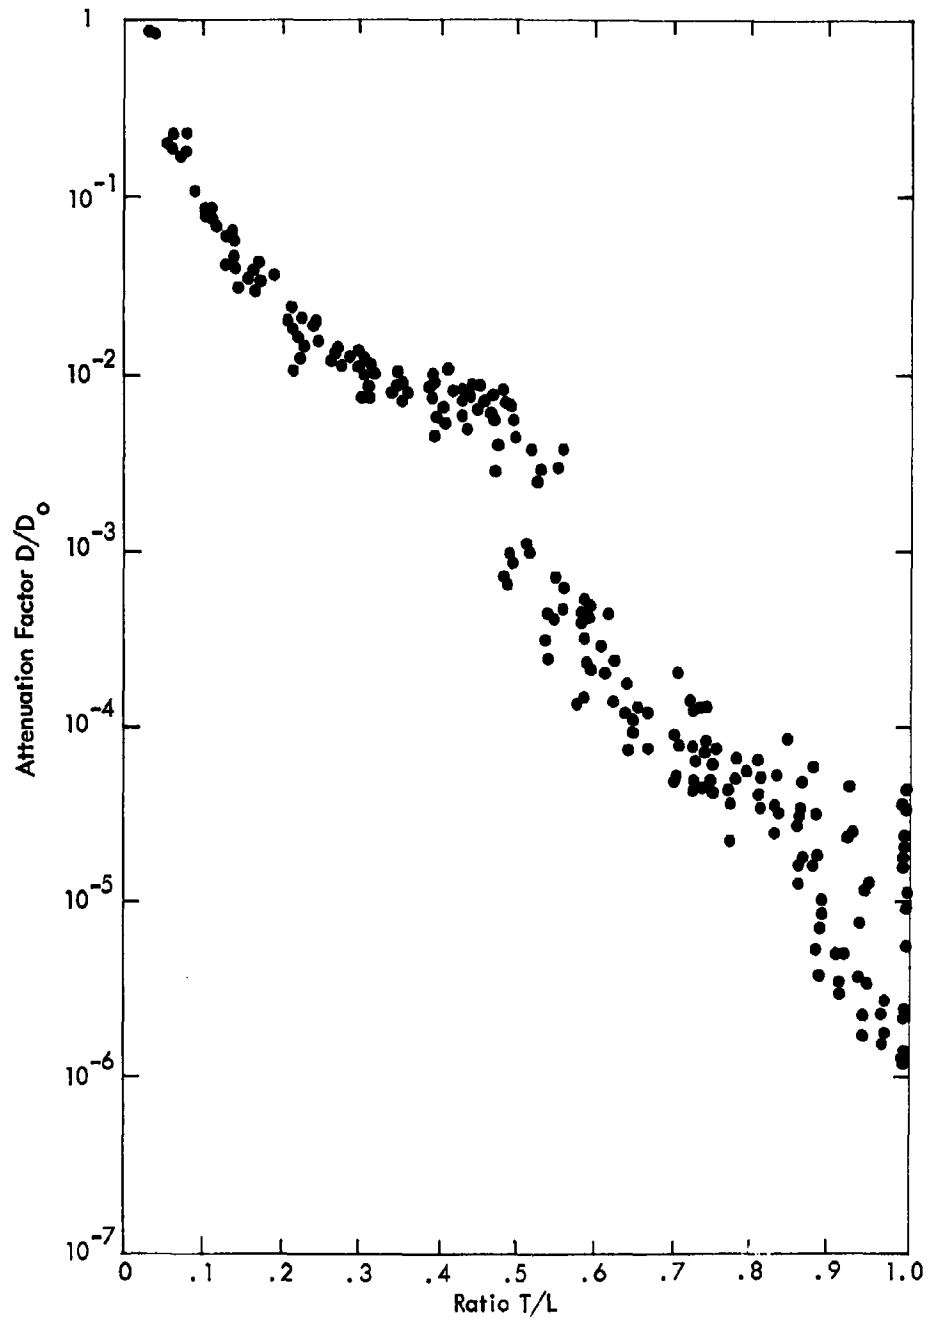


Figure 30. Attenuation factor vs ratio T/L for 6 x 6-foot ducts.

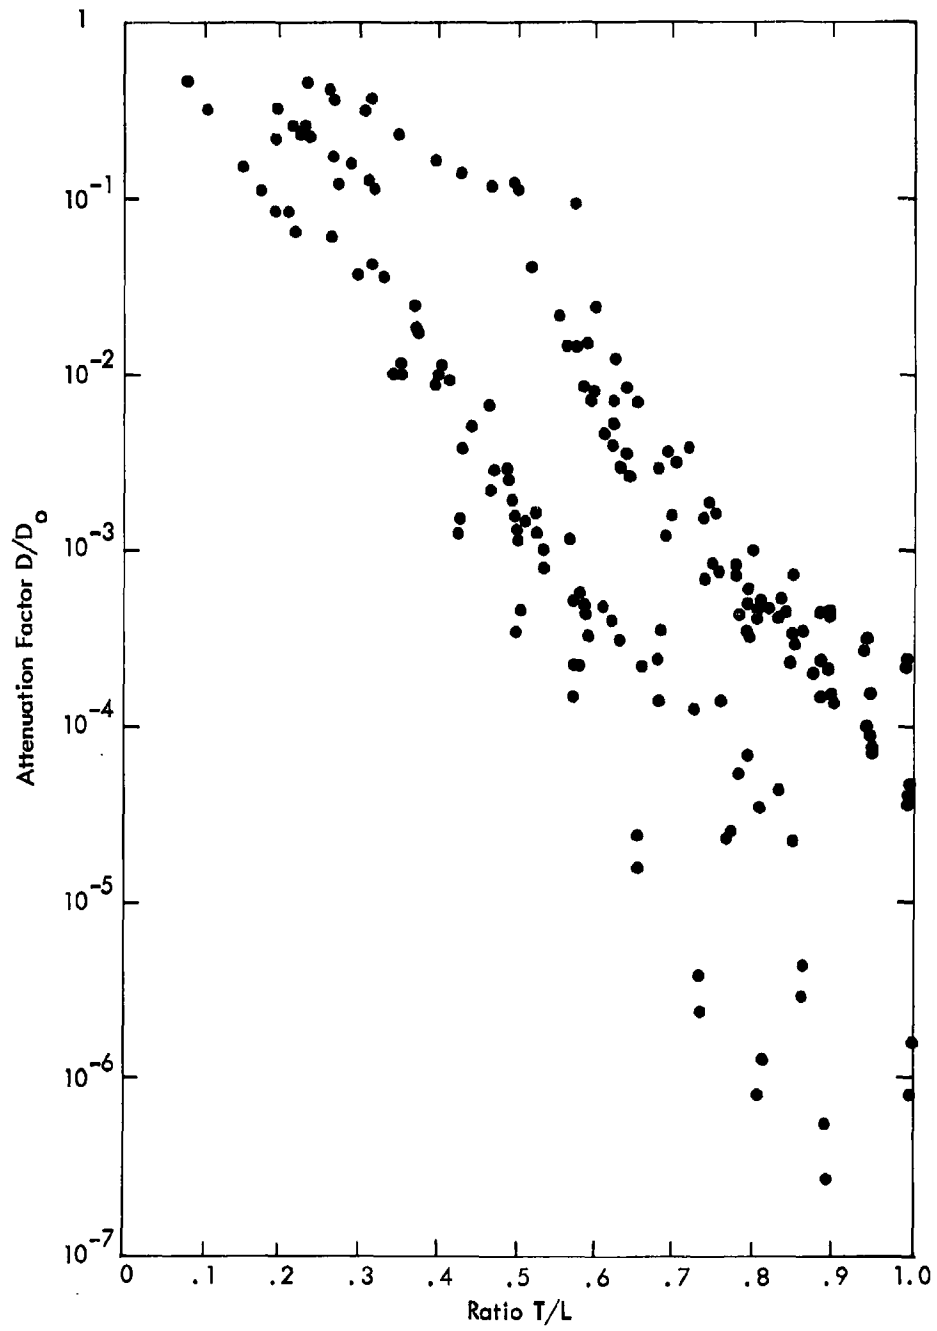


Figure 31. Attenuation factor vs ratio T/L for other than 6 x 6-foot ducts.

DISTRIBUTION LIST

SNDL Code	No. of Activities	Total Copies	
	1	25	Chief, Defense Atomic Support Agency, Washington, D. C.
	1	10	Chief, Bureau of Yards and Docks (Code 42)
23A	1	1	Naval Forces Commanders (Taiwan only)
39B	2	4	Construction Battalions
39D	10	10	Mobile Construction Battalions
39E	3	3	Amphibious Construction Battalions
39F	1	2	Construction Battalion Base Units
A2A	1	1	Chief of Naval Research - Only
A3	2	2	Chief of Naval Operation (OP-07, OP-04)
A5	5	5	Bureaus
B3	2	2	Colleges
E4	1	2	Laboratory ONR (Washington, D. C. only)
E5	1	1	Research Office ONR (Pasadena only)
E16	1	1	Training Device Center
F9	7	7	Station - CNO (Boston; Key West; San Juan; Long Beach; San Diego; Treasure Island; and Rodman, C. Z. only)
F17	6	6	Communication Station (San Juan; San Francisco; Pearl Harbor; Adak, Alaska; and Guam only)
F41	1	1	Security Station
F42	1	1	Radio Station (Oso and Cheltenham only)
F48	1	1	Security Group Activities (Winter Harbor only)
H3	7	7	Hospital (Chelsea; St. Albans, Portsmouth, Va; Beaufort; Great Lakes; San Diego; and Camp Pendleton only)
H6	1	1	Medical Center
J1	2	2	Administration Command and Unit - BuPers (Great Lakes and San Diego only)
J3	1	1	U. S. Fleet Anti-Air Warfare Training Center (Virginia Beach only)
J4	2	2	Amphibious Bases
J19	1	1	Receiving Station (Brooklyn only)
J34	1	1	Station - BuPers (Washington, D. C. only)
J46	1	1	Personnel Center
J48	1	1	Construction Training Unit
J60	1	1	School Academy
J65	1	1	School CEC Officers
J84	1	1	School Postgraduate
J90	1	1	School Supply Corps

DISTRIBUTION LIST (Cont'd)

SNDL Code	No. of Activities	Total Copies	
J95	1	1	School War College
J99	1	1	Communication Training Center
L1	11	11	Shipyards
L7	4	4	Laboratory - BuShips (New London; Panama City; Carderock; and Annapolis only)
L26	5	5	Naval Facilities - BuShips (Antigua; Turks Island; Barbados; San Salvador; and Eleuthera only)
L30	1	1	Submarine Base (Groton, Conn. only)
L32	2	2	Naval Support Activities (London and Naples only)
L42	2	2	Fleet Activities - BuShips
M27	4	4	Supply Center
M28	6	6	Supply Depot (except Guantanamo Bay; Subic Bay; and Yokosuka)
M61	2	2	Aviation Supply Office
N1	6	18	BuDocks Director, Overseas Division
N2	9	27	Public Works Offices
N5	3	9	Construction Battalion Center
N6	5	5	Construction Officer-in-Charge
N7	1	1	Construction Resident-Officer-in-Charge
N9	6	12	Public Works Center
N14	1	1	Housing Activity
R9	2	2	Recruit Depots
R10	2	2	Supply Installations (Albany and Barstow only)
R20	1	1	Marine Corps Schools (Quantico)
R64	3	3	Marine Corps Base
R66	1	1	Marine Corps Camp Detachment (Tengan only)
W1A1	6	6	Air Station
W1A2	35	35	Air Station
W1B	8	8	Air Station Auxiliary
W1C	4	4	Air Facility (Phoenix; Monterey; Oppama; Naha; and Naples only)
W1E	6	6	Marine Corps Air Station (except Quantico)
W1H	9	9	Station - BuWeps (except Rata)
	1	1	Deputy Chief of Staff, Research and Development, Headquarters, U. S. Marine Corps, Washington, D. C.
	1	1	President, Marine Corps Equipment Board, Marine Corps School, Quantico, Va.
	1	2	Library of Congress, Washington, D. C.

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	Chief of Staff, U. S. Army, Chief of Research and Development, Department of the Army, Washington, D. C.
1	1	Office of the Chief of Engineers, Assistant Chief of Engineering for Civil Works, Department of the Army, Washington, D. C.
1	1	Chief of Engineers, Department of the Army, Washington, D. C., Attn: Engineering Research and Development Division
1	1	Chief of Engineers, Department of the Army, Washington, D. C., Attn: ENG CW-OE
1	1	Director, U. S. Army Engineer Research and Development Laboratories, Fort Belvoir, Va., Attn: Information Resources Branch
1	1	ASD (ASNRR), Wright-Patterson Air Force Base, Ohio
1	3	Headquarters, U. S. Air Force, Directorate of Civil Engineering, Washington, D. C., Attn: AFOCE-ES
1	1	Commanding Officer, U. S. Naval Construction Battalion Center, Port Hueneme, Calif., Attn: Materiel Dept., Code 140
1	1	Deputy Chief of Staff, Development, Director of Research and Development, Department of the Air Force, Washington, D. C.
1	1	Director, National Bureau of Standards, Department of Commerce, Connecticut Avenue, Washington, D. C.
1	2	Office of the Director, U. S. Coast and Geodetic Survey, Washington, D. C.
1	20	Defense Documentation Center, Building 5, Cameron Station, Alexandria, Va.
1	2	Director of Defense Research and Engineering, Department of Defense, Washington, D. C.
1	1	Disaster Recovery Training Officer, Code 450, Construction Battalion Center, Davisville, R. I.
1	2	Director, Bureau of Reclamation, Washington, D. C.
1	1	Facilities Officer, Code 108, Office of Naval Research, Washington, D. C.
1	1	Federal Aviation Agency, Office of Management Services, Administrative Services Division, Washington, D. C., Attn: Library Branch
1	2	Commander Naval Beach Group TWO, U. S. Naval Amphibious Base, Little Creek, Norfolk, Va.
1	1	Director, U. S. Naval Ordnance Laboratory, White Oak, Silver Springs, Md.
1	1	Office of Naval Research, Branch Office, Navy No. 100, Box 39, FPO, New York
1	1	U. S. Naval Radiological Defense Laboratory, San Francisco
1	1	Officer in Charge, CECOS, Port Hueneme, Calif., Attn: ADCE Course
1	1	U. S. Air Force, Asst. Chief of Staff, Intelligence, Building B, AHS, Washington, D. C., Attn: Mr. Sargent White
1	1	Commander, Air Force Ballistic Missile Division, Air Research and Development Command, P. O. Box 262, Inglewood, Calif.
1	1	Directorate of Research, Air Force Weapons Laboratory, Kirtland Air Force Base, N. M.
1	1	Office of the Chief of Engineers, Department of the Army, T-7, Gravelly Point, Washington, D. C., Attn: ENGNB
1	1	Commanding Officer, Engineer Research and Development Laboratories, Fort Belvoir, Va.
1	1	Commander, Pacific Missile Range, Technical Documentation Section, P. O. Box 10, Point Mugu, Calif., Attn: Code 4332

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	Office of the Chief of Engineers, Department of the Army, T-7, Gravelly Point, Washington, D. C., Attn: ENG MC-EB
1	1	Director, U. S. Army Engineer Waterways Experiment Station, P. O. Box 631, Vicksburg, Miss., Attn: Mr. G. L. Arbuthnot, Jr.
1	1	U. S. Army Chemical Center, Nuclear Defense Laboratory, Edgewood, Md.
1	1	Director, Ballistic Research Laboratories, Aberdeen, Md.
1	2	Chief, Defense Atomic Support Agency, Washington, D. C.
1	1	Headquarters, Field Command, Defense Atomic Support Agency, Sandia Base, Albuquerque, N. M.
1	1	U. S. Atomic Energy Commission, Technical Information Service, P. O. Box 62, Oak Ridge, Tenn.
1	1	Director, Civil Effects Test Group, Atomic Energy Commission, Washington, D. C.
1	1	Formulation and Analysis Branch, Mathematics and Computation Laboratory, National Resource Evaluation Center, Office of Emergency Planning, Washington, D. C.
1	1	Mr. William J. Taylor, Terminal Ballistics Laboratory, Aberdeen Proving Ground, Md.
1	1	LCDR Charles W. Gulick, Jr., CEC, USN, Navy No. 926, FPO, San Francisco
1	1	CDR J. C. LeDaux, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	CAPT W. M. McLellan, CEC, USN, Ret., Rensselaer Polytechnic Institute, Troy, N. Y.
1	1	LT Edward S. Perry, U. S. Naval Reserve Officers Training Corps Unit, University of Illinois, Urbana, Ill.
1	1	CAPT L. N. Saunders, CEC, USN, Code C10, U. S. Naval Construction Battalion Center, Port Hueneme, Calif.
1	1	CDR E. M. Saunders, CEC, USN, Chief of Naval Materiel, Department of the Navy, Washington, D. C.
1	1	CDR H. E. Stephens, CEC, USN, Bureau of Yards and Docks, Code 41.101, Washington, D. C.
1	1	LCDR R. C. Vance, Executive Officer, Mobile Construction Battalion 11, FPO, San Francisco
1	1	CDR W. A. Walls, CEC, USN, Defense Atomic Support Agency, Washington, D. C.
1	1	Major F. A. Verser, Jr., USA, Defense Atomic Support Agency, Washington, D. C.
1	1	Mr. L. Neal FitzSimons, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	Mr. Ben Taylor, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	Mr. Charles M. Eisenhauer, Radiation Physics Laboratory, National Bureau of Standards, Washington, D. C.
1	1	Mr. O. H. Hill, Building 12, Room 505, Radiation Physics Division, National Bureau of Standards, Washington, D. C.
1	1	CDR J. D. Andrews, CEC, USN, SHAPE Headquarters, APO 55, New York
1	1	CAPT W. J. Christensen, CEC, USN, U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif.

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	LCDR N. W. Clements, CEC, USN, Navy Nuclear Power Unit, Fort Belvoir, Va.
1	1	CDR C. Curione, CEC, USN, U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif.
1	1	LT L. K. Donovan, CEC, USN, Navy Nuclear Power Unit, Fort Belvoir, Va.
1	1	LT Walter J. Eager, Jr., CEC, USN, Naval Postgraduate School, Monterey, Calif.
1	1	LTJG Clinton W. Kelly, III, CEC, USN, Bureau of Yards and Docks, Program Officer, U. S. Naval Radiological Defense Laboratory, San Francisco
1	1	CDR W. J. Francy, CEC, USN, Bureau of Yards and Docks, Director, Southeast Division, U. S. Naval Base, Charleston, S. C.
1	1	CDR C. F. Krickenberger, CEC, USN, Bureau of Yards and Docks, Code 50.200, Washington, D. C.
1	1	Dr. Lauriston S. Taylor, Chief, Radiation Physics Division, National Bureau of Standards, Washington, D. C.
1	1	Dr. James O. Buchanan, Technical Operations, Inc., South Avenue, Burlington, Mass.
1	1	LT S. H. Mathes, CEC, USN, U. S. Naval Construction Battalion Center, Port Hueneme, Calif.
1	1	Mr. Jack C. Greene, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	Dr. Harold A. Knapp, Fallout Studies Branch, Division of Biology and Medicine, U. S. Atomic Energy Commission, Washington, D. C.
1	1	Dr. Karl Z. Morgan, Director, Health Physics Division, Oak Ridge National Laboratory, Oak Ridge, Tenn.
1	1	Dr. Joseph D. Coker, National Resource Evaluation Center, Executive Office Building, Washington, D. C.
1	1	Dr. Charles F. Ksanda, Military Evaluation Division, U. S. Naval Radiological Defense Laboratory, San Francisco
1	1	Dr. George E. Pugh, Institute of Defense Analyses, Weapons Systems Evaluation Division, Washington, D. C.
1	1	Mr. John Auxier, Oak Ridge National Laboratory, Oak Ridge, Tenn.
1	1	Dr. William Kreger, Naval Radiological Defense Laboratory, San Francisco
1	1	Dr. Hans Tiller, Nuclear Defense Laboratory, Army Chemical Center, Md.
1	1	Mr. Irving Gaskill, National Resource Evaluation Center, Executive Office Building, Washington, D. C.
1	1	Major Robert S. Marcum, Defense Atomic Support Agency, Department of Defense, Washington, D. C.
1	1	Mr. George Sisson, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	Mr. James C. Pettee, National Resource Evaluation Center, Executive Office Building, Washington, D. C.
1	1	LTCOL Russell J. Hutchinson, 052921, Office of the Engineer, Camp Walters, Mineral Wells, Tex.
1	1	LCDR J. D. Crowley, CEC, USN, U. S. Naval School, CEC Officers, Port Hueneme, Calif.
1	1	Professor M. L. P. Go, Civil Engineering Department, University of Hawaii, Honolulu

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	CDR H. L. Murphy, Room 211, Federal Office Building, San Francisco
1	1	LCDR W. H. Bannister, CEC, USN, Field Command, Defense Atomic Support Agency, Sandia Base, Albuquerque, N. M.
1	1	Major Robert Crawford, USAF, Air Force Weapons Laboratory, Kirtland Air Force Base, Albuquerque, N. M.
1	1	Dr. John Balloch, Director, Operations Analysis, 26th Air Division, SAGE, Hancock Field, Syracuse, N. Y.
1	1	Mr. J. F. Tamantini, A & E Development Division, Office of Civil Defense, Department of Defense, Washington, D. C.
1	1	LCDR C. R. Whipple, CEC, USN, U. S. Naval Ordnance Laboratory, White Oak, Md.
1	1	Dr. W. E. Fisher, Air Force Weapons Laboratory, Kirtland Air Force Base, Albuquerque, N. M.
1	1	Mr. Everitt P. Blizzard, Director, Neutron Physics, Oak Ridge National Laboratory, P. O. Box X, Oak Ridge, Tenn.
1	1	LCDR T. Yeshihara, CEC, USN, U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif.
1	1	LT M. MacDonald, CEC, USN, U. S. Naval School, CEC Officers, Port Hueneme, Calif.
1	1	Library, Engineering Department, University of California, 405 Hilgard Avenue, Los Angeles
1	1	Sandia Corporation, Box 5800, Albuquerque, N. M.
1	1	Rivers and Harbor Library, Princeton University, Princeton, N. J.
1	1	Head, Civil Engineering Department, Carnegie Institute of Technology, Schenley Park, Pittsburgh, Pa.
1	1	Mr. G. H. Albright, Pennsylvania State University, College of Engineering and Architecture, University Park, Pa.
1	1	Mr. A. F. Dill, Civil Engineering Hall, University of Illinois, Urbana, Ill.
1	1	Dr. N. M. Newmark, Civil Engineering Hall, University of Illinois, Urbana, Ill.
1	1	Professor J. Neils Thompson, Civil Engineering Department, University of Texas, Austin, Tex.
1	1	Mr. Fred Sauer, Physics Department, Stanford Research Institute, Menlo Park, Calif.
1	1	Dr. T. H. Schiffman, Armour Research Foundation of Illinois, Institute of Technology, Technology Center, Chicago, Ill.
1	1	Dr. Robert V. Whitman, Massachusetts Institute of Technology, Cambridge, Mass.
1	1	Dr. Lewis V. Spencer, Ottawa University, Physics Department, Ottawa, Kan.
1	1	Mr. E. E. Shalowitz, Protective Construction, GSA Building, 19th and F Streets, N. W., Washington, D. C.
1	1	Mr. Werner Weber, Nuclear Engineering Consultant, N. Y. State Civil Defense Commission, P. O. Box 7007, State Office Building, Albany, N. Y.
1	1	Dr. Harold Brode, The Rand Corporation, 1700 Main Street, Santa Monica, Calif.
1	1	Mr. R. D. Cavanaugh, Barry Controls, Inc., 700 Pleasant Street, Watertown, Mass.

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	Mr. Kenneth Kaplan, Broadview Research Corporation, 1811 Trousdale Drive, Burlingame, Calif.
1	1	Mr. Thomas Morrison, American Machine and Foundry Company, 7501 North Natchez Avenue, Niles, Ill.
1	1	Mr. Walter Gunther, The Mitre Corporation, P. O. Box 208, Lexington, Mass.
1	1	Mr. W. R. Perret - 5112, Applied Experiments Division, Sandia Corporation, Albuquerque, N. M.
1	1	Mr. Lyndon Welch, Eberle M. Smith Associates, Inc., 153 East Elizabeth Street, Detroit, Mich.
1	1	Professor Herbert M. Bosch, Public Health Engineering, School of Public Health, University of Minnesota, Minneapolis, Minn.
1	1	Dr. Merit P. White, Civil Engineering Department, School of Engineering, University of Massachusetts, Amherst, Mass.
1	1	Dr. Robert J. Hansen, Department of Civil & Sanitary Engineering, Massachusetts Institute of Technology, Cambridge, Mass.
1	1	Mr. Harold Horowitz, Building Research Institute, National Academy of Sciences, 2101 Constitution Avenue, N. W., Washington, D. C.
1	1	Mr. Luke Vortman - 5112, Applied Experiments Division, Sandia Corporation, Albuquerque, N. M.
1	1	Mr. Richard Park, National Academy of Sciences, 2101 Constitution Avenue, N. W., Washington, D. C.
1	1	Mr. Frederick A. Pawley, AIA Research Secretary, American Institute of Architects, 1735 New York Avenue, N. W., Washington, D. C.
1	1	CDR J. F. Dobson, CEC, USN, U. S. Naval School, CEC Officers, Port Hueneme, Calif.
1	1	Dr. E. E. Massey, Defense Research Board, Department of National Defense, Ottawa, Canada
1	1	Dr. Robert Rapp, The Rand Corporation, 1700 Main Street, Santa Monica, Calif.
1	1	Dr. Stephen B. Withey, Program Director, Survey Research Center, University of Michigan, Ann Arbor, Mich.
1	1	Dr. Eric T. Clarke, Technical Operations, Inc., Burlington, Mass.
1	1	Dr. A. B. Chilton, Civil Engineering Hall, University of Illinois, Urbana, Ill.
1	1	Mrs. Shea Valley, CRTZS, A. F. Cambridge Research Center, Bedford, Mass.
1	1	Professor J. T. Hanley, Department of Civil Engineering, University of Minnesota, Minneapolis, Minn.
1	1	Professor J. Silverman, Department of Chemical Engineering, University of Maryland, College Park, Md.
1	1	Dr. F. T. Mavis, Dean, College of Engineering, University of Maryland, College Park, Md.
1	1	Dr. Raymond R. Fox, Associate Professor and Director, Protective Construction Courses, The George Washington University, Washington, D. C.

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	Chief, Bureau of Ships, Attn: Chief of Research and Development Division, Navy Department, Washington, D. C.
1	1	Officer in Charge, U. S. Naval Biological Laboratory, Naval Supply Center, Oakland, Calif.
1	1	Officer in Charge, U. S. Navy Unit, Rensselaer Polytechnic Institute, Troy, N. Y.
1	1	Chief, Bureau of Medicine and Surgery, Attn: Research Division, Navy Department, Washington, D. C.
1	1	Officer in Charge, U. S. Naval Supply Research and Development Facility, Naval Supply Center, Attn: Library, Bayonne, N. J.
1	1	Director, Marine Physical Laboratory, U.S. Navy Electronics Laboratory, San Diego, Calif.
1	1	Chief, Bureau of Naval Weapons, Attn: Research Division, Navy Department, Washington, D. C.
1	1	Commander, Pacific Missile Range, Attn: Technical Director, Point Mugu, Calif.
1	1	Officer in Charge, U. S. Naval Supply Research and Development Facility, Naval Supply Center, Bayonne, N. J.
1	1	Commander, Norfolk Naval Shipyard, Attn: Chemical Laboratory, Portsmouth, Va.
1	1	Commanding Officer, Fleet Training Center, Navy No. 128, FPO, San Francisco
1	1	Commander, U. S. Naval Shipyard, Attn: Rubber Laboratory, Mare Island, Vallejo, Calif.
1	1	Commander, U. S. Naval Shipyard, Attn: Material Laboratory, Brooklyn, N. Y.
1	1	Commanding Officer, Naval Electronics Laboratory, Attn: Technical Director, San Diego, Calif.
1	1	Commanding Officer, U. S. Naval Unit, U. S. Army Chemical Corps School, Fort McClellan, Ala.
1	1	U. S. Naval Research Laboratory, Chemistry Division, Washington, D. C.
1	1	Commanding Officer, Field Research Laboratory, Bureau of Medicine and Surgery, Camp Lejeune, N. C.
1	1	Commanding Officer, Signal Corps Engineering Labs, Fort Monmouth, N. J.
1	1	Directorate of Medical Research, Chemical Warfare Laboratory, Army Chemical Center, Md.
1	1	U. S. Army Cold Regions Research and Engineering Laboratory, Corps of Engineers, P. O. Box 282, Hanover, N. H.
1	1	Coles Signal Laboratory, Red Bank, N. J.
1	1	Air Force Cambridge Research Center, Hanscom Field, Mass.
1	1	Arctic Aeromedical Laboratory, U. S. Air Force, APO 731, Seattle, Wash.
1	1	Commanding Officer, Biological Warfare Laboratories, Fort Detrick, Frederick, Md.
1	1	Chief, Physical Research Branch, Research Division, U. S. Department of Commerce, Bureau of Public Roads, Washington, D. C.
1	1	Department of Zoology, Duke University, Durham, N. C.
1	1	Director, Engineering Research Institute, University of Michigan, Ann Arbor
1	1	Director, Marine Laboratory, University of Miami, Coral Gables, Fla.
1	1	Director, Soil Physics Laboratory, Department of Engineering, Princeton University, Princeton, N. J.
1	1	Director, The Technological Institution, Northwestern University, Evanston, Ill.
1	1	Civil Effects Test Group, Director, Atomic Energy Commission, Washington, D. C.
1	1	Library, University of Alaska, Fairbanks
1	1	Library, Battelle Institute, Columbus, Ohio
1	1	Library, University of Southern California, University Park, Los Angeles
1	1	Library, Institute of Technology, University of Minnesota, Minneapolis

DISTRIBUTION LIST (Cont'd)

No. of Activities	Total Copies	
1	1	Library, California Institute of Technology, Pasadena, Calif.
1	1	Mr. John F. Batter, CONESCO, Inc., 205 Sixth Street, Cambridge, Mass.
1	1	Professor D. W. Green, 1668 Maple Avenue, Galesburg, Ill.
1	1	Mr. John H. Hubbell, National Bureau of Standards, Washington, D. C.
1	1	Mr. Robert M. Kinkaid, Edgerton, Gerneshausen, and Greer, Inc., P. O. Box 1912, Las Vegas, Nev.
1	1	Dr. R. L. Ashley, Atomics International, P. O. Box 309, Canoga Park, Calif.
1	1	Dr. H. E. Stanton, Physics Division, Argonne National Laboratory, Argonne, Ill.
1	1	Dr. C. W. Terrell, Armour Research Foundation, 10 West 35th Street, Chicago
1	1	Mr. S. K. Penny, Radiation Shielding Information Center, Oak Ridge National Laboratory, P. O. Box X, Oak Ridge, Tenn.

U. S. Naval Civil Engineering Laboratory
Technical Report R-289

GAMMA-RAY STREAMING THROUGH DUCTS, by
C. M. Huddleston and W. L. Wilcoxson
51 p. illus 6 Feb 64 UNCLASSIFIED

A survey of the current status of experimental
and theoretical investigations of the problem of
gamma-ray streaming through air ducts in concrete.

Key Words: nuclear physics; shelters; ducts;
radiation; gamma rays; streaming;
survey

- I. Shelters — Gamma-ray streaming
2. Radiation — Gamma-ray streaming through ducts
- I. Huddleston, C. M.
- II. Wilcoxson, W. L.
- III. Y-F008-08-05-201
- IV. DASA 11.026

U. S. Naval Civil Engineering Laboratory
Technical Report R-289

GAMMA-RAY STREAMING THROUGH DUCTS, by
C. M. Huddleston and W. L. Wilcoxson
51 p. illus 6 Feb 64 UNCLASSIFIED

A survey of the current status of experimental
and theoretical investigations of the problem of
gamma-ray streaming through air ducts in concrete.

Key Words: nuclear physics; shelters; ducts;
radiation; gamma rays; streaming;
survey

1. Shelters — Gamma-ray streaming
2. Radiation — Gamma-ray streaming through ducts
- I. Huddleston, C. M.
- II. Wilcoxson, W. L.
- III. Y-F008-08-05-201
- IV. DASA 11.026

U. S. Naval Civil Engineering Laboratory
Technical Report R-289

GAMMA-RAY STREAMING THROUGH DUCTS, by
C. M. Huddleston and W. L. Wilcoxson
51 p. illus 6 Feb 64 UNCLASSIFIED

A survey of the current status of experimental
and theoretical investigations of the problem of
gamma-ray streaming through air ducts in concrete.

Key Words: nuclear physics; shelters; ducts;
radiation; gamma rays; streaming;
survey

1. Shelters — Gamma-ray streaming
2. Radiation — Gamma-ray streaming through ducts
- I. Huddleston, C. M.
- II. Wilcoxson, W. L.
- III. Y-F008-08-05-201
- IV. DASA 11.026

U. S. Naval Civil Engineering Laboratory
Technical Report R-289

GAMMA-RAY STREAMING THROUGH DUCTS, by
C. M. Huddleston and W. L. Wilcoxson
51 p. illus 6 Feb 64 UNCLASSIFIED

A survey of the current status of experimental
and theoretical investigations of the problem of
gamma-ray streaming through air ducts in concrete.

Key Words: nuclear physics; shelters; ducts;
radiation; gamma rays; streaming;
survey

1. Shelters — Gamma-ray streaming
2. Radiation — Gamma-ray streaming through ducts
- I. Huddleston, C. M.
- II. Wilcoxson, W. L.
- III. Y-F008-08-05-201
- IV. DASA 11.026