

AD-A105 158

ANDERSON ENGINEERING INC SPRINGFIELD MO

F/G 13/13

NATIONAL DAM SAFETY PROGRAM. STRUCTURE F-2 (MO 20513); VERDIGRI--ETC(U)

AUG 80 J HEALY, S BRADY, N MORALES, T BECKLEY DACW43-80-C-0073

NI

UNCLASSIFIED

1 OF 1
ADA
FORN R

END
DATE
FILMED
11-81
DTIC

LEVEL II

①
B-5

VERDIGRIS-NEOSHO RIVER BASIN

STRUCTURE F-2

NEWTON COUNTY, MISSOURI

MO 20513

DTIC
ELECTE
S **D**
OCT 07 1981
E

PHASE 1 INSPECTION REPORT
NATIONAL DAM SAFETY PROGRAM



United States Army
Corps of Engineers

...Serving the Army
...Serving the Nation

St. Louis District

PREPARED BY: U.S. ARMY ENGINEER DISTRICT, ST. LOUIS

FOR: STATE OF MISSOURI

AUGUST, 1980

This document has been approved
for public release and sale; its
distribution is unlimited.

81 10 5 108

AD A 100 158

3-5 FILE COPY
DTIC

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. AD-A105158	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Phase I Dam Inspection Report National Dam Safety Program Newton County Structure F-2 (MO 20513) Newton County, Missouri		5. TYPE OF REPORT & PERIOD COVERED Final Report
7. AUTHOR(s) Anderson Engineering, Inc. Jack /Healy Steve /Brady Nelson /Morales Tom /Beckley		6. PERFORMING ORG. REPORT NUMBER
9. PERFO U.S. Army Engineer District, St. Louis Dam Inventory and Inspection Section, LMSED-PD 210 Tucker Blvd., North, St. Louis, Mo. 63101		8. CONTRACT OR GRANT NUMBER(s) DACW43-80-C-0073 ✓
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Engineer District, St. Louis Dam Inventory and Inspection Section, LMSED-PD 210 Tucker Blvd., North, St. Louis, Mo. 63101		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) National Dam Safety Program. Structure F-2 (MO 20513), Verdigris River Basin, Newton County, Missouri. Phase I Inspection Report.		12. REPORT DATE August-1980
16. DISTRIB Approved for release; distribution unlimited.		13. NUMBER OF PAGES Approximately 60
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
18. SUPPLEMENTARY NOTES		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Dam Safety, Lake, Dam Inspection, Private Dams		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report was prepared under the National Program of Inspection of Non-Federal Dams. This report assesses the general condition of the dam with respect to safety, based on available data and on visual inspection, to determine if the dam poses hazards to human life or property.		


DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)



SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

RESPONSIBILITY. The controlling DoD office will be responsible for completion of the Report Documentation Page, DD Form 1473, in all technical reports prepared by or for DoD organizations.

CLASSIFICATION. Since this Report Documentation Page, DD Form 1473, is used in preparing announcements, bibliographies, and data banks, it should be unclassified if possible. If a classification is required, identify the classified items on the page by the appropriate symbol.

COMPLETION GUIDE

General. Make Blocks 1, 4, 5, 6, 7, 11, 13, 15, and 16 agree with the corresponding information on the report cover. Leave Blocks 2 and 3 blank.

Block 1. Report Number. Enter the unique alphanumeric report number shown on the cover.

Block 2. Government Accession No. Leave Blank. This space is for use by the Defense Documentation Center.

Block 3. Recipient's Catalog Number. Leave blank. This space is for the use of the report recipient to assist in future retrieval of the document.

Block 4. Title and Subtitle. Enter the title in all capital letters exactly as it appears on the publication. Titles should be unclassified whenever possible. Write out the English equivalent for Greek letters and mathematical symbols in the title (see "Abstracting Scientific and Technical Reports of Defense-sponsored RDT/E," AD-667 000). If the report has a subtitle, this subtitle should follow the main title, be separated by a comma or semicolon if appropriate, and be initially capitalized. If a publication has a title in a foreign language, translate the title into English and follow the English translation with the title in the original language. Make every effort to simplify the title before publication.

Block 5. Type of Report and Period Covered. Indicate here whether report is interim, final, etc., and, if applicable, inclusive dates of period covered, such as the life of a contract covered in a final contractor report.

Block 6. Performing Organization Report Number. Only numbers other than the official report number shown in Block 1, such as series numbers for in-house reports or a contractor/grantee number assigned by him, will be placed in this space. If no such numbers are used, leave this space blank.

Block 7. Author(s). Include corresponding information from the report cover. Give the name(s) of the author(s) in conventional order (for example, John R. Doe or, if author prefers, J. Robert Doe). In addition, list the affiliation of an author if it differs from that of the performing organization.

Block 8. Contract or Grant Number(s). For a contractor or grantee report, enter the complete contract or grant number(s) under which the work reported was accomplished. Leave blank in in-house reports.

Block 9. Performing Organization Name and Address. For in-house reports enter the name and address, including office symbol, of performing activity. For contractor or grantee reports enter the name and address of the contractor or grantee who prepared the report and identify the appropriate corporate division, school, laboratory, etc., of the author. List city, state, and ZIP Code.

Block 10. Program Element, Project, Task Area, and Work Unit Numbers. Enter here the number code from the applicable Department of Defense form, such as the DD Form 1498, "Research and Technology Work Unit Summary" or the DD Form 1634, "Research and Development Planning Summary," which identifies the program element, project, task area, and work unit or equivalent under which the work was authorized.

Block 11. Controlling Office Name and Address. Enter the full, official name and address, including office symbol, of the controlling office. (Equates to funding/sponsoring agency. For definition see DoD Directive 5200.20, "Distribution Statements on Technical Documents.")

Block 12. Report Date. Enter here the day, month, and year or month and year as shown on the cover.

Block 13. Number of Pages. Enter the total number of pages.

Block 14. Monitoring Agency Name and Address (if different from Controlling Office). For use when the controlling or funding office does not directly administer a project, contract, or grant, but delegates the administrative responsibility to another organization.

Blocks 15 & 15a. Security Classification of the Report: Declassification/Downgrading Schedule of the Report. Enter in 15 the highest classification of the report. If appropriate, enter in 15a the declassification/downgrading schedule of the report, using the abbreviations for declassification/downgrading schedules listed in paragraph 4-207 of DoD 5200.1-R.

Block 16. Distribution Statement of the Report. Insert here the applicable distribution statement of the report from DoD Directive 5200.20, "Distribution Statements on Technical Documents."

Block 17. Distribution Statement (of the abstract entered in Block 20, if different from the distribution statement of the report). Insert here the applicable distribution statement of the abstract from DoD Directive 5200.20, "Distribution Statements on Technical Documents."

Block 18. Supplementary Notes. Enter information not included elsewhere but useful, such as: Prepared in cooperation with . . . Translation of (or by) . . . Presented at conference of . . . To be published in . . .

Block 19. Key Words. Select terms or short phrases that identify the principal subjects covered in the report, and are sufficiently specific and precise to be used as index entries for cataloging, conforming to standard terminology. The DoD "Thesaurus of Engineering and Scientific Terms" (TEST), AD-672 000, can be helpful.

Block 20. Abstract. The abstract should be a brief (not to exceed 200 words) factual summary of the most significant information contained in the report. If possible, the abstract of a classified report should be unclassified and the abstract to an unclassified report should consist of publicly-releasable information. If the report contains a significant bibliography or literature survey, mention it here. For information on preparing abstracts see "Abstracting Scientific and Technical Reports of Defense-Sponsored RDT&E," AD-667 000.



DEPARTMENT OF THE ARMY
ST. LOUIS DISTRICT, CORPS OF ENGINEERS
210 TUCKER BOULEVARD, NORTH
ST. LOUIS, MISSOURI 63101

REPLY TO
ATTENTION OF

SUBJECT: Structure F-2
Newton County, Missouri
Missouri Inventory No. 20513

This report presents the results of field inspection and evaluation
of the Structure F-2. It was prepared under the National Program of
Inspection of Non-Federal Dams.

SIGNED

SUBMITTED BY: _____
Chief, Engineering Division

17 SEP 1980

Date

SIGNED

APPROVED BY: _____
Colonel, CE, District Engineer

18 SEP 1980

Date

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	..

VERDIGRIS-NEOSHO RIVER BASIN

STRUCTURE F-2
NEWTON COUNTY, MISSOURI
MISSOURI INVENTORY NO. 20513

PHASE I INSPECTION REPORT
NATIONAL DAM SAFETY PROGRAM

Prepared By

Anderson Engineering, Inc., Springfield, Missouri
Hanson Engineers, Inc., Springfield, Illinois

Under Direction Of

St. Louis District, Corps of Engineers

For

Governor of Missouri

AUGUST, 1980

PHASE I REPORT
NATIONAL DAM SAFETY PROGRAM
SUMMARY

Name of Dam: Structure F-2
State Located: Missouri
County Located: Newton
Stream: Tributary of Lost Creek
Date of Inspection: May 29, 1980

Structure F-2 was inspected by an interdisciplinary team of engineers from Anderson Engineering, Inc. of Springfield, Missouri and Hanson Engineers, Inc. of Springfield, Illinois. The purpose of this inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and visual inspection, in order to determine if the dam poses hazards to human life or property.

The guidelines used in the assessment were furnished by the Department of the Army, Office of the Chief of Engineers, and they have been developed with the help of several Federal and State agencies, professional engineering organizations, and private engineers. Based on these guidelines, the St. Louis District, Corps of Engineers has determined that this dam is in the high hazard potential classification, which means that loss of life and appreciable property loss could occur if the dam fails. The estimated damage zone extends approximately 1 mile downstream of the dam. Located within this zone are approximately 20 dwellings, all in the town of Seneca.

The dam is in the small size classification, since it is greater than 25 ft high but less than 40 ft high, and the maximum storage capacity is greater than 50 ac-ft but less than 1000 ac-ft.


Our inspection and evaluation indicates that the combined spillways do meet the criteria set forth in the guidelines for a dam having the above size and hazard potential. The combined spillways will pass 75 percent of the Probable Maximum Flood without overtopping. The Probable Maximum Flood is defined as the flood discharge that may be expected from the most severe combination of critical meteorologic and hydrologic conditions that are reasonably possible in the region. The guidelines require that a dam of small size with a high downstream hazard potential pass 50 to 100 percent of the PMF. Considering the height of dam (28 feet), and the maximum storage capacity (56 acre-feet) and the low volume of permanent water storage, 50 percent of the

PMF has been determined to be the appropriate spillway design flood. The 1 percent probability flood will not overtop the dam. The 1 percent probability flood is one that has a 1 percent chance of being exceeded in any given year.


Deficiencies visually observed by the inspection team were: (1) some small brush growth on the embankment faces; and (2) heavily wooded downstream channel.

Another deficiency was the lack of seepage and stability analysis comparable to the requirements of the recommended guidelines.


It is recommended that the owners take the necessary action without undue delay to correct the deficiencies reported herein. A detailed discussion of these deficiencies is included in the following report.



Jack Healy, P.E.
Hanson Engineers, Inc.



Steve Brady, P.E.
Anderson Engineering, Inc.



Nelson Morales, P.E.
Hanson Engineers, Inc.



Tom Beckley, P.E.
Anderson Engineering, Inc.



AERIAL VIEW OF LAKE AND DAM

PHASE 1 INSPECTION REPORT
NATIONAL DAM SAFETY PROGRAM
STRUCTURE F-2 ID NO. 20513

TABLE OF CONTENTS

<u>Paragraph No.</u>	<u>Title</u>	<u>Page No.</u>
	SECTION 1 - PROJECT INFORMATION	
1.1	General	1
1.2	Description of the Project	1
1.3	Pertinent Data	3
	SECTION 2 - ENGINEERING DATA	
2.1	Design	7
2.2	Construction	8
2.3	Operation	8
2.4	Evaluation	9
	SECTION 3 - VISUAL INSPECTION	
3.1	Findings	10
3.2	Evaluation	12
	SECTION 4 - OPERATIONAL PROCEDURES	
4.1	Procedures	13
4.2	Maintenance of Dam	13
4.3	Maintenance of Operating Facilities	13
4.4	Description of Any Warning System in Effect	13
4.5	Evaluation	13
	SECTION 5 - HYDRAULIC/HYDROLOGIC	
5.1	Evaluation of Features	14
	SECTION 6 - STRUCTURAL STABILITY	
6.1	Evaluation of Structural Stability	16
	SECTION 7 - ASSESSMENT/REMEDIAL MEASURES	
7.1	Dam Assessment	17
7.2	Remedial Measures	18

APPENDICES

	<u>Sheet</u>
 APPENDIX A	
Location Map	1
Vicinity Map	2
Plan, Profile and Section of Dam	3
Spillway Section and Profile	3A
Plan Sketch of Dam	4
Project Map - Lost Creek Watershed	5
SCS As Built Plan Sheets	6 - 10
Inspection Report	11
 APPENDIX B	
Geologic Regions of Missouri	1
Thickness of Loessial Deposits	2
Geologic Investigation Plan Sheet	3
Detailed Geologic Investigation of Dam Site	4 - 20
 APPENDIX C	
Overtopping Analysis PMF	1 - 10
 APPENDIX D	
List of Photographs	1
Photograph Index	2
Photographs	

SECTION 1 - PROJECT INFORMATION

1.1 GENERAL:

A. Authority:

The National Dam Inspection Act, Public Law 92-567, authorized the Secretary of the Army, through the Corps of Engineers, to initiate a program of safety inspection of dams throughout the United States. Pursuant to the above, the St. Louis District, Corps of Engineers, District Engineer directed that a safety inspection be made of Structure F-2 in Newton County, Missouri.

B. Purpose of Inspection:

The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and a visual inspection in order to determine if the dam poses hazards to human life or property.

C. Evaluation Criteria.

Criteria used to evaluate the dam were furnished by the Department of the Army, Office of the Chief of Engineers, "Recommended Guidelines for Safety Inspection of Dams, Appendix D." These guidelines were developed with the help of several federal agencies and many state agencies, professional engineering organizations, and private engineers.

1.2 DESCRIPTION OF PROJECT:

A. Description of Dam and Appurtenances:

Structure F-2 is an earth fill structure approximately 28 ft high and 330 ft long at the crest. The appurtenant work consists of a 30 inch diameter reinforced concrete primary spillway pipe with a reinforced concrete flow riser and an earth cut swale located at the east abutment.

Sheet 3 of Appendix A shows a plan, profile and typical section of the embankment as obtained from field inspection data. Sheets 6 through 10 of Appendix A are selected As Built drawings obtained from the U. S. Department of Agriculture, Soil Conservation Service, Columbia, Missouri.

SECTION 1 - PROJECT INFORMATION

1.1 GENERAL:

A. Authority:

The National Dam Inspection Act, Public Law 92-367, authorized the Secretary of the Army, through the Corps of Engineers, to initiate a program of safety inspection of dams throughout the United States. Pursuant to the above, the St. Louis District, Corps of Engineers, District Engineer directed that a safety inspection be made of Structure F-2 in Newton County, Missouri.

B. Purpose of Inspection:

The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and a visual inspection in order to determine if the dam poses hazards to human life or property.

C. Evaluation Criteria.

Criteria used to evaluate the dam were furnished by the Department of the Army, Office of the Chief of Engineers, "Recommended Guidelines for Safety Inspection of Dams, Appendix D." These guidelines were developed with the help of several federal agencies and many state agencies, professional engineering organizations, and private engineers.

1.2 DESCRIPTION OF PROJECT:

A. Description of Dam and Appurtenances:

Structure F-2 is an earth fill structure approximately 28 ft high and 330 ft long at the crest. The appurtenant work consists of a 30 inch diameter reinforced concrete primary spillway pipe with a reinforced concrete flow riser and an earth cut swale located at the east abutment.

Sheet 3 of Appendix A shows a plan, profile and typical section of the embankment as obtained from field inspection data. Sheets 6 through 10 of Appendix A are selected As Built drawings obtained from the U. S. Department of Agriculture, Soil Conservation Service, Columbia, Missouri.

B. Location:

The dam is located in the southwestern part of Newton County, Missouri on a tributary of Lost Creek. The dam and lake are within the Seneca, Missouri 7.5 minute quadrangle sheet (Section 36, T25N, R34W - latitude $36^{\circ}51.0'$; longitude $94^{\circ}36.4'$). Sheet 2 of Appendix A shows the general vicinity. Sheet 5 of Appendix A is the Project Map developed as part of the Work Plan for Watershed Protection and Flood Prevention for the Lost Creek Watershed prepared by the Soil and Water Conservation District of Newton County.

C. Size Classification:

With an embankment height of 28 ft and a maximum storage capacity of approximately 56 acre ft, the dam is in the small size category.

D. Hazard Classification:

The St. Louis District, Corps of Engineers has classified this dam as a high hazard dam. The estimated damage zone extends approximately 1 mile downstream of the dam. Located within this zone are approximately 20 dwellings, all in the town of Seneca. The inspection team verified the existence of the dwellings located in the estimated damage zone. Photographs #11 and #12 show some of these dwellings.

E. Ownership:

The dam is owned by the Lost Creek Watershed Subdistrict, Jim Stone, Chairman, P. O. Box 149, Neosho, Missouri 64850; and is on property owned by Mrs. Paul Stelts, Seneca, Missouri 64865.

F. Purpose of Dam:

The dam was constructed under the Authority of the Watershed Protection and Flood Prevention Act (Public Law 566, 83rd Congress, 68 Statute 666) as amended primarily for the purpose of a Debris Basin Structure for the Lost Creek Watershed, Newton County, Missouri.

G. Design and Construction History:

The dam was designed by the U. S. Department of Agriculture, Soil Conservation Service, Columbia, Missouri, under the Authority of the Watershed Protection and Flood Prevention Act. Prior to the design of the dams, a watershed work plan for the Lost Creek Watershed was prepared in January, 1971, by the Soil and Water Conservation District of Newton County with assistance by SCS. A partial set of As Built Plans are included as Sheets 6 through 10 of Appendix A. A complete set of plans are available through the Columbia, Missouri office of SCS.

Geologic Investigation and analysis completed by SCS are included as Sheets 3 through 20 of Appendix B.

The contract for construction was let on July 22, 1976, for Newton County Structure F-2. Newton County Structures F-1 and F-3 were included in the contract with Structure F-2.

The contractor for this project was Higginbotham Construction Company, Route 1, Brookline, Missouri. Construction commenced in October, 1976, and the dam was completed in July, 1977.

Inspection of the project was conducted under the control of Mr. Joe Green, Project Engineer, Soil Conservation Service, Mount Vernon, Missouri. Results of the inspection and testing including inspectors field notes, compaction and concrete reports, are currently on file in the Columbia, Missouri SCS office.

Mr. Higginbotham indicated that the dam was built in general conformance with the plans and that no modifications were required during construction. The core trench was excavated to the elevations shown on the plans and filled in with select material from the borrow area located within the lake bed. Compaction of the embankment was by the use of a double sheepsfoot roller. He stated that the emergency spillway section was excavated to the plan elevation and topsoil was placed over the exposed rock and compacted earth to the final spillway elevation.

Mr. Green likewise indicated that no modifications were required to the plans during the construction phase. He or one of his staff performed daily inspections during the course of construction.

II. Normal Operating Procedures:

All flows will normally be passed by the restricted flow riser to the 30 inch spillway pipe and the uncontrolled earth cut emergency spillway. Information obtained from Mr. Green indicates that the maximum pool level for this dam was approximately 2.5 feet above the 8 inch diameter slide gate.

1.3 PERTINENT DATA:

Pertinent data about the dam, appurtenant works, and reservoir are presented in the following paragraphs. Sheet 3 of Appendix A presents a plan, profile and typical section of the embankment from field data obtained by the inspection team. Sheets 6 through 10 of Appendix A are selected sheets from the complete set of As Built plans prepared by the Soil Conservation Service.

A. Drainage Area:

The drainage area for this dam, as obtained from the Watershed Work Plan and As Built Plans (Sheet 10 of Appendix A) is approximately 80 acres.

B. Discharge at Dam Site:

- (1) All discharge at the dam site is through the restricted flow riser for the 30 inch diameter principal spillway pipe and an uncontrolled earth cut emergency spillway.
- (2) Estimated Total Spillway Capacity at Maximum Pool (Top of Dam - El. 947.4). 1096 cfs
- (3) Estimated Capacity of Principal Spillway: 21 cfs
- (4) Estimated Capacity of Emergency Spillway: 1075 cfs
- (5) Estimated Experienced Maximum Flood at Dam Site. No Flow Through Spillways Reported
- (6) Diversion Tunnel Low Pool Outlet at Pool Elevation: Not Applicable
- (7) Diversion Tunnel Outlet at Pool Elevation: Not Applicable
- (8) Gated Spillway Capacity at Pool Elevation: Not Applicable
- (9) Gated Spillway Capacity at Maximum Pool Elevation: Not Applicable

C. Elevations:

All elevations are consistent with an assumed mean sea level elevation of 918.64 for T.B.M. #8, described in As Built Plans as nail in north side of 24 inch Mulberry Tree on left slope, 15 south of toe, approximately 30 feet east of north-south property line fence (See Sheet 6 of Appendix A).

- (1) Top of Dam. 947.4
- (2) Principal Spillway Crest: 931.9
- (3) Emergency Spillway Crest: 943.3
- (4) Principal Spillway Pipe Invert Elevation at Outlet: 917.6
- (5) Streambed at Centerline of Dam: 920.0
- (6) Pool on Date of Inspection: 927.8
- (7) Apparent High Water Mark: 925.0
- (8) Maximum Tailwater: None
- (9) Upstream Portal Invert Diversion Tunnel: Not Applicable
- (10) Downstream Portal Invert Diversion Tunnel: Not Applicable

D. Reservoir Lengths:

- (1) At Top of Dam: 800 Feet
- (2) At Principal Spillway Crest: 400 Feet
- (3) At Emergency Spillway Crest: 700 Feet

E. Storage Capacities:

- (1) At Principal Spillway Crest: 7.6 Acre-Feet
- (2) At Top of Dam: 56 Acre-Feet
- (3) At Emergency Spillway Crest: 35.6 Acre-Feet

F. Reservoir Surface Areas:

- (1) At Principal Spillway Crest: 1.4 Acres
- (2) At Top of Dam: 4.9 Acres
- (3) At Emergency Spillway Crest: 3.9 Acres

G. Dam:

- (1) Type: Earth
- (2) Length at Crest: 330 Feet
- (3) Height: 28 Feet
- (4) Top Width: 14 Feet
- (5) Side Slopes: Upstream varies from 1V:2.83H to 1V:6.82H;
Downstream varies from 1V:2.66H to 1V:3.49H
- (6) Zoning: Gravelly Silt and Clay
- (7) Impervious Core: 12 Feet Wide
- (8) Cutoff: 8 Feet Below Base of Dam
- (9) Grout Curtain: None

H. Diversion and Regulating Tunnel:

- (1) Type: Not Applicable
- (2) Length: Not Applicable
- (3) Closure: Not Applicable
- (4) Access: Not Applicable
- (5) Regulating Facilities: Not Applicable

I. Spillway:

I.1 Principal Spillway:

- (1) Location. Centerline Dam Station 3 + 00
- (2) Type: 30 Inch Diameter Reinforced Concrete Pipe with Restricted Flow Riser

I.2 Emergency Spillway:

- (1) Location: East Abutment
- (2) Type: Earth Cut Swale, 50 ft wide, embankment (north) slope 1V:3H, abutment (south) slope 1V:2H
- (3) Upstream Channel: Grass covered earth channel
- (4) Downstream Channel: Grass covered, steep to moderate earth slopes

J. Regulating Outlets:

The 8 inch diameter slide gate associated with the restricted flow riser is the only regulating outlet feature of the dam.

SECTION 2 - ENGINEERING DATA

2.1 DESIGN:

Design calculations and construction plans were prepared by and are currently on file with the U. S. Department of Agriculture Soil Conservation Service in Columbia, Missouri. A partial set of these plans are included as Sheets 6 through 10 of Appendix A. A Watershed Work Plan was prepared for the Lost Creek Watershed prior to the design phase. A copy of the Project Map is included as Sheet 5 of Appendix A. This plan, prepared under the Authority of Public Law 566, is also on file in the Columbia SCS office.

A. Surveys:

A topographic survey was conducted by the Soil Conservation Service for the Lost Creek watershed. The survey was tied to the sea level datum, and temporary benchmarks were located at each dam site. Concrete monuments were set at each end of the embankment by SCS. A description of these benchmarks is shown on Sheet 6 of Appendix A. From the topographic survey data a 4 foot contour interval map was drawn for design purposes.

B. Geology and Subsurface Materials:

The site is located in the border zone between the Ozarks and Western Plains geologic regions of Missouri. This area is characterized topographically by rolling to hilly with oak and hickory forest areas. The sedimentary rock layers exposed in the Ozarks region dip downward away from the Ozarks region and the higher and younger sedimentary deposits become the surface ledges in southwest Missouri. The soils in this region are residual from cherty and dolomitic limestones of the Mississippian age. The site is located upon an outcrop of the Warsaw formation of the Meramecian series. The limestone bedrock occurs at an average depth of 10 feet below initial ground level along the entire dam centerline, as described in the Geologic Report on the site. The Geologic Report prepared by the Soil Conservation Service is contained in Appendix B.

Soils in the area of the dam are one of this area's most common soils. The embankment soils are reddish-brown silty clays (CL) with chert rock fragments. The chert is from the parent material and is found in each of the soil layers of this soil series. These soils generally make good fill material when properly compacted.

The "Geologic Map of Missouri" indicates that two known faults run in a northeast-southwesterly direction through or very near the dam site. The Missouri Geological Survey has indicated that these faults are known as the Seneca faults and there is no known activity or movement. These faults in this area are generally considered to be inactive. The publication "Caves of Missouri" indicates there are four caves in Newton County and these are several miles from the dam site.

C. Foundation and Embankment Design:

Included as Sheet 3 of Appendix B is the Geologic Investigation of Dam Site for this structure. The profile at the centerline of the dam shows the location of the borings as obtained by SCS. Sheets 4 through 13 of Appendix B are the detailed soil investigation with conclusions from the study. Sheets 12 and 13 of Appendix B are a discussion of the results from the Soil Mechanics Laboratory of SCS. One of the tests performed was slope stability analysis.

Based upon the available information, the basic foundation soil appears to be silty clays (CL). There is apparently no particular zoning of the embankment and no internal drainage features are known to exist.

D. Hydrology and Hydraulics:

The hydrologic and hydraulic design parameters of this dam are as shown on Sheet 10 of Appendix A. The Soil Conservation Service surveyed 17 valley cross-sections in the watershed and routed 8 evaluation storms through the channel using the T. R. 20 computer program. Assistance was obtained from the Tulsa District, Corps of Engineers for the study and evaluation. Based on the As Built Plans and a field check of spillway dimensions and embankment evaluations and a check of the drainage area on U.S.G.S. quad sheets, hydrologic analysis using U. S. Army Corps of Engineers guidelines was performed and appear in Appendix C as Sheets 1 through 9.

E. Structure:

The only structure associated with this dam is the restricted flow riser. Details of this riser appear as Sheet 9 of Appendix A.

2.2 CONSTRUCTION:

Inspection during the construction of the dam was performed by the Soil Conservation Service Office, Mount Vernon, Missouri, under the direction of Mr. Joe Green, Project Engineer. Mr. Green stated that daily inspection was performed during construction. The inspector's log and inspection tests, to include compaction and concrete testing, are currently on file at the Soil Conservation Service Office, Columbia, Missouri. The construction inspection data were not obtained.

2.3 OPERATION:

Normal flows would be passed by the restricted flow riser to the 30 inch diameter spillway pipe and the uncontrolled earth-cut spillway. Mr. Green stated that normally the 8 inch diameter slide gate on the flow riser is closed.

2.4 EVALUATION:

A. Availability:

2.1. The engineering data available are as listed in Section

B. Adequacy:

The engineering data available were inadequate to make a detailed assessment of the design, construction, and operation of this structure. Seepage analyses comparable to the requirements of the "Recommended Guidelines for Safety Inspection of Dams" were not available, which is considered a deficiency. The seepage analyses should be performed for appropriate loading conditions (including earthquake loads) and made a matter of record.

C. Validity:

The As Built Plans and Soil Investigation data and test results prepared by the Soil Conservation Service included in Appendices A and B are valid engineering data on the design and construction of the dam.

SECTION 3 - VISUAL INSPECTION

3.1 FINDINGS:

A. General:

The field inspection was made on May 29, 1980. The inspection team consisted of personnel from Anderson Engineering, Inc. of Springfield, Missouri, and Hanson Engineers, Inc. of Springfield, Illinois. The team members were:

Steve Brady Anderson Engineering, Inc., (Civil Engineer) ;
Tom Beckley Anderson Engineering, Inc., (Civil Engineer)
Jack Healy - Hanson Engineers, Inc., (Geotechnical Engineer)
Nelson Morales - Hanson Engineers, Inc., (Hydraulic Engineer)

Photographs of the dam, appurtenant structures, reservoir, and downstream features are presented in Appendix D.

B. Dam:

The dam appears to be in good condition. No sloughing or sliding of the embankment was noted. The horizontal and vertical alignments of the crest were good, and no surfacing cracking or unusual movement was obvious. The crest of the embankment was 14 feet wide and the lowest crest elevation was 947.4. The field survey data obtained by the inspection team compared favorably to the As Built Plans for this dam.

On the date of inspection, the pool level was about 1.3 feet above the slide gate invert. An apparent high water mark was observed on the riser structure 1.2 feet above the inspected pool level. According to Mr. Green, that is the high water elevation to his knowledge. He stated that the dam has never held water. To his knowledge there has not been any attempt to locate the apparent leakage. The Lost Creek Watershed Work Plan noted that the geologic site conditions make permanent water storage unpredictable. As the structure was intended to function as a Debris Basin Structure, permanent water storage is not a major factor.

Shallow auger probes into the embankment indicated the fill material to be a reddish-brown silty clay (CL.). The embankment is grass-covered and appears to be in good condition. Due to the heavy grass cover, thorough inspection of the embankment was difficult. No sloughing of the embankment or seepage through the embankment was evident. No animal burrows were noted. No serious erosion was observed.

No rip rap was noted on the upstream face at normal pool elevation. Due to the lack of permanent water capability and the heavy grass cover, erosion does not appear to be a problem. A scattering of light brush growth on the embankment was noted.

No instrumentation (monuments, piezometers, etc.) other than T.B.M. #8 was observed.

C. Appurtenant Structures:

C.1 Principal Spillway:

The principal spillway consisting of the 30 inch reinforced concrete spillway pipe and associated flow restrictor riser is in good condition. The 8 inch diameter slide gate was in good working condition. Opening of the slide gate and permitting a small quantity of water to exit the spillway pipe was performed by the inspection team.

The approach to the inlet structure was clear. Considerable rip rap was placed around the inlet structure. The principal orifice (11 feet above the structure invert) did not appear to have been used. Past flow through the spillway pipe occurred when the slide gate was opened. Mr. Green stated that occasionally the slide gate would be open when he visited the site.

No rip rap was noted at the outlet of the spillway pipe. However, due to the absence of any appreciable flow through the pipe no erosion was observed.

C.2 Emergency Spillway:

The emergency spillway was located at the east abutment. The spillway channel appeared to be an earth cut channel. The grass cover in the channel was good with no noticeable erosion. The spillway has not been used since the dam was constructed. According to Mr. Higginbotham portions of the spillway were excavated to rock and then covered with topsoil. Continued use of the spillway would probably result in appreciable erosion.

The outlet channel is directed well away from the embankment. The outlet and inlet channel were clear.

D. Reservoir:

The immediate periphery of the lake was wooded and grass covered with moderate slopes. The reservoir banks appeared to be in good condition with heavy grass cover. No appreciable sedimentation was noted.

E. Downstream Channel:

Immediately downstream of the embankment the channel is grass covered. Approximately 50 yards downstream the channel becomes narrow with heavy brush and tree growth. The slopes are steep to moderate.

3.2 EVALUATION:

Due to the apparent geologic conditions, the dam does not impound any appreciable permanent water storage. With use as a debris basin structure with limited flows, the absence of rip rap on the upstream face of the embankment and at the principal spillway pipe and the unlined emergency spillway section do not appear to be significant.

Some light brush growth was noted on the embankment. The grass cover on the dam was good. The presence of any seepage areas could not be observed due to the lack of water impounded by the dam.

Photographs of the dam, appurtenant structures, and the reservoir are presented in Appendix D.

SECTION 4 - OPERATIONAL PROCEDURES

4.1 PROCEDURES:

The operation and maintenance of the dam are the responsibility of the Lost Creek Watershed District Board in conjunction with the Soil and Water Conservation District, Neosho, Missouri. For the first three years after construction of the dam, a joint inspection is being conducted by members of the District Board and the Soil Conservation Service. After three years the District Board is responsible for providing yearly inspections. In addition to the annual inspection, the dam is to be inspected after each severe flood and after the occurrence of any other unusual conditions which might adversely affect the structural measure. The inspection is to include the condition of primary spillway and its appurtenances, the emergency spillway, the earthfill and any other items installed as a part of the structure. Copies of the inspection report are forwarded to the Soil Conservation Service office in Springfield, Missouri. The last annual inspection was conducted on May 14, 1980, and the results are included as Sheet 11 of Appendix A.

4.2 MAINTENANCE OF DAM:

After the yearly inspection of the dam, the Lost Creek Watershed District Board determines the maintenance to be done. Monies for the required maintenance are derived from a tax levy imposed upon the residents of the Watershed District.

4.3 MAINTENANCE OF OPERATING FACILITIES:

The maintenance required for the restricted flow riser is accomplished after the yearly inspection by the Watershed District Board. The slide gate appeared to be in good condition.

4.4 DESCRIPTION OF ANY WARNING SYSTEM IN EFFECT:

The inspection team is unaware of any existing warning system for this dam.

4.5 EVALUATION:

The general maintenance of the dam and associated items appeared to be in good condition. The brush growth should be removed from the dam on a yearly basis. Should the dam ever provide permanent water storage, rip rap may be required on the upstream face and at the outlet of the principal spillway.

SECTION 5 - HYDRAULIC/HYDROLOGIC

5.1 EVALUATION OF FEATURES:

A. Design Data:

The hydrologic and hydraulic design data for this dam are as shown on Sheet 10 of Appendix A.

B. Experience Data:

No recorded rainfall, runoff, discharge, or reservoir stage data were obtained for this lake and watershed. During the design phase, flood frequency used in evaluation of damages was obtained from six representative stream gauges in the surrounding area.

C. Visual Observations:

The approach channels to the spillway are clear. The emergency spillway is well separated from the embankment, and spillway releases would not be expected to endanger the dam. Spillway flows through the principal spillway pipe could result in erosion at the pipe outlet. The downstream channel has a dense growth of brush and trees.

D. Overtopping Potential:

The hydraulic and hydrologic analyses (using the U. S. Army Corps of Engineers guidelines and the HEC-1 computer program) were based on (1) a field survey of spillway dimensions and embankment elevations; (2) an estimate of the reservoir storage and the pool and drainage areas from the Seneca Missouri, 7.5 Minute U.S.G.S. quad sheet; and (3) data obtained from the As Built Plans for this project (See Appendix A, Sheets 6 through 10).

Based on the hydrologic and hydraulic analysis presented in Appendix C, the combined spillways will pass 75 percent of the Probable Maximum Flood. The Probable Maximum Flood is defined as the flood discharge that may be expected from the most severe combination of critical meteorologic and hydrologic conditions that are reasonably possible in the region. The recommended guidelines from the Department of the Army, Office of the Chief of Engineers, require that this structure (small size with high downstream hazard potential) pass 50 percent to 100 percent of the PMF, without overtopping. Considering the height of dam (28 feet), the maximum storage capacity (56 acre-feet) and the low volume of permanent water storage 50 percent of the PMF has been determined to be the appropriate spillway design flood. The structure will pass a 1 percent probability flood without overtopping.

Application of the probable maximum precipitation (PMP), minus losses, resulted in a flood hydrograph peak inflow of 1964 cfs. For 50 percent of the PMP, the peak inflow was 982 cfs.

The routing of the PMF through the spillways and dam indicates that the dam will be overtopped by 0.76 feet at elevation 948.16. The duration of the overtopping will be .33 hours, and the maximum outflow will be 1609 cfs. The maximum discharge capacity of the spillways is 1096 cfs. The routing of 50 percent of the PMF indicates that the dam will not be overtopped. The maximum outflow will be 671 cfs. Overtopping of an earthen embankment could cause serious erosion and could possibly lead to failure of the structure.

SECTION 6 - STRUCTURAL STABILITY

6.1 EVALUATION OF STRUCTURAL STABILITY:

A. Visual Observations:

Observed features which could adversely affect the structural stability of this dam are discussed in Sections 3.1B and 3.2.

B. Design and Construction Data:

Design data obtained are included in Appendix A. Analysis of the soil structure is included in Appendix B. Additional design data and construction notes and test results are located at the Soil Conservation Service in Columbia, Missouri.

Seepage and stability analysis comparable to the requirements of the guidelines were not available, which constitutes a deficiency which should be rectified.

C. Operating Records:

No operating records have been obtained.

D. Post-Construction Changes:

There have been no reported post-construction changes to this dam.

E. Seismic Stability:

The structure is located in seismic zone I. An earthquake of this magnitude would not generally be expected to cause severe structural damage to a well constructed earth dam of this size. However, it is recommended that the prescribed seismic loading for this zone be applied in stability analysis performed for this dam.

SECTION 7 ASSESSMENT/REMEDIAL MEASURES

7.1 DAM ASSESSMENT:

This Phase I inspection and evaluation should not be considered as being comprehensive since the scope of work contracted for is far less detailed than would be required for an in-depth evaluation of dams. Latent deficiencies, which might be detected by a totally comprehensive investigation, could exist.

A. Safety:

The embankment is in good condition. Some items were noted during the visual inspection which should be investigated further, corrected or controlled. These items are: (1) light brush present on the embankment faces; and (2) the downstream channel was heavily wooded.

Another deficiency was the lack of seepage and stability analyses comparable to the recommended guidelines.

The dam will be overtopped by flows in excess of 75 percent of the Probable Maximum Flood. Overtopping of an earthen embankment could cause serious erosion and could possibly lead to failure of the structure.

B. Adequacy of Information:

The conclusions in this report were based on review of the information listed in Section 2.1, the performance history as related by others, and visual observation of external conditions. The inspection team considers that these data are sufficient to support the conclusions herein. Seepage and stability analyses comparable to the "Recommended Guidelines for Safety Inspection of Dams" were not available, which is considered a deficiency.

C. Urgency:

The remedial measures recommended in paragraph 7.2 should be accomplished in the near future. If the deficiencies listed in paragraph A are not corrected, and if good maintenance is not provided, the embankment condition will deteriorate and possibly could become serious in the future.

D. Necessity for Additional Inspection:

Based on the result of the Phase I inspection, no additional inspection is recommended.

E. Seismic Stability:

The structure is located in seismic zone 1. An earthquake of this magnitude would not generally be expected to cause severe structural damage to a well constructed earth dam of this size. However, it is recommended that the prescribed seismic loading for this zone be applied in any stability analyses performed for this dam.

7.2 REMEDIAL MEASURES:

The following remedial measures and maintenance procedures are recommended. All remedial measures should be performed under the guidance of a professional engineer experienced in the design and construction of dams.

A. Alternatives:


Not Applicable

B. O & M Procedures:


- (1) Seepage and stability analyses comparable to the requirements of the recommended guidelines should be performed by an engineer experienced in the construction of dams.
- (2) The light brush growth should be removed and vegetative growth on the dam should be cut annually.
- (3) Wave protection should be provided for the upstream face of the embankment if permanent water storage is accomplished.
- (4) A detailed inspection of the dam should be made periodically by an engineer experienced in the design and construction of dams.

APPENDIX A

Dam Location and Plans

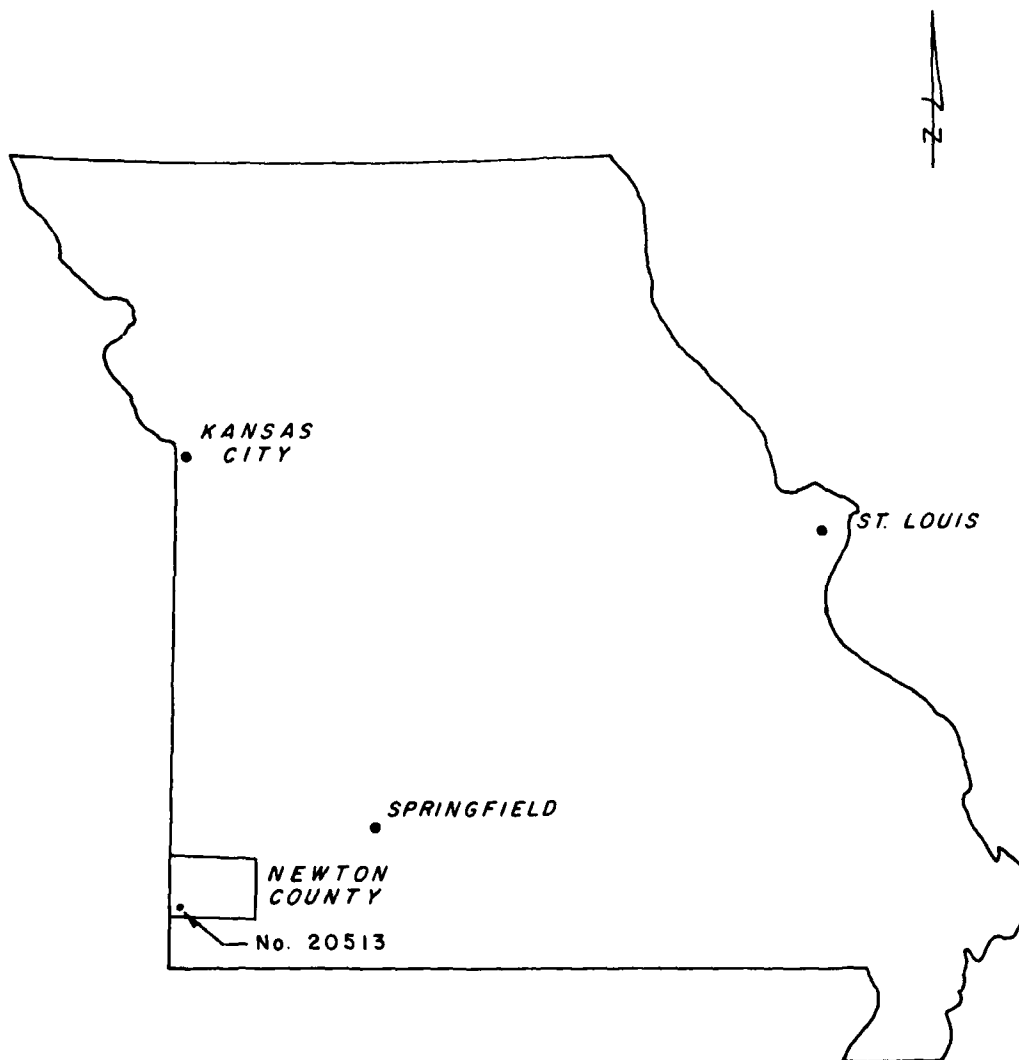

LOCATION MAP

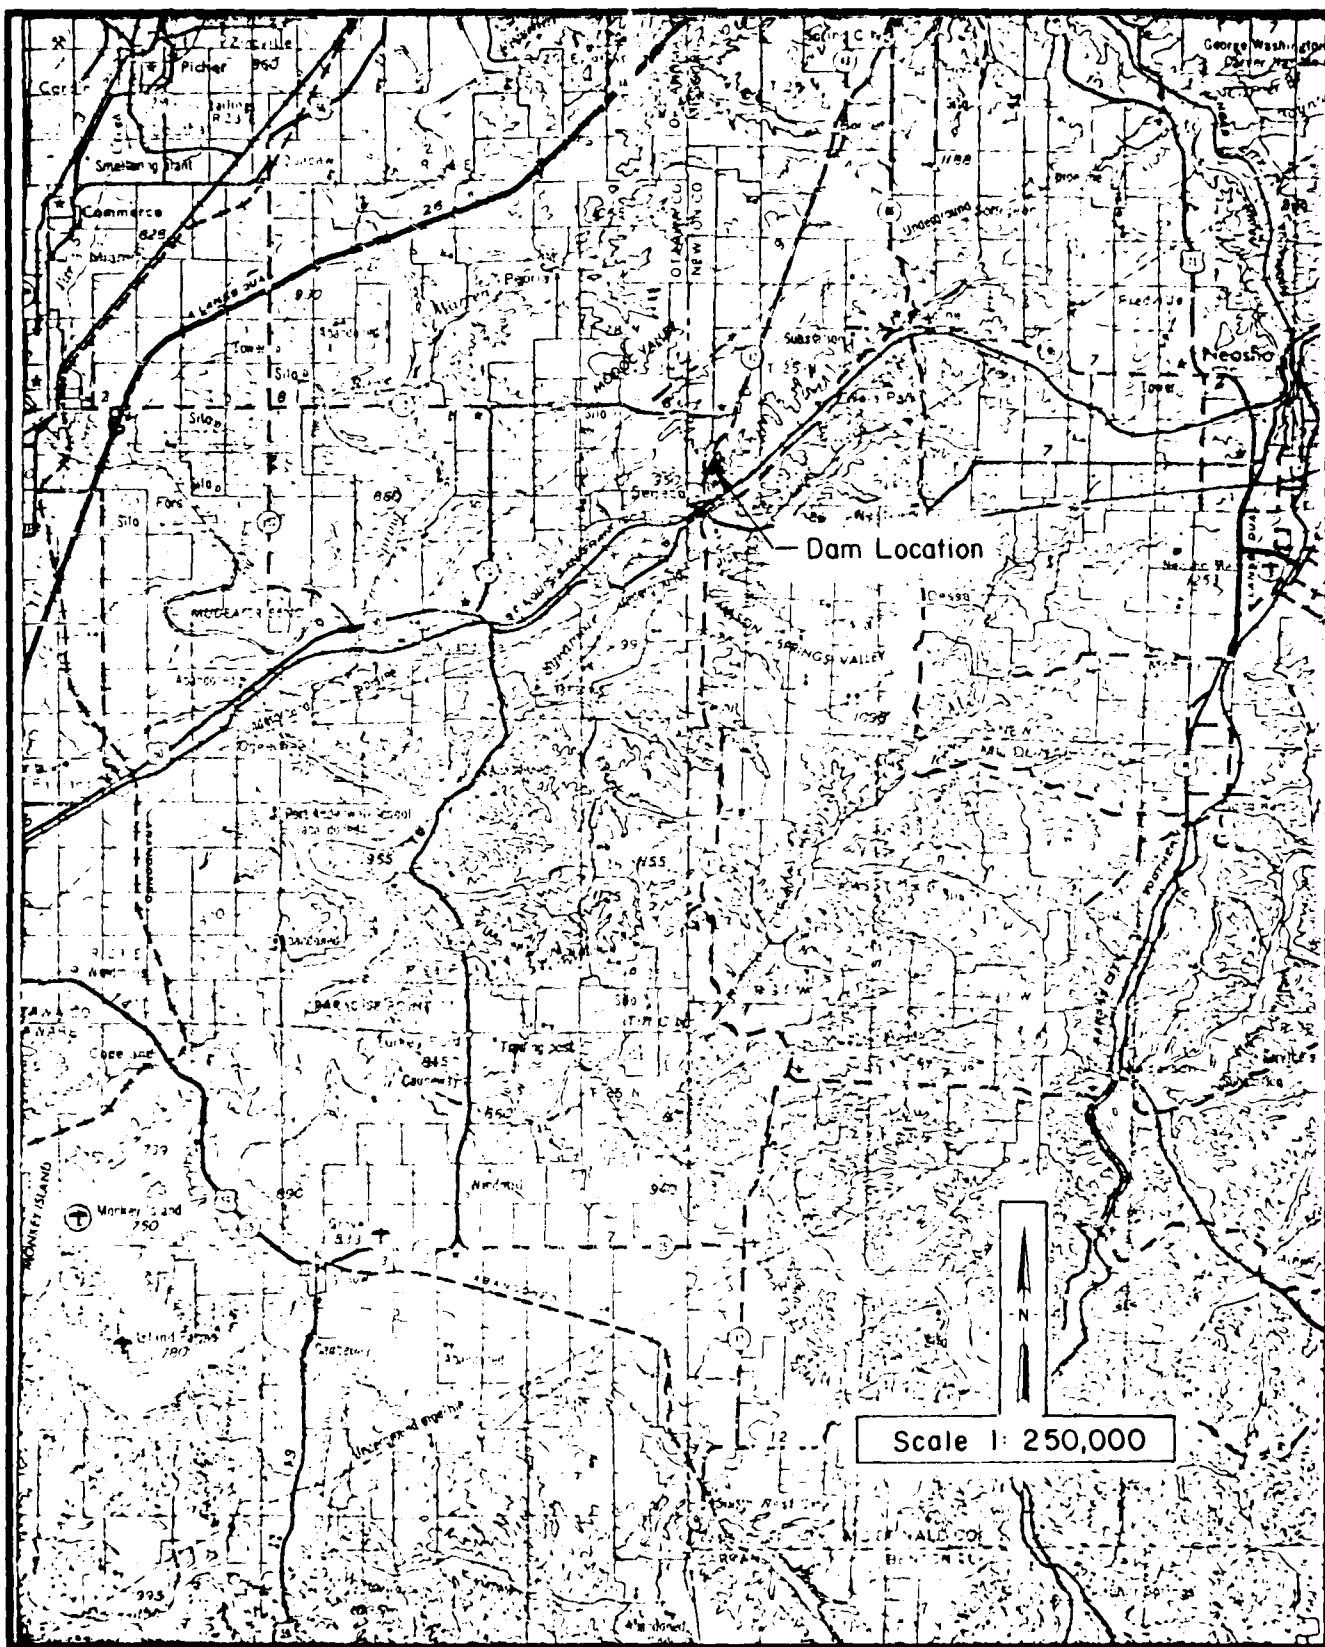

VICINITY MAP



SPRINGFIELD, IL • PEORIA, IL • ROCKFORD, IL

Newton County Structure F-2 Dam
Newton County, Missouri
Mo I.D. No 20513


Sheet 2, Appendix A

0+00

1+00


2+00


3+00

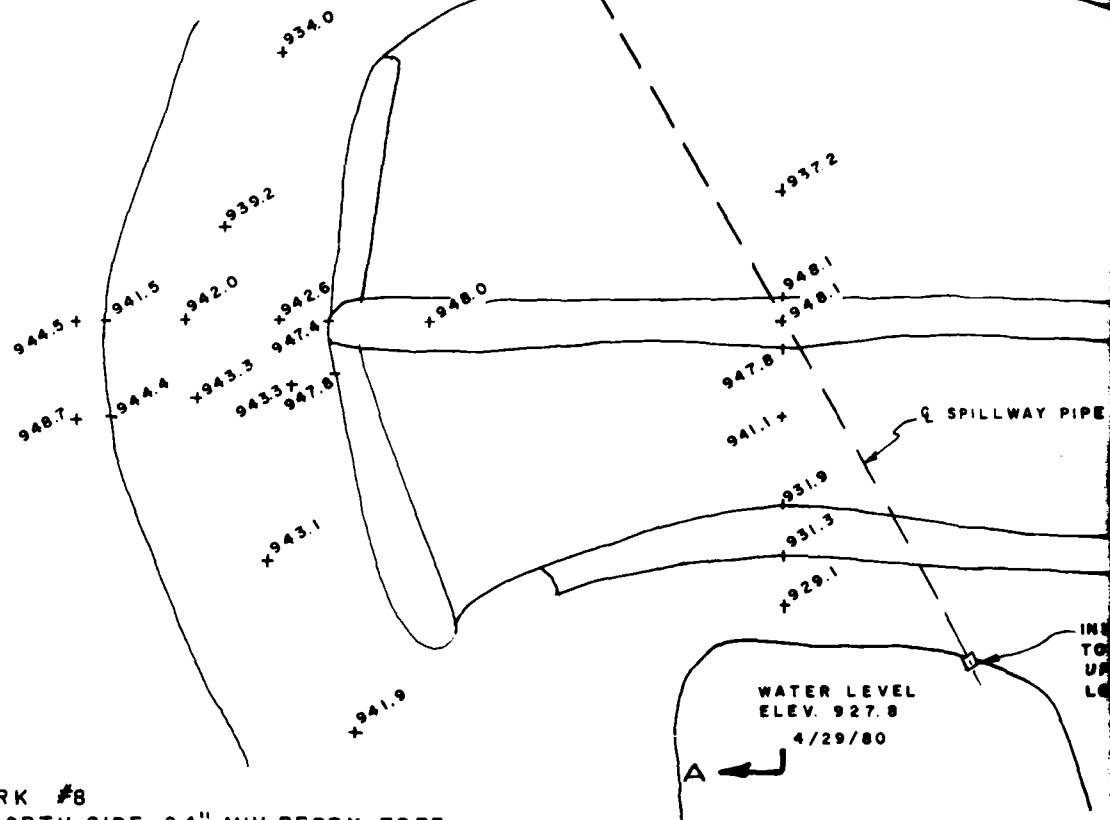
INVERT 30" RCP
ELEV. 917.6

BENCHMARK #8
NAIL IN NORTH SIDE 24" MULBERRY TREE
LEFT SLOPE 15' SOUTH OF TOE
ELEV. 918.64

PLAN VIEW
SCALE: 1" = 50'

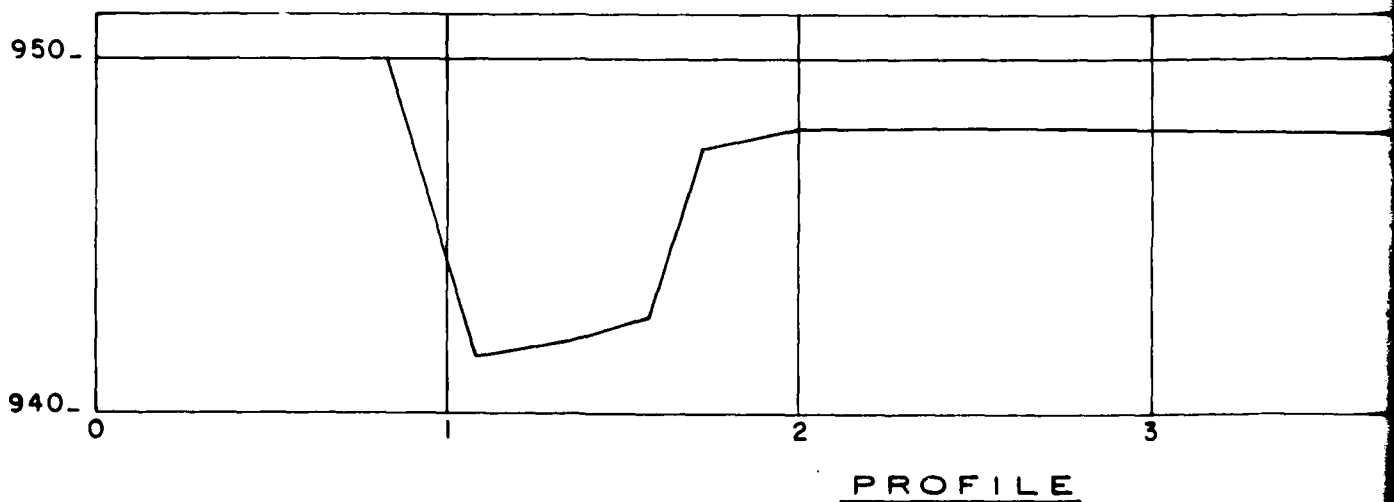

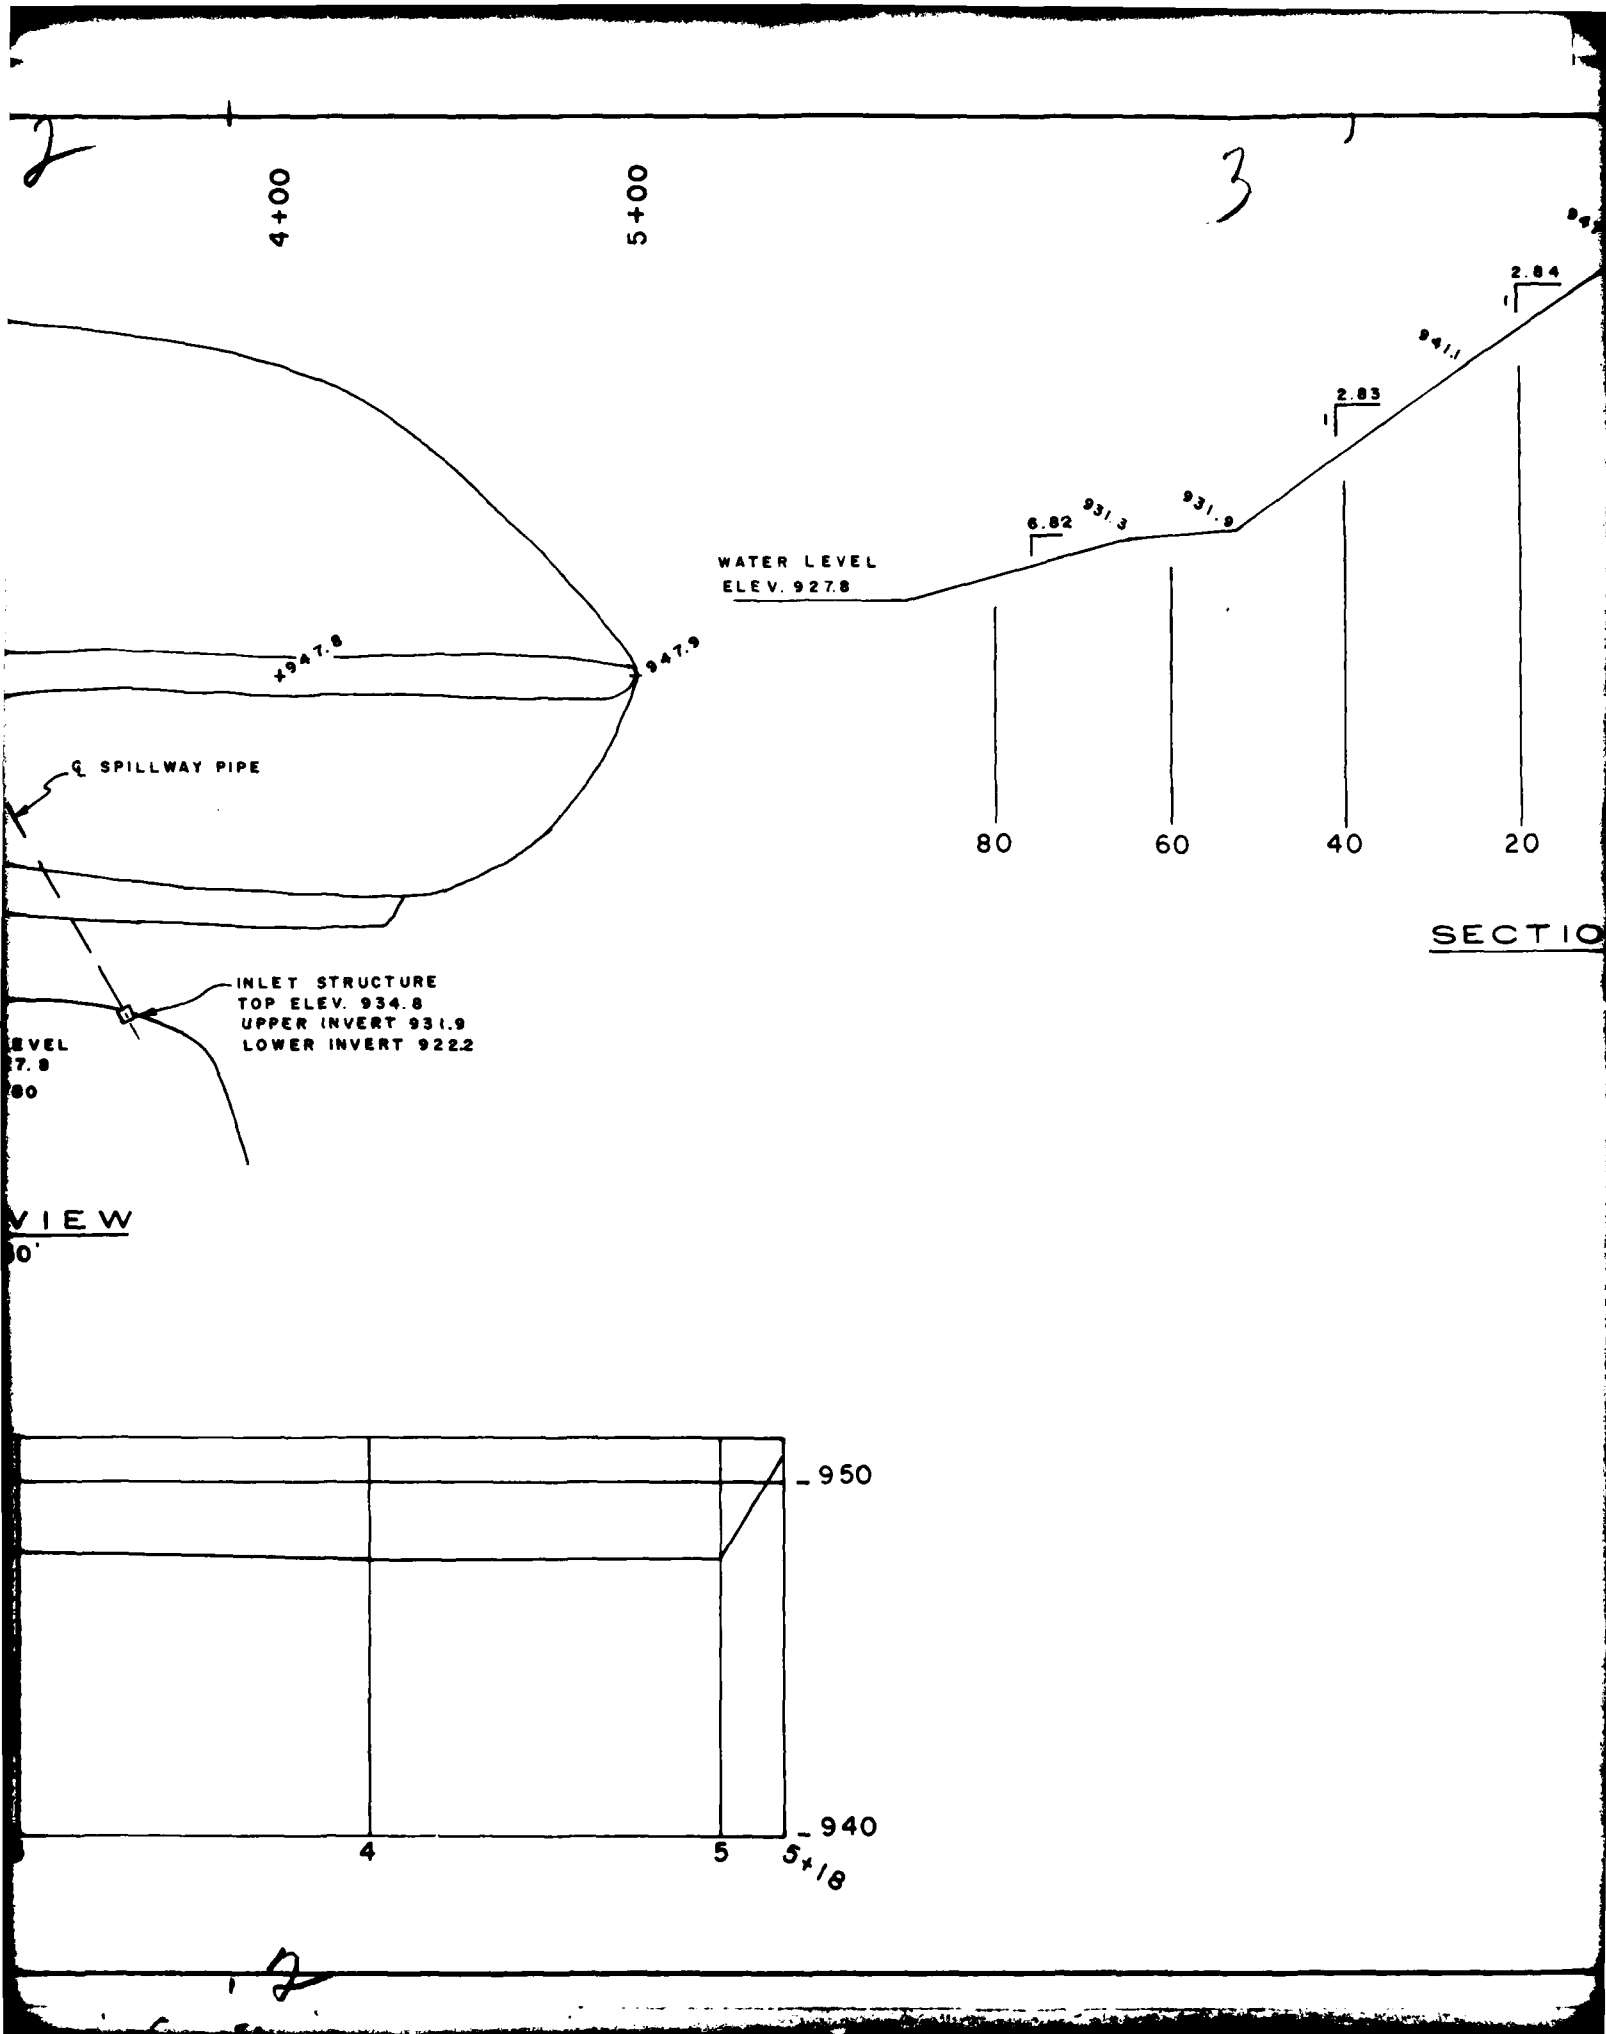

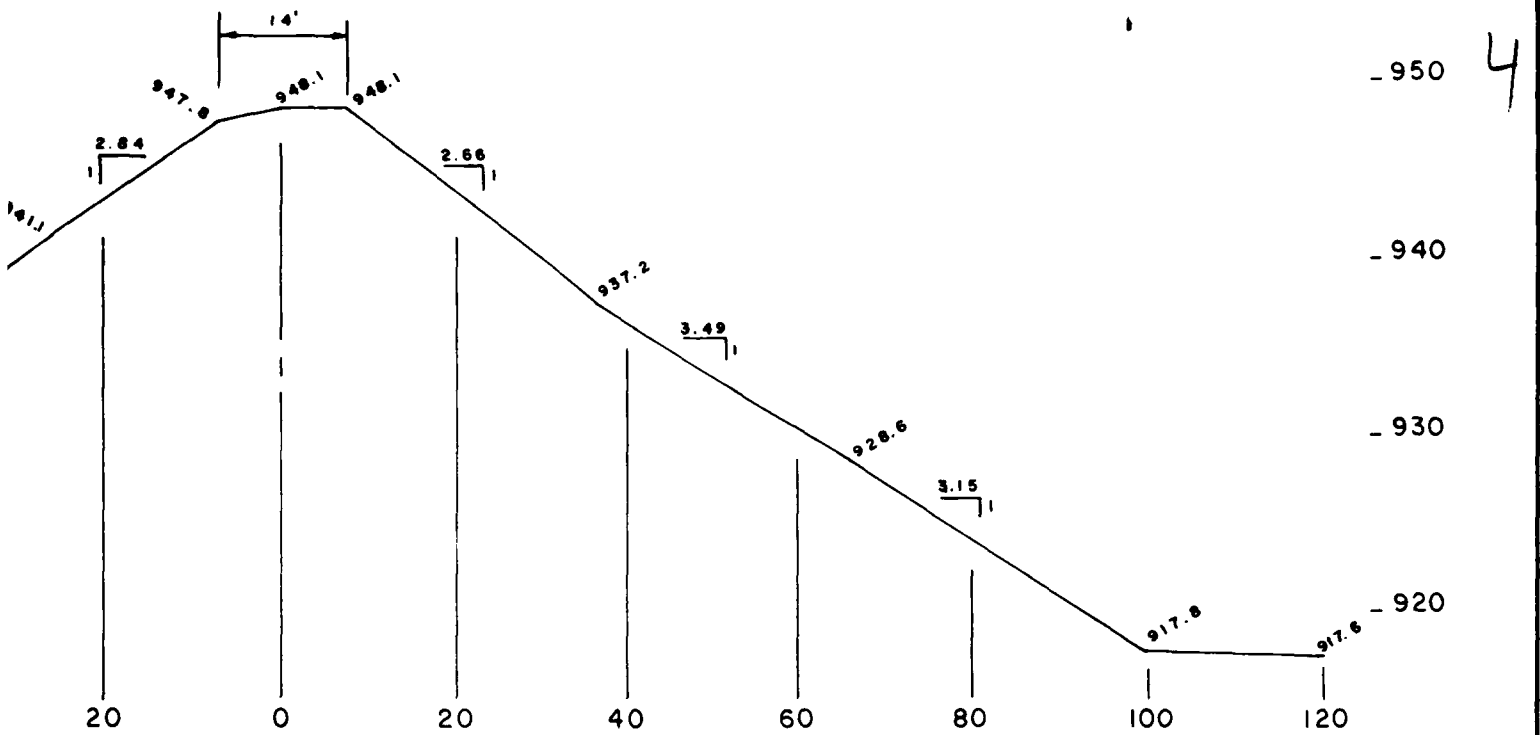

SECTION A-A STA 3+00

SHEET 3 APPENDIX A

ANDERSON ENGINEERING, INC.
730 NORTH BENTON AVENUE
SPRINGFIELD, MISSOURI 65802


NEWTON COUNTY STRUCTURE F-2

MO. No. 20513


PLAN & PROFILE

NEWTON COUNTY, MO.

+ 3


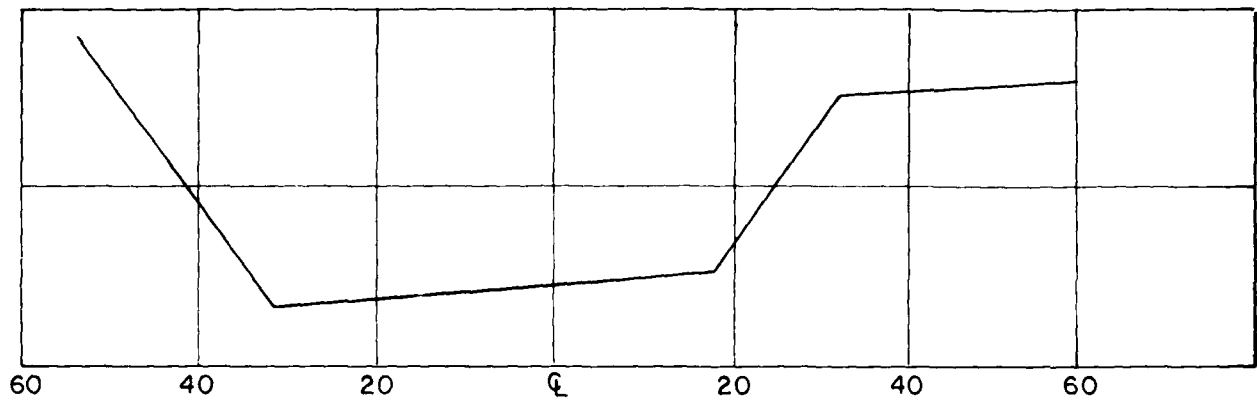


SPILLWAY SECTION ϕ DAM

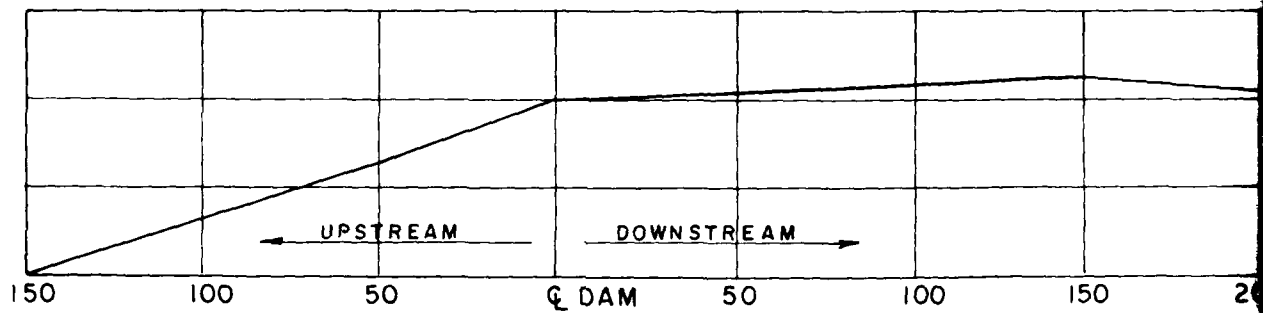

SPILLWAY PROFILE

2

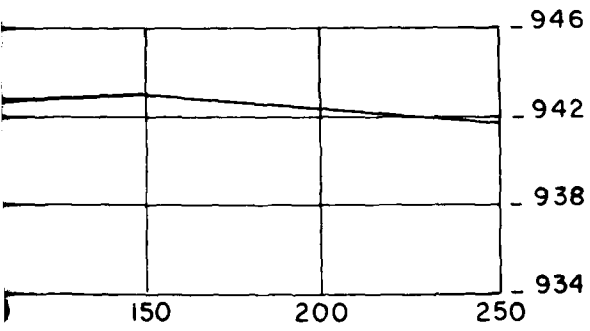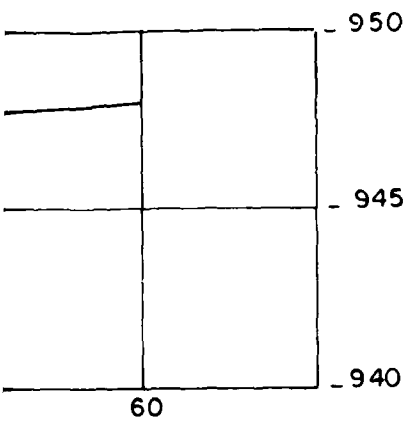


SHEET 3A APPENDIX A

ANDERSON ENGINEERING, INC.
730 NORTH BENTON AVENUE
SPRINGFIELD, MISSOURI 65802

NEWTON COUNTY STRUCTURE F-2
MO. No. 20513

SPILLWAY
SECTION & PROFILE
NEWTON COUNTY, MO.

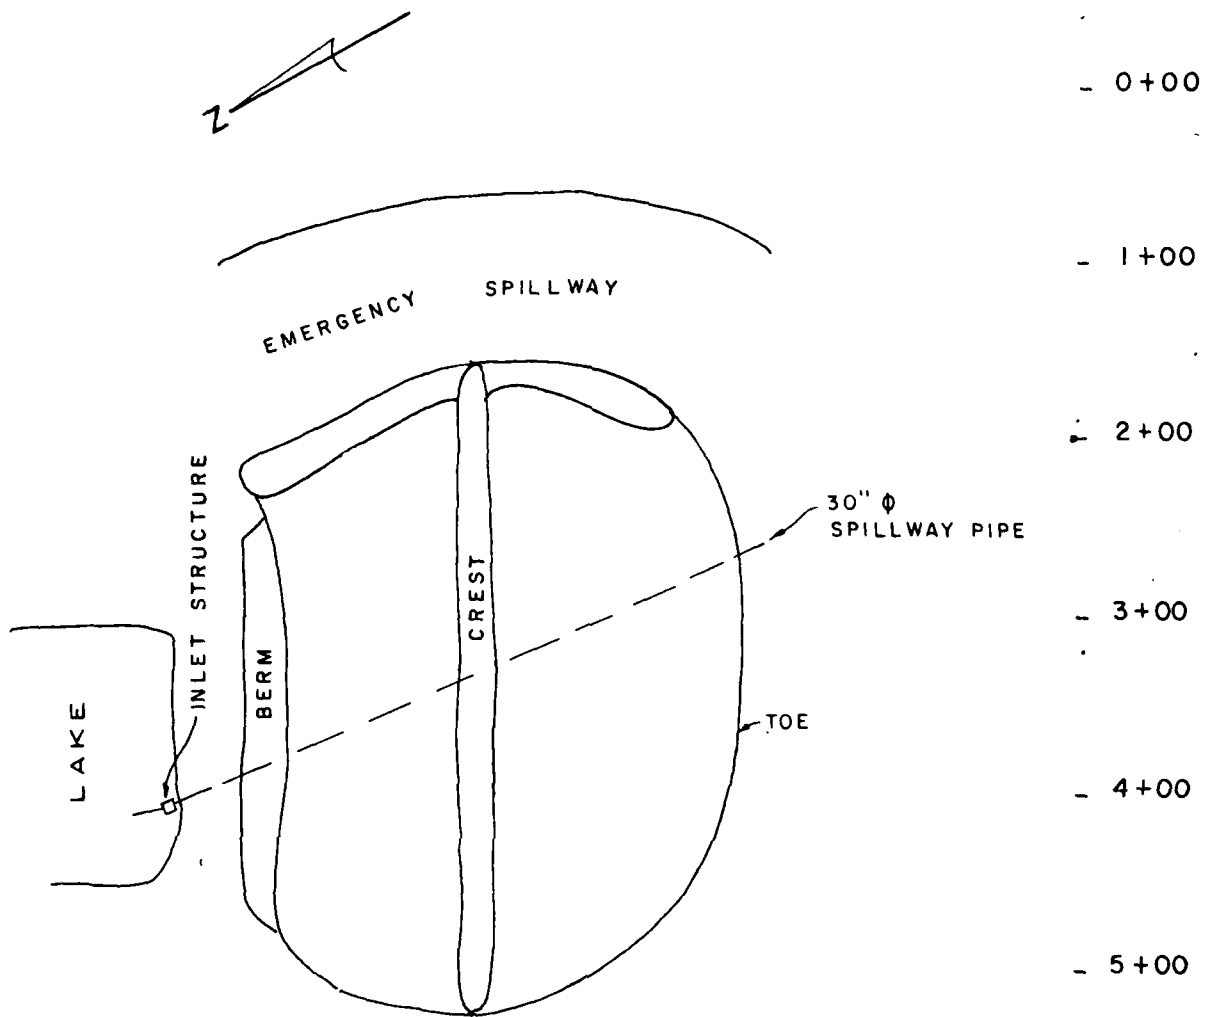

PLAN SKETCH OF DAM
 STRUCTURE F-2
 MO. No. 20513

LEGEND

WATERSHED BOUNDARY

DRAINAGE AREA CONTROLLED BY STRUCTURE

AREA BENEFITED

PROJECT MEASURES


STRUCTURE NUMBER

FLOODWATER RETARDING STRUCTURE

DEBRIS BASIN STRUCTURE

PROPOSED FLOOD CHANNEL CORPS OF ENGINEERS

ECONOMIC EVALUATION REACH

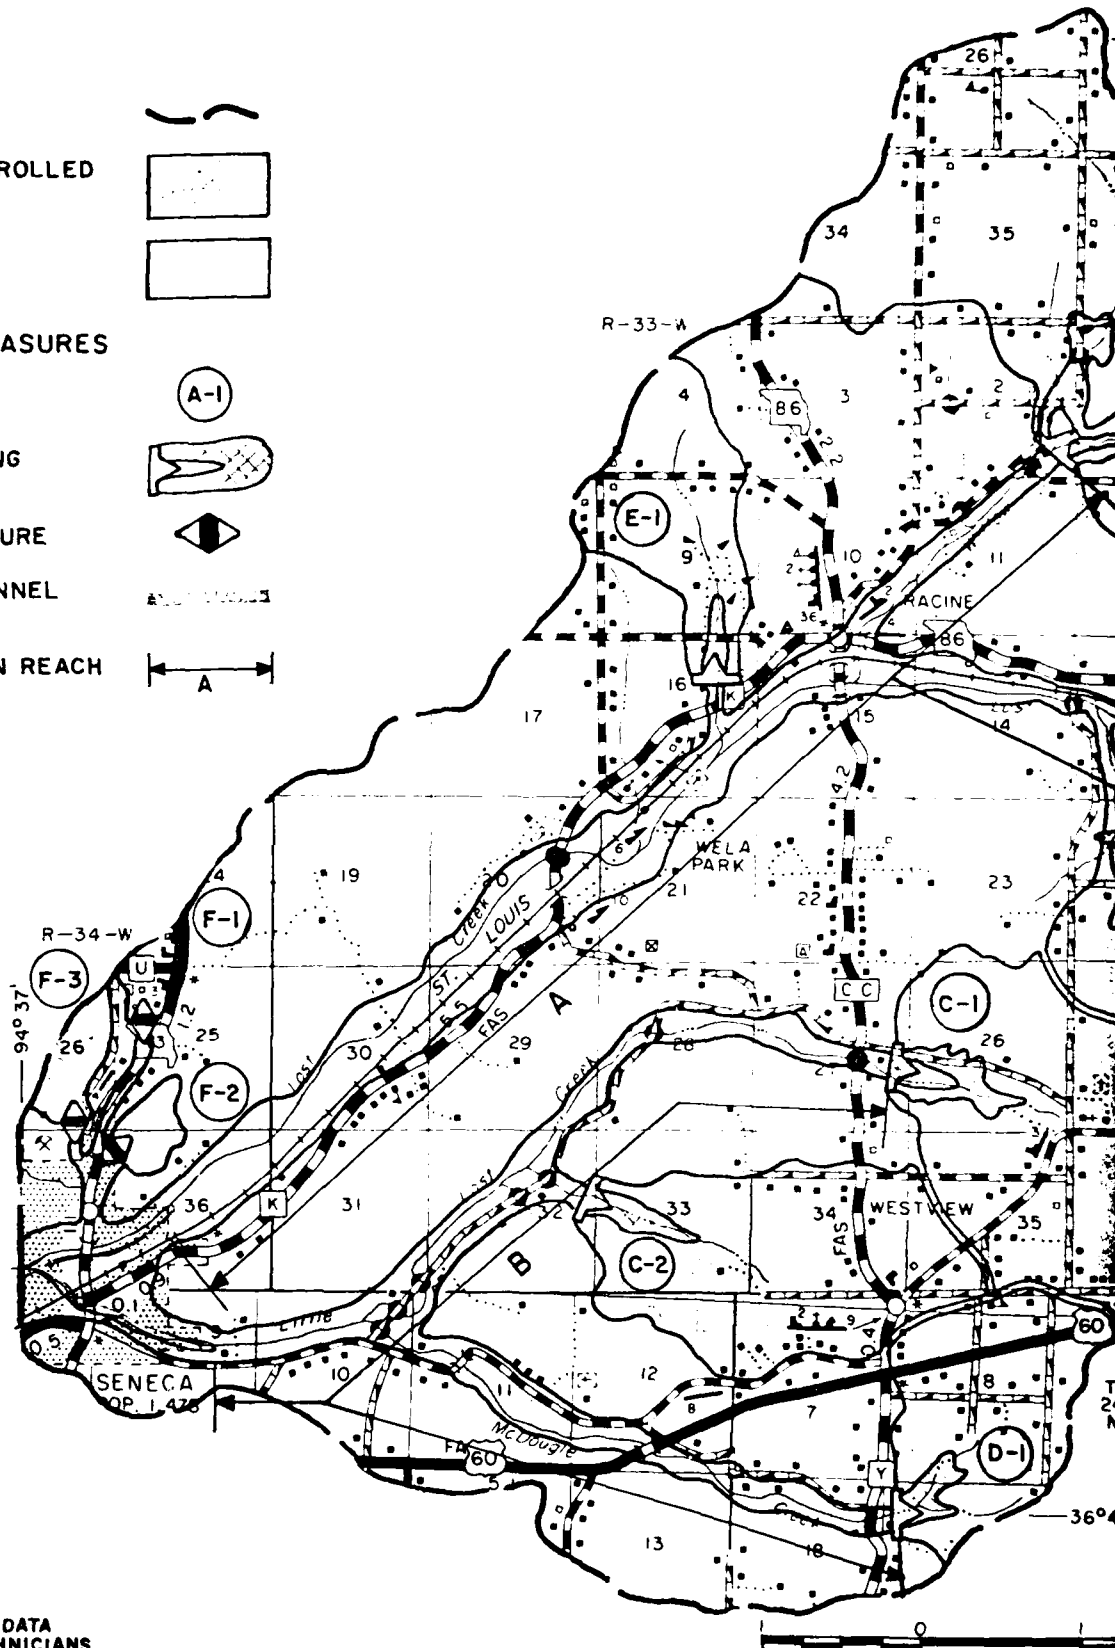

SOURCE


SCS BASE 5,0-28,307 AND DATA
FURNISHED BY FIELD TECHNICIANS

USDA-SCS-LINCOLN NEBR 1970

POLYCONIC PROJECTION

SCALE 1/70

PROJECT MAP LOST CREEK WATERSHED NEWTON COUNTY, MISSOURI

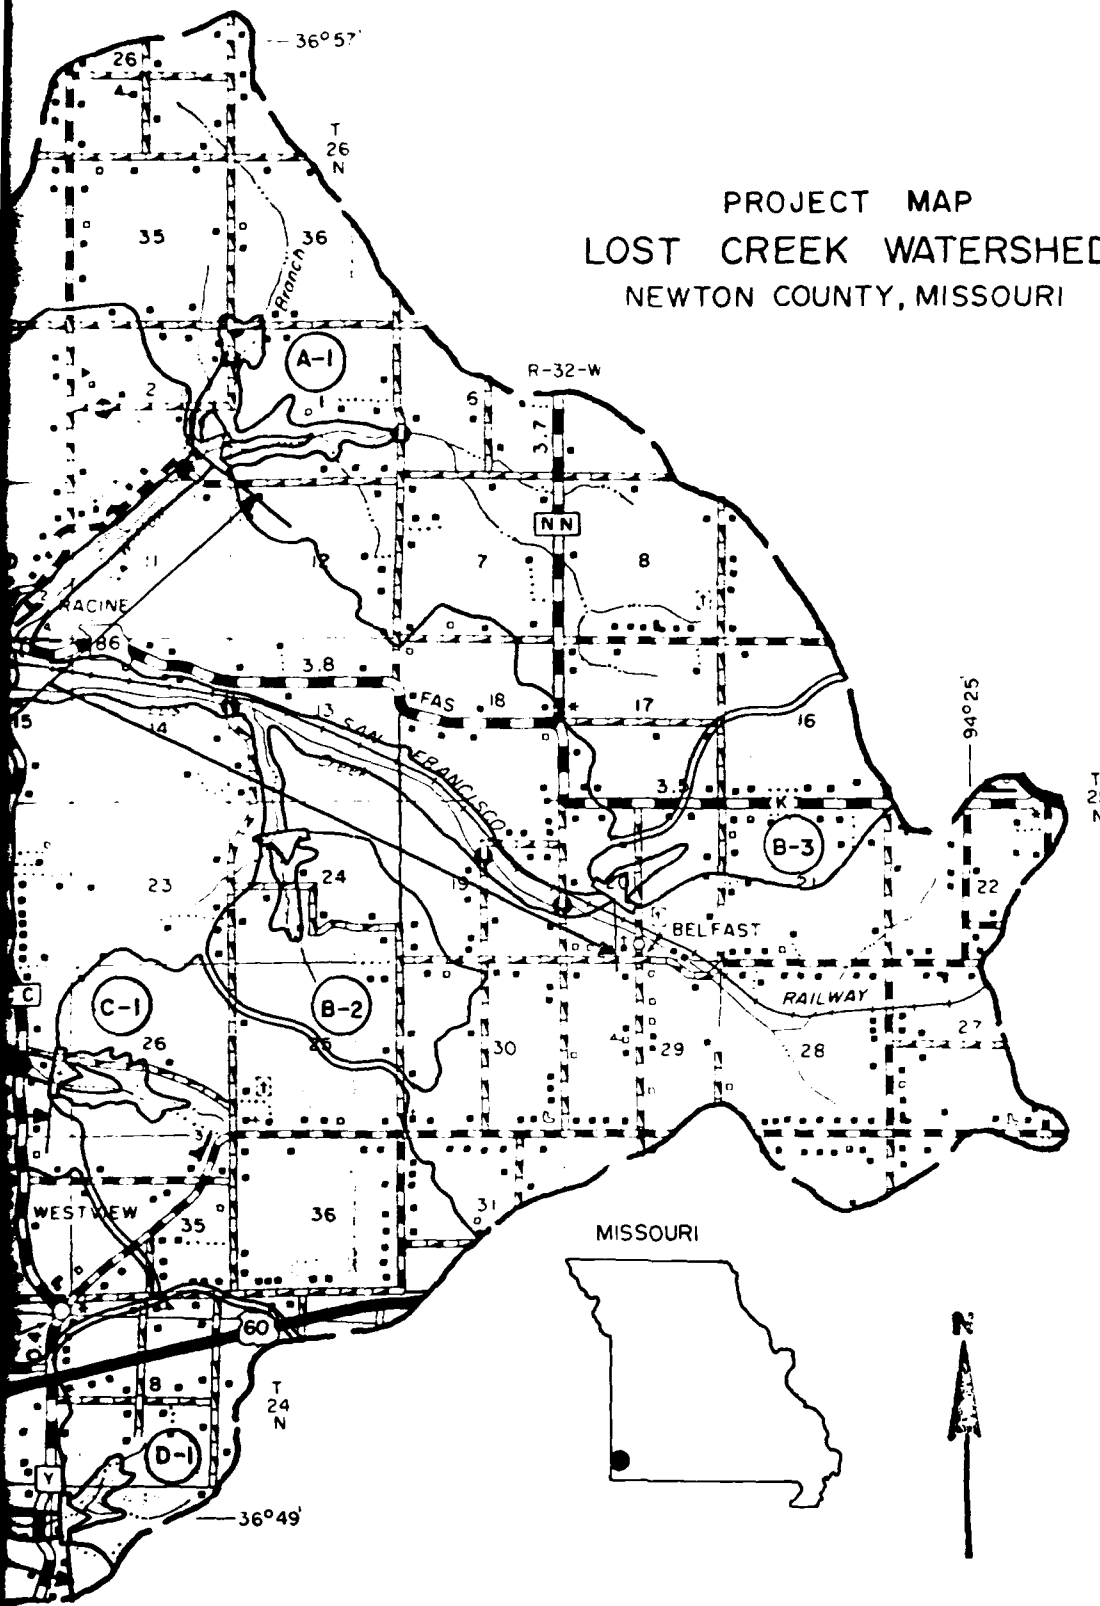

MISSOURI


SCALE 1/70,000

7-2-70
5,0-28,312

Storage Area, Acres	80
Emergency Spillway, Acre Feet	76
Retarding Pools, Acre Feet	250
Cement Pools, Acres	1.4
Retarding Pool, Acres	39

Structure F-2 located at the north edge
of Seneca, Missouri in the NW 1/4 of Sec.
36, T. 25 N, R. 34 W.


B.M. #1 Elevation - 956.83
Top concrete monument 5125/1225 & Dam.
Top concrete monument 71 left draft 1/2 dam
T.B.M. #2 Elevation - 956.84
Nail in north side 24' A. J. lobby, top of 24'
slope, 15' south of toe, approx 30' east of
north-south property line fence
B.M. #2 Elevation - 956.83
Top concrete monument 5125/1225 & Dam.

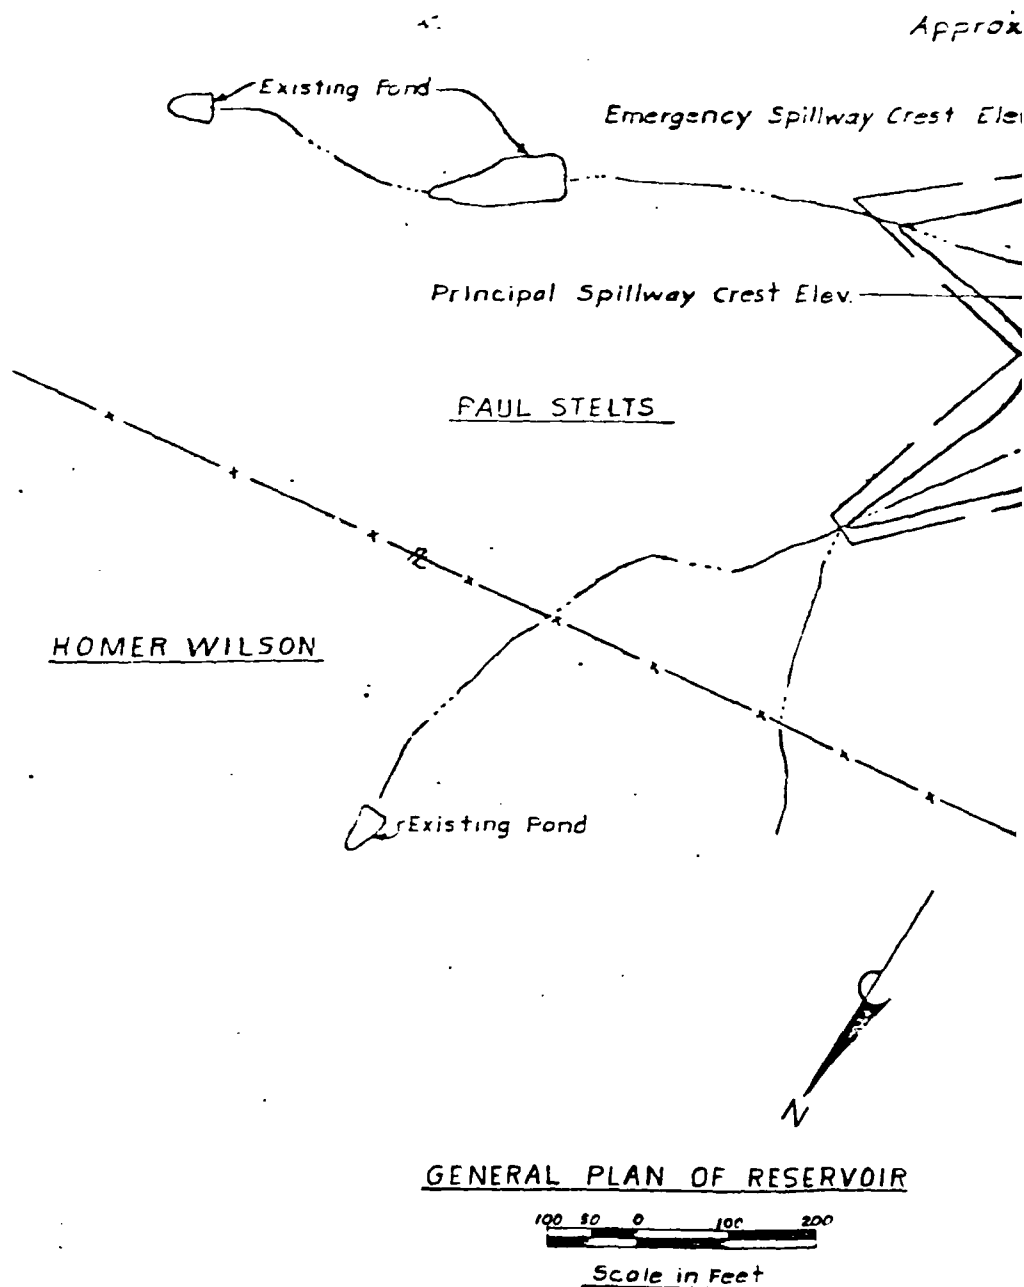

918.64
 24' Mulberry Tree on Lt
 of toe, approx 30' east of
 property line fence.
 956.83'
 monument 51251225 & Dam.


212' of
 212' of
 by the Engineer.

212' of
 212' of
 Ingress-Egress Route

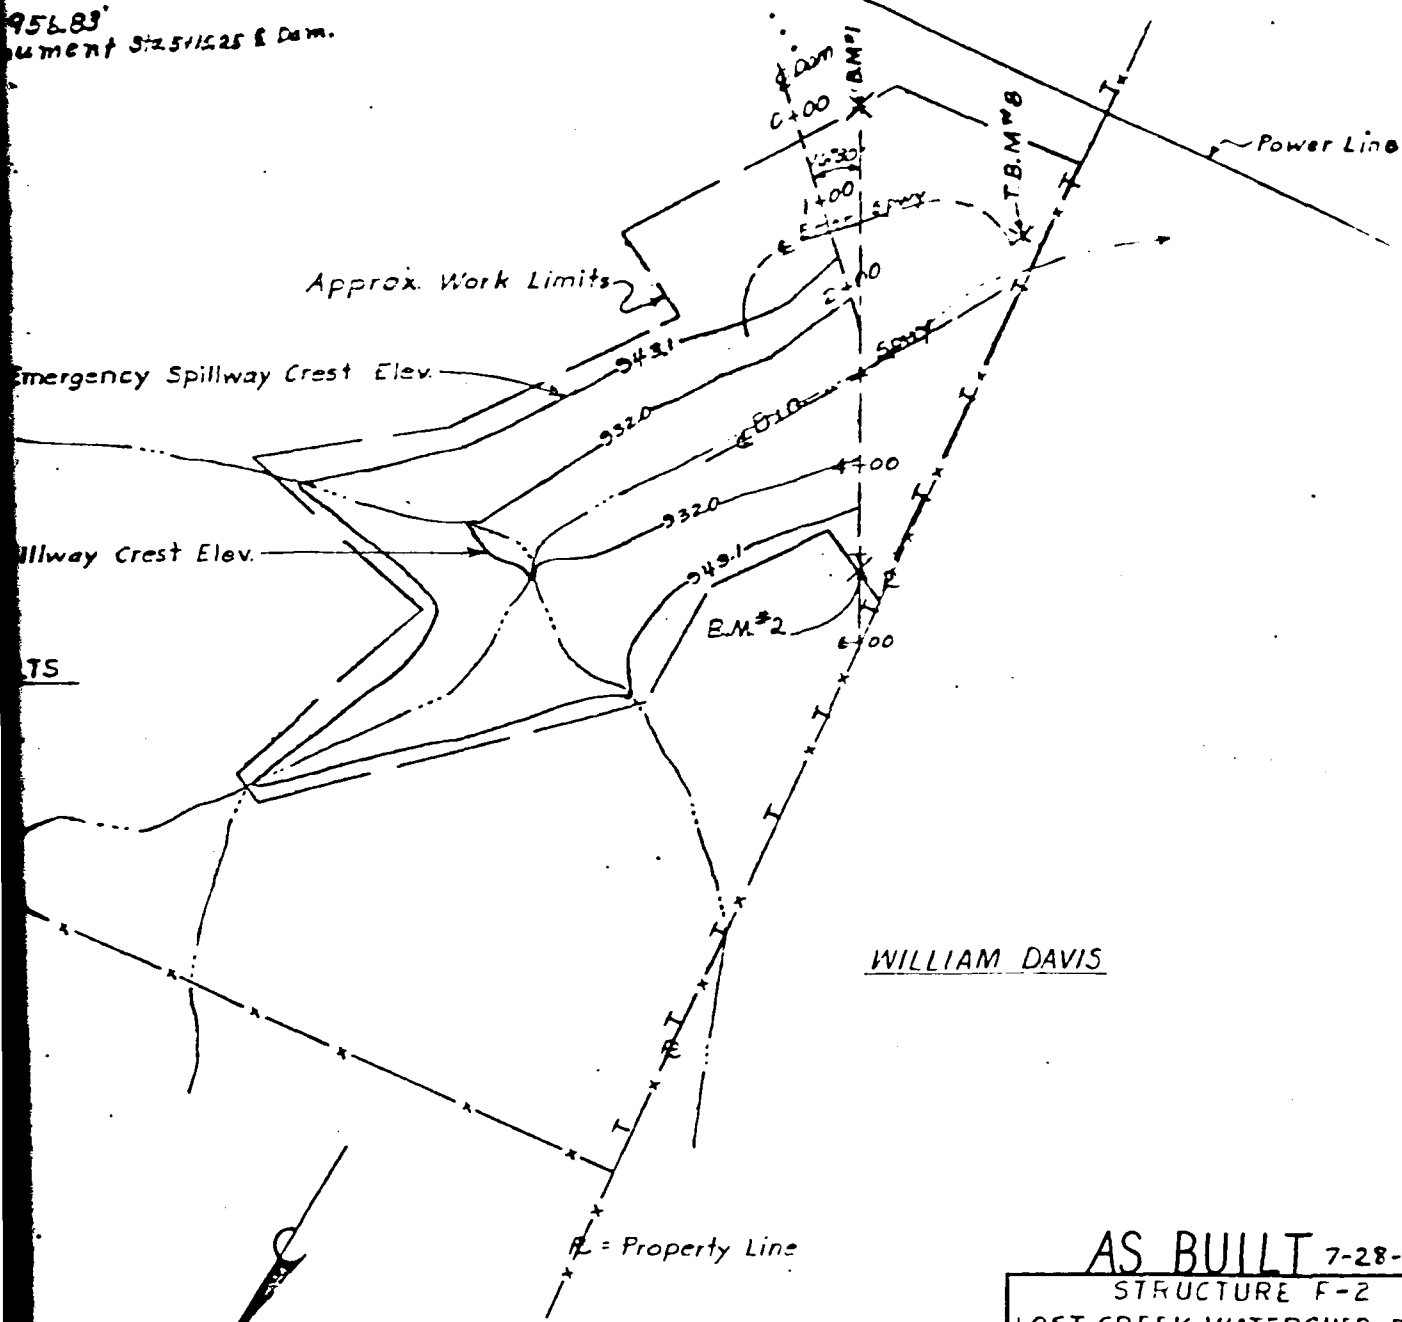

WILLIAM DAVIS

AN OF RESERVOIR



Scale in Feet

AS BUILT 7-28-77

STRUCTURE F-2			
LOST CREEK WATERSHED PL-566			
NEWTON COUNTY, MISSOURI			
U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE			
Designed	GREEN	Date	11-75
Drawn	JENNINGS	Date	11-75
Checked		Date	
Reviewed	BLAINE C. SMITH	Date	3-75
		Sheet	2
		Project	SE-35712

COMPLETED 7-25-77



EMER. SPWY CURVE DATA	
I	87°
R	81'P
L	142'
T	226'
D	100'

Sta 1+35 E. Dam =
Sta 3+45.9 E. Emer Spwy

EMER. SPWY CURVE DATA	
I	90°
R	75.0'
L	117.8'
T	75.0'
D	75°24'

PLAN OF EMBANKMENT AND SPILLWAYS



NOTES:

Topsoil

A minimum of 6 (six) inches of topsoil to be placed on all compacted earth fill and in the earth portion of the emergency spillway.

Waste Areas


Waste areas to be as shown or as directed by the Engineer.

Protective Dike

Protective dike dimensions; 12' effective height; 3:1 side slopes; 9' minimum base width.

Siltng Basin


The siltng basin shall be constructed at the approx. location shown. The dimensions shall be: 10' bottom width, depth of 2' below channel grade, 2:1 side slopes and 50' length. The basin shall be filled to grade and blended to the surrounding area after all construction is complete and prior to seeding operations.

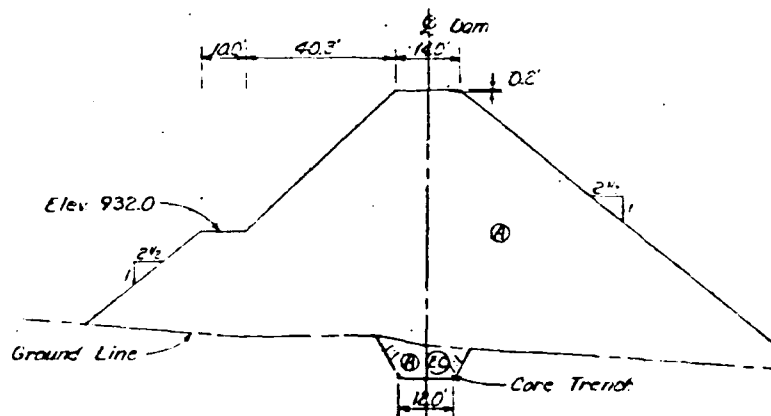



TYPICAL SECTION OF EMBANKMENT

66-102
 Form to be constructed
 Protective Dike

Remove the upper portion of the dam and spillway by prior to seeding operations

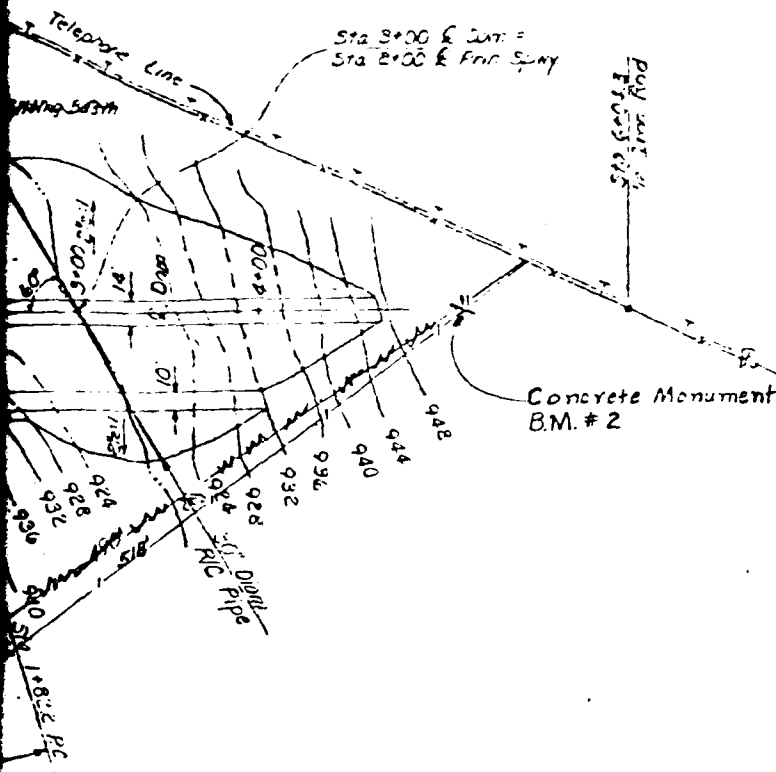

DAM AND SPILLWAYS

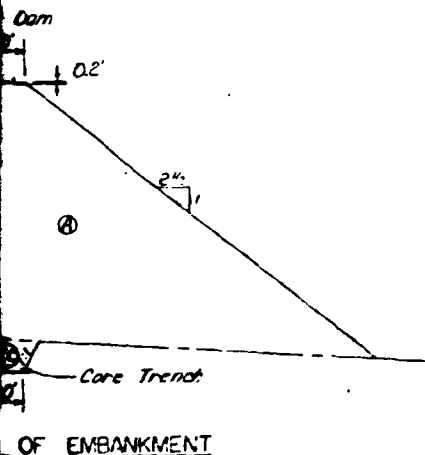

COMPLETED - 7-28-77

AS BUILT 7-28-77

QUANTITIES	
Excavation Common	765
Core Trench	100 Cu Yds
Structure & Siltng Basin	575 Cu Yds
Total	1250 Cu Yds
Excavation Rock	467
Embankment	64 Cu Yds
Earth Fill	18,050
Class A	18,050 Cu Yds
*Topsoil	3,944
Temp. Fence Barbed Wire	1000 Lbs
Seeding	1.5 Acres
Mulching	13.0 Acres
Temporary Seeding	13.0 Acres
*4,100 Sq Yds of a depth of 6 (six) inches is equal to 683 Cu Yds	




STRUCTURE F-2
 LOST CREEK WATERSHED PL-506
 NEWTON COUNTY, MISSOURI

U. S. DEPARTMENT OF AGRICULTURE
 SOIL CONSERVATION SERVICE

Designed M. F. E.	1977	Approved by J. A. C.
Drawn J. A. C.	1976	Reviewed by J. A. C.
Checked J. A. C.	1976	Reviewed by J. A. C.
Field E. E. F.	1976	Reviewed by J. A. C.
5.8-35.72		

NOTES

1. Pipe elevations other than those shown in the table will be furnished by the Engineer, when required.
2. Antiseep collars shall not be placed closer than two (2) feet to a pipe joint.
3. Compacted backfill shall be placed over the riser footing up to the slide gate invert elevation. The backfill will be blended to the existing ground line as shown in the Riser Backfill Detail.

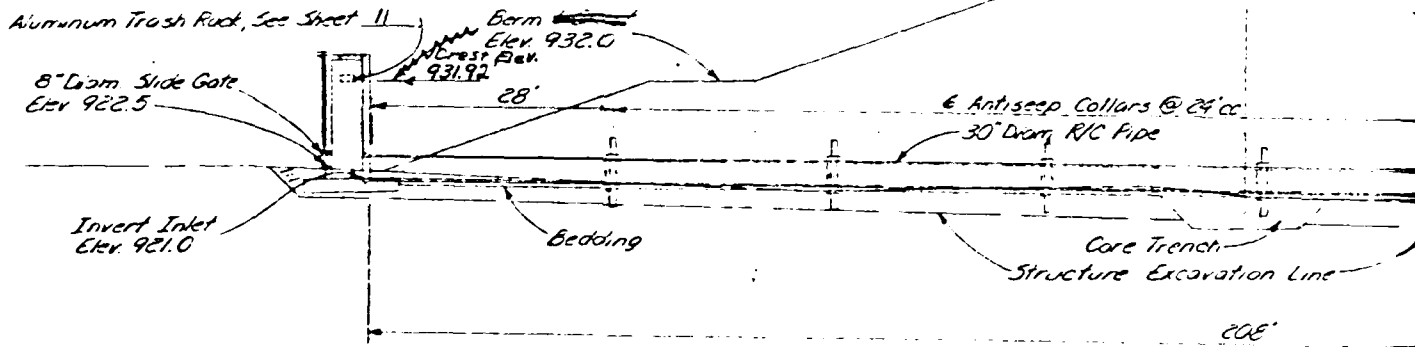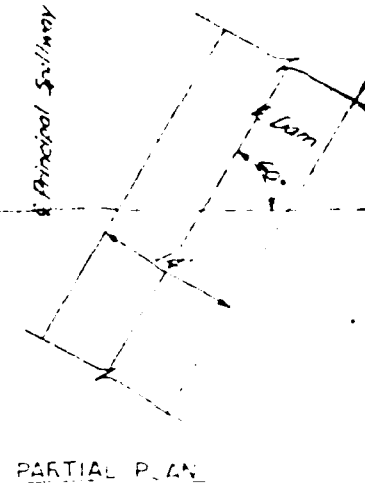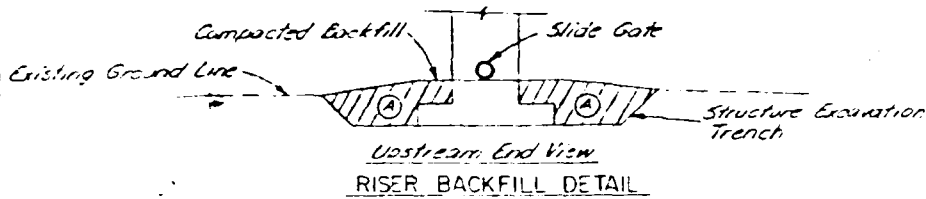


Scale in Feet
0 10 20


MATERIALS

Concrete, Class 4000 _____
 Steel Bar Reinforcement _____
 Prestressed Concrete Pressure Pipe, 30" Diam, Steel Cylinder Type _____
 Aluminum Trash Rack _____
 Slide Gate, 8" Diam _____


PILE CAPSULE TABLE	
Distance From Outlet	Elevation
0	915.00
16	918.23
24	918.35
40	915.68
56	918.99
72	919.28
88	919.55
104	919.80
120	920.02
136	920.23
152	920.43
168	920.61
184	920.79
200	920.95
208	921.05

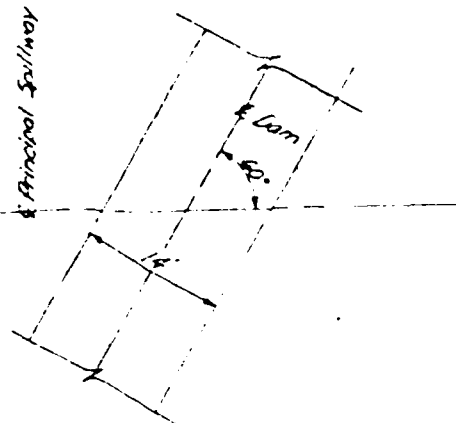

PARTIAL PLAN

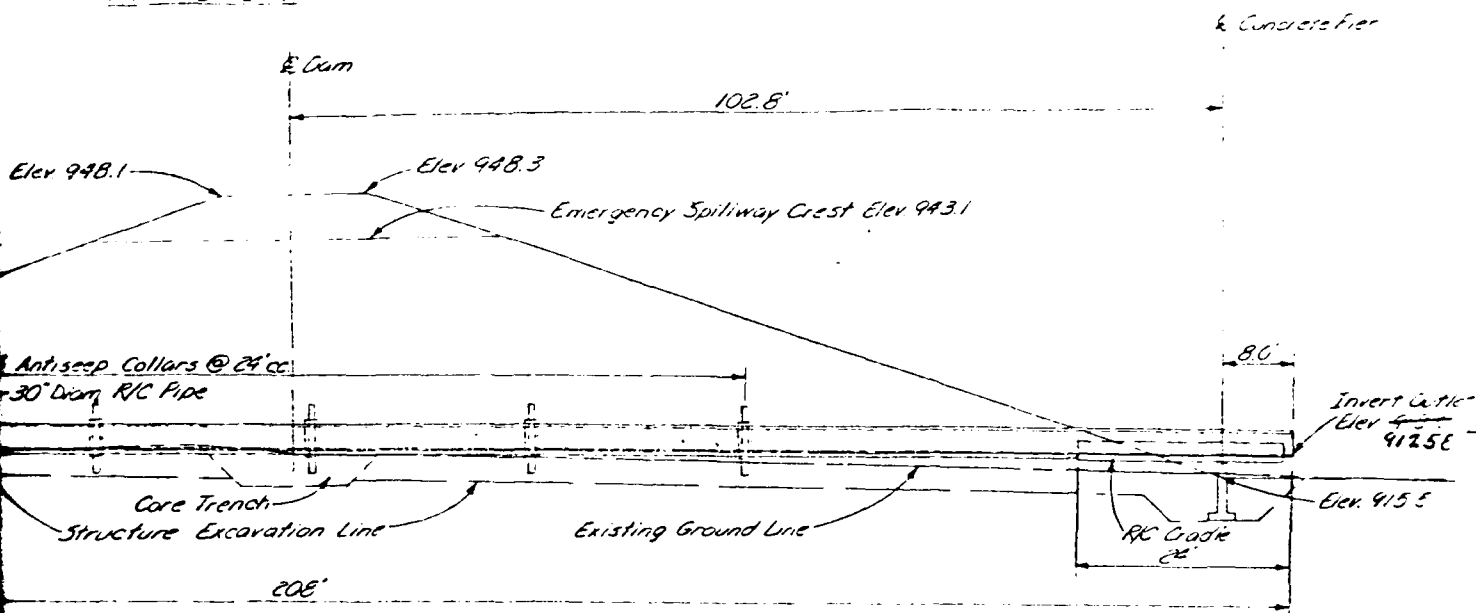

SECTION ON CENTERLINE



AS BUILT 7-28-77

MATERIALS

46.3 Cu Yds	
3,264 Pounds	
208 Lin Ft	
Lump Sum	
1 Each	

30" Diam., Steel Cylinder Type


STRUCTURE F-2

RESTRICTED FLOW INLET FOR 30" DAMP.
GENERAL LAYOUT
LOST CREEK WATERSHED PL 566
NEWTON COUNTY, MISSOURI

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE


Designed MMB	2-76	Approved by	
Drawn BAE	3-76	Checked by	
Typed		Reviewed by	
Reviewed BES BMMB	3-76	Final	58-3572

COMPLETED - 7-26-77




TOP PLAN

Medium duty cast iron or steel manhole frame and solid lid. The removable lid shall be attached to the frame by bolts or locking device.

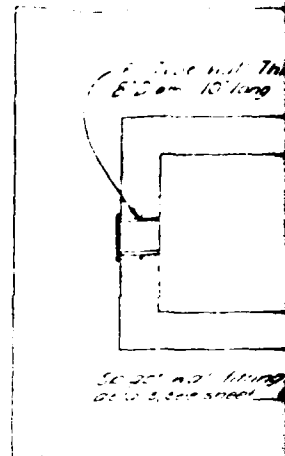


SECTION

NOTE: FOR DETAIL OF TRASH RACK AND ANCHORAGE SEE SHEET 1.

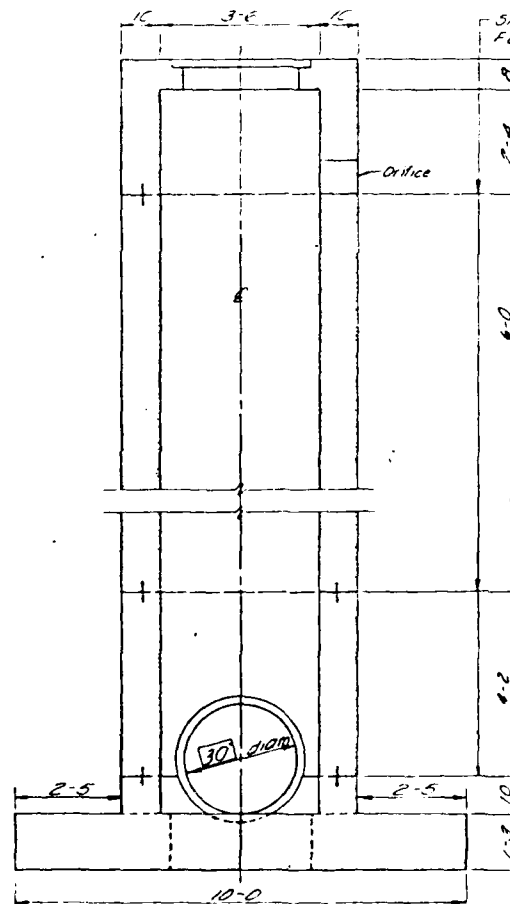

SECTION B-B

Removable handwheel with lid.

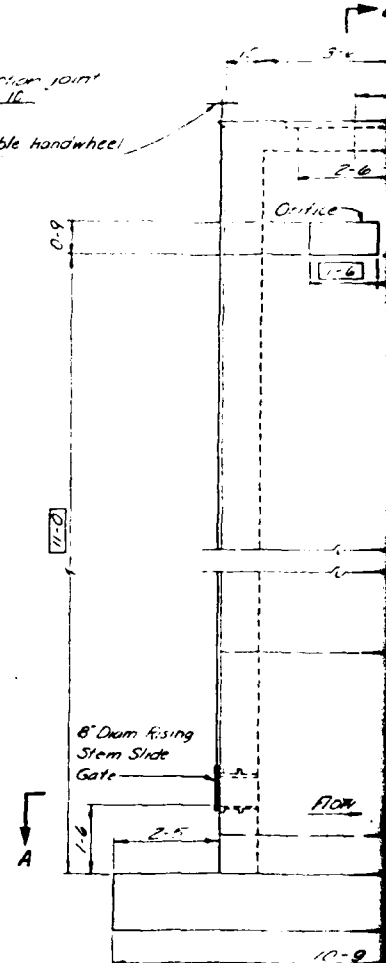

SIDEWALL EL


DETAILS OF 3'-6" x 3'-6" RESTRICTED FLOW RISER (10' Height $\leq$ 15' Sidewall Orifice)

E. B. W. UNIT - DESIGN SECTION
LINCOLN, NEBRASKA

BASE DWS NO. 5.E-13.850227

DATE APPROVED MAY 10, 1971 REV. 8-71


SHEET 1 OF 4

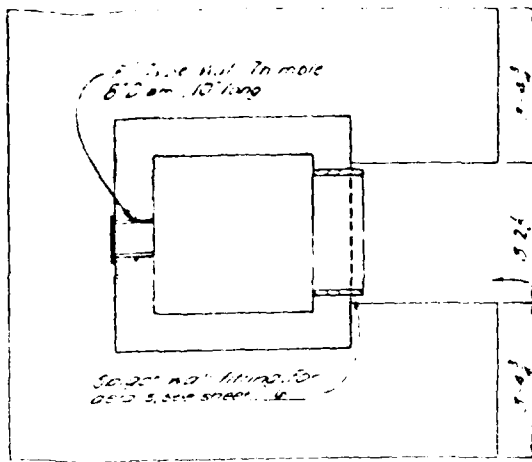

SECTION A-A

Whole
table
one

BACK AND ANCHORAGE SEE SHEET 12

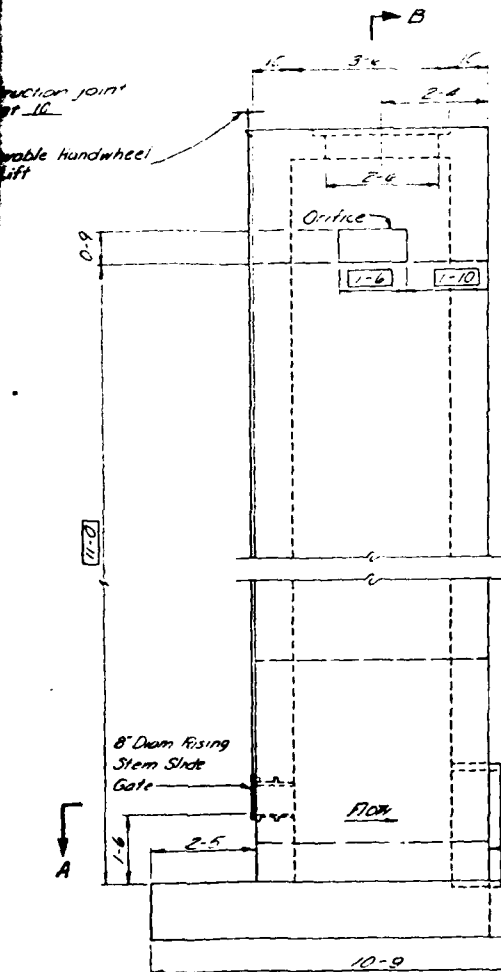

SIDEWALL ELEVATION

STEEL SCHEDULE									
BAR	SIZE	COUNT	LENGTH	TOTAL LENGTH					
B1	5	9	9'-0"	81'-0"					
B2	5	8	3'-0"	24'-0"					
B3	5	8	10'-0"	80'-0"					
B4	5	5	7'-0"	35'-0"					
B5	5	9	9'-0"	81'-0"					
B6	5	8	3'-0"	24'-0"					
B7	5	8	10'-0"	80'-0"					
B8	5	11	7'-0"	77'-0"					
B9	6	12	10'-0"	120'-0"	2	3.3	7'-0"		
B10	6	6	7'-0"	42'-0"	2	6.9	7'-0"		
B11	4	3	4'-0"	12'-0"					
B12	4	10	7'-0"	70'-0"	2	6.9	6'-0"		
B13	4	6	7'-0"	42'-0"	2	6.9	1'-0"		
B14	4	2	4'-0"	8'-0"					
B15	5	2	6'-0"	12'-0"	2	6.9	3'-0"		
B16	5	16	6'-0"	96'-0"	2	3.3	3'-0"		
B17	4	2	4'-0"	8'-0"					
B18	5	4	4'-0"	16'-0"	2				
B19	6	2	3'-0"	6'-0"					
B20	6	2	2'-0"	4'-0"	2	6.9	2'-0"		
M1	4	17	7'-0"	119'-0"					
M2	4	28	4'-0"	112'-0"					
M3	4	17	7'-0"	119'-0"					
M4	4	28	4'-0"	112'-0"	2	3.3	3'-0"		
M5	4	6	5'-0"	30'-0"	1				
T1	4	14	6'-0"	84'-0"	2	3.3	3'-0"		
T2	4	20	4'-0"	80'-0"					
T3	5	10	6'-0"	60'-0"	2	2.9	3'-0"		
T4	5	2	3'-0"	6'-0"	2	6.9	2'-0"		
T5	5	3	4'-0"	12'-0"	2	1.2	2'-0"		
T6	5	1	2'-0"	2'-0"	2	1.0	1'-0"		
T7	5	3	3'-0"	9'-0"	2	6.9	2'-0"		
T8	5	2	4'-0"	8'-0"	2	1.6	2'-0"		
T9	5	1	2'-0"	2'-0"	2	0.9	1'-0"		
T10	4	4	1'-0"	4'-0"	1				
T11	4	4	4'-0"	16'-0"	2	1.6	3'-0"		
T12	4	4	0'-0"	0'-0"	1				
T13	4	4	2'-0"	8'-0"	1				
T14	4	15	2'-0"	30'-0"					
T15	4	4	1'-0"	4'-0"	2	1.6	3'-0"		
T16	4	4	4'-0"	16'-0"	1				
T17	4	4	0'-0"	0'-0"	1				
T18	4	5	1'-0"	5'-0"	1				
T19	4	3	0'-0"	0'-0"	1				

NOTE: T1 and T2 Bars deleted from steel schedule

1 2 3 4
Scale in feet

AS BUILT 7-28-77

STRUCTURE F-2

R/C RESTRICTED FLOW RISER
FOR 30" DIAM. R/C PIPE
LOST CREEK WATERSHED PL. 566
NEWTON COUNTY, MISSOURI

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

QUANTITIES
STEEL
B4 BARS: 1082.5 FT. 723.6 LB.
B5 BARS: 742.5 FT. 772.3 LB.
B6 BARS: 102.5 FT. 274.1 LB.
TOTAL: 1827.5 LB.
CONCRETE, CLASS 4000 - 8.3 CU. YD.

Designed BES Date 3-76
Drawn BAE 4-76
Checked MMB 4-76
Approved By
5-E-35 712

STRUCTURE DATA

Class of Structure "C" Debris Basin

Drainage Area (total) 80 Ac. 0.13 Sq.Mi.
 (uncontrolled) 80 Ac. 0.13 Sq.Mi.

Time of Concentration 0.18 Hours

Soil Cover Complex Number 71 For A.M.C. II

Sediment Capacity Available 7.6 Ac.Ft. below Elev. 932.0

Total Sediment Capacity Available 7.6 Ac.Ft.
 Capacity Equivalents (Vol.) 1.14 In.

Retarding Capacity Provided 28.0 Ac.Ft.
 Capacity Equivalents (Vol.) 4.20 In.

Water Supply Provided None Ac.Ft.-Identify Uses

Freeboard Hy
 Rainfall
 Runoff
 Peak Inf
 Maximum
 Maximum

Principal Spillway:

Maximum Capacity (low stage) 18 c.f.s.
 Maximum Capacity (high stage) c.f.s.
 10 Day Drawdown Elev. 932.0

Emergency Spillway:

Percent Chance Use 1 Storm Duration 6 Hour
 Type Vegetated Earth "n" Value Used 0.04


Emergency Spillway Hydrograph for Class "C" Structures

Rainfall 12.00 in.
 Runoff 8.19 in.
 Peak Inflow 547 c.f.s.
 Maximum Discharge - Emergency Spillway 105 c.f.s.
 Maximum Water Surface Elev. 944.2
 Velocity of Flow (Ve) 5.9 f.p.s.

Supplementary Data and Special Design Features:

Principal Spillway Crest Elev. = 932.0
Emergency Spillway Crest Elev. = 943.1
Emergency Spillway Bottom Width = 50'
Settled Top of Dam Elev. = 947.6
Height x Storage = 24.3 x 35.6 = 865

Elevations




Supplementary
 Special Design

UCTURE DATA

Freeboard Hydrograph for Class "C" Structures

Rainfall 28.80 in.
Runoff 24.41 in.
Peak Inflow 1559 c.f.s.
Maximum Discharge - Emergency Spillway 1378 c.f.s.
Maximum Water Surface Elev. 947.6

Reservoir Capacity

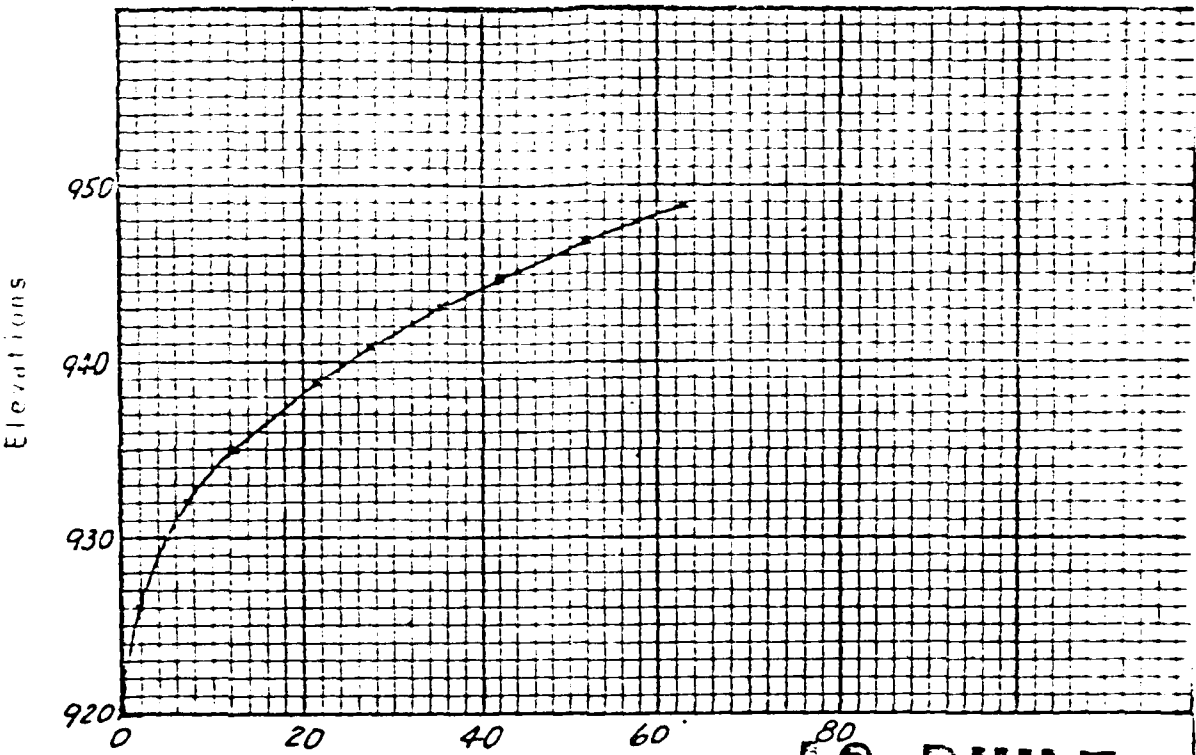

Total Storage - Ac.Ft.

AS BUILT
7-28-77

Supplementary Data and
Special Design Features:

STRUCTURE F-2			
LOST CREEK WATERSHED PL-566			
NEWTON COUNTY, MISSOURI			
U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE			
Designed	JAG & MMB	Date	1976
Drawn	BES	3-76	
Checked	MMB & NHR	3-76	
Reviewed			
Approved			
		Project No.	5.E-35 712-A

1-AS-30a (11/70) UNITED STATES DEPARTMENT OF AGRICULTURE
 Form AS-NO-5 SOIL CONSERVATION SERVICE
 File Code: AS-12-13 Columbia, Missouri 65201

OPERATION AND MAINTENANCE INSPECTION REPORT
 FOR STRUCTURES

May 14, 1960

Watershed Lost Creek
Repton County

Structure No. P-2 Inspection:

Special /

Annual /x/

Item	Condition		Describe Main- tenance and Needed Repairs	Esti- mated Costs	Agreed Date Repairs To Be Compl'd	Date Repairs Compl'd
	Satis- factory	Unsatis- factory				
Vegetation	✓					
Fences	✓					
Principal Spillway	✓					
Emergency Spillway	✓					
Embankment	✓					
Reservoir Area	✓					
Scour Hole & Outlet Chnl	✓					
Foundation						
Drains & Relief Wells	N.A.					
Other						
a few plants inside the fenced area			will be cut and sprayed	\$25	10-1-60	
Remarks: Reservoir holding only a small amount of water. Crown ditch is invading spillway and other areas.						

Warren H. George
 District Conservationist


Edna Wilson
Bessie B. Bunch
 Sponsoring Local Organization Rep.

Newton, Land Water Conservation District
 Sponsoring Local Organization

(Check list on reverse side)

APPENDIX B

Geology and Soils



LEGEND


GLACIATED PLAINS 

WESTERN PLAINS 

OZARKS 

ST. FRANCOIS MOUNTAINS 

SOUTHEASTERN LOWLANDS 

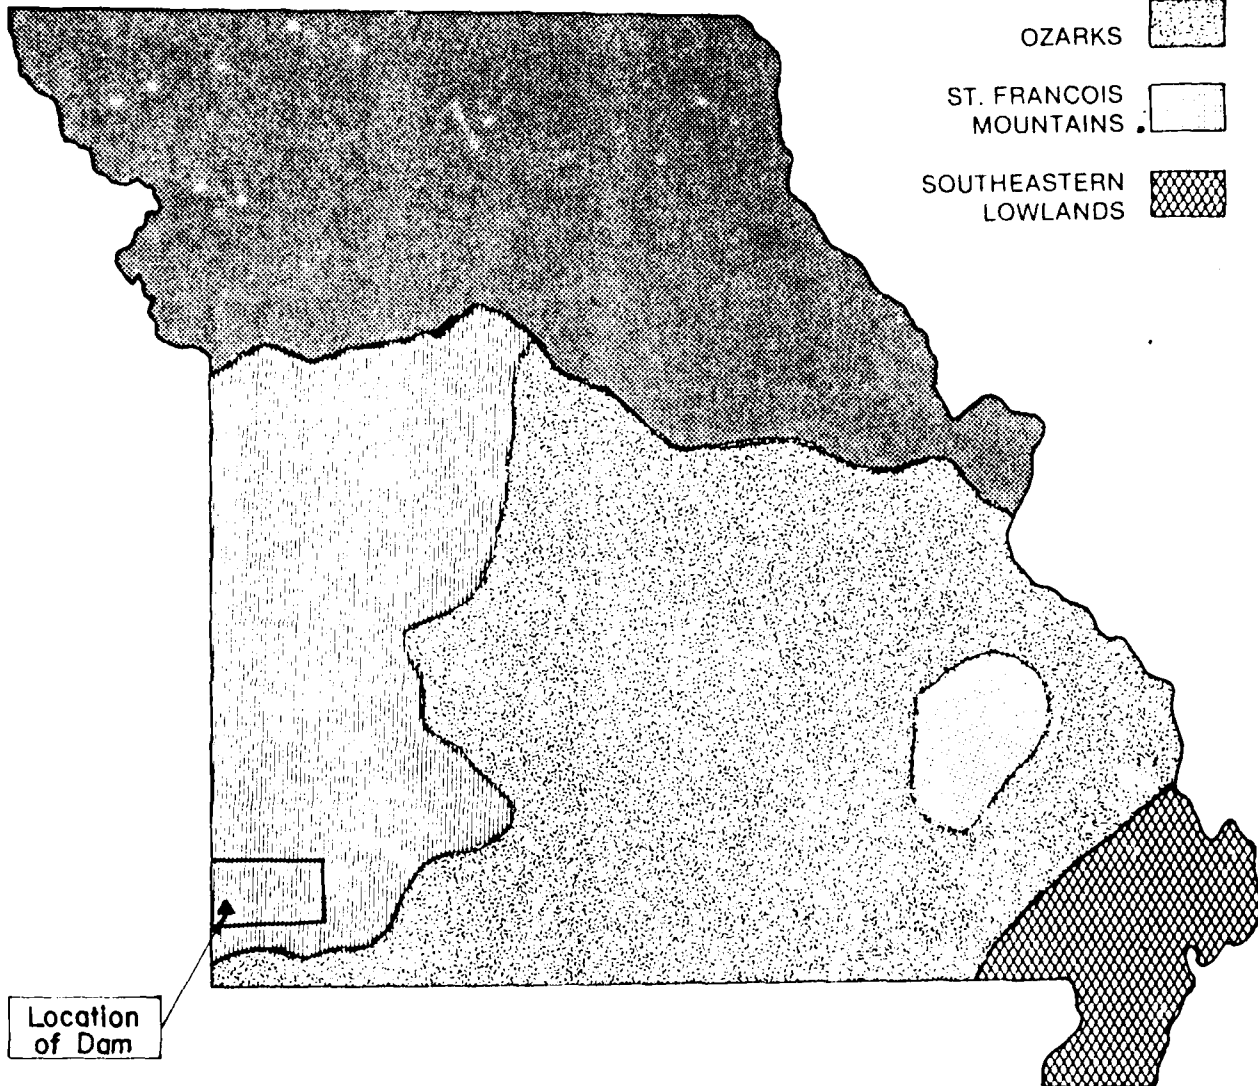

Location of Dam


MAJOR GEOLOGIC REGIONS OF MISSOURI



SPRINGFIELD, IL • PEORIA, IL • ROCKFORD, IL

Newton County Structure F-2
Newton County, Missouri
Mo. I.D. No. 20513

SHEET 1, APPENDIX B

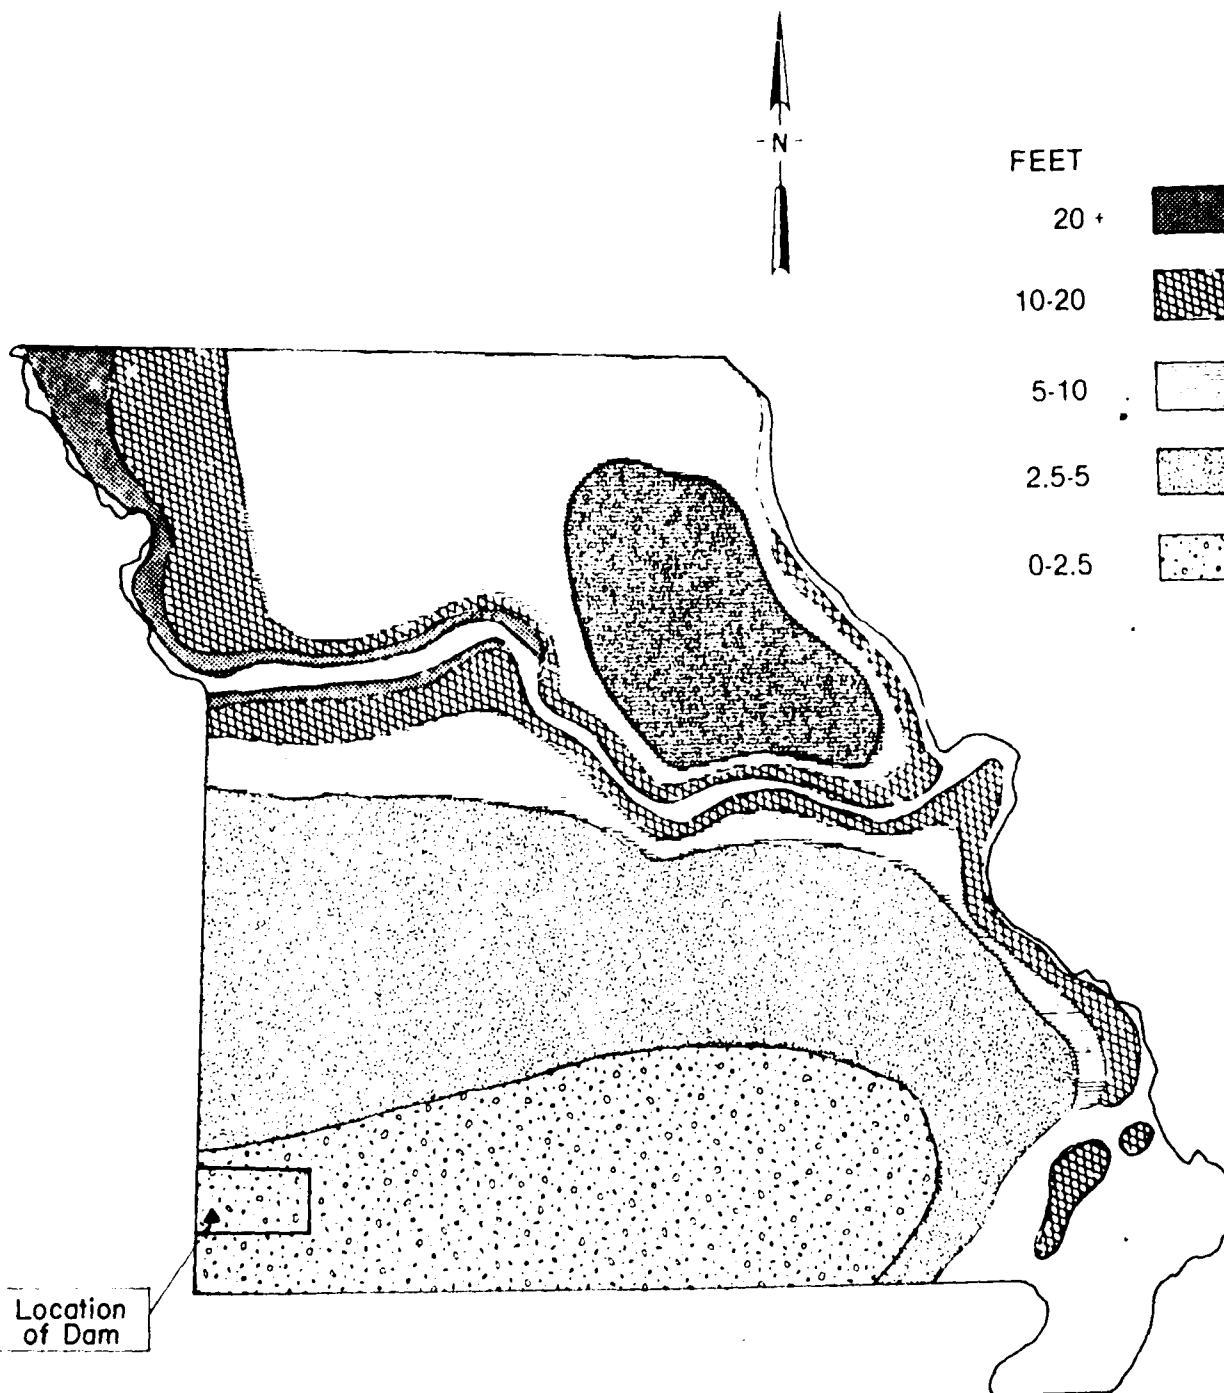



THICKNESS OF LOESSIAL DEPOSITS




SPRINGFIELD, IL • PEORIA, IL • ROCKFORD, IL

Newton County Structure F-2
Newton County, Missouri
Mo. I.D. No. 20513

SHEET 2, APPENDIX B

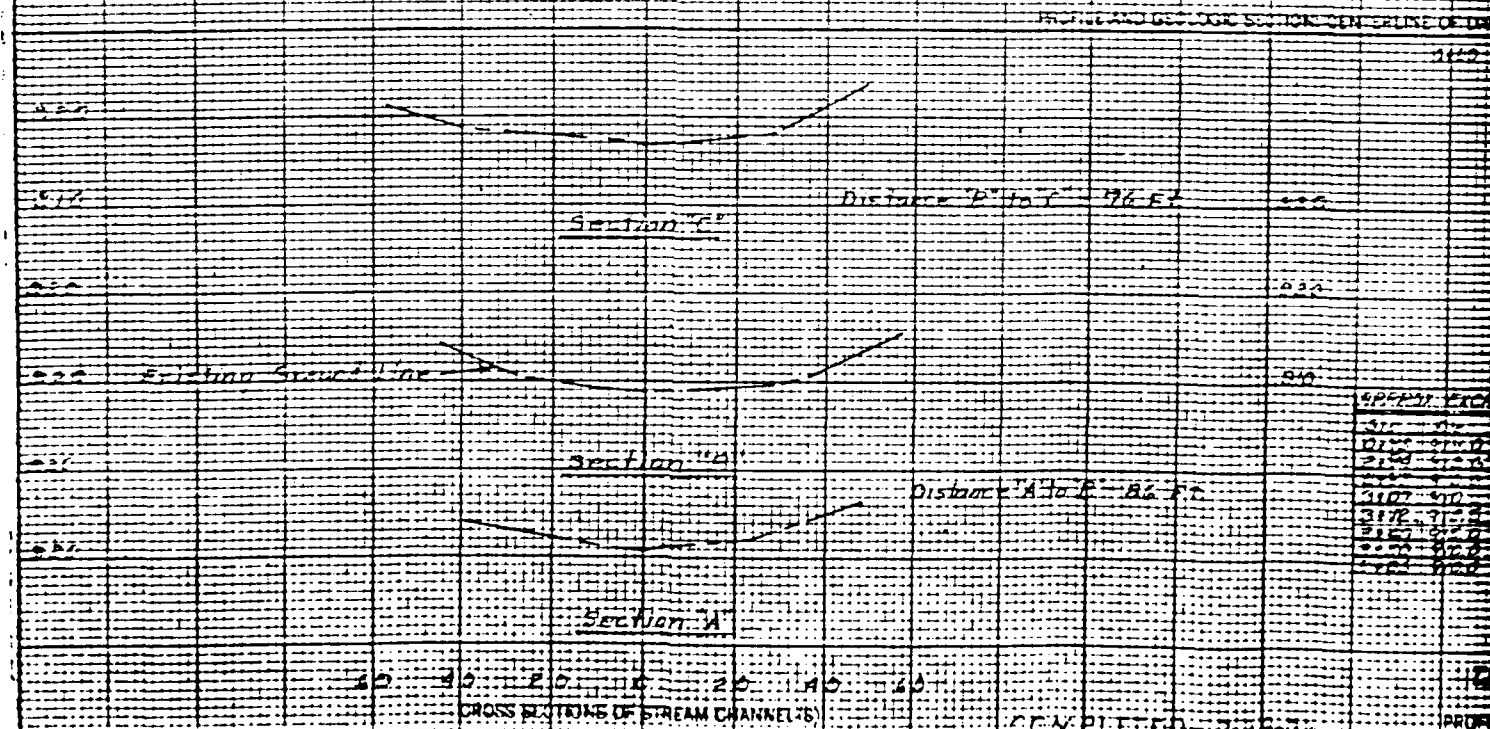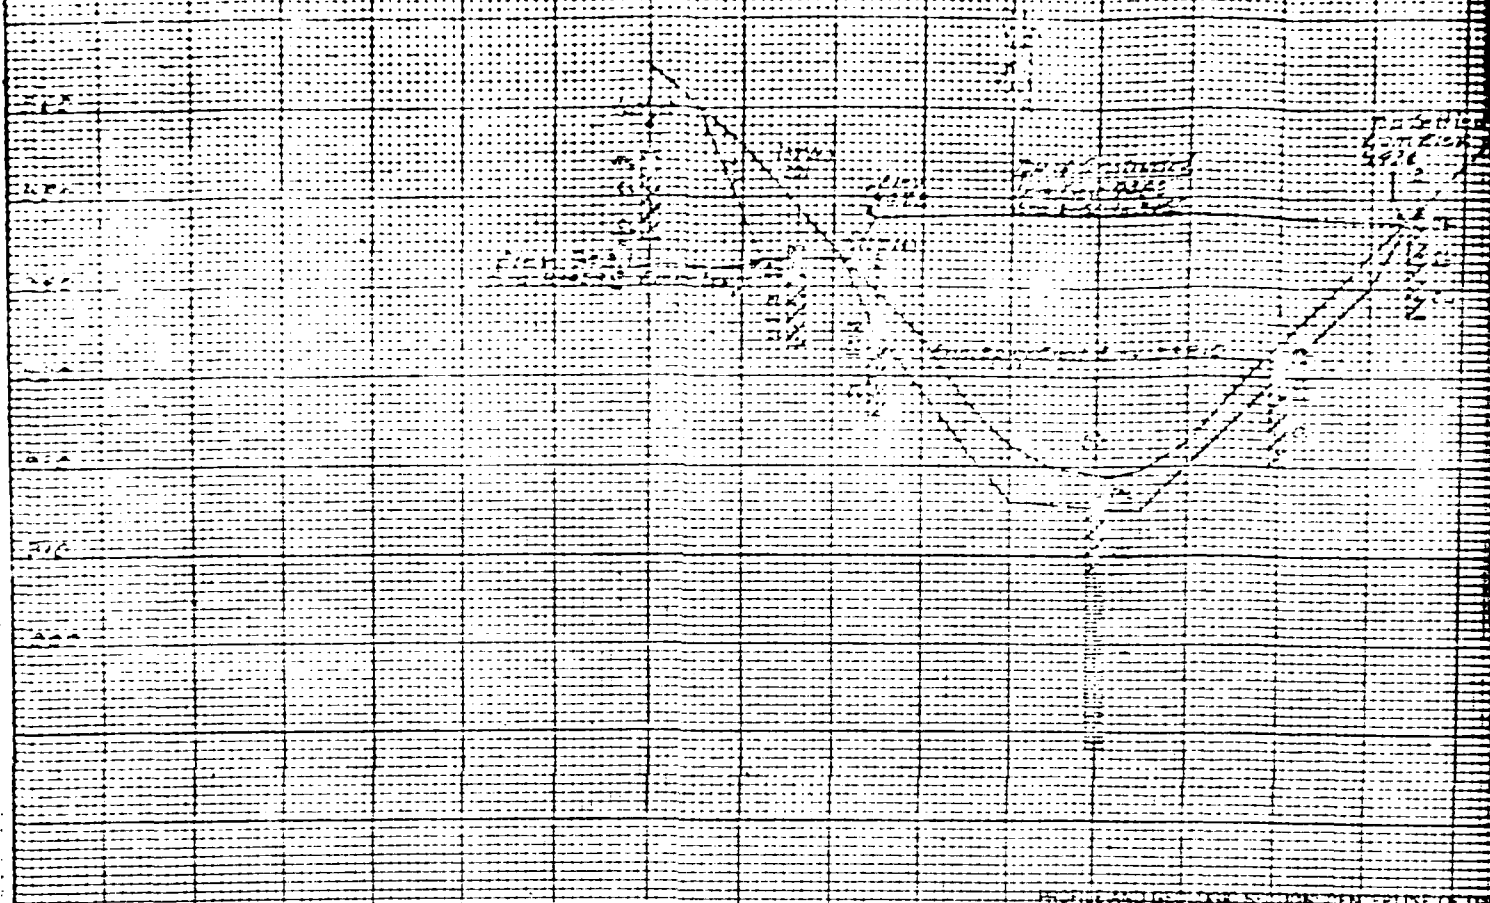

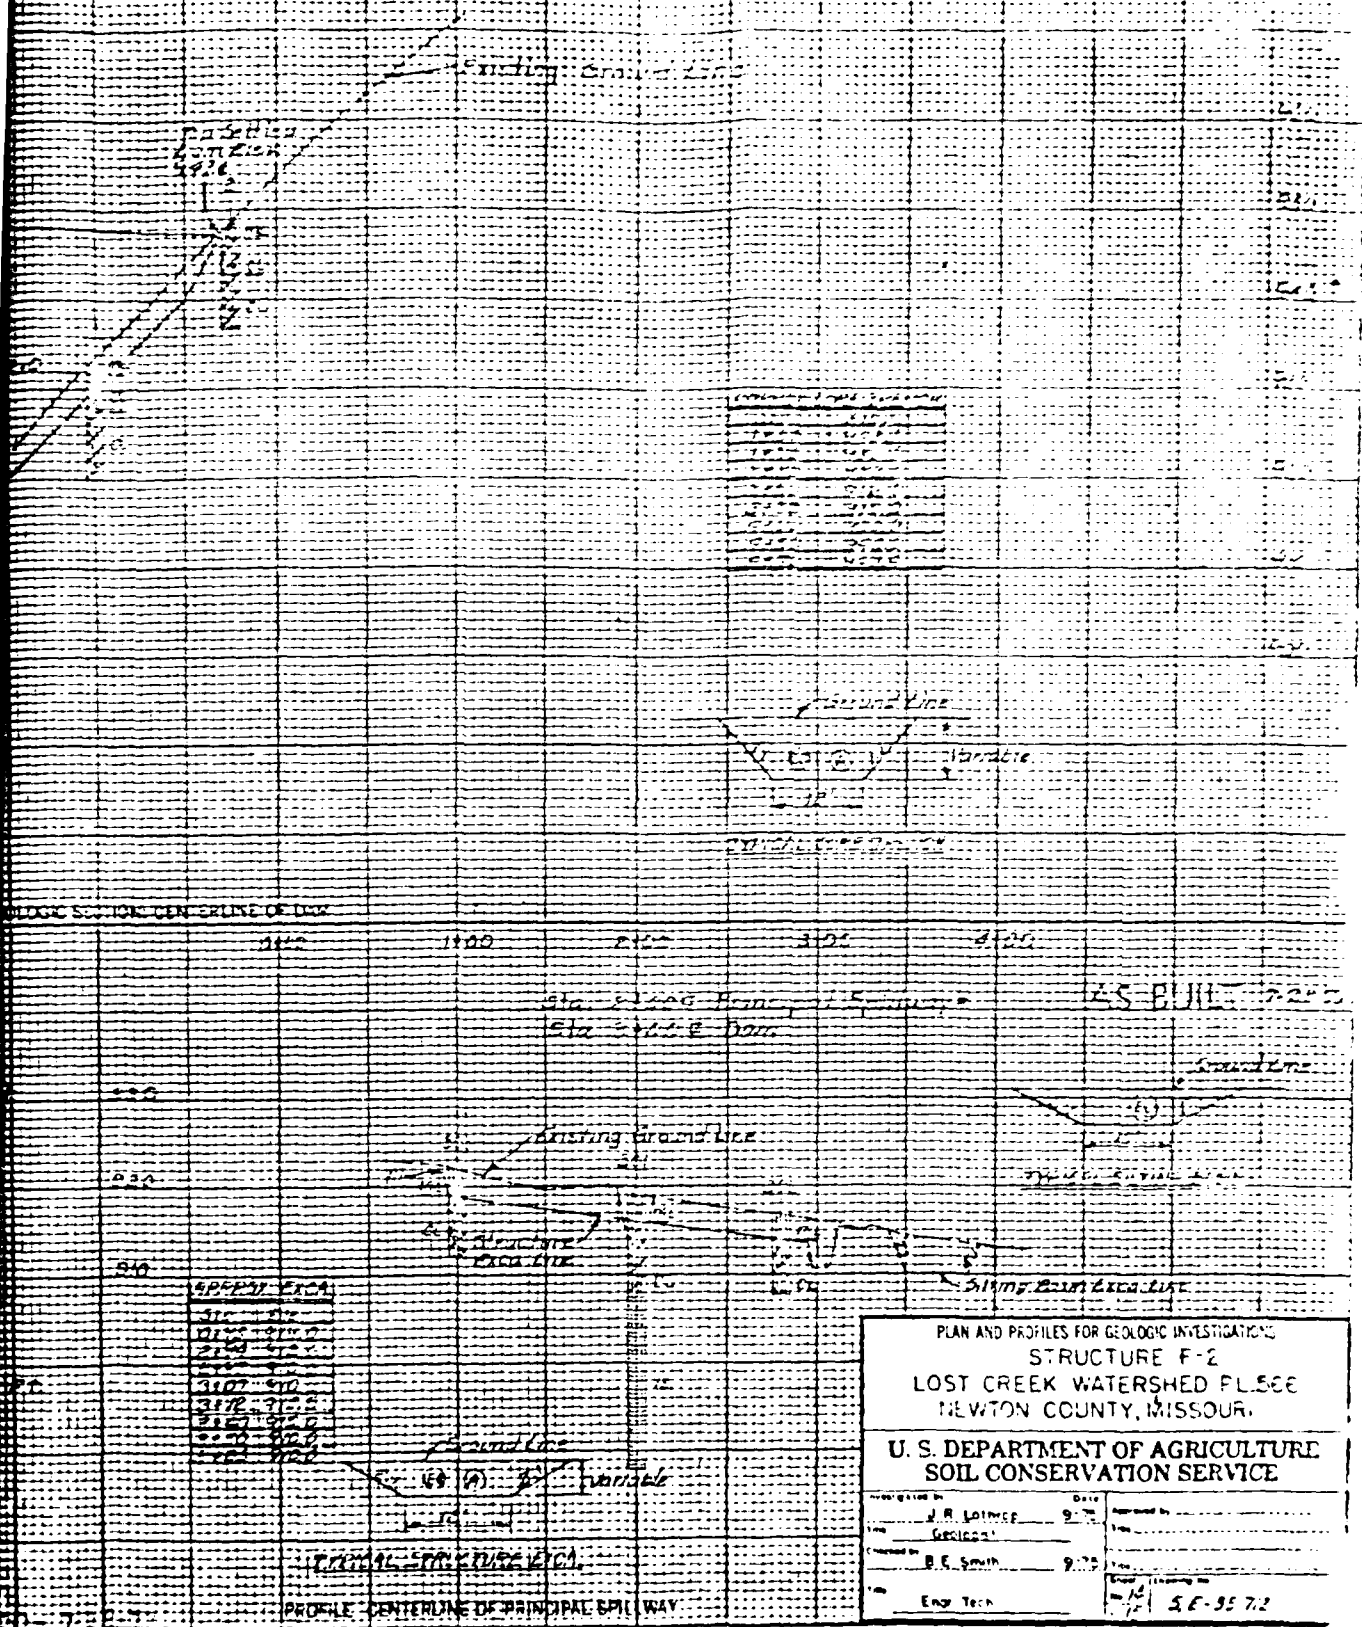

PLAN AND PROFILES FOR GEOLOGIC INVESTIGATIONS
 STRUCTURE F-2
 LOST CREEK WATERSHED F.L.S.E.E.
 NEWTON COUNTY, MISSOURI

U. S. DEPARTMENT OF AGRICULTURE
 SOIL CONSERVATION SERVICE

Investigation by J. R. Lottice Date 9-75
 Drawn by GEORGE L. Smith Date 9-75
 Checked by B. E. Smith Date 9-75
 Approved by Eng. Tech. Date 9-75

Sheet 3 of Appendix B

UNITED STATES DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

10-59

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

GENERAL

State Missouri County Newton ; NW 1/4 Sec. 36 T 25N R 34W ; Watershed Last Creek
Subwatershed _____ Fund class MF-08 2018 Site number F-2 Site group II Structure class C
(FP-2, V.P-1, etc.)
Investigated by [Signature] Equipment used Failing 1500 RD Date 9-21-75
(signature and title) (Type, size, make, model, etc.)

SITE DATA

Drainage area size 0.13 sq. mi., 80 acres. Type of structure Compacted Earth Purpose Debris Basin
Direction of valley trend (downstream) SW Maximum height of fill 28⁶ feet. Length of fill 355 feet.
Estimated volume of compacted fill required 17,450 yards

STORAGE ALLOCATION

	Volume (ac. ft.)	Surface Area (acres)	Depth at Dam (feet)
Sediment	<u>7.6 Total</u>	<u>1.4</u>	<u>13.2</u>
Floodwater	<u>28</u>	<u>3.9</u>	<u>24.3</u>

SURFACE GEOLOGY AND PHYSIOGRAPHY

Physiographic description Ozark Highland Topography Rolling ; Attitude of beds: Dip S Strike E-W
Steepness of abutments: Left 17 percent; Right 21 percent. Width of floodplain at centerline of dam 60 feet
General geology of site: This site is located upon an outcrop of the Warsaw formation of the
Meramecian series and is Mississippian in age. Bedrock on the site is hardness 4-5
limestone which occurs at an average depth of 10 feet along the entire dam alignment.
The bedrock surface may be expected to be uneven and pinnacled.
Soils developed above bedrock are of medium to stiff consistancy. Clayey
gravelly silt (ML) and gravelly clays (CL).
The channel is grass covered and poorly defined and carried no water at the time
of the site investigation. A water table was not encountered.

THIS PAGE IS BEST QUALITY REPRODUCTION
FROM COPY FURNISHED TO US

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

FEATURE G Dam

(CENTERLINE OF DAM, PRINCIPAL SPILLWAY, EMERGENCY SPILLWAY, THE STREAM CHANNEL, INVESTIGATIONS FOR DRAINAGE OF STRUCTURE, BORROW AREA, RESERVOIR BASIN, ETC.)

DRILLING PROGRAM

EQUIPMENT USED	NUMBER OF HOLES		NUMBER OF SAMPLES TAKEN		
	EXPLORATION	SAMPLING	UNDISTURBED (STATE TYPE)	DISTURBED LARGE SMALL	
Failing 1500 RD	4	1	--	2	--
TOTAL	4	1	--	2	--

SUMMARY OF FINDINGS
(INCLUDE ONLY FACTUAL DATA)

Hardness 4-5 limestone occurs at an average depth of 10 feet along the entire G dam alignment.

Soils developed above bedrock are of medium to stiff consistancy. Clayey gravelly silt (ML) and chert gravelly clays (CL).

A water table was not encountered.

THIS PAGE IS TO BE
FROM WELL FORMATION LOGS

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

FEATURE Principal Spillway

(CENTERLINE OF DAM, PRINCIPAL SPILLWAY, EMERGENCY SPILLWAY, THE STREAM CHANNEL, INVESTIGATIONS FOR DRAINAGE OF STRUCTURE, BORROW AREA, RESERVOIR BASIN, ETC.)

DRILLING PROGRAM

EQUIPMENT USED	NUMBER OF HOLES		NUMBER OF SAMPLES TAKEN		
	EXPLORATION	SAMPLING	UNDISTURBED (STATE TYPE)	LARGE DISTURBED	SMALL DISTURBED
Failing 1500 RD	3	1	1 (3") <i>Shelby</i>	1	--
TOTAL	3	1	1 (3")	1	--

SUMMARY OF FINDINGS
(INCLUDE ONLY FACTUAL DATA)

Hardness 4-5 limestone bedrock was encountered at an average depth of 10 feet along the principal spillway alignment.

Soils developed above bedrock are a thin brown-black gravelly silt (ML) surface horizon overlying a brown-red silty gravelly slightly cobbly clay (CL) horizon. The second horizon extends to the bedrock contact.

A water table was not encountered.

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

FORM SCS-376B

REV. 2-64

SHEET 4 OF 6

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

FEATURE Borrow Area

(CENTERLINE OF DAM, PRINCIPAL SPILLWAY, EMERGENCY SPILLWAY, THE STREAM CHANNEL, INVESTIGATIONS FOR DRAINAGE
OF STRUCTURE, BORROW AREA, RESERVOIR BASIN, ETC.)

DRILLING PROGRAM

EQUIPMENT USED	NUMBER OF HOLES		NUMBER OF SAMPLES TAKEN		
	EXPLORATION	SAMPLING	UNDISTURBED (STATE TYPE)	DISTURBED LARGE SMALL	
Failling 1500 RD	4	1	--	2	--
TOTAL	4	1	--	2	--

SUMMARY OF FINDINGS
(INCLUDE ONLY FACTUAL DATA)

Three soil horizons generally comprise the materials of the borrow. The surface horizon averaging 2 to 3 feet in depth, is a slightly gravelly silt (ML). The second horizon is a very cherty gravelly brown to light red clay (CL) that extends to an average depth of 5 feet. The third horizon is a cherty gravelly red clay (CL). The third horizon directly overlies limestone bedrock.

Hardness 4 to 5 limestone bedrock will limit borrowing to depths of 7 feet or less. Average depth to limestone is 9 feet.

Higher plasticity soils appear to increase with depth.

No water table was encountered in any of the borrow borings.

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

FORM SCS-376B

REV. 2-64

SHEET 5 OF 6

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

FEATURE Stream Channel

(CENTERLINE OF DAM, PRINCIPAL SPILLWAY, EMERGENCY SPILLWAY, THE STREAM CHANNEL, INVESTIGATIONS FOR DRAINAGE
OF STRUCTURE, BORROW AREA, RESERVOIR BASIN, ETC.)

DRILLING PROGRAM

EQUIPMENT USED	NUMBER OF HOLES		NUMBER OF SAMPLES TAKEN		
	EXPLORATION	SAMPLING	UNDISTURBED (STATE TYPE)	LARGE DISTURBED	SMALL
No borings					
TOTAL					

SUMMARY OF FINDINGS
(INCLUDE ONLY FACTUAL DATA)

The principal spillway alignment is in the channel and the borings along that alignment are congruent to the channel sections. The channel is grass covered and poorly defined. Two major draws upstream contained farm ponds that were 65% full and no water was in the channel at the time of the site investigation.

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

FEATURE Emergency Spillway

(CENTERLINE OF DAM, PRINCIPAL SPILLWAY, EMERGENCY SPILLWAY, THE STREAM CHANNEL, INVESTIGATIONS FOR DRAINAGE OF STRUCTURE, BORROW AREA, RESERVOIR BASIN, ETC.)

DRILLING PROGRAM

EQUIPMENT USED	NUMBER OF HOLES		NUMBER OF SAMPLES TAKEN		
	EXPLORATION	SAMPLING	UNDISTURBED (STATE TYPE)	DISTURBED LARGE SMALL	
Failing 1500 RD	14	1	--	2	---
TOTAL	14	1	--	2	--

SUMMARY OF FINDINGS
(INCLUDE ONLY FACTUAL DATA)

A thin brown silt (ML) surface horizon averaging 2 to 3 feet in depth overlies brown and red chert gravelly clay horizons, and these clay horizons extend to limestone bedrock. Hardness 4-5 cherty limestone bedrock occurs at an average depth of 10 feet. The limestone bedrock is encountered a few feet above proposed grade in the left or outside portions of the forebay, control and the lower exit areas.

DETAILED GEOLOGIC INVESTIGATION OF DAM SITES

WATERSHED Lost Creek		SUBWATERSHED		COUNTY Newton	STATE Missouri
SITE NO. F-2	SITE GROUP II	STRUCTURE CLASS C		INVESTIGATED BY: SIGNATURE OF GEOLOGIST <i>[Signature]</i>	DATE 9-21-75

INTERPRETATIONS AND CONCLUSIONS

C. Dam The recommended minimum cutoff trench depths should provide an adequate cut-off. The trench will bottom on both abutments in cherty gravelly clay (CL) material and through the floodplain section in silty chert gravelly clay material. Low seepage may be expected. It is not anticipated that the limestone bedrock will be uncovered, where there may be some highly permeable strata.

Principal Spillway Location, alignment and foundation are satisfactory and the skewed location at station 3+00 C dam is adequate. It is suggested that the ML surface material found along this alignment be removed during construction.

Drainage Not recommended.

Stream Channel Since the channel is grass covered and poorly defined normal stripping operations during construction should be adequate treatment.


Emergency Spillway An estimated 7,500 cubic yards of required excavation may be expected from this area of which an estimated 500 cubic yards of this amount may be expected to be rock excavation. The rock should be suitable for use for front berm protective cover.

Borrow Ample materials are available along with required excavation from the emergency spillway to construct the embankment. More plastic gravelly clay materials are found in the higher elevations than in the floodplain areas; and it is suggested that borrowing be limited in the floodplain areas.

Discuss samples - include they are from

ENGINEER'S REPORT
SITE F-2 LOST CREEK

1. STREAM CHANNEL - Stripping and foundation preparation and core trench excavation should eliminate all the stream channel cleanout needed.
2. DEPTH OF CORE - Recommend that the core trench be as shallow as possible, probably about 8 feet deep. Removing the upper highly cherty CL layer and penetrating approximately two feet (2') into the lower less cherty CL layer. Suggest 12.0 bottomwidth with 1:1 side slopes.
3. UNDESIRABLE MATERIAL - The only undesirable material is the rock excavation in the emergency spillway. Suggest this material be placed in the valley between the emergency spillway berm and back toe of the fill below the centerline of the dam or on the front slope of the dam below the upstream berm.
4. MATERIALS - Excavation from core and emergency spillway except for rock excavation may be used for fill. Emergency spillway excavation with 3:1 side slopes will amount to approximately 7,000 cubic yards of usable material. Ample material may be obtained by excavating below the emergency spillway elevation in the borrow area. Consideration should be given to steeper side slopes for the emergency spillway due to rock encountered above grade.
5. CONDUIT - Due to class of structure the conduit will be reinforced 30 inch concrete pipe with capped riser.
6. DRAINAGE - It is very doubtful that any type of drainage will be needed.
7. Recommend that fill placement control be class C compaction or class A compaction with controls on the minus 3/4" fraction.

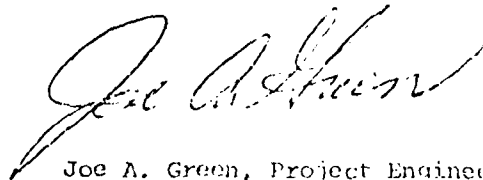

Joe A. Green, Project Engineer
September 22, 1975

I concur in these recommendations
22222

A-21-4.
1-23-76

12

UNITED STATES DEPARTMENT OF AGRICULTURE

SOIL CONSERVATION SERVICE - Soil Mechanics Laboratory

800 "J" Street, Lincoln, Nebraska 68508

SUBJECT: ENG 13-18, Missouri WF-08, Lost Creek, Site F-2 DATE: January 22, 1976
(Newton County)

TO: Monroe Dale
State Conservation Engineer
Soil Conservation Service
Columbia, Missouri

ATTACHMENTS

1. Form SCS-ENG-354, Soil Mechanics Laboratory Data, 1 sheet
2. Form SCS-ENG-355A & 355B, Triaxial Shear Test, 1 test, 2 sheets
3. Form SCS-366, Direct Shear Test, 1 sheet
4. Form SCS-ENG-362, Compaction and Penetration Resistance, 2 sheets
5. Form SCS-357, Summary - Slope Stability Analysis, 2 sheets

DISCUSSION

FOUNDATION

- A. Bedrock. Limestone bedrock occurs at depths of about 9 to 13 feet on the abutments in the bottom of the valley.
- B. Soil Classification. The soil mantling the bedrock is composed of about a 2-foot layer of ML overlying gravelly clay that is classed as CL. Samples 301-1 and 301-2 are from the gravelly clay layer. These samples have LL's in the range of 35 and PI's in the range of 12. They contain about 25 percent gravel and from 51 to 63 percent fines. They are classed as CL.
- C. Dry Density. Test specimens trimmed from the core sample submitted had densities ranging from 1.57 g/cc to 1.61 g/cc. The difference in density of the test specimens is probably due to difference in gravel content.
- D. Shear Strength. A direct shear test was made on core sample 301-2. The specimens were flooded prior to shear and the shear strength parameters are considered to represent the consolidated drained values. They are $\bar{c} = 35.5'$, $\bar{\phi} = 0$. The size of the core sample and the condition of the core prevented us from making a triaxial shear test as requested.

EMPALEMENT

- A. Classification. Two samples were submitted from the emergency spillway area and two were submitted from the borrow area. Sample 207.1 is from the surface 1 to 3 feet and is classed as CI-ML. Sample 207.2 is a CL.



Both samples from the borrow area are from hole 101. They contain about 25 percent gravel and from 41 to 45 percent fines. They are classed as CL. The deeper sample 101-2 is more plastic than Sample 101-1. The clay fraction is non-dispersive.

- B. Compacted Density. Standard Proctor compaction tests were made on two samples as requested. Density control on the minus 3/4-inch fraction is planned, so the laboratory tests were made on the minus 3/4-inch fraction. The moisture versus density relationship is shown on the attached Form SCS-ENG-352.

SHEAR STRENGTH

A triaxial shear test was made on Sample 101-1 as requested. The test was made on the minus 3/4-inch fraction at 95 percent of standard Proctor density. The test specimens were backpressured to saturation. The shear strength parameters obtained are $\phi = 17.5^\circ$, $c = 375$ psf and $\bar{\sigma} = 35.5^\circ$, $\bar{c} = 175$ psf.


SLOPE STABILITY ANALYSIS

A stability analysis was made for the proposed 2 1/2:1 slopes. The analysis considered a phreatic line from emergency spillway elevation and the no-drain condition. The upstream slope was checked for the full drawdown condition, and the downstream slope was checked for the steady-seepage condition. Shear strength parameters used were $\phi = 17.5^\circ$, $c = 375$ psf. The factors of safety obtained were greater than 1.60. The formation shear strength indicated by the undisturbed sample is high for the proposed embankment.

CONCLUSIONS AND RECOMMENDATIONS

We concur with the proposals outlined in the engineer's report for this site. With the embankment density controlled to 95% of Proctor density on the minus 3/4-inch fraction the proposed 2 1/2:1 slopes have acceptable factors of safety. The clay fraction of the proposed embankment soil is non-dispersive and this soil is expected to be quite erosion resistant, so a drain is probably not needed.

The consolidation potential of the CL formation soil indicated by consolidation of the direct shear test specimens is 1.1 percent under a 1440-psf load, 3.2 percent under a 2880-psf load, and 5.2 percent under a 4320-psf load. These values could be used as estimates for computing horizontal strain on the conduit.


Tom P. Dammigan
Head

Attachments:

cc: Joe A. Green, Project Engineer,
M. Vernon (c).

Paul H. Thompson, District Engineer

Sheet 15 of Appendix B

[illegible]

MATERIALS TESTING REPORT U.S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE **TRIAxIAL SHEAR TEST**


PROJECT AND STATE East Creek SE 1/4-2, MISSOURI SAMPLE LOCATION Recon, R 4+00

FIELD SAMPLE NO. 101-1 DEPTH 3-5' GEOLOGIC ORIGIN

TYPE OF SAMPLE COMPACTED TESTED AT GML - LINCOLN APPROVED BY DATE

INDEX TEST DATA				SPECIMEN DATA		TYPE OF TEST
USCS <u>SC</u>	LL <u>29</u>	PI <u>10</u>		HEIGHT <u>8.0</u> "	DIAMETER <u>1</u> "	
% FINER (mm): 0.002 <u>15</u> ; 0.005 <u>18</u> ; 0.074 (#200) <u>41</u>				MATERIALS TESTED PASSED <u>42</u> "SIEVE		UU ☐
G_s (-#4) <u>2.64</u> ; G_s (+#4)				METHOD OF PREPARATION <u>STATIC COMPACTION IN 4 LIFTS</u>		CU ☐
STANDARD: γ_d MAX. <u>15.5</u> pcf; w_0 <u>15.0</u> %				MOLDING MOISTURE <u>16.0</u> %		CU ☒
MODIFIED: γ_d MAX. _____ pcf; w_0 _____ %				MOLDED AT <u>25.4</u> % OF γ_d MAXIMUM		CD ☐


DRY DENSITY		δ PARAMETERS	MOISTURE CONTENT, %			TIME OF CONSOLIDATION (hrs)	MINOR PRINCIPAL STRESS σ_3 (psi)	DEVIATOR STRESS $\sigma_1 - \sigma_3$ (psi)	AXIAL STRAIN AT FAILURE, ϵ (%)
INITIAL pcf ☐	CONSOLIDATED pcf ☐		START OF TEST	DEG. OF SAT. AT START OF TEST	END OF TEST				
109.6	110.2	0.96	16.8		18.2	16.17	10	15.6	10.0
110.2	110.7	0.97	16.0		16.9	15.95	2.5	23.4	10.0
110.7		0.89	15.2		16.7	15.92	10	42.0	10.0

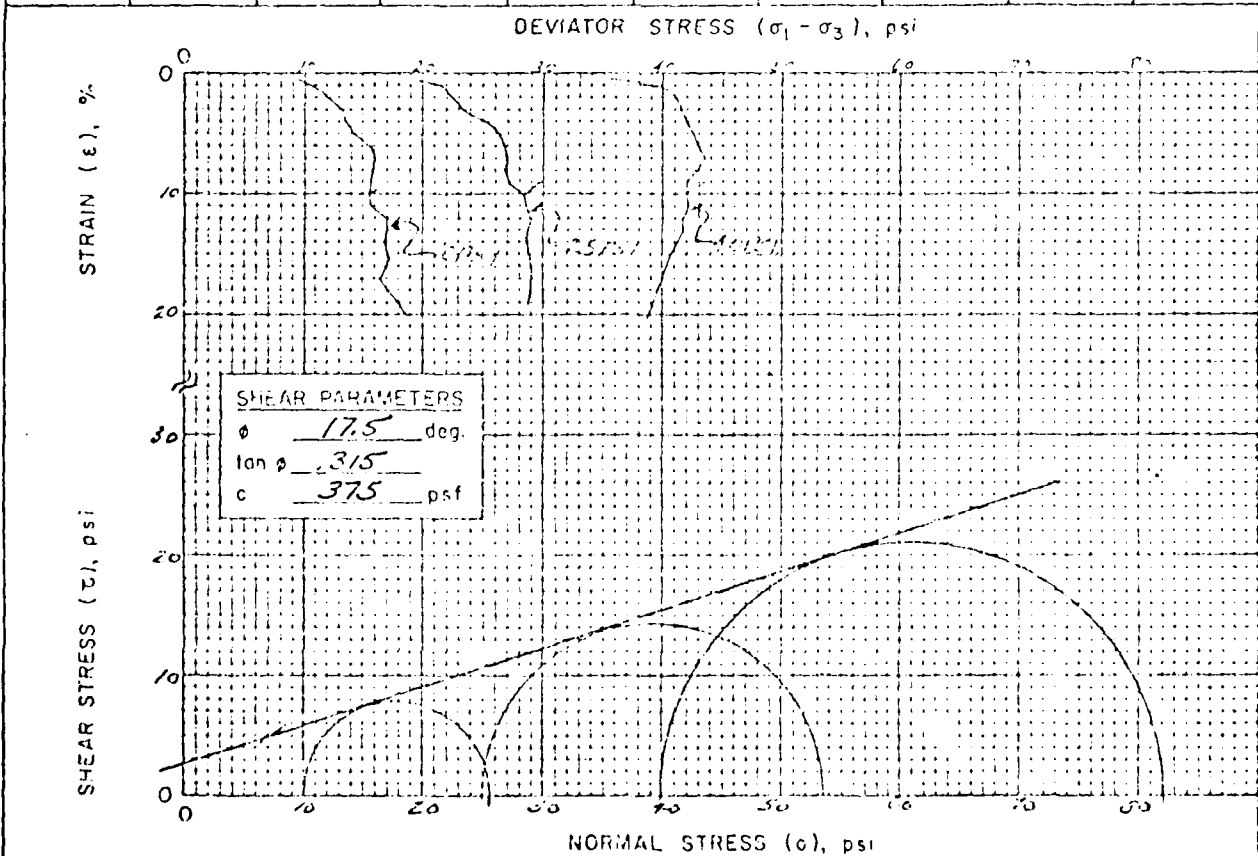

REMARKS BACK-PATENTED

Sheet 15 of Appendix B

MATERIALS		U. S. DEPARTMENT OF AGRICULTURE		TRIAxIAL SHEAR TEST	
TESTING REPORT		SOIL CONSERVATION SERVICE		with pore pressure measured	
PROJECT and STATE <i>1st test site, R-2, MISSOURI</i>				SAMPLE LOCATION <i>Bottom, R-2</i>	
TYPE OF SAMPLE <i>Compacted</i>		TESTED AT <i>Soil-Linear</i>		APPROVED BY	
DATE		DATE		DATE	
MINOR PRINCIPAL STRESS, σ_3 (psi)	PORE PRESSURE, u (psi)	EFFECTIVE MINOR PRINCIPAL STRESS, $\bar{\sigma}_3$ (psi)	DEVIATOR STRESS, $\sigma_1 - \sigma_3$ (psi)	FAILURE CRITERIA	AXIAL STRAIN AT FAILURE, ϵ (%)
<i>10</i>	<i>5.6</i>	<i>4.2</i>	<i>15.6</i>		<i>10.0</i>
<i>25</i>	<i>16.4</i>	<i>8.6</i>	<i>28.4</i>		<i>10.0</i>
<i>40</i>	<i>26.4</i>	<i>13.6</i>	<i>42.0</i>		<i>10.0</i>

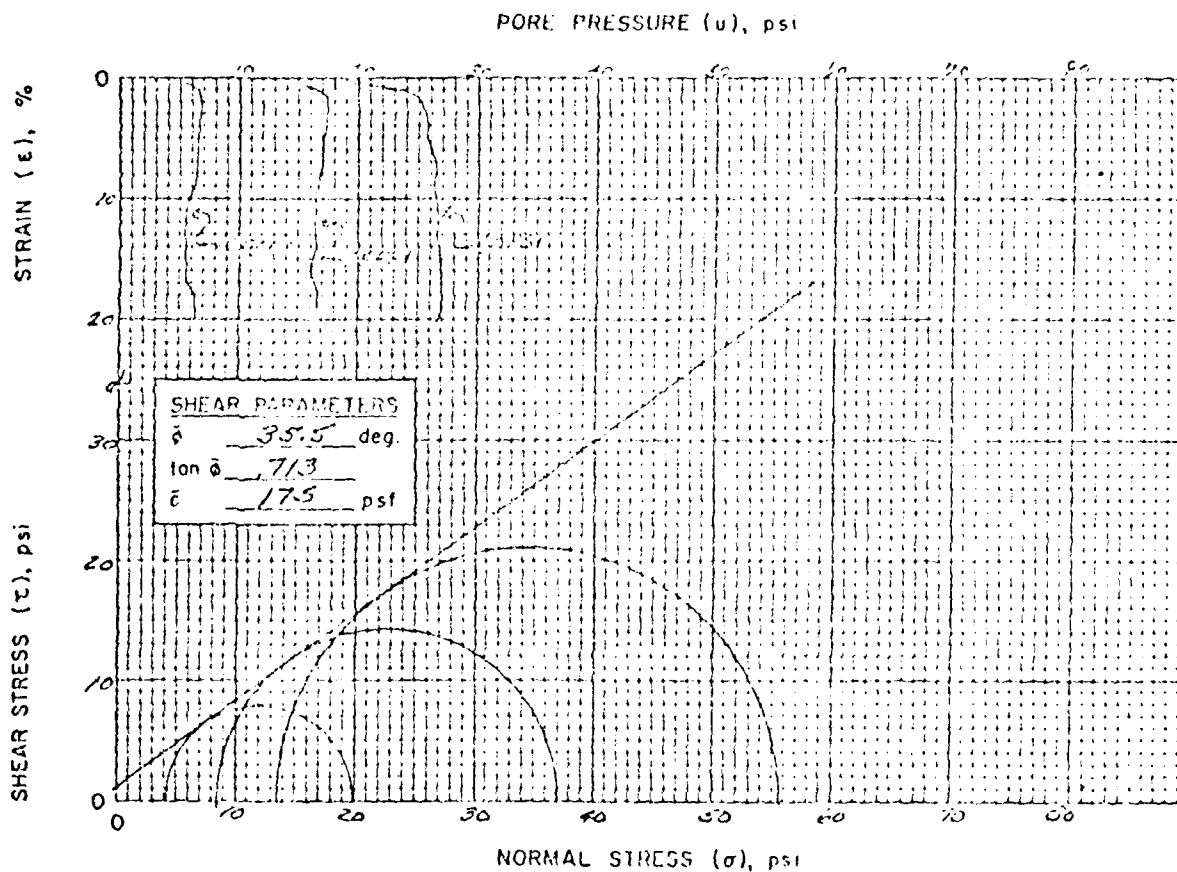


REMARKS *BACK-PRESSURED*

OK
1/28

MATERIALS TESTING REPORT	U.S. DEPARTMENT of AGRICULTURE SOIL CONSERVATION SERVICE	DIRECT SHEAR TEST
---------------------------------	---	--------------------------

PROJECT and STATE LOST CREEK SITE F-2 MISSOURI		SAMPLE LOCATION	
FIELD SAMPLE NO. 301.2	DEPTH	GEOLOGIC ORIGIN	
TYPE OF SAMPLE UNDISTURBED	TESTED AT SML LINCOLN	APPROVED BY	DATE

CLASSIFICATION CL	LL 34 PI 12	SPECIFIC GRAVITY
TYPE OF TEST Consolidated Drained	CONTROL STRAIN	$G_s(-)^{\#4}$ 2.67
RATE OF LOADING (in/min)	MOISTURE CONDITION FLOODED	$G_s(+)^{\#4}$
TYPE OF SPECIMEN	AREA (sq in) 1.5	THICKNESS (in) 1.0
		$G_m(bulk)(+)^{\#4}$

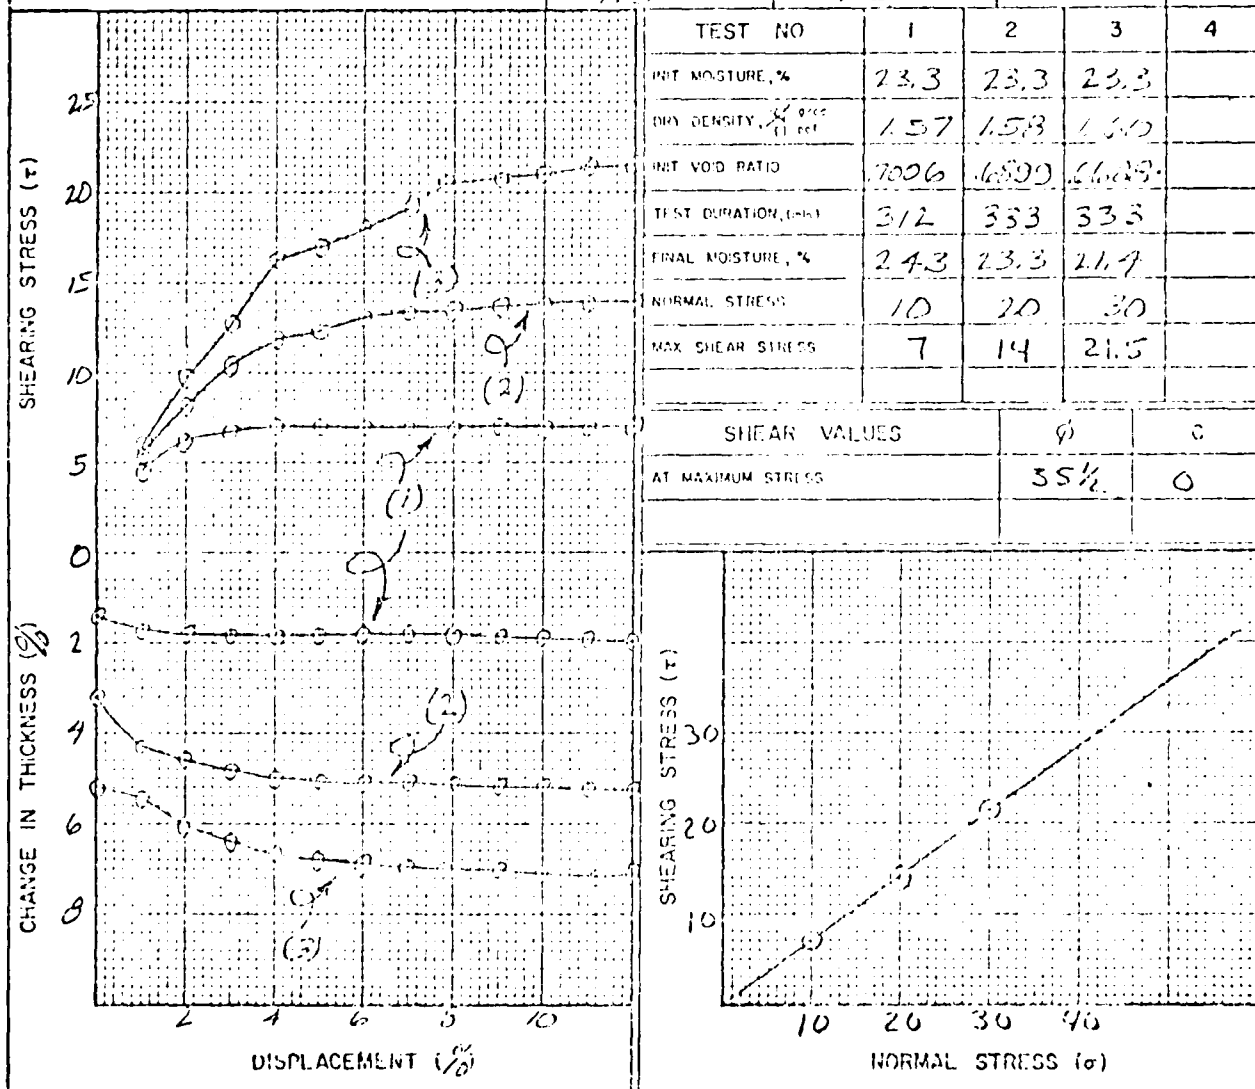

REMARKS
THIS PAGE IS FOR THE USE OF THE FIELD OFFICE Sheet 17 of Appendix B

MATERIALS TESTING REPORT	U.S. DEPARTMENT of AGRICULTURE SOIL CONSERVATION SERVICE	COMPACTION AND PENETRATION RESISTANCE
PROJECT and STATE <u>Little Creek # F-2, Missouri.</u>		
FIELD SAMPLE NO <u>202.2</u>	LOCATION <u>Em. Spwy. 25' L 3+50 E</u>	DEPTH <u>3-16'</u>
GEOLOGIC ORIGIN	TESTED AT <u>SIML-LINCOLN</u>	APPROVED BY DATE
CLASSIFICATION <u>CL LL 35 PI 14</u>		CURVE NO. <u>1X</u> OF <u>2</u>
MAX. PARTICLE SIZE INCLUDED IN TEST <u>< 3/4"</u>		STD (ASTM D-698) ☒ ; METHOD <u>4</u>
SPECIFIC GRAVITY (G _s) { MINUS NO. 4 <u>2.634</u> PLUS NO. 4 <u>2.46</u> <u>AV. 2.55</u>		MOD (ASTM D-1557) ☐ ; METHOD _____
		OTHER TEST ☐ (SEE REMARKS)

PENETRATION RESISTANCE, psi

MAX. γ_d 108.5 pcf

OPT MOIST 15.5 %

NATURAL MOIST. _____ %

DENSITY OF COMPACTED SOIL, pcf

MOISTURE CONTENT, PERCENT OF DRY WEIGHT

REMARKS

CURVE IS FOR THE MINUS NO. 4 FRACTION

GRADATION OF TOTAL SAMPLE

< NO. 200 56 %; < NO. 4 85 %; < NO. 10 100 %

MATERIALS TESTING REPORT		U. S. DEPARTMENT of AGRICULTURE SOIL CONSERVATION SERVICE		COMPACTION AND PENETRATION RESISTANCE	
PROJECT and STATE <u>Lost Creek # F-2, Missouri</u>					
FIELD SAMPLE NO. <u>101-1</u>		LOCATION <u>Borrow, B 4+00</u>			DEPTH <u>2.51</u>
GEOLOGIC ORIGIN		TESTED AT <u>SML-LINCOLN</u>		APPROVED BY	DATE
CLASSIFICATION <u>SC</u> <u>LL 29</u> <u>PI 10</u>				CURVE NO. <u>24</u> OF <u>2</u>	
MAX. PARTICLE SIZE INCLUDED IN TEST <u>< 3/4"</u>				STD. (ASTM D-638) ☒ ; METHOD <u>C</u>	
SPECIFIC GRAVITY (G _s) { MINUS NO. 4 <u>2.64</u> PLUS NO. 4 <u>2.48</u> <u>AV. 2.56</u>				MOD. (ASTM D-1557) ☐ ; METHOD	
				OTHER TEST ☐ (SEE REMARKS)	

PENETRATION RESISTANCE, psi

DENSITY OF COMPACTED SOIL, pcf

MAX. G_s 115.5 pcf

CPT MOIST. 1.30 %

NATURAL MOIST. _____ %


6 8 10 12 14 16 18
MOISTURE CONTENT, PERCENT OF DRY WEIGHT

REMARKS	CURVE IS FOR THE MINUS NO. 4 FRACTION GRADATION OF TOTAL SAMPLE < NO. 200 <u>41</u> %; < NO. 4 <u>7.5</u> %; < <u>1 1/2"</u> <u>100</u> %
---------	---

[illegible]

APPENDIX C

Overtopping Analysis

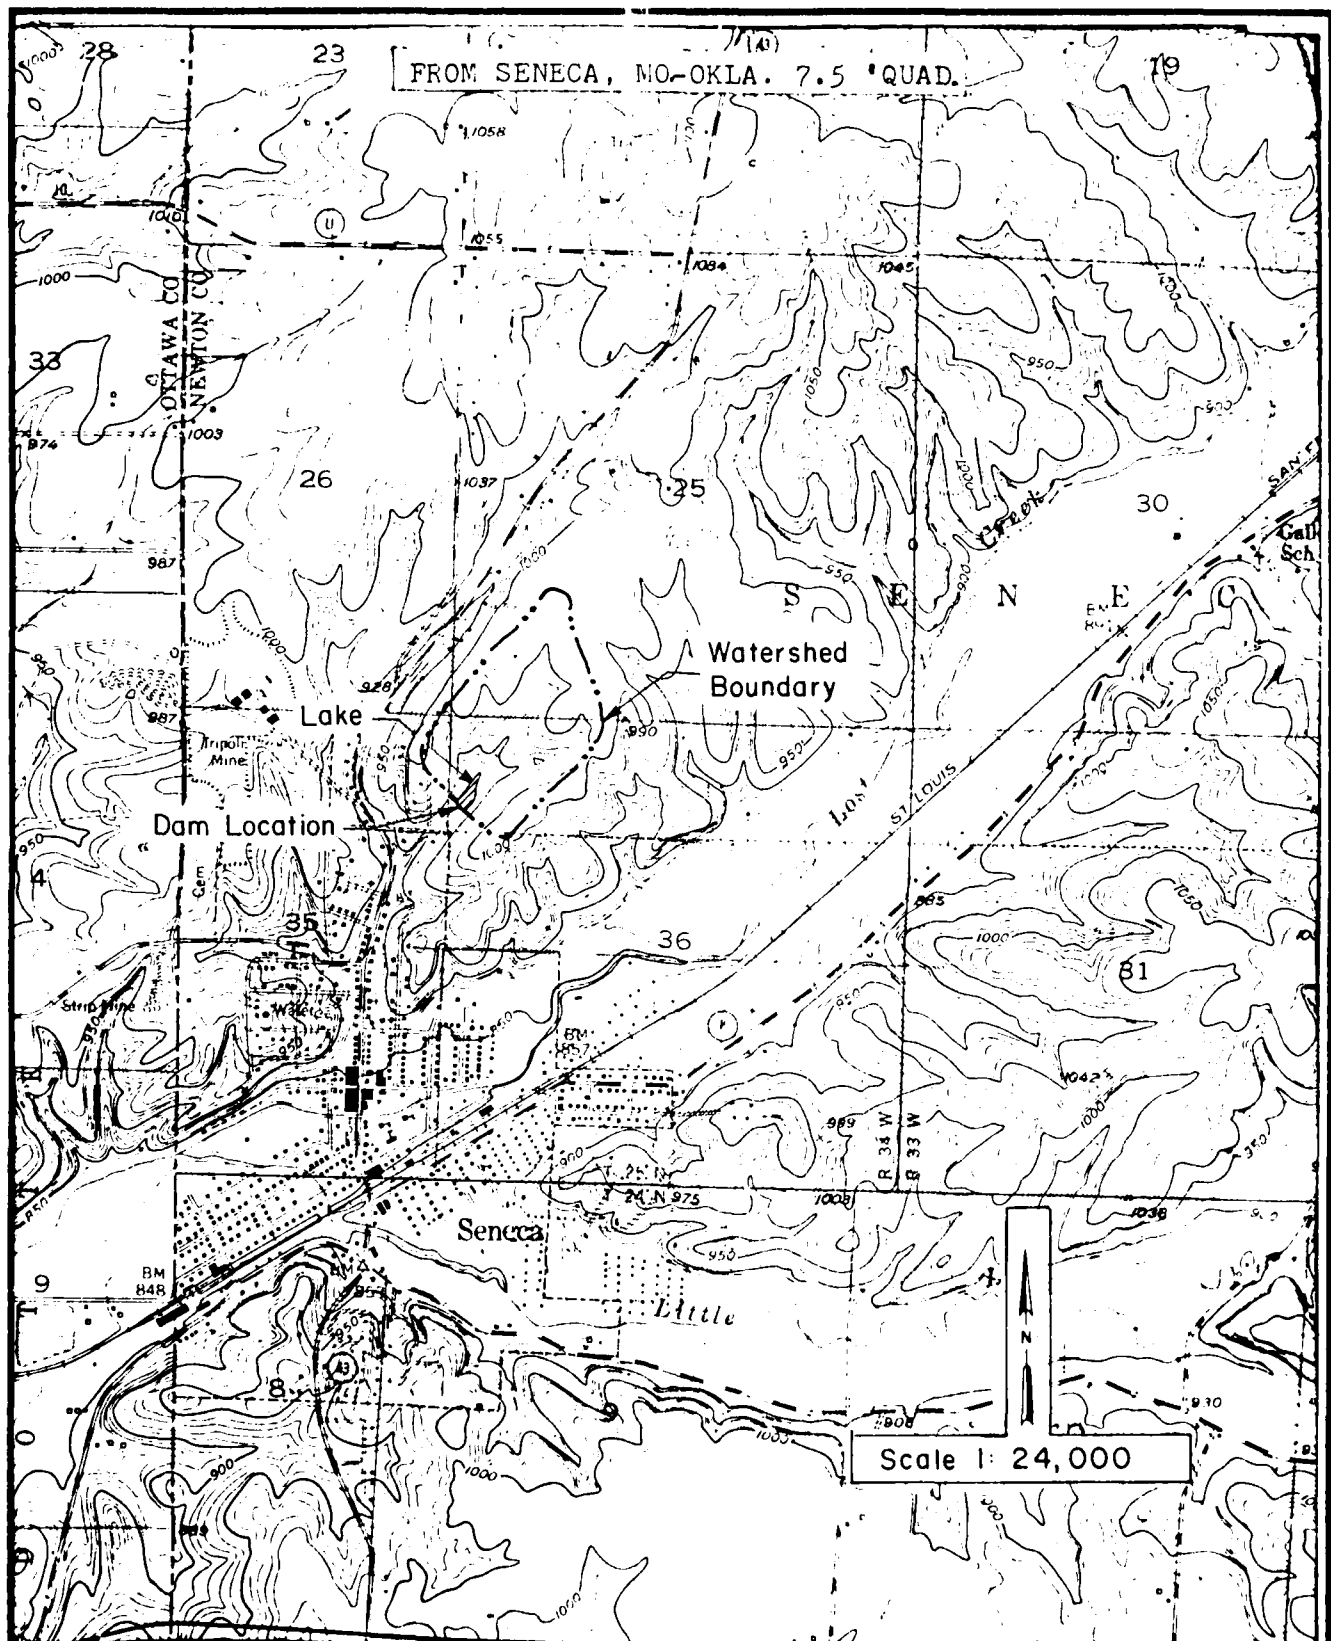

LAKE AND WATERSHED MAP



SPRINGFIELD, IL • PEORIA, IL • ROCKFORD, IL

Newton County Structure F-2 Dam
 Newton County, Missouri
 Mo. I.D. No. 20513

Sheet I, Appendix C

APPENDIX C

HYDROLOGIC AND HYDRAULIC ANALYSIS

To determine the overtopping potential, flood routings were performed by applying the Probable Maximum Precipitation (PMP) to a synthetic unit hydrograph to develop the inflow hydrograph. The inflow hydrograph was then routed through the reservoir and spillway. The overtopping analysis was accomplished using the systemized computer program HEC-1 (Dam Safety Version), July 1978, prepared by the Hydrologic Engineering Center, U.S. Army Corps of Engineers, Davis, California.

The PMP was determined from regional charts prepared by the National Weather Service in "Hydrometeorological Report No. 33." Reduction factors were not applied. The rainfall distribution for the 24-hour PMP storm duration was assumed according to the procedures outlined in EM 1110-2-1411 (SPD Determination).

The synthetic unit hydrograph for the watershed was developed by the computer program using the SCS method. The parameters for the unit hydrograph are shown in Table 1 (Sheet 4, Appendix C).

The SCS curve number (CN) method was used in computing the infiltration losses for rainfall-runoff relationship. The CN values used, and the result from the computer output, are shown in Table 2 (Sheet 5, Appendix C).

The reservoir routing was accomplished by using the Modified Puls Method. The hydraulic capacity of the spillway was used as an outlet control in the routing. The hydraulic capacity of the spillway and the storage capacity of the reservoir were defined by the elevation-surface area--storage-discharge relationships shown in Table 3 (Sheet 5, Appendix C). This dam has been designed for flood control purposes, and the water surface elevation is maintained below the primary spillway invert elevation. To consider the effect of the reservoir storage, an antecedent storm of 25 percent and 50 percent of the PMF was considered (assuming the reservoir at the sedimentation pool elevation 932.0) to determine the starting reservoir elevation for the routing of 50 percent and 100 percent of the PMF respectively. The antecedent storms were assumed to occur four days prior to their corresponding storm. Both antecedent storms will fill the reservoir beyond the emergency spillway level, but at the end of the four days, the reservoir will reduce to the sedimentation pool level since the primary spillway is unregulated. Thus, the final routing analysis was accomplished considering the starting reservoir level at the primary spillway invert elevation 932.0 (sedimentation pool).

The result of the routings of the PMF ratios indicate that the dam will pass the 1 percent probability flood without overtopping the dam.

The rating curve for the spillways (see Table 4 Sheet 6, Appendix C) was determined assuming orifice flow for the primary spillway and channel flow for the emergency spillway.

The flow over the crest of the dam during overtopping was determined using the non-level dam option (\$L and \$V cards) of the HEC-1 program. The program assumes critical flow over a broad-crested weir.

A summary of the routing analysis for different ratios of the PMF is shown in Table 5 (Sheet 7, Appendix C).

The computer input data, a summary of the output data, and a plot of the inflow-outflow hydrograph for the PMF are presented on Sheets 8, 9 and 10 of Appendix C.

TABLE 1
SYNTHETIC UNIT HYDROGRAPH

Parameters:

Drainage Area (A)	0.13 sq. miles
Length of Watercourse (L)	0.45 miles
Difference in elevation (H)	103 ft
Time of concentration (Tc)	0.18 hours
Lag Time (Lg)	0.11 hours
Time to peak (Tp)	0.15 hours
Peak Discharge (Qp)	420 cfs
Duration (D)	5 min.

<u>Time (*)</u>	<u>(*) Discharge (cfs)</u>
0	0
5	235
10	413
15	213
20	87
25	35
30	14
35	6
40	3
45	0

(*) From the computer output

FORMULA USED:

$$T_c = \left(\frac{11.2 L^3}{H} \right)^{0.385}$$

$$L_g = 0.6 T_c$$

$$T_p = \frac{D}{2} + L_g$$

$$Q_p = \frac{484 A \cdot Q}{T_p} \quad Q = \text{Excess Runoff} = 1 \text{ inch}$$

TABLE 2

RAINFALL-RUNOFF VALUES

<u>Selected Storm Event</u>	<u>Storm Duration (Hours)</u>	<u>Rainfall (Inches)</u>	<u>Runoff (Inches)</u>	<u>Loss (Inches)</u>
PMP	24	35.49	33.52	1.97
1% Prob. Flood	24	8.39	5.03	3.37

Additional Data:

- 1) Soil Conservation Service Soil Group D
- 2) Soil Conservation Service Runoff Curve CN = 85 (AMC III) for the PMF
- 3) Soil Conservation Service Runoff Curve CN = 71 (AMC II) for the
1 percent chance flood
- 4) Percentage of Drainage Basin Impervious 3 percent

TABLE 3

ELEVATION, SURFACE AREA, STORAGE AND DISCHARGE RELATIONSHIPS

<u>Elevation (feet-MSL)</u>	<u>Lake Surface Area (acres)</u>	<u>Lake Storage (acre-ft)</u>	<u>Spillways Discharge (cfs)</u>
920.0	0	0	
* 932.0	1.4	7.6	0
943.3	3.9	35.6	18
** 947.4	4.9	56	1096
950.0	5.1	69	2523

*Primary spillway crest elevation

**Top of dam elevation

The above relationships were developed using data from the SCS plans and the U.S.G.S. SENECA, MO.-OKLA. 7.5 minute quadrangle map.

TABLE 4
SPILLWAYS RATING CURVE

<u>Reservoir Elevation</u>	<u>Primary Spillway (c.f.s.)</u>	<u>Emergency Spillway (c.f.s.)</u>	<u>Total Discharge (c.f.s.)</u>
932.0	0		0
935.0	9		9
940.0	15		15
943.3	18	0	18
943.8	18	28	46
944.3	19	95	114
944.8	19	189	208
945.3	20	308	328
946.3	21	625	646
* 947.4	21	1075	1096
949.0	22	1890	1912
950.0	23	2500	2523

* Top of Dam Elevation

METHOD USED:

- 1) Primary Spillway: Assuming orifice flow

$$Q = C.A. (2g.h)^{1/2}$$

Q = Discharge in c.f.s.

C = Discharge coefficient = 0.60

A = Opening area in ft² (9" x 18")

g = Acceleration of gravity = 32.2 ft/sec²

h = Head measured from reservoir elevation to center of orifice (in ft)

- 2) Emergency Spillway: Assuming open channel flow

Using charts from "UD Method of Reservoir Flood Routing," S.C.S.
Technical Release No. 35, February 1967.

TABLE 5
RESULTS OF FLOOD ROUTINGS

Ratio of PMF	Peak Inflow (CFS)	Peak Lake Elevation (ft.-MSL)	Total Storage (AC.-FT.)	Peak Outflow (CFS)	Depth (ft.) Over Top of Dam
		* 932.0	7.6	0	
0.10	196	938.8	24	14	
0.20	393	943.9	38	56	
0.25	491	944.4	41	137	
0.30	589	945.1	44	274	
0.35	688	945.6	47	412	
0.40	786	945.9	48	507	
0.50	982	946.4	51	671	
0.75	1473	** 947.4	56	1084	0
1.00	1964	948.2	60	1609	0.8

* Primary spillway crest elevation

** Top of dam elevation

The percentage of the PMF that will reach the top of the dam is 75 percent.

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS
FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)
AREA IN SQUARE MILES (SQUARE KILOMETERS)


OPERATION	STATION	AREA	PLAN	RATIOS APPLIED TO FLOWS								
				RATIO 1	RATIO 2	RATIO 3	RATIO 4	RATIO 5	RATIO 6	RATIO 7	RATIO 8	RATIO 9
				0.10	0.20	0.25	0.30	0.35	0.40	0.50	0.75	1.00
HYDROGRAPH AT	1	0.13	1	196.	393.	491.	589.	688.	786.	982.	1473.	1964.
	(	0.34)	(	5.56)	11.13)	13.91)	16.69)	19.47)	22.25)	27.81)	41.72)	55.63)
ROUTED TO	2	0.13	1	14.	56.	137.	274.	412.	507.	671.	1084.	1609.
	(	0.34)	(	0.38)	1.59)	3.89)	7.76)	11.66)	14.35)	19.01)	30.69)	45.55)

SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1	ELEVATION	INITIAL VALUE	SPILLWAY CREST	TOP OF DAM
	STORAGE	932.00	932.00	947.40
	OUTFLOW	8.	8.	56.
		0.	0.	1096.

RATIO OF PMF	MAXIMUM RESERVOIR U.S.ELEV	MAXIMUM DEPTH OVER DAM	MAXIMUM STORAGE AC-FT	MAXIMUM OUTFLOW CFS	DURATION OVER TOP HOURS	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
0.10	938.80	0.00	24.	14.	0.00	18.50	0.00
0.20	943.87	0.00	38.	56.	0.00	17.17	0.00
0.25	944.42	0.00	41.	137.	0.00	16.00	0.00
0.30	945.07	0.00	44.	274.	0.00	15.83	0.00
0.35	945.56	0.00	47.	412.	0.00	15.83	0.00
0.40	945.86	0.00	48.	507.	0.00	15.75	0.00
0.50	946.36	0.00	51.	671.	0.00	15.75	0.00
0.75	947.37	0.00	56.	1084.	0.00	15.75	0.00
1.00	948.16	0.76	60.	1609.	0.33	15.75	0.00

PMF Ratios
Output Data

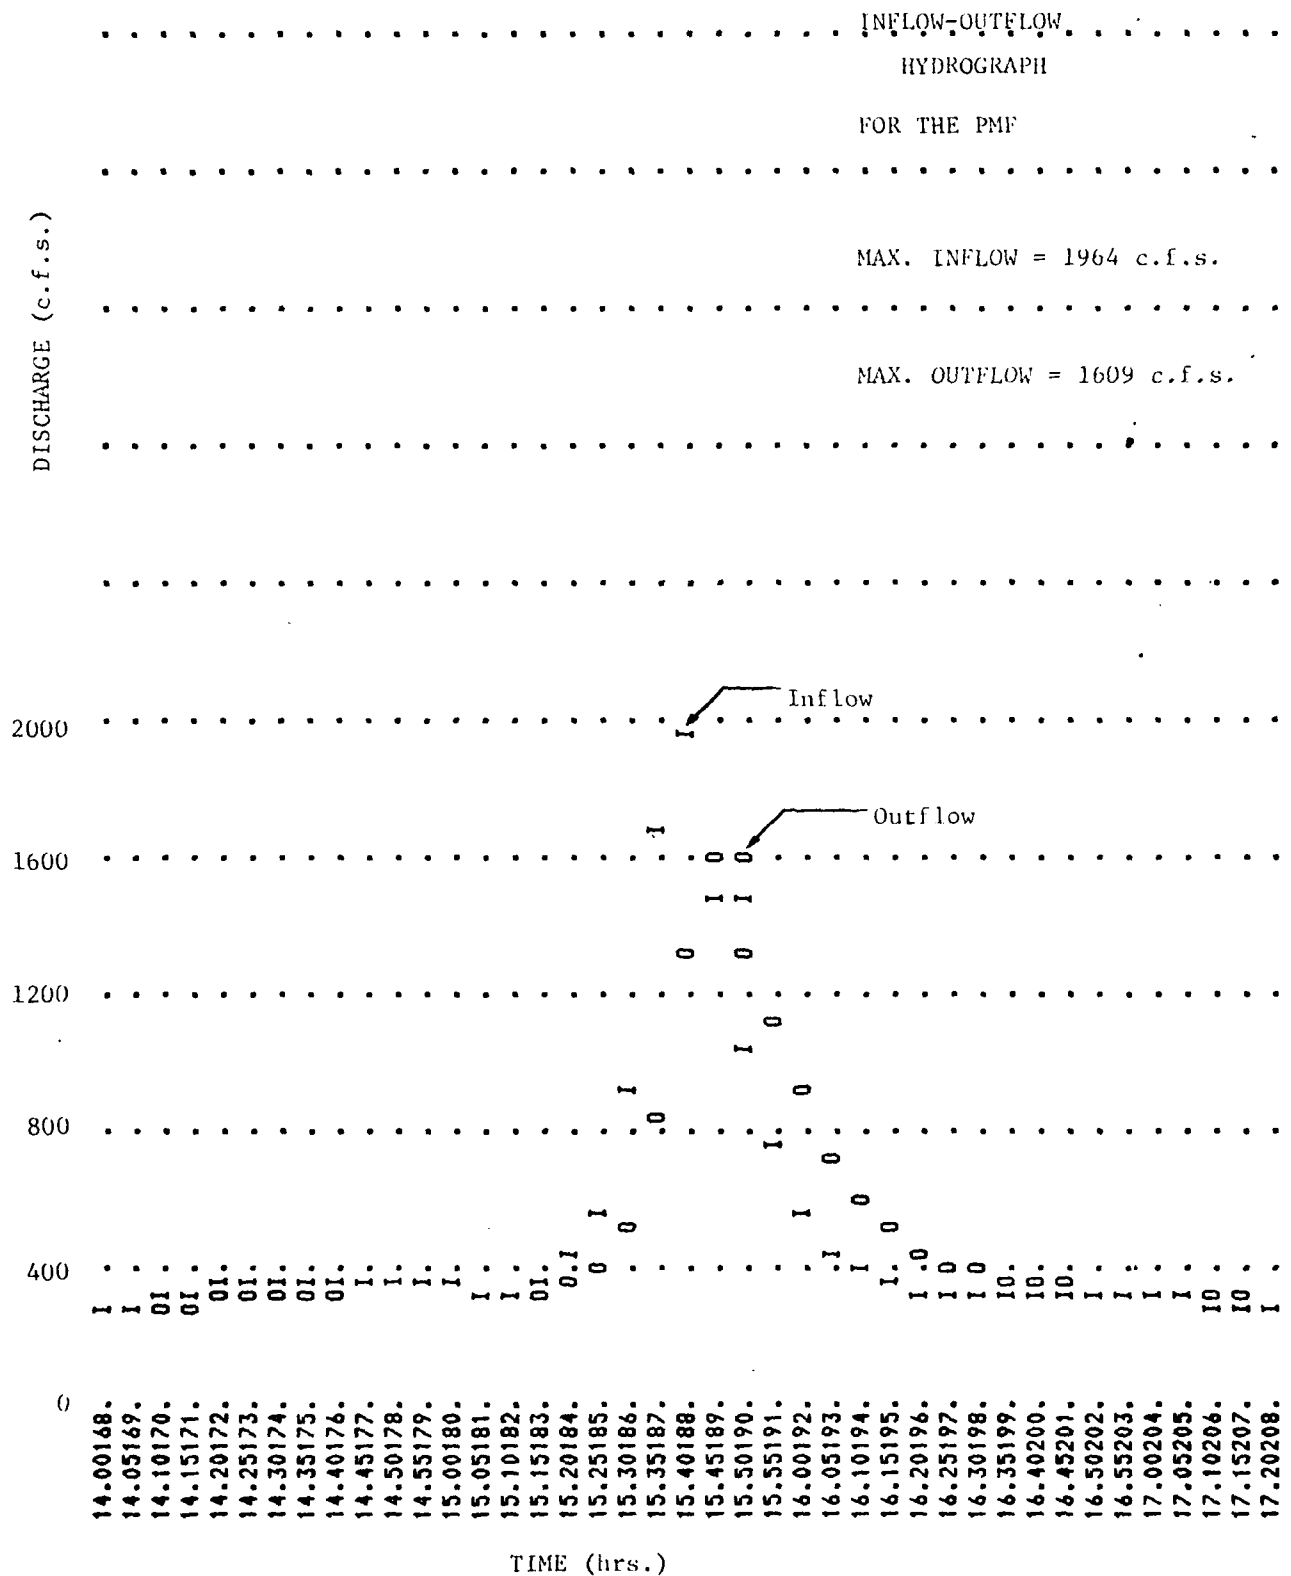

APPENDIX D

Photographs



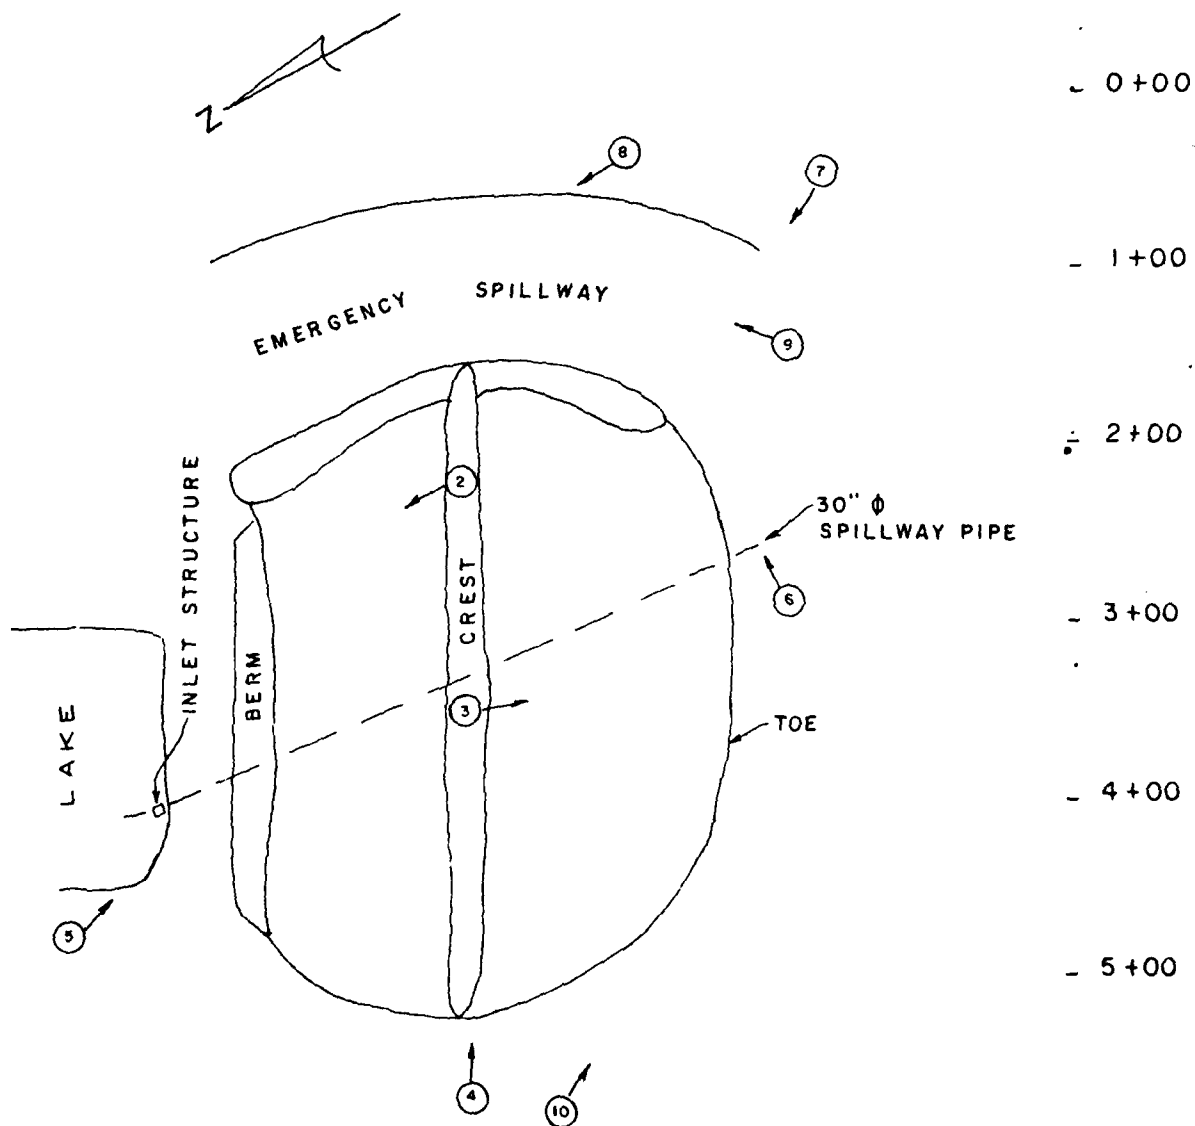


PHOTO INDEX
 STRUCTURE F-2
 MO. No. 20513

LIST OF PHOTOGRAPHS

<u>Photo No.</u>	<u>Description</u>
1	Aerial View of Dam
2	Upstream View of Lake (Looking Northeast)
3	Downstream View From Crest (Looking Southwest)
4	View of Crest (Looking Southeast)
5	View of Inlet Structure (Looking North)
6	View of Spillway Outlet (Looking West)
7	Downstream Face of Embankment (Looking North)
8	View of Emergency Spillway and Lake (Looking North)
9	Upstream View of Emergency Spillway (Looking North)
10	Downstream View (Looking East)
11	Downstream Hazard (Looking East)
12	Downstream Hazard (Looking Southeast)

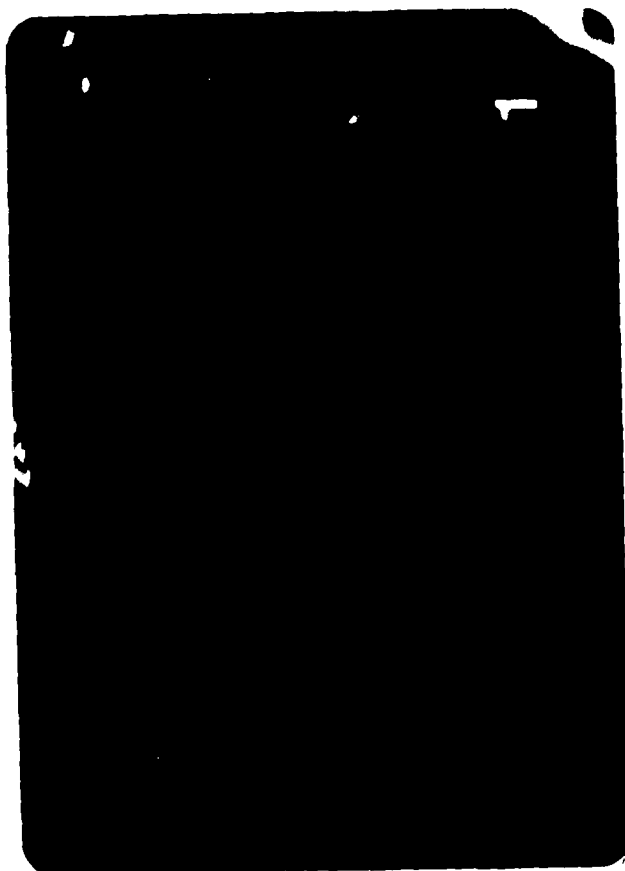

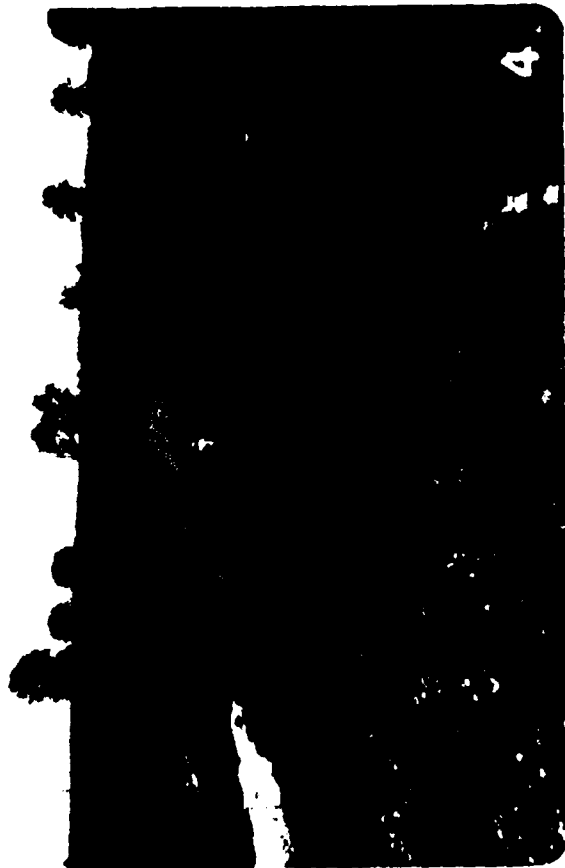



ATE
LME