

UNCLASSIFIED

AD NUMBER
AD464010
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; APR 1965. Other requests shall be referred to US Naval Ordnance Lab., White Oak, Silver Spring, MD.
AUTHORITY
US Naval Ordnance Lab ltr dtd 25 Jan 1966

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD 464010

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION


CAMERON STATION ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

DISCLAIMER NOTICE

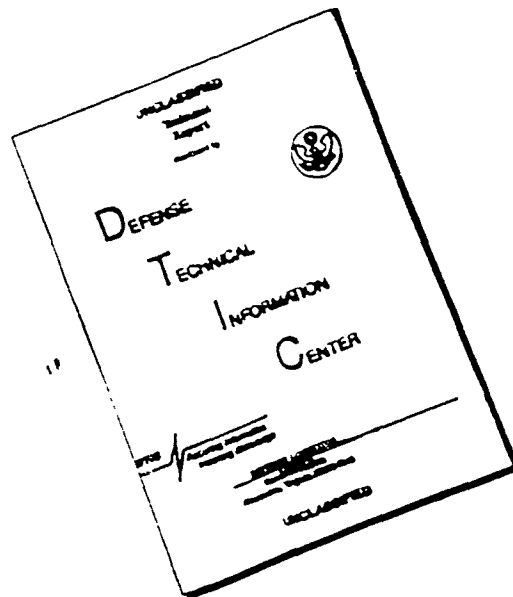

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

NOLTR 65-47

CATALOGED BY: DDC

464010

AS AD No.

SHOCK SENSITIVITY AND HAZARD
CLASSIFICATION

REPRODUCED FROM THE
PROPERTY OF THE UNITED STATES GOVERNMENT

NOL

20 APRIL 1965

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

NOLTR 65-47

AVAILABLE COPY WILL NOT PERMIT
FULLY LEGIBLE REPRODUCTION.
REPRODUCTION WILL BE MADE IF
REQUESTED BY USERS OF DDC.

464010

NOTICE

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to:

**Defense Documentation Center (DDC)
Cameron Station
Alexandria, Virginia**

Department of Defense contractors who have established DDC services or have their 'need-to-know' certified by the cognizant military agency of their project or contract should also request copies from DDC.

NOLTR 65-47

Shock Sensitivity and Hazard Classification

By

I. Jaffe

ABSTRACT: The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the ease of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be Class A or mass detonating because of the ease with which this reaction is initiated.

PUBLISHED JUNE 1965

APPROVED BY:

Carl Boyars, Chief
Physical Chemistry Division
CHEMISTRY RESEARCH DEPARTMENT
U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, SILVER SPRING, MARYLAND

NOLTR 65-47

20 April 1965

This work was performed under Task RMMP 22149/P009-06-11. It is part of a continuing effort to correlate sensitivity tests and test results with the hazard characteristics and classification of explosives and propellants. This report discusses the usefulness of shock sensitivity tests to hazard classification.

R. E. ODENING
Captain, USN
Commander

Albert Lightbody
ALBERT LIGHTBODY
By direction

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
EXPERIMENTAL	2
RESULTS	3
DISCUSSION	3
REFERENCES	5

ILLUSTRATIONS

TABLE 1	Results of the Standard Gap Test	6
TABLE 2	Results of the Extended Gap Test	6

FIGURES

FIGURE 1	Gap Test Assembly	7
FIGURE 2	The Extended Gap Test	8
FIGURE 3	A Witness Plate Obtained as the Result of a Detonation (Go)	9
FIGURE 4	Front and Side View of a Witness Plate Obtained as the Result of a Strong Chemical Reaction (No Go)	9

Shock Sensitivity and Hazard Classification

INTRODUCTION

The Defense Department has established standard tests which determine the hazard classifications and hazard characteristics for ammunition and explosives (1). For the first time, minimum test criteria have been specified for solid propellants. Previously solid propellants were tested and treated as explosives, and, as such, the handling and use of these materials in the field were restricted. The new tests establish hazard classifications for shipping and storage and also determine certain hazard characteristics for solid propellants. This latter information is particularly useful in guiding the safe handling of a missile or device containing solid propellant in the field.

The present instructions (1) calls for a four phase program to be run from the inception of the propellant in the laboratory to the completed missile. However, the proposed revision of the tests to be adopted in the near future calls for only three phases. These are:

Phase I - The tests are made to determine the hazard classification of the solid propellant in the laboratory stage. Tests are made on small samples mainly to determine the Interstate Commerce Commission (ICC) classification for shipment.

Phase II - These tests are made on larger samples, from a few pounds to the full scale device, and the results are used to determine ICC and Military classifications. The latter is a classification which is used throughout the Defense Department.

Phase III - The tests are made on the completed, assembled system and the results are used for ICC and Military classification as well as to establish any specific hazards peculiar to the system.

The Laboratory is one of the work groups which developed the criteria for the required safety tests (1). Specifically, it was responsible for the development of the shock sensitivity test (card gap test) used in Phase II. This test is essentially the same as the NOL shock sensitivity test. The main exception is the use of a pentolite donor instead of the tetryl donor. Pentolite is a somewhat stronger booster and is easier to obtain commercially than tetryl.

A 50% probability point of 70 cards was chosen as the boundary between the classification of materials for which the hazard is chiefly fire hazards and mass detonation, respectively (1). If a propellant detonates with a 50% point gap below 70 cards its chief hazard is considered to be combustion rather than detonation; seventy cards or above, its chief hazard is considered to be a mass detonation. The gap equivalent of 1.78 cm (0.70 inches) was an arbitrary choice based upon the available results of shock sensitivity tests on solid propellants and the experience with these materials in the field.

To obtain a more realistic figure, it was suggested that a series of materials known as "nitrocarbonitrates" be shock tested. These materials are classified by the ICC (Bureau of Explosives) as fire hazards; however, they are considered by the Bureau of Explosives to be quite close to the materials classified as detonation hazards. It was hoped that the results of these shock sensitivity tests would give some proper guidance for the choice of a more realistic figure for classification in the card gap test, Phase II.

EXPERIMENTAL

"Nitrocarbonitrates" are essentially ammonium nitrate to which some fuel (coal, oil) has been added. The material tested, HP-61*, contains a major portion of ammonium nitrate and small amounts of coal and "hydrocarbon oil". The material is shipped in paper sacks, has a dark greyish color and a consistency of coarse sand.

Twenty of the standardized steel tubes used in the NOL gap test were sealed off at one end by cementing a cellulose acetate card to the bottom of the tube. The tubes were carefully weighed and measured to determine their volume and mass before a given mass of the "nitrocarbonitrate" was poured into them. The density of the charges was adjusted to 0.8 g/cc, which is the manufactured density and the working density in the field.

Both the NOL standard gap test and the extended gap test have been described in the literature in detail (2, 3, 4). Figures 1 and 2 are schematic drawings showing the important features of the tests. In both instances a standard donor composed of two pressed graphited tetryl pellets ($\rho = 1.51$ g/cc) is initiated by a No. 6 detonator**. A variable gap

* Manufactured by the Hercules Powder Co., Kenil, N. J.

** Manufactured by Olin Mathieson

is obtained with cellulose acetate cards each 0.025 cm (0.01 inch) thick and 5.08 cm (2.00 inches) in diameter and polymethylmethacrylate (PMMA)* discs equivalent to 50 (0.5 inches) and 100 (1.0 inch) cards. Thus it is possible to obtain any thickness of gap in increments of 0.025 cm (0.01 inch) by using the cards, discs, or a combination of both. It had been determined that cellulose acetate and PMMA discs may be used interchangeably (3).

The acceptor is cast, pressed or in this instance poured into a standard cold drawn, mild steel, seamless pipe. The witness plate is made of mild steel, 0.95 cm (3/8 inch) thick and 15.2 cm (4 inches) square. After a test, a plate which is retrieved with a hole in it is taken as evidence of a "go" in this go/no-go test.

The extended gap test differs from the NOL standard test in that an explosive (rather than a steel plate) witness is used (Fig. 2). The steel witness plate is used here to judge whether the explosive witness detonated or not. With an explosive witness it is possible to test materials which are shock sensitive but which do not develop a detonation pressure large enough to punch a hole in the steel witness plate. In the present instance, cast TNT was used as the explosive witness.

RESULTS

The standard NOL gap tests made with HP-61 gave a no-go. The witness plate for the test, made at a gap of one card, contained a deep, derby-shaped bulge, but no hole, which is the criterion for a go (Figure 3). Table 1 contains the results of tests made with gaps ranging up to 150 cards. In all instances the plates were bulged as in Figure 4. This indicated that a strong chemical reaction occurred (possibly a detonation) whose reaction pressure was below that required to produce a hole in the witness plate. Table 2 contains the results of the extended gap test. The 50% point of HP-61 was determined as 121 cards.

DISCUSSION

By the NOL extended gap test, HP-61 with a 50% gap of 121 cards (119 cards for a pentolite donor) falls in the class of propellants for which the chief hazard is mass detonation (1). By the Bureau of Explosives test IB-1 (1), however,

* Usually Plexiglas manufactured by Rohm and Haas

HP-61 is considered a material for which the chief hazard is combustion. These contradictory classifications of the same material arise for two reasons:

(1) The NOL test result is determined principally by the shock sensitivity of the material, no matter how weak or how strong the reaction initiated by the shock. The Bureau of Explosives test, on the other hand, measures chiefly the damage caused by whatever reaction is initiated. A two inch cube of the material is placed on a lead cylinder (1.5 in. diam x 4 in. length) and initiated by a blasting cap; damage to the lead cylinder is the test result. Ease of initiation and amount of damage caused by the reaction initiated are not necessarily related. In the case of organic H.E., detonations do cause large amounts of damage, but for composite explosives, e.g., HP-61, this is obviously not always so.

(2) The limiting gap value of 70 cards was selected for non-porous propellants of much higher impedance than the HP-61, e.g., of densities 1.7 g/cc and greater rather than 0.8 g/cc. For this reason, granular and non-porous materials cannot be judged on the same scale; this matter was discussed at some length in Ref. (4). A gap of 121 cards for HP-61 indicates a much lower pressure transmitted to a sample of 0.8 g/cc than to one of 1.7 g/cc. Hence a valid comparison can only be made in terms of pressures transmitted to the two test samples, not in terms of the 50% gap thickness measured in the two cases. HP-61 is much more sensitive than a voidless propellant which has the same 50% gap thickness of 121 cards.

From the standpoint of hazards, both factors: ease of initiating the reaction and the damage which the reaction can cause, once it is initiated, are important. It is necessary to design tests to measure such factors quantitatively (and, if possible, separately), and then assign them weighting according to their respective roles in hazardous situations. With sufficient exact knowledge, ambiguities in classification such as that illustrated with HP-61 may be avoided.

Inasmuch as detonation of HP-61 will cause a large amount of damage (even though less than an equal amount of TNT), it should be classified as a mass detonating material in accord with its shock sensitivity.

NOLTR 65-47

REFERENCES

1. Explosive Hazard Classification Procedure, BUWEPINST 8020.
2. D. Price and I. Jaffe, ARS Journal, 31, 595-599 (1961).
3. I. Jaffe, R. Beauregard, and A. Amster, ARS Journal, 32, 22-25 (1962).
4. D. Price and I. Jaffe, AIAA Journal, 1, 389-394 (1963).

TABLE 1 - Results of the Standard Gap Test

Shot No.	Cards	Result*
1	1	±
2	60	±
3	115	±
4	122	±
5	150	±

* + - go

- - no-go

± - no-go, but plate contains a depression (see Fig. 4)

Tetryl lot No. 1878-125

TABLE 2 - Results of the Extended Gap Test*

Shot No.	Cards	Result
1	1	+
2	1	+
3	51	+
4	75	+
5	150	-
6	110	+
7	130	-
8	120	+
9	125	-
10	123	-
11	121	+
12	122	-

50% Point 121 Cards

* Witness: cast TNT

Tetryl lot: 1878-125

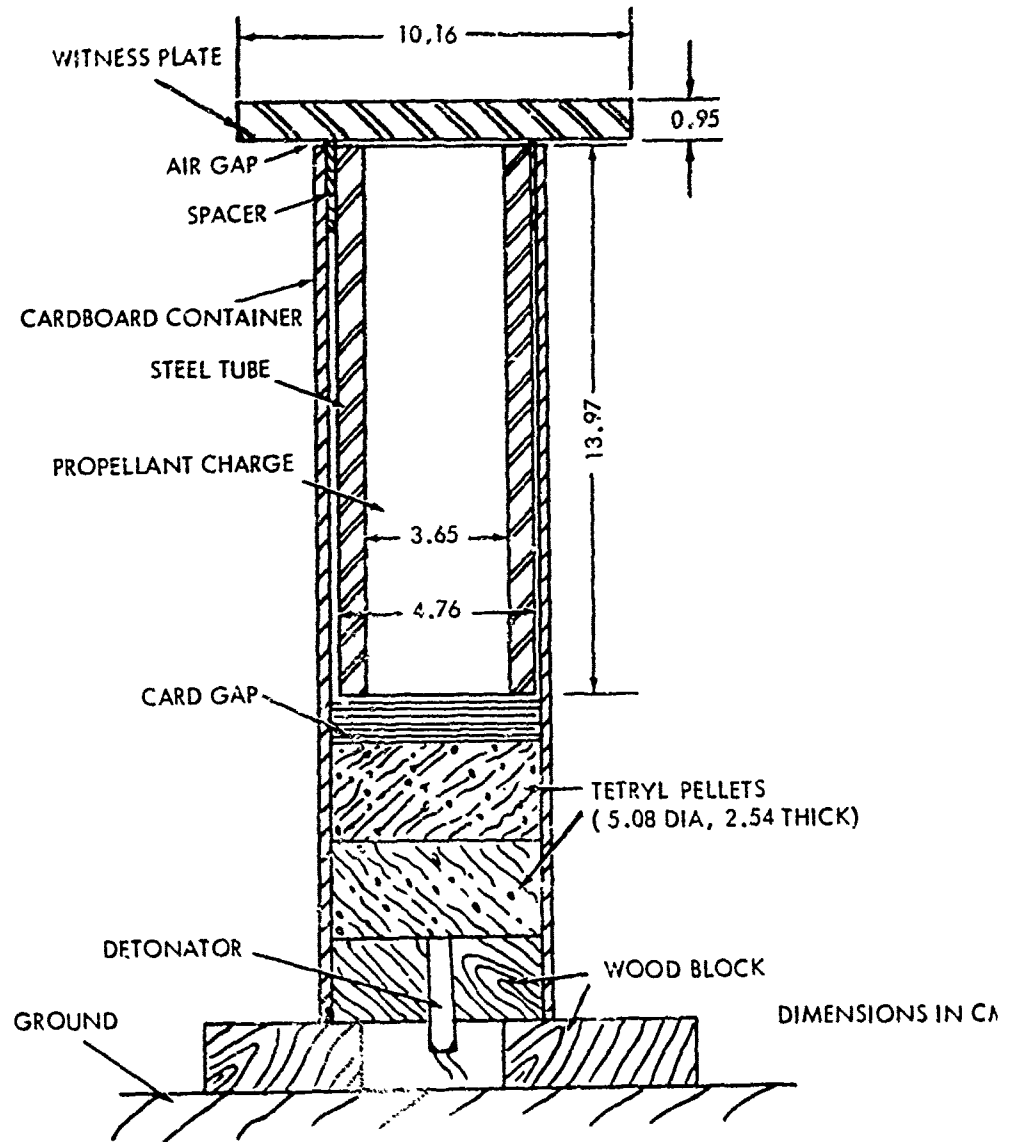


FIG. 1 GAP TEST ASSEMBLY

HOLTR 65-47

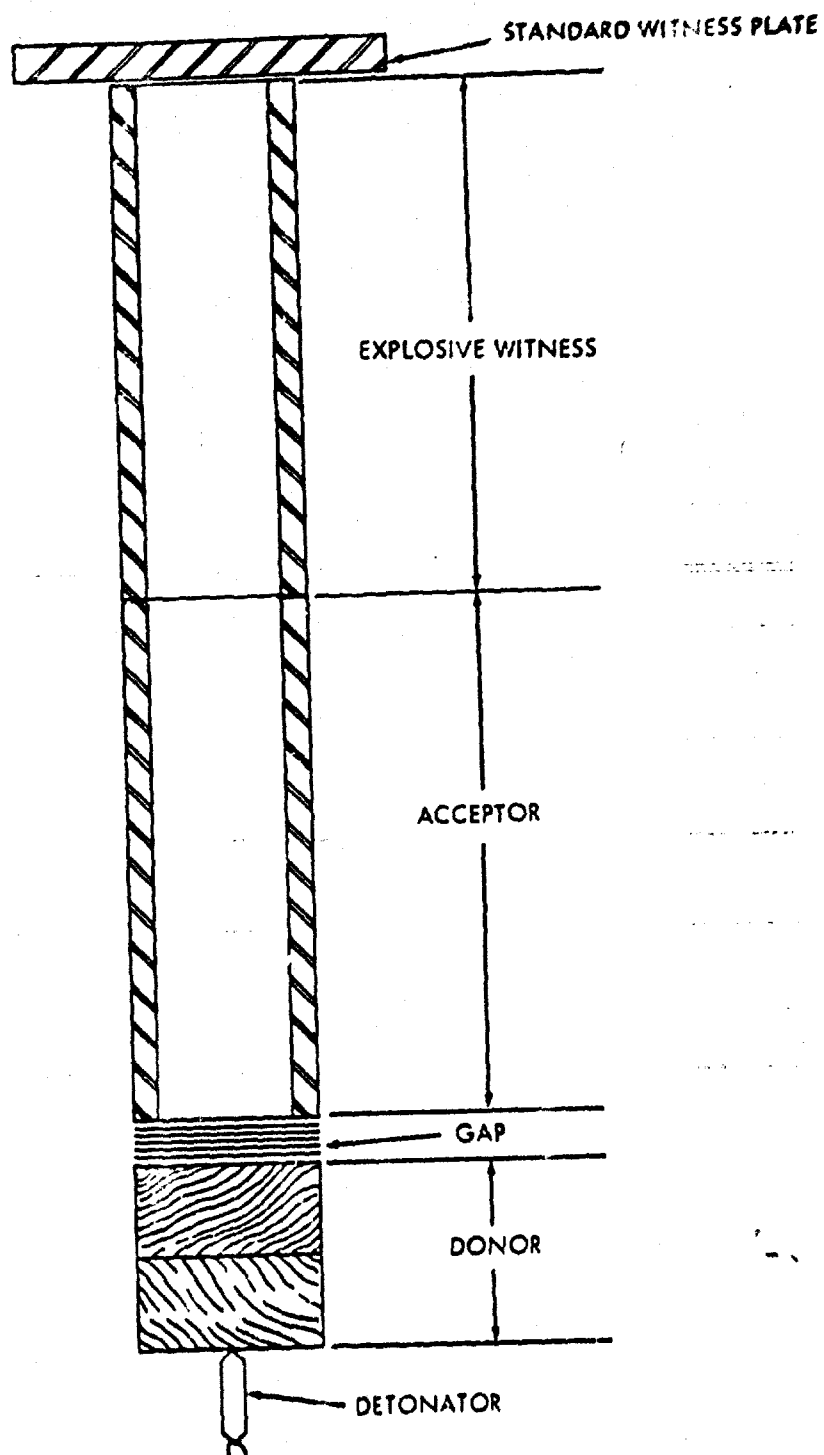


FIG. 2 THE EXTENDED GAP TEST

Best Available Copy

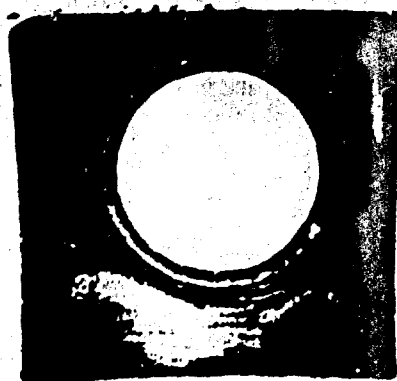


FIG. 3 A WITNESS PLATE OBTAINED AS THE RESULT OF A DETONATION (FOUO)



FIG. 4 FRONT AND SIDE VIEW OF WITNESS PLATE OBTAINED AS THE RESULT OF A DETONATION (FOUO)

NOLTR 65-47

DISTRIBUTION

	<u>No. of Copies</u>
CPIA (Distribution List)	132
Director, Special Projects Office	
Washington 25, D.C.	
Code 20	4
Code 271	1
Code 2710	1
Chief, Bureau of Naval Weapons	
Washington 25, D.C.	
DIS-3	4
RUME-32	1
RUME-33	1
RUME-21	1
RMMP-11	1
RRRE-6	1
Commanding Officer, Naval Propellant Plant	
Indian Head, Maryland	
Process Development Division	1
W. C. Cagle	1
Commanding Officer	
Naval Explosive Ordnance Disposal Facility	
Indian Head, Maryland	
Library Division	1
U.S. Army Engineer Research and Development	
Laboratories, Fort Belvoir, Virginia	
STINFO Branch	1
U.S. Bureau of Mines	
4800 Forbes Street, Pittsburgh 13, Pennsylvania	
Dr. C. M. Mason	1
Aerojet-General Corporation, Azusa, California	
R. F. Chaiken	1
Aerojet-General Corporation, Downey, California	
Dr. H. J. Fisher	3
Hercules Powder Company	
Allegany Ballistics Laboratory	
Robert Richardson	1
Dr. Eyler	1
Dr. LeBlanc	1
Director, Office of the Secretary of Defense	
Adv. Res. Proj. Agency, Washington 25, D.C.	
Dr. John F. Kincaid	1
Atlantic Research Corporation	
812 North Fairfax Street, Alexandria, Virginia	
Dr. Andrej Macek	1

NOLTR 65-47

DISTRIBUTION
(Cont.)

	<u>No. of Copies</u>
University of Cal. Lawrence Radiation Lab. P.O. Box 1663, Los Alamos, New Mexico	
Dr. L. C. Smith	1
Space Technology Laboratory P.O. Box 95001, Los Angeles 45, California	
Mr. H. A. Taylor	1
Aerojet General Corporation Sacramento, California	
Dr. W. Kirchner	1
Lockheed Missiles and Space Company A Division of Lockheed Aircraft Corporation 1122 Jagels Road Sunnyvale, California	
Mr. J. Lightfoot	1
Bureau of Naval Weapons Representative (Special Projects Office) Lockheed Missiles and Space Company P.O. Box 504, Sunnyvale, California SPL-313	2
Bureau of Naval Weapons Resident Representative (Special Projects Office) Aerojet-General Corporation Sacramento, California SPLA-30	2
Bureau of Naval Weapons Branch Representative Allegany Ballistics Laboratory Cumberland, Maryland SPH-30	2
Aeronutronics A Division of the Ford Motor Company Ford Road, Newport Beach, California	
Mr. W. Weller	2
Mr. M. Boyer	1
Rohm and Haas Company Redstone Arsenal, Huntsville, Alabama	
Dr. H. Shuey	3
Commander, U.S. Naval Ordnance Test Station China Lake, California Code 452	2
Code 5008	1
Armed Services Explosives Safety Board Building T-7, Gravelly Point, Washington, D.C. R. C. Herman	1

NOLTR 65-47

DISTRIBUTION
(Cont.)

	<u>No. of Copies</u>
Stanford Research Institute	
Liquid Propellant Department	
Propulsion Services Division	
Menlo Park, California	
Dr. A. B. Amster	1
Defense Documentation Center	
Cameron Station	
Alexandria, Virginia	20
Office of Naval Research	
Washington 25, D.C.	
Code 429	2
University of Cal. Lawrence Radiation Laboratory	
P.O. Box 1663, Los Alamos, New Mexico	
R. Wasley	1
Aerojet-General Corporation	
Downey, California	
W. H. Andersen	1

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the report is classified)		
1 ORIGINATING ACTIVITY (Corporate author) U.S. NAVAL ORDNANCE LABORATORY WHITE OAK SILVER SPRING, MARYLAND		2 REPORT SECURITY CLASSIFICATION UNCLASSIFIED
3 REPORT TITLE SHOCK SENSITIVITY AND HAZARD CLASSIFICATION		
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Summary		
5 AUTHOR(S) (Last name, first name, initial) Jaffe, Irving (MNN)		
6 REPORT DATE April 20, 1965	7a TOTAL NO OF PAGES 10	7b NO OF REFS 4
8a CONTRACT OR GRANT NO	9a ORIGINATOR'S REPORT NUMBER(S) NOLTR 65-47	
b PROJECT NO RMMP 22149/F009-06-11	9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c	d	
10 AVAILABILITY LIMITATION NOTICES QUALIFIED REQUESTERS MAY OBTAIN COPIES OF THIS REPORT FROM DDC		
11 SUPPLEMENTARY NOTES -	12 SPONSORING MILITARY ACTIVITY Bureau of Naval Weapons	
13 ABSTRACT The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the ease of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be Class A or mass detonating because of the ease with which this reaction is initiated.		

DD FORM 1473

UNCLASSIFIED

Security Classification

UNCLASSIFIED
Security Classification

16 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Shock sensitivity Hazard classification Gap test Nitrocarbonitrates "Extended" gap test						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subject number, system number, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
10. **AVAILABILITY LIMITATION NOTICES:** Enter any time statements or other information of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and actual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

UN CLASSIFIED

Security Classification

Best Available Copy

Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 63-47) SHOCK SENSITIVITY AND HAZARD CLASSIFICATION, by I. Jaffe. 20 April 1965. 6p. illus. BuWeps task RAMP 22149/FO09-06-11. UNCLASSIFIED The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the case of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be class A or mass detonating because of the ease with which this reaction is initiated.	1. Explosives - Safety 2. Explosives - Shock sensitivity 3. Explosives - Card gap tests I. Title Jaffe, Irving III. Project Abstract card is unclassified.	Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 63-47) SHOCK SENSITIVITY AND HAZARD CLASSIFICATION, by I. Jaffe. 20 April 1965. 6p. illus. BuWeps task RAMP 22149/FO09-06-11. UNCLASSIFIED The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the case of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be class A or mass detonating because of the ease with which this reaction is initiated.	1. Explosives - Safety 2. Explosives - Shock sensitivity 3. Explosives - Card gap tests I. Title Jaffe, Irving III. Project Abstract card is unclassified.
Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 63-47) SHOCK SENSITIVITY AND HAZARD CLASSIFICATION, by I. Jaffe. 20 April 1965. 6p. illus. BuWeps task RAMP 22149/FO09-06-11. UNCLASSIFIED The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the case of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be class A or mass detonating because of the ease with which this reaction is initiated.	1. Explosives - Safety 2. Explosives - Shock sensitivity 3. Explosives - Card gap tests I. Title Jaffe, Irving III. Project Abstract card is unclassified.	Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 63-47) SHOCK SENSITIVITY AND HAZARD CLASSIFICATION, by I. Jaffe. 20 April 1965. 6p. illus. BuWeps task RAMP 22149/FO09-06-11. UNCLASSIFIED The shock sensitivity of a fuel oil-ammonium nitrate mixture (nitrocarbonitrate) is less than zero cards on the large scale gap test, but 122 cards on the "extended" gap test. The latter test value results from the case of initiating the reaction whereas the no-go on the standard test results from the very small damage caused by the detonation reaction. It is suggested that the hazard classification of nitrocarbonitrate be class A or mass detonating because of the ease with which this reaction is initiated.	1. Explosives - Safety 2. Explosives - Shock sensitivity 3. Explosives - Card gap tests I. Title Jaffe, Irving III. Project Abstract card is unclassified.